


Frame-accurate browser playback keeps decoding and metadata synchronized

1 Index packets by presentation order

sort key: presentation timestamp (PTS), then packet sequence

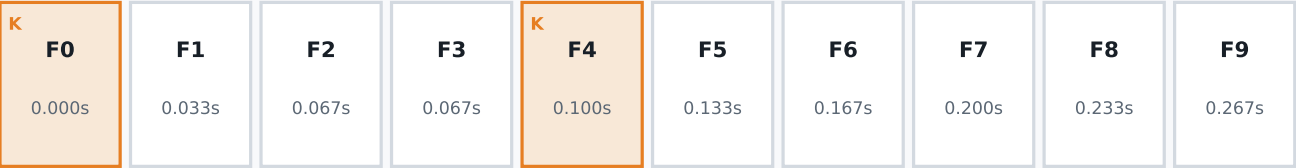

frame index = position in this ordered list

equal PTS
ordered by sequence

2 Seek from a valid decode boundary

target F7 · requested cache window F5–F9
decode forward



restart keyframe

display target


Bounded, race-safe decode

cache: behind ← target → ahead
prefetch; evict outside the window

op 41 stale → discard

op 42 current → commit

3 Use one frame identity throughout

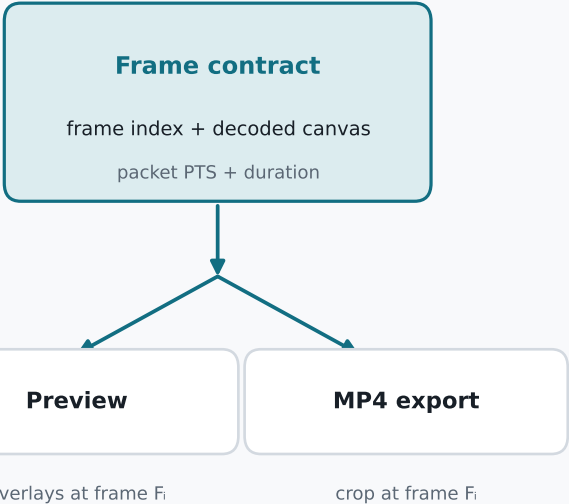

same frame-index mapping · same detection lookup

same detailed-crop geometry