

MMB

Morsbach Maschinenbau GmbH.

MMB 10" SUBMERSIBLE PUMP 10S /2000 MODELS CATALOGUE



STAINLESS STEEL SUBMERSIBLE PUMPS


Nominal Diameter: **10"**

Nominal Flow: **125m³/h**

Outlet Size: **6"**

Flow Range: **75-150m³/h**

Performance Curves: From 1 to 17 Stages

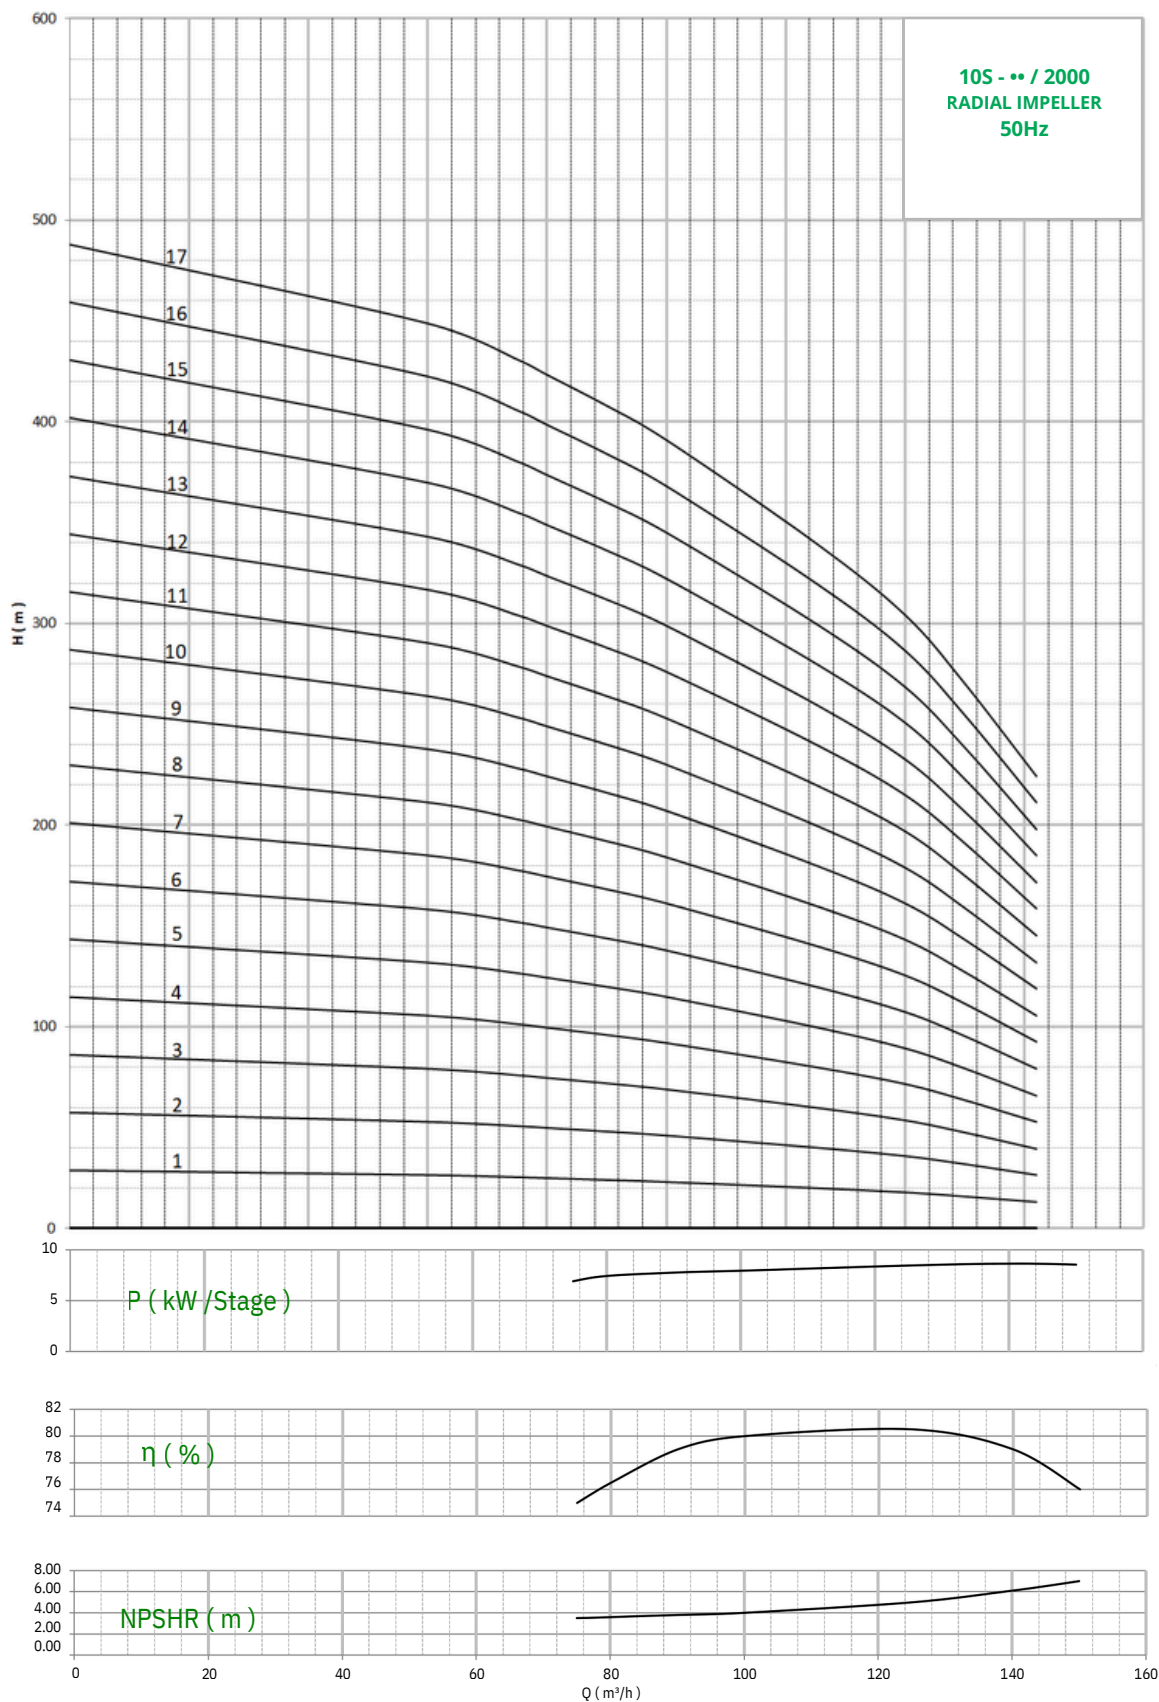

STAINLESS STEEL SUBMERSIBLE PUMPS

Nominal Diameter: **10"**


Nominal Flow: **125m³/h**

Outlet Size: **6"**

Flow Range: **75-150m³/h**

Performance Curves : From 1 to 17 Stages

DIMENSIONS & WEIGHT

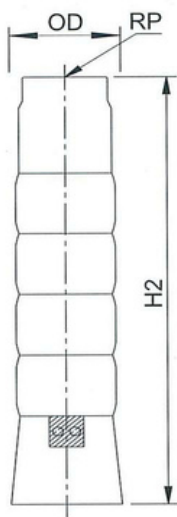

PUMP MODEL	No. of Stages	REQUIRED MOTOR POWER		APROX. DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
		Kw	HP	#OD	RP	H2	
10S-01/2000	1	11	15	225	6"	644	30.6
10S-02/2000	2	22	30	225	6"	798	36.8
10S-03/2000	3	30	40	225	6"	952	42.9
10S-04/2000	4	45	60	225	6"	1106	49.1
10S-05/2000	5	55	75	225	6"	1260	55.2
10S-06/2000	6	63	85	225	6"	1414	61.3
10S-07/2000	7	75	100	225	6"	1568	67.5
10S-08/2000	8	75	100	225	6"	1722	73.6
10S-09/2000	9	93	125	225	6"	1876	79.8
10S-10/2000	10	93	125	225	6"	2030	85.9
10S-11/2000	11	110	150	225	6"	2184	92.0
10S-12/2000	12	132	175	225	6"	2338	98.2
10S-13/2000	13	132	175	225	6"	2492	104.3
10S-14/2000	14	150	200	225	6"	2646	110.5
10S-15/2000	15	150	200	225	6"	2800	116.6
10S-16/2000	16	170	225	225	6"	2954	122.7
10S-17/2000	17	170	225	225	6"	3108	128.9

PUMP MODEL	No. of Stages	MOTOR (Kw)	lps	0	16.67	20.83	22.22	25.00	27.78	34.72	38.89	41.67	45.00
			m ³ /h	0	60	75	80	90	100	125	140	150	162
10S-01/2000	1	11	TOTAL MANOMETRIC HEAD IN METERS - (COLUMN WATER)	29	26	25	25	24	23	20	18	16	13
10S-02/2000	2	22		57	53	51	50	48	46	40	36	32	26
10S-03/2000	3	30		86	79	76	75	72	69	60	54	48	40
10S-04/2000	4	45		115	106	101	100	96	92	80	72	64	53
10S-05/2000	5	55		144	132	127	125	120	115	100	90	80	66
10S-06/2000	6	63		172	158	152	149	144	138	120	107	95	79
10S-07/2000	7	75		201	185	177	174	168	161	140	125	111	92
10S-08/2000	8	75		230	211	203	199	192	184	160	143	127	106
10S-09/2000	9	93		258	238	228	224	216	207	180	161	143	119
10S-10/2000	10	93		287	264	254	249	240	230	200	179	159	132
10S-11/2000	11	110		316	290	279	274	264	253	220	197	175	145
10S-12/2000	12	132		344	317	304	299	288	276	240	215	191	158
10S-13/2000	13	132		373	343	330	324	312	299	260	233	207	172
10S-14/2000	14	150		402	370	355	349	336	322	280	251	223	185
10S-15/2000	15	150		431	396	380	374	360	345	300	269	239	198
10S-16/2000	16	170		459	422	406	398	384	368	320	286	254	211
10S-17/2000	17	170		488	449	431	423	408	391	340	304	270	224