

MMB

Morsbach Maschinenbau GmbH.

MMB 8" SUBMERSIBLE PUMP 8S /1250 MODELS CATALOGUE



STAINLESS STEEL SUBMERSIBLE PUMPS


Nominal Diameter: **8"**

Nominal Flow: **75m³/h**

Outlet Size: **4"/ 5"**

Flow Range: **40-100m³/h**

Performance Curves: From 2 to 21 Stages

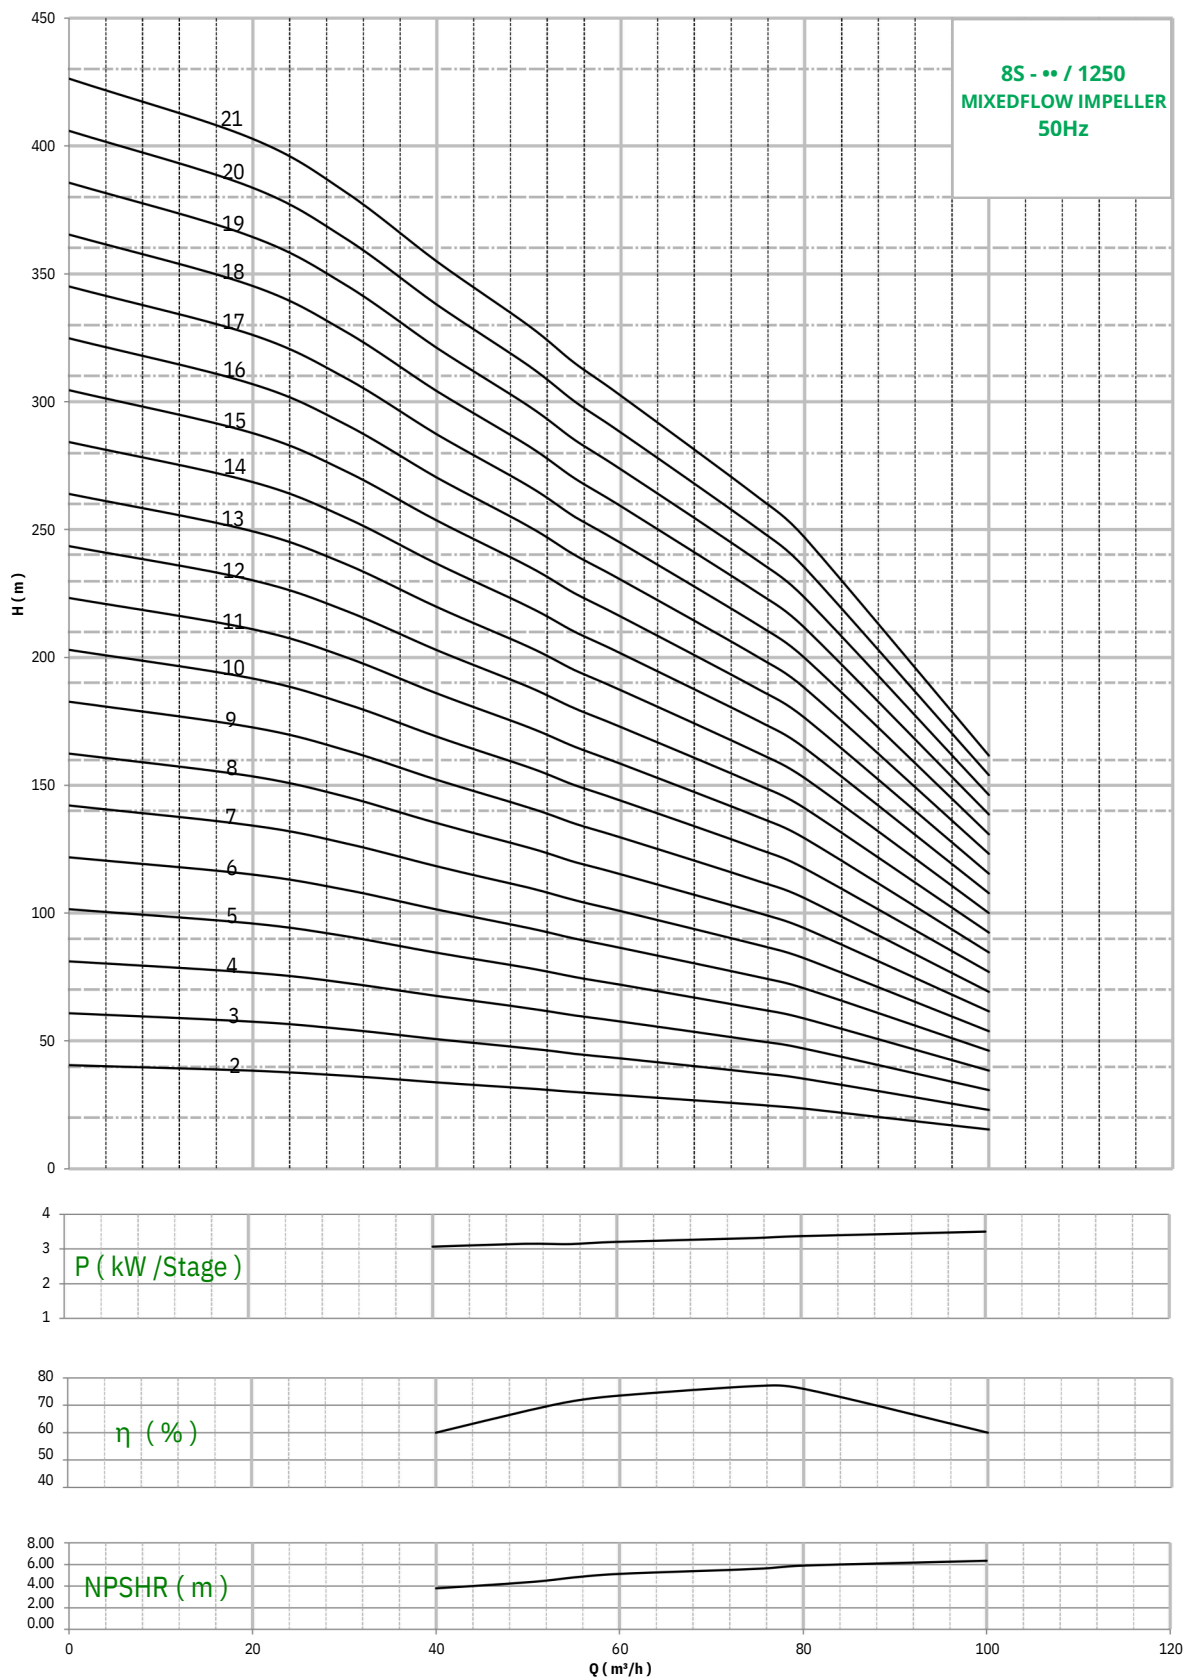

Refer General Information for performance curve conditions and for other details. Curves tolerance according to ISO : 9906, Annex - A

Morsbach Maschinenbau GmbH
Zur Hardt 6, 51597 Morsbach-Überholz, Germany
Tel: +49 2294 599 | Fax: +49 2294 6121

STAINLESS STEEL SUBMERSIBLE PUMPS

Nominal Diameter: **8"**


Nominal Flow: **75m³/h**

Outlet Size: **4"/5"**

Flow Range: **40-100m³/h**

Performance Curves : From 2 to 21 Stages

DIMENSIONS & WEIGHT

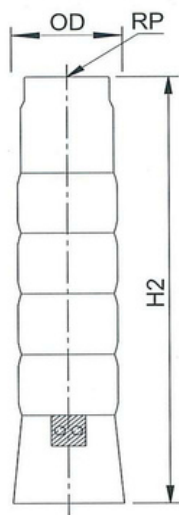

PUMP MODEL	No. of Stages	REQUIRED MOTOR POWER		DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
		Kw	HP	#OD	RP	H2	
8S-02/1250	2	7.5	10	195	125	738	22.7
8S-03/1250	3	13	17.5	195	125	866	26.4
8S-04/1250	4	15	20	195	125	994	30.1
8S-05/1250	5	18.5	25	195	125	1122	33.8
8S-06/1250	6	26	35	195	125	1250	37.5
8S-07/1250	7	30	40	195	125	1378	41.2
8S-08/1250	8	30	40	195	125	1506	44.9
8S-09/1250	9	37	50	195	125	1634	48.6
8S-10/1250	10	45	60	195	125	1762	52.3
8S-11/1250	11	45	60	195	125	1890	56
8S-12/1250	12	55	75	195	125	2018	59.7
8S-13/1250	13	55	75	195	125	2146	63.4
8S-14/1250	14	63	85	195	125	2274	67.1
8S-15/1250	15	75	100	195	125	2402	70.8
8S-16/1250	16	75	100	195	125	2530	74.5
8S-17/1250	17	75	100	195	125	2658	78.2
8S-18/1250	18	93	125	195	125	2786	81.9
8S-19/1250	19	75	125	195	125	2914	85.6
8S-20/1250	20	93	125	195	125	3042	89.3
8S-21/1250	21	110	150	195	125	3170	93

PUMP MODEL	No. of Stages	MOTOR (Kw)	lps	0	5.47	8.33	11.11	13.89	15.28	16.67	20.83	22.22	27.78
			m ³ /h	0	20	30	40	50	55	60	75	80	100
8S-02/1250	2	7.5	TOTAL MANOMETRIC HEAD IN METERS - (COLUMN WATER)	41	38	36	34	31	30	29	25	24	15
8S-03/1250	3	13		61	58	55	51	47	45	43	38	35	23
8S-04/1250	4	15		81	77	73	68	63	60	58	50	47	31
8S-05/1250	5	18.5		102	96	91	85	79	75	72	63	59	39
8S-06/1250	6	26		122	115	109	101	94	90	86	75	71	46
8S-07/1250	7	30		142	134	127	118	110	105	101	88	82	54
8S-08/1250	8	30		162	154	146	135	126	120	115	100	94	62
8S-09/1250	9	37		183	173	164	152	141	135	130	113	106	69
8S-10/1250	10	45		203	192	182	169	157	150	144	125	118	77
8S-11/1250	11	45		223	211	200	186	173	165	158	138	129	85
8S-12/1250	12	55		244	230	218	203	188	180	173	150	141	92
8S-13/1250	13	55		264	250	237	220	204	195	187	163	153	100
8S-14/1250	14	63		284	269	255	237	220	210	202	175	165	108
8S-15/1250	15	75		305	288	273	254	236	225	216	188	176	116
8S-16/1250	16	75		325	307	291	270	251	240	230	200	188	123
8S-17/1250	17	75		345	326	309	287	267	255	245	213	200	131
8S-18/1250	18	93		365	346	328	304	283	270	259	225	212	139
8S-19/1250	19	75		386	365	346	321	298	285	274	238	223	146
8S-20/1250	20	93		406	384	364	338	314	300	288	250	235	154
8S-21/1250	21	110		426	403	382	355	330	315	302	263	247	162