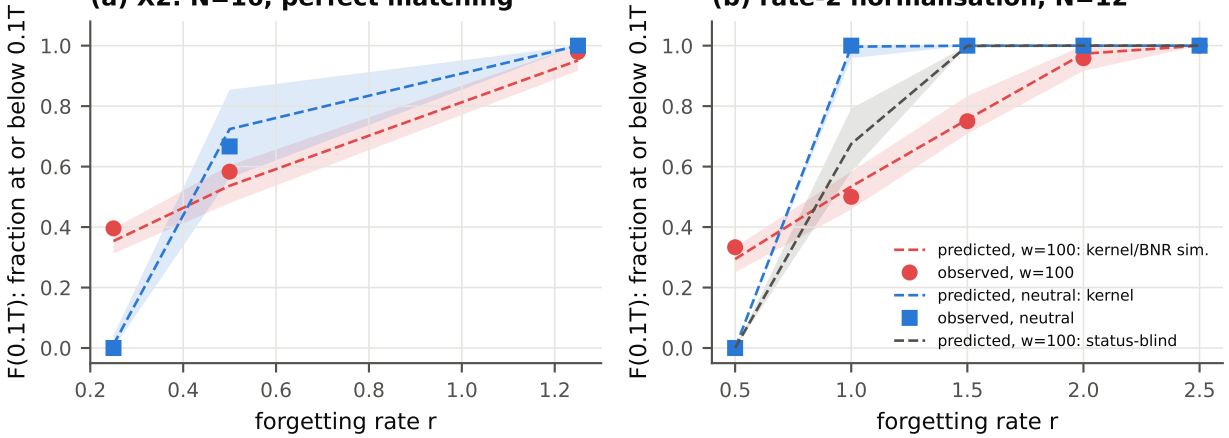
(a) X2: N=16, perfect matching
F(0.1T): fraction at or below 0.1T
0.0
0.2
0.4
0.6
0.8
1.0
0.2
0.4
0.6
0.8
1.0
1.2
forgetting rate r
(b) rate-2 normalisation, N=12
F(0.1T): fraction at or below 0.1T
0.0
0.2
0.4
0.6
0.8
1.0
0.5
1.0
1.5
2.0
2.5
forgetting rate r
predicted, w=100: kernel/BNR sim.
observed, w=100
predicted, neutral: kernel
observed, neutral
predicted, w=100: status-blind