WEB MEDIUM


Slow Leak

Hit `http://web.secleaf.xyz:8080/` with curl and checked the response headers:

```
$ curl -i http://web.secleaf.xyz:8080/ HTTP/1.1 200 OK Set-Cookie: work_order=s%3AeyJpZCI6IjYxOWM1Z...; Path=/; HttpOnly X-Drip: S X-Drip-Serial: 1/40
```

Notice the two custom headers right away:

- `X-Drip: S`
- `X-Drip-Serial: 1/40`

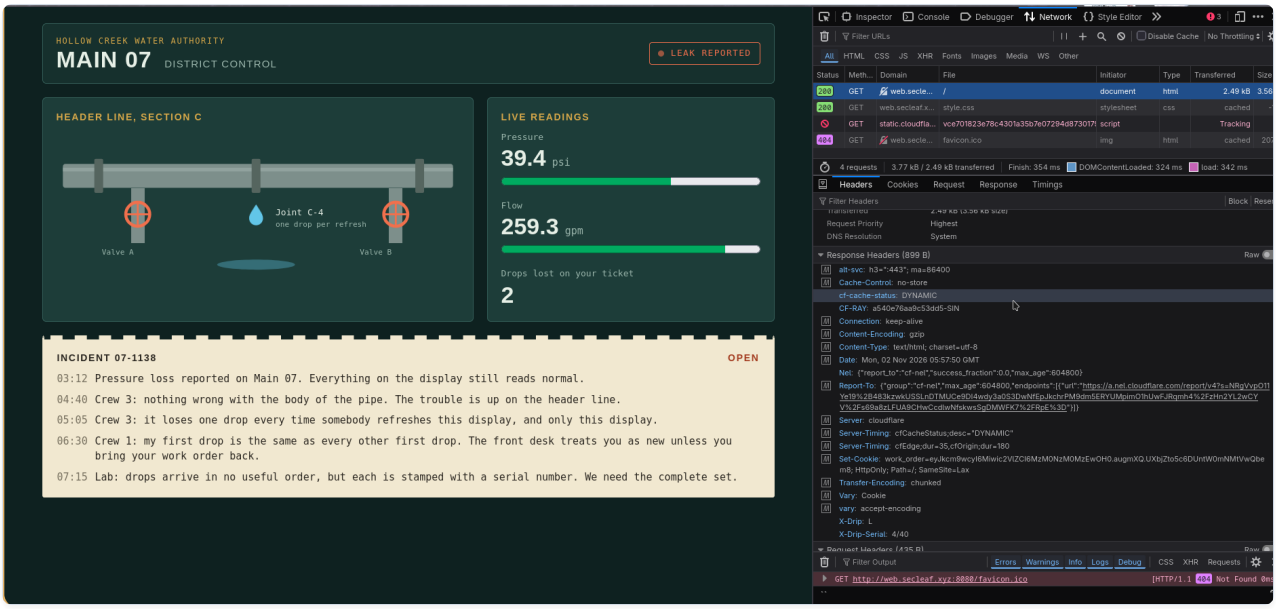

DevTools Network Analysis

It's leaking the flag one character at a time across 40 total indices. Sending requests with the same `work_order` cookie yielded random positions (`14/40` , `27/40` , `3/40` , etc.).

Wrote a quick dirty python script using `requests.Session()` to loop until all 40 slots were filled:

Solution Script: Slow_Leak.py (included in attached solution archive)

Ran the script, grabbed all 40 drops, and stitched the flag:

```
$ python3 solve.py
```

```
[11/40] Index 12 -> 'd'
[12/40] Index 11 -> '4'
[13/40] Index 03 -> 'c'
[14/40] Index 20 -> 'k'
[15/40] Index 04 -> 'L'
[16/40] Index 06 -> 'a'
[17/40] Index 07 -> 'f'
[18/40] Index 16 -> '_'
[19/40] Index 08 -> '{'
[20/40] Index 31 -> '4'
[21/40] Index 26 -> 'd'
[22/40] Index 22 -> '0'
[23/40] Index 32 -> 't'
[24/40] Index 15 -> '5'
[25/40] Index 34 -> '4'
[26/40] Index 38 -> 'm'
[27/40] Index 21 -> '_'
[28/40] Index 24 -> '3'
[29/40] Index 13 -> '3'
[30/40] Index 35 -> '_'
[31/40] Index 14 -> 'r'
[32/40] Index 39 -> '3'
[33/40] Index 27 -> 'r'
[34/40] Index 02 -> 'e'
[35/40] Index 28 -> '1'
[36/40] Index 33 -> '_'
[37/40] Index 29 -> 'p'
[38/40] Index 36 -> 't'
[39/40] Index 05 -> 'e'
[40/40] Index 37 -> '1'

[+] Flag: SecLeaf{h34d3r5_l34k_0n3_dr1p_4t_4_t1m3}

~/SecLeaf writeups/repo_clone/SecLeafCTF/WEB/Slow_Leak main* 11s
❯
```

Flag Execution Proof

Solution Script: Slow_Leak.py (included in attached solution archive)

RECOVERED FLAG **SecLeaf{h34d3r5_l34k_0n3_dr1p_4t_4_t1m3}**