



HTML Semantic Elements

[< Previous](#)[Next >](#)

Semantic elements = elements with a meaning.

What are Semantic Elements?

A semantic element clearly describes its meaning to both the browser and the developer.

Examples of **non-semantic** elements: `<div>` and `` - Tells nothing about its content.

Examples of **semantic** elements: `<form>`, `<table>`, and `<article>` - Clearly defines its content.

Semantic Elements in HTML


Many web sites contain HTML code like: `<div id="nav">` `<div class="header">` `<div id="footer">` to indicate navigation, header, and footer.

In HTML there are some semantic elements that can be used to define different parts of a web page:

- `<article>`
- `<aside>`
- `<details>`
- `<figcaption>`
- `<figure>`
- `<footer>`
- `<header>`



- `<nav>`
- `<section>`
- `<summary>`
- `<time>`

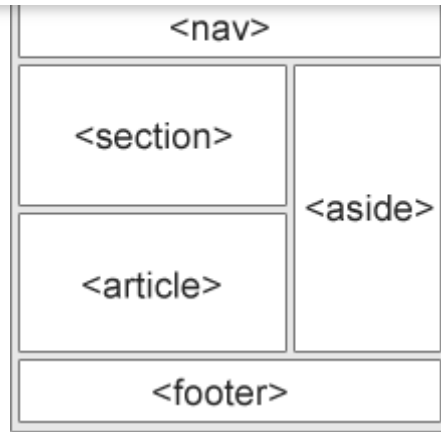

HTML `<section>` Element

The `<section>` element defines a section in a document.

According to W3C's HTML documentation: "A section is a thematic grouping of content, typically with a heading."

A home page could normally be split into sections for introduction, content, and contact information.

Example

```
<section>
  <h1>WWF</h1>
  <p>The World Wide Fund for Nature (WWF) is....</p>
</section>
```

Try it Yourself »

HTML `<article>` Element

The `<article>` element specifies independent, self-contained content.

An article should make sense on its own, and it should be possible to read it independently from the rest of the web site.



HTML

CSS

MORE ▼



- Forum post
- Blog post
- Newspaper article

Example

```
<article>
  <h1>What Does WWF Do?</h1>
  <p>WWF's mission is to stop the degradation of our planet's natural
environment,
  and build a future in which humans live in harmony with nature.</p>
</article>
```

Try it Yourself »

Nesting <article> in <section> or Vice Versa?

The `<article>` element specifies independent, self-contained content.

The `<section>` element defines section in a document.

Can we use the definitions to decide how to nest those elements? No, we cannot!

So, on the Internet, you will find HTML pages with `<section>` elements containing `<article>` elements, and `<article>` elements containing `<section>` elements.

You will also find pages with `<section>` elements containing `<section>` elements, and `<article>` elements containing `<article>` elements.

Example for a newspaper: The sport `<article>` in the sport **section**, may have a technical **section** in each `<article>`.

HTML <header> Element

The `<header>` element specifies a header for a document or section.



HTML

CSS

MORE ▼



You can have several `<header>` elements in one document.

The following example defines a header for an article:

Example

```
<article>
  <header>
    <h1>What Does WWF Do?</h1>
    <p>WWF's mission:</p>
  </header>
  <p>WWF's mission is to stop the degradation of our planet's natural
environment,
  and build a future in which humans live in harmony with nature.</p>
</article>
```

Try it Yourself »

HTML `<footer>` Element

The `<footer>` element specifies a footer for a document or section.

A `<footer>` element should contain information about its containing element.

A footer typically contains the author of the document, copyright information, links to terms of use, contact information, etc.

You may have several `<footer>` elements in one document.

Example

```
<footer>
  <p>Posted by: Hege Refsnes</p>
  <p>Contact information: <a href="mailto:someone@example.com">
someone@example.com</a>.</p>
</footer>
```



HTML <nav> Element

The `<nav>` element defines a set of navigation links.

Notice that NOT all links of a document should be inside a `<nav>` element. The `<nav>` element is intended only for major block of navigation links.

Example

```
<nav>
  <a href="/html/">HTML</a> |
  <a href="/css/">CSS</a> |
  <a href="/js/">JavaScript</a> |
  <a href="/jquery/">jQuery</a>
</nav>
```

Try it Yourself »

HTML <aside> Element

The `<aside>` element defines some content aside from the content it is placed in (like a sidebar).

The `<aside>` content should be related to the surrounding content.

Example

```
<p>My family and I visited The Epcot center this summer.</p>

<aside>
  <h4>Epcot Center</h4>
```



Try it Yourself »

HTML <figure> and <figcaption> Elements

An image and a caption can be grouped together in a `<figure>` element.

The purpose of a caption is to add a visual explanation to an image.

Example

```
<figure>
  
  <figcaption>Fig1. - Trulli, Puglia, Italy.</figcaption>
</figure>
```

Try it Yourself »

The `` element defines the image, the `<figcaption>` element defines the caption.

Why Semantic Elements?

According to the W3C: "A semantic Web allows data to be shared and reused across applications, enterprises, and communities."

Semantic Elements in HTML

Below is an alphabetical list of some of the semantic elements in HTML.

The links go to our complete [HTML Reference](#).

Tag	Description



HTML

CSS


MORE ▼



<u><aside></u>	Defines content aside from the page content
<u><details></u>	Defines additional details that the user can view or hide
<u><figcaption></u>	Defines a caption for a <figure> element
<u><figure></u>	Specifies self-contained content, like illustrations, diagrams, photos, code listings, etc.
<u><footer></u>	Defines a footer for a document or section
<u><header></u>	Specifies a header for a document or section
<u><main></u>	Specifies the main content of a document
<u><mark></u>	Defines marked/highlighted text
<u><nav></u>	Defines navigation links
<u><section></u>	Defines a section in a document
<u><summary></u>	Defines a visible heading for a <details> element
<u><time></u>	Defines a date/time

[< Previous](#)[Next >](#)

COLOR PICKER



HOW TO

Tabs

Dropdowns

Accordions

Side Navigation

[HTML](#)[CSS](#)[MORE ▼](#)[Progress Bars](#)[Parallax](#)[Login Form](#)[HTML Includes](#)[Google Maps](#)[Range Sliders](#)[Tooltips](#)[Slideshow](#)[Filter List](#)[Sort List](#)[SHARE](#)[CERTIFICATES](#)[HTML](#)[CSS](#)[JavaScript](#)[SQL](#)[Python](#)[PHP](#)[jQuery](#)[Bootstrap](#)[XML](#)[Read More »](#)[REPORT ERROR](#)[PRINT PAGE](#)[FORUM](#)[ABOUT](#)



HTML

CSS

MORE ▼



Top Tutorials

- HTML Tutorial
- CSS Tutorial
- JavaScript Tutorial
- How To Tutorial
- SQL Tutorial
- Python Tutorial
- W3.CSS Tutorial
- Bootstrap Tutorial
- PHP Tutorial
- jQuery Tutorial
- Java Tutorial
- C++ Tutorial

Top References

- HTML Reference
- CSS Reference
- JavaScript Reference
- SQL Reference
- Python Reference
- W3.CSS Reference
- Bootstrap Reference
- PHP Reference
- HTML Colors
- jQuery Reference
- Java Reference
- Angular Reference

Top Examples

- HTML Examples
- CSS Examples
- JavaScript Examples
- How To Examples
- SQL Examples
- Python Examples
- W3.CSS Examples
- Bootstrap Examples
- PHP Examples
- jQuery Examples
- Java Examples
- XML Examples

Web Certificates

- HTML Certificate
- CSS Certificate
- JavaScript Certificate
- SQL Certificate
- Python Certificate
- jQuery Certificate
- PHP Certificate
- Bootstrap Certificate



HTML

CSS

MORE ▼

[Get Certified »](#)

W3Schools is optimized for learning, testing, and training. Examples might be simplified to improve reading and basic understanding. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using this site, you agree to have read and accepted our terms of use, cookie and privacy policy. Copyright 1999-2020 by Refsnes Data. All Rights Reserved.

Powered by W3.CSS.

