HTML Ordered List | HTML Numbered List

HTML Ordered List or Numbered List displays elements in numbered format. The HTML ol tag is used for ordered list. We can use ordered list to represent items either in numerical order format or alphabetical order format, or any format where an order is emphasized. There can be different types of numbered list:

- Numeric Number (1, 2, 3)
- Capital Roman Number (I II III)
- Small Romal Number (i ii iii)
- Capital Alphabet (A B C)
- Small Alphabet (a b c)

To represent different ordered lists, there are 5 types of attributes in tag.

Type	Description
Type	This is the default type. In this type, the list items are numbered with numbers.
Type "I"	In this type, the list items are numbered with upper case roman numbers.
Type "i"	In this type, the list items are numbered with lower case roman numbers.
Type "A"	In this type, the list items are numbered with upper case letters.
Type "a"	In this type, the list items are numbered with lower case letters.

HTML Ordered List Example

Let's see the example of HTML ordered list that displays 4 topics in numbered list. Here we are not defining type="1" because it is the default type.

```
HTML
Java
JavaScript
SQL
```

Test it Now

Output:

- 1. HTML
- 2. Java
- 3. JavaScript
- 4. SQL

ol type="l"

Let's see the example to display list in roman number uppercase.

```
    type="I">
    HTML
    Java
    JavaScript
    SQL
```

Test it Now

Output:

- I. HTML
- II. Java
- III. JavaScript
- IV. SQL

ol type="i"

Let's see the example to display list in roman number lowercase.

```
HTML
Java
Java
SQL
```

Test it Now

Output:

- i. HTML
- ii. Java
- iii. JavaScript
- iv. SQL

ol type="A"

Let's see the example to display list in alphabet uppercase.

```
  HTML
  Java
  JavaScript
  SQL
```

Test it Now

Output:

- A. HTML
- B. Java
- C. JavaScript
- D. SQL

ol type="a"

Let's see the example to display list in alphabet lowercase.

```
    type="a">
    HTML
    Java
    JavaScript
    SQL
```

Test it Now

Output:

- a. HTML
- b. Java
- c. JavaScript
- d. SQL

start attribute

The start attribute is used with ol tag to specify from where to start the list items.

```
    type="1" start="5">: It will show numeric values starting with "5".
```

: It will show capital alphabets starting
with "E".

type="a" start="5">: It will show lower case alphabets starting with "e".

: It will show Roman upper case value
starting with "V".

type="i" start="5">: It will show Roman lower case value starting with "v".

```
  HTML
  Java
  JavaScript
  SQL
```

Test it Now

Output:

- v. HTML
- vi. Java
- vii. JavaScript
- viii. SQL

reversed Attribute:

This is a Boolean attribute of HTML tag, and it is new in HTML5 version. If you use the reversed attribute with

tag then it will numbered the list in descending order (7, 6, 5, 4.....1).

Example:

```
HTML
Java
JavaScript
SQL
```

Test it Now

Output:



Supporting Browsers






Help Others, Please Share




Learn Latest Tutorials

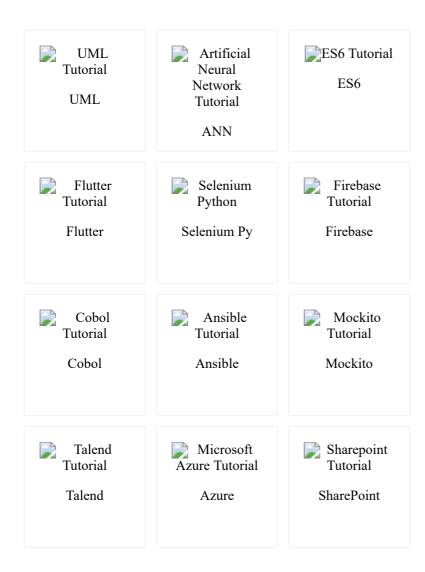

Preparation



Trending Technologies

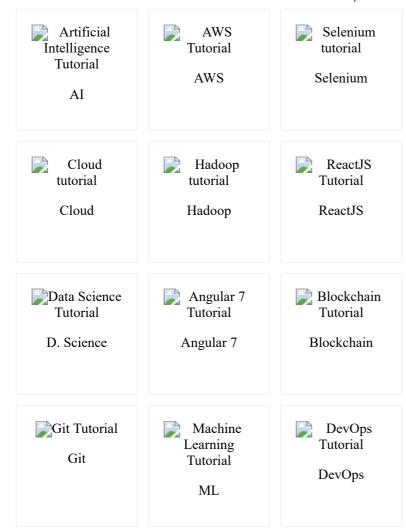

B.Tech / MCA

