

DAA Theory | End-sem Exam

Your email will be recorded when you submit this form.

Not [u19cs012@coed.svnit.ac.in](#)? [Switch account](#)

DAA Theory | End-sem Exam

What is the best-case running time of the following algorithm? Array A of n integers is an input to the algorithm.


```
for  $j = 2$  to  $A.length$ 
     $key = A[j]$ 
    // Insert  $A[j]$  into the sorted sequence  $A[1 \dots j - 1]$ .
     $i = j - 1$ 
    while  $i > 0$  and  $A[i] > key$ 
         $A[i + 1] = A[i]$ 
         $i = i - 1$ 
     $A[i + 1] = key$ 
```

- ☒ $O(n)$
- ☐ $O(n \log n)$
- ☐ $O(\log n)$
- ☐ $O(n^2)$


[Clear selection](#)




Which of the following represents that $f(n) = O(g(n))$? [Not: O man Big-oh]

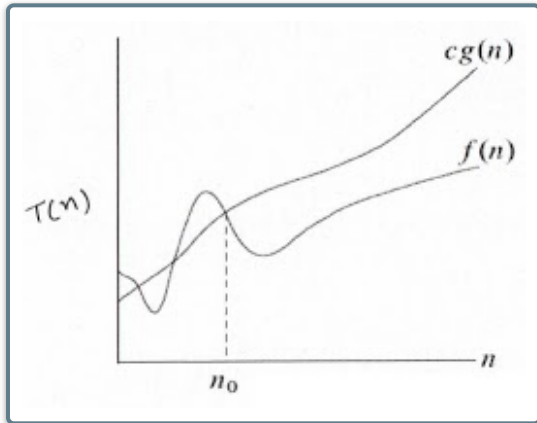

☒ Option 1

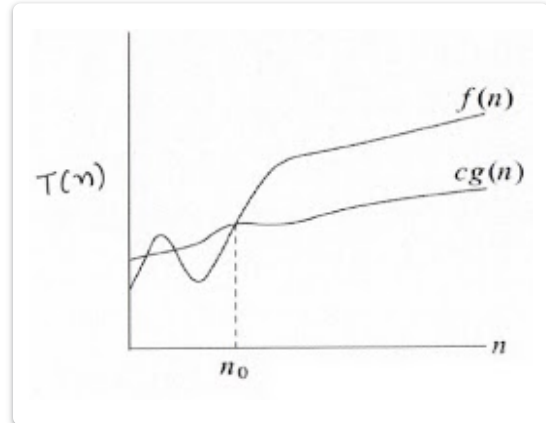

☐ Option 2

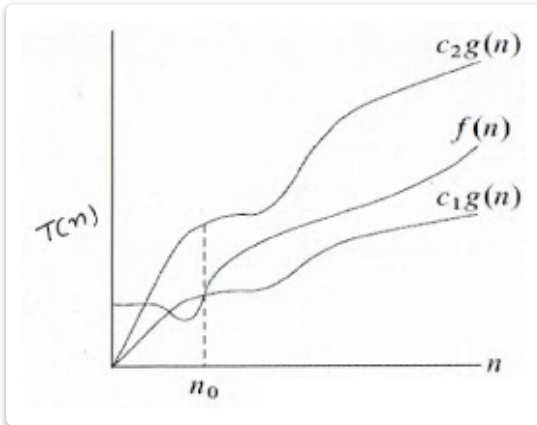

☐ Option 3

☐ All of the above

Clear selection

A decision problem A is NP-complete if

☐ Only (a)

☒ Both (a) and (b)

☐ Every problem in NP is reducible to A in polynomial time

☐ A is in NP

Clear selection




NP-complete problems are the hardest problems in NP.

- ☐ Can't Say
- ☐ True
- ☒ False
- ☐ Insufficient Information

Clear selection

Consider the tree shown in the figure here. It _____ represent a prefix code.

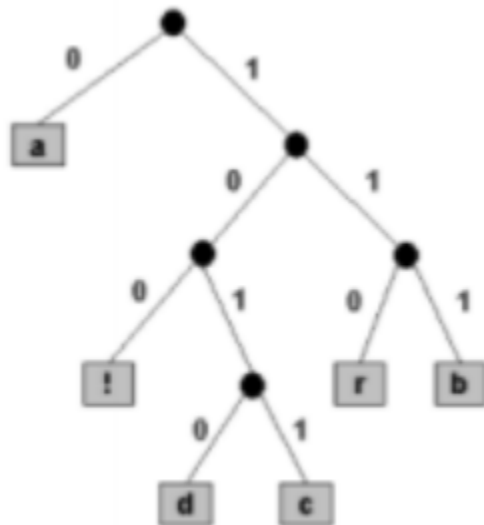

- ☐ does not
- ☒ does
- ☐ cannot be predicted whether it does or it does not

Clear selection



The recurrence relation of a merge sort is _____.

$$T(n) = T\left(\frac{n}{2}\right) + C$$

☐ Option 1

$$T(n) = T\left(\frac{n}{2}\right) + O(n)$$

☐ Option 2

$$T(n) = 2T\left(\frac{n}{2}\right) + C$$

☐ Option 3

$$T(n) = 2T\left(\frac{n}{2}\right) + O(n)$$

☒ Option 4

Clear selection

Solve: $T(n) = 2T(n/2) + \sqrt{3}$

☐ $\Theta(\sqrt{n} \log n)$

☐ $\Theta(\sqrt{n})$

☒ $\Theta(n)$

☐ $\Theta(\sqrt{n} \log \sqrt{n})$

Clear selection



Let $c > 3/2$, which of the following statements is TRUE for large values of n ?

A) $O(n^{\frac{3}{2}}) < O(n) < O(n^c) < O(c^n)$

B) $O(n^{\frac{3}{2}}) < O(n) < O(c^n) < O(n^c)$

C) $O(n) < O(n^{\frac{3}{2}}) < O(n^c) < O(c^n)$

D) $O(n) < O(n^{\frac{3}{2}}) < O(c^n) < O(n^c)$

☐ A

☐ B

☒ C

☐ D

Clear selection

The minimum number of scalar multiplications required to calculate a matrix-chain product of dimensions (70, 120, 90, 30, 60, 100, 50, 90, 10) is

☐ 3,30,000

☒ 3,92,000

☐ 3,81,000

☐ 4,55,000

Clear selection



Given items as {value, weight} pairs $\{\{66,23\}, \{45,20\}, \{15,4\}\}$. The capacity of knapsack=35. Find the maximum value output assuming items to be divisible and nondivisible respectively.

- ☐ 111, 60
- ☐ 90, 60
- ☐ 99, 81
- ☒ 126, 81

Clear selection

Based on the definitions of asymptotic notations what can be inferred from the below statement:
“Algorithm-1 is asymptotically efficient than Algorithm-2”.

- (A). For all input Algorithm-1 will be a better choice
- (B). For all input Algorithm-1 will be a better choice except possibly small inputs
- (C). For all input Algorithm-1 will be a better choice except possibly large inputs
- (D). Algorithm-2 will be a better choice for all small inputs

- ☐ A
- ☒ B
- ☐ C
- ☐ D

Clear selection



The following functions are arranged as per their growth from slowest growing function to the fastest growing function. Which of the following is incorrect?

- ☐ $n, n * \log n, n^{(1.1)}, n^2$
- ☒ $n, n^{(1.1)}, n * \log n, n^2$
- ☐ $\log n, n * \log n, n^2, 2^n$
- ☐ $1, n^2, (3/2)^n, 2^n$

Clear selection

What is the worst-case running time of Max-Heapify algorithm?

- ☐ $O(\log n)$
- ☒ $O(n)$
- ☐ $O(1)$
- ☐ $O(n \log n)$

Clear selection

If $T(n) = 5 * n^2$, then $T(n) =$ _____.

- ☐ $O(n^2)$
- ☐ $O(n^2 * \log n)$
- ☐ $O(n^3)$
- ☒ All of the above

Clear selection



Consider the problem of scheduling the lectures in a classroom. Given that a lecture j starts at s_j and finishes at f_j , and the the goal is to find the minimum number of classrooms to schedule all lectures, so that no two occur at the same time in the same room.

task	start-time	finish-time	time required
J	s_j	f_j	
A	0	2	2
B	3	7	4
C	4	7	3
D	9	11	2
E	7	10	3
F	1	5	4
G	6	8	2

- ☐ 7
- ☒ 3
- ☐ 4
- ☐ 5


Clear selection

If $T(n) = n^2 + 5 * n + 7$, then $T(n) =$ _____.

- ☐ $O(1)$
- ☒ $O(n^2)$
- ☐ $O(n)$
- ☐ $O(n * \log n)$

Clear selection

Find the possible vector cover in the below mentioned graph.

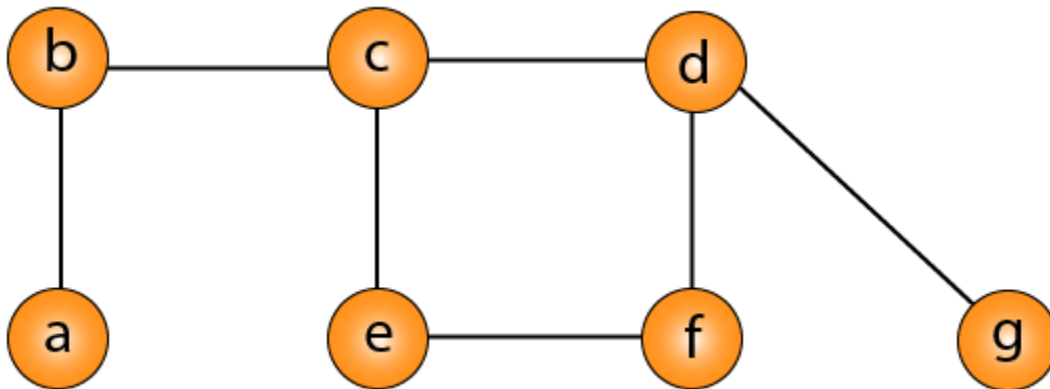

- ☒ $\{b, c, d, e, f, g\}$
- ☐ $\{e, f\}$
- ☐ $\{c, g\}$
- ☐ $\{a, e, d, g\}$

Clear selection



What is the time complexity for below recurrence relation?

$$T(n) = T(\sqrt{n}) + c$$

☒ $O(\log \log n)$


☐ $O(n^2)$

☐ $O(\log n)$

☐ $O(n)$

Clear selection

Given a figure, which of the following relations is correct?

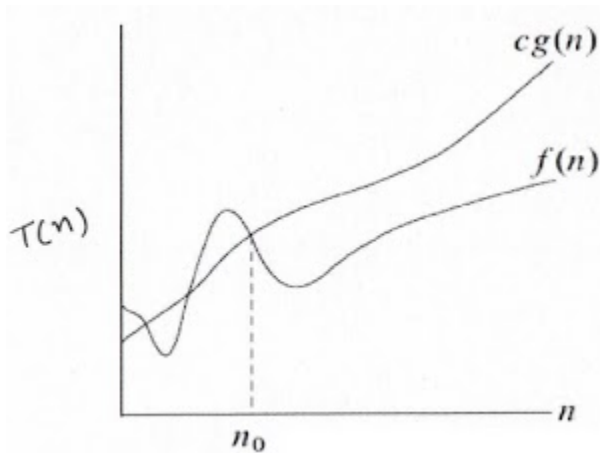

☐ $O(g(n)) = f(n)$

☒ $f(n) = O(g(n))$



☐ $g(n) = O(f(n))$

☐ $O(f(n)) = g(n)$

Clear selection



One of the spanning tree of the graph shown in the figure is ____, whereas its one of the MST is ____

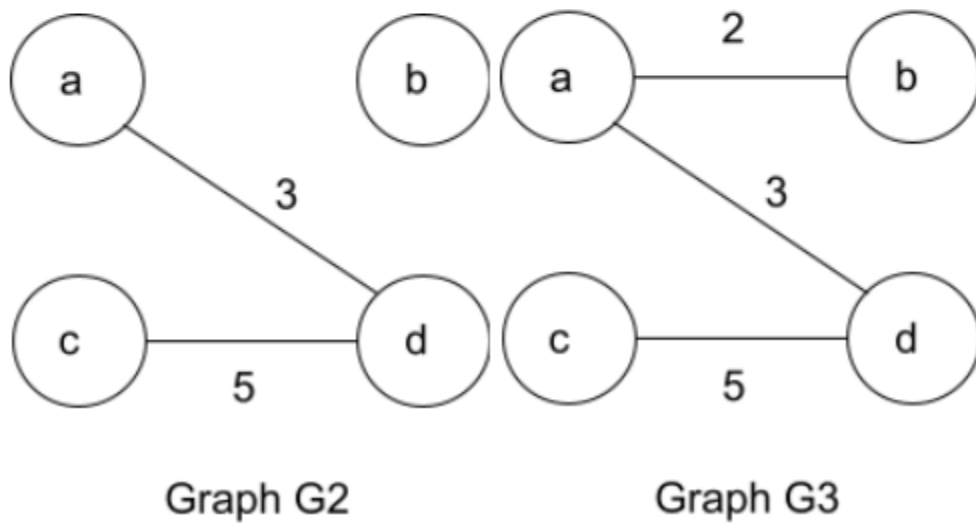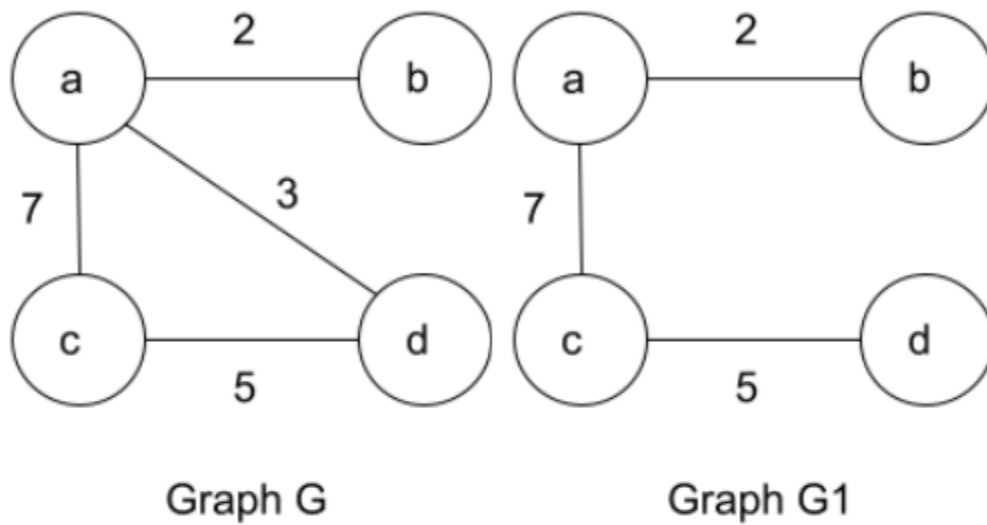

- ☐ G1, G2
- ☐ G3, G1
- ☐ G3, G2
- ☒ G1, G3

Clear selection

Given the following recurrence relation of an algorithm, what is the running time of the algorithm?

$$T(n) = 2T\left(\frac{n}{2}\right) + O(n)$$

- ☒ $O(n * \log n)$
- ☐ $O(n)$
- ☐ $O(1)$
- ☐ $O(\log n)$

Clear selection

If $f(n) = \log n$ and $g(n) = n$, then _____.

- ☐ The function $f(n)$ grows faster than $g(n)$ when n approaches infinity.
- ☒ The function $f(n)$ grows slower than $g(n)$ when n approaches infinity.
- ☐ The function $f(n)$ and $g(n)$ grow at the same rate when n approaches infinity.
- ☐ None of the above

Clear selection

The best-case running time of binary search algorithm is _____.

- ☐ $O(n \log n)$
- ☐ $O(\log n)$
- ☐ $O(n)$
- ☒ $O(1)$

Clear selection



Which of the following complexity class is not solvable in polynomial time but verifiable in polynomial time?

- ☐ P Class
- ☒ NP Class
- ☐ NP Complete
- ☐ All of the above

Clear selection

The recurrence relation of a binary search is _____.

$$T(n) = T\left(\frac{n}{2}\right) + C$$

☒ Option 1

$$T(n) = T\left(\frac{n}{2}\right) + O(n)$$

☐ Option 2

$$T(n) = 2T\left(\frac{n}{2}\right) + C$$

☐ Option 3

$$T(n) = 2T\left(\frac{n}{2}\right) + O(n)$$

☐ Option 4

Clear selection



You are given a rod of length 5 and the prices of each length are as follows:

length	price
1	2
2	5
3	6
4	9
5	9

Calculate the maximum value that you can get after cutting the rod and selling the pieces?

- ☐ 13
- ☒ 12
- ☐ 10
- ☐ 11

Clear selection

Let $T(n)$ be a function defined by the recurrence. $T(n) = 4T(n/4) + \sqrt{n}$ for $n \geq 4$ and $T(1) = 1$. Which of the following statement is TRUE?

- ☐ $T(n) = \Theta(\log n)$
- ☒ $T(n) = \Theta(n)$
- ☐ $T(n) = \Theta(\sqrt{n})$
- ☐ $T(n) = \Theta(n \log n)$

Clear selection



In the worst-case, the number of swaps required to sort n elements using selection sort is _____.

- ☐ $O(\log n)$
- ☐ $O(n \log n)$
- ☒ $O(n)$
- ☐ $O(n^2)$

Clear selection

Fill up the empty space in the following code:

```
MergeSort(A, p, r):  
    if _____  
        return  
    q = (p+r)/2  
    mergeSort(A, p, q)  
    mergeSort(A, q+1, r)  
    merge(A, p, q, r)
```

- ☐ $p < r$
- ☐ $p == r$
- ☒ $p > r$
- ☐ $p != r$

Clear selection



Which of the following algorithms follows divide and conquer strategy?

- ☐ Insertion sort
- ☐ Selection sort
- ☒ Merge sort
- ☐ Heap sort

Clear selection

Which of the following statements is correct?

$$\lim_{n \rightarrow \infty} \frac{f(n)}{g(n)} = 0$$

- ☐ Function f grows faster than function g as input n approaches infinity.
- ☒ Function g grows faster than function g as input n approaches infinity.
- ☐ Function f and g grows at the same rate as input n approaches infinity.
- ☐ None of the above

Clear selection



Let an array $A = \{11, 9, 17, 19, 22, 26, 6, 14\}$. Which of the following options represents the partially sorted array after the first four passes of the insertion sort?

- ☐ {6, 9, 11, 14, 17, 19, 22, 26}
- ☒ {9, 11, 17, 19, 22, 26, 6, 14}
- ☐ {9, 11, 19, 17, 22, 26, 6, 14}
- ☐ None of the above

Clear selection

Comment on following statements:

S1: Any two real numbers can be compared.

S2: All functions are asymptotically comparable.

S3: For any two functions $f(n)$ and $g(n)$, it is possible that neither $f(n) = O(g(n))$ nor $f(n) = \Omega(g(n))$.

(A). S1 and S2 is true and S3 is false

(B). S1, S2, and S3 all are false

(C). S1, S2, and S3 all are true

(D). S1 and S3 true and S2 is false

- ☐ A
- ☐ B
- ☐ C
- ☒ D

Clear selection



State True or False

(1). $(\log n)^{1/2} = O(\log \log n)$

(2). $2^{2n} = O(2^n)$

(A). TRUE, TRUE

(B). TRUE, FALSE

(C). FALSE, TRUE

(B) FALSE, FALSE

☐ A

☒ B

☐ C

☐ D

Clear selection

The best-case running time of linear search algorithm is _____.

☒ **$O(1)$**

☐ $O(n \log n)$

☐ $O(n)$

☐ $O(\log n)$

Clear selection




Consider the selection sort algorithm for sorting n numbers. The maximum number of swaps possible are _____.

- ☐ n^2
- ☐ n
- ☐ 1
- ☒ $n-1$

Clear selection

Consider the tree shown in the figure here. Given that it encodes the character string as shown below, the characters encoded are _____. Encoding - 000100111010011

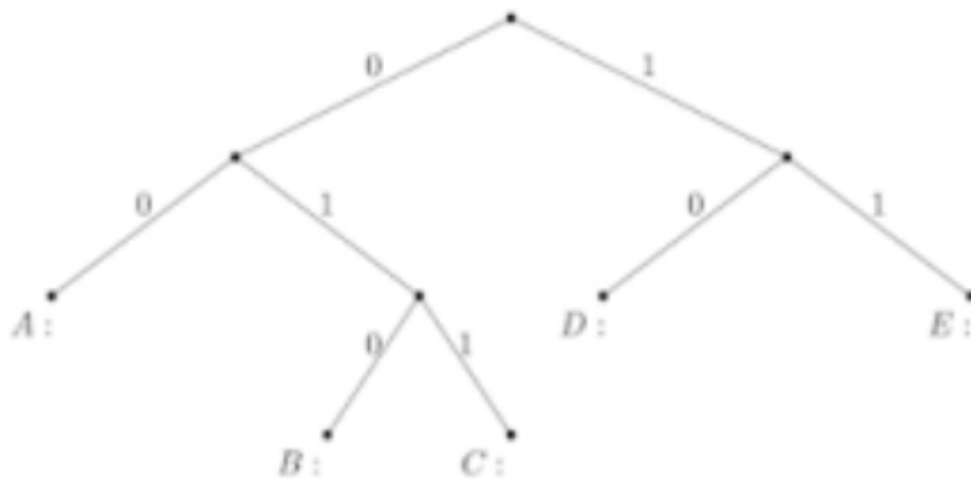

- ☐ ABDddb
- ☒ ABCDDC
- ☐ ABDDDC
- ☐ ABDEBC

Clear selection



If we will be able solve satisfiability problem in Polynomial time then travelling salesperson problem can also be solved in polynomial time

- ☐ Can't Say
- ☐ False
- ☐ Insufficient Information
- ☒ True

Clear selection

Which data structure is used in dijkstra's shortest path algorithm on weighed graph to implement it in linear time?

- ☐ Stack
- ☐ B-tree
- ☒ Queue
- ☐ Heap

Clear selection

If $f(n) = 2n + 5$ and $g(n) = 3n - 2$, then _____.

- ☐ The function $f(n)$ grows faster than $g(n)$ when n approaches infinity.
- ☐ The function $f(n)$ grows slower than $g(n)$ when n approaches infinity.
- ☒ The function $f(n)$ and $g(n)$ grow at the same rate when n approaches infinity.
- ☐ None of the above

Clear selection



To sort the following list in ascending order using insertion sort, how many times elements have to be shifted from their positions? {40, 14, 70, 57, 38, 27}

- ☐ 10
- ☐ 7
- ☒ 9
- ☐ 8

Clear selection

The worst-case running time of binary search algorithm is _____.

- ☒ $O(\log n)$
- ☐ $O(n \log n)$
- ☐ $O(n)$
- ☐ $O(1)$

Clear selection

Which of the following statements is correct?

$$\lim_{n \rightarrow \infty} \frac{f(n)}{g(n)} = \infty$$

- ☒ Function f grows faster than function g as input n approaches infinity.
- ☐ Function g grows faster than function f as input n approaches infinity.
- ☐ Function f and g grows at the same rate as input n approaches infinity.
- ☐ None of the above

Clear selection



The worst-case running time of linear search algorithm is _____.

- ☐ $O(n^2)$
- ☐ $O(n \log n)$
- ☒ $O(n)$
- ☐ $O(\log n)$

Clear selection

Consider a typical Activity Selection problem. The activities pool as in the A_1, A_2, \dots, A_{12} need to use the same resource. Their start and finish times are as shown, in the figure here. Then, _____ is the maximum number of activities that can be completed without having conflicts in this schedule is _____.

Activity	A_1	A_2	A_3	A_4	A_5	A_6	A_7	A_8	A_9	A_{10}	A_{11}	A_{12}
Start T	1	3	2	6	6	8	4	4	9	10	2	7
Finish T	6	5	7	8	9	9	7	7	12	14	5	10

- ☐ 2
- ☐ 3
- ☒ 4
- ☐ 5

Clear selection



After _____ try, we can find the existence of an element in a sorted array containing 1000 elements using binary search.

- ☐ 100
- ☐ 31.6227
- ☒ 10
- ☐ 1000

Clear selection

Suppose $T(n) = n\sqrt{n}$. Consider the following statements. a) $T(n)$ is $O(n^3)$ b) $T(n)$ is $O(n\log n)$

- ☐ Both a) and b) correct
- ☐ Neither a) nor b) correct
- ☐ Only b) correct
- ☒ Only a) correct

Clear selection



Let $T(m)$ and $S(m)$ are running time of an algorithm with input size 'm' where $T(m)$ is worst case and $S(m)$ is average case running time respectively. What is correct based on this?

(A). $S(m) = \Omega(T(m))$

(B). $S(m) = \Theta(T(m))$

(C). $S(m) = O(T(m))$

(D). $S(m) = o(T(m))$

☐ A

☐ B

☒ C

☐ D

Clear selection

What is the worst-case running time of the following algorithm? Array A of n integers is an input to the algorithm.

```
for  $j = 2$  to  $A.length$ 
     $key = A[j]$ 
    // Insert  $A[j]$  into the sorted sequence  $A[1 \dots j - 1]$ .
     $i = j - 1$ 
    while  $i > 0$  and  $A[i] > key$ 
         $A[i + 1] = A[i]$ 
         $i = i - 1$ 
     $A[i + 1] = key$ 
```

☐ $O(\log n)$

☐ $O(n)$

☒ $O(n^2)$

☐ $O(n \log n)$

Clear selection



Consider the following two sequences :

$A = \langle Q, R, S, R, P, Q, R \rangle$, and

$B = \langle R, P, S, Q, R, Q \rangle$

Find the length of longest common subsequence of A and B.

☒ 4

☐ 5

☐ 2

☐ 3

[Clear selection](#)

[Back](#)

[Submit](#)

Never submit passwords through Google Forms.

This form was created inside of Sardar Vallabhbhai National Institute of Technology, Surat. [Report Abuse](#)

Google Forms

