


## School Management Application

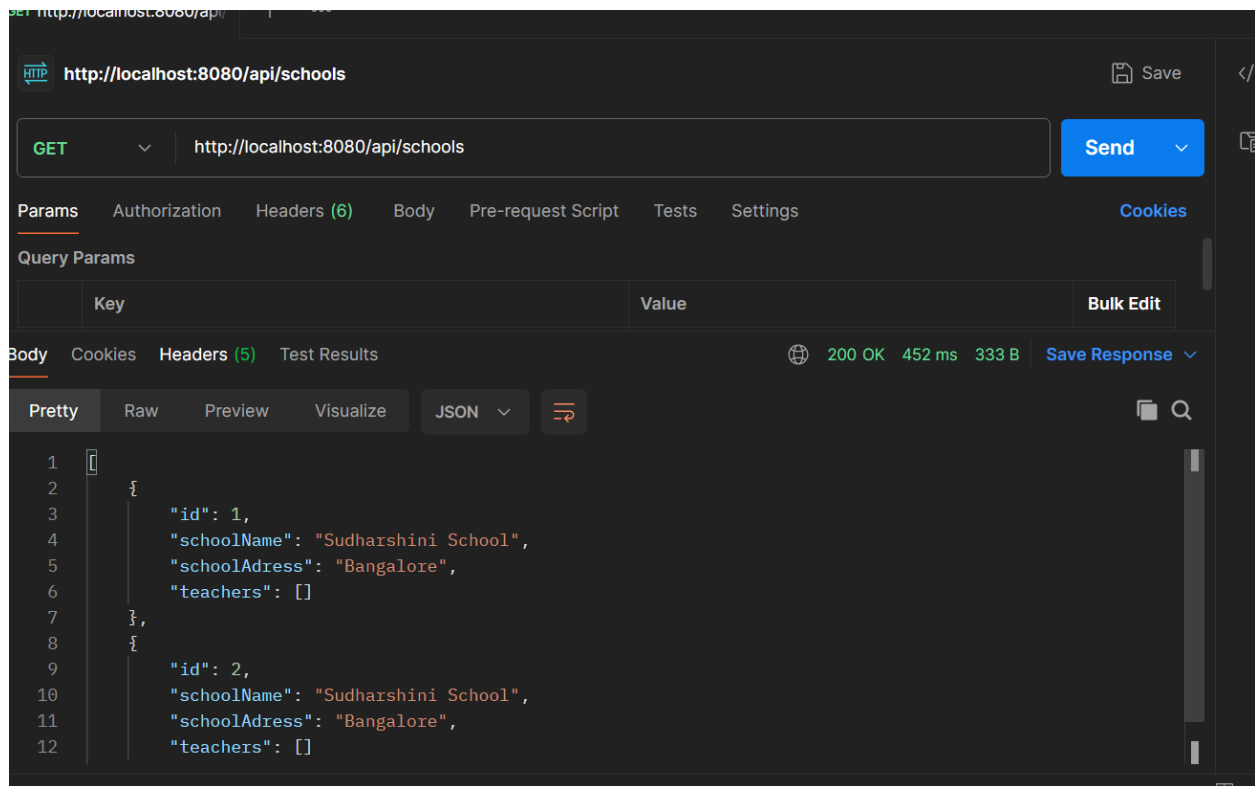

HTTP **http://localhost:8080/api/schools** Save </>

**GET** ▼ **http://localhost:8080/api/schools** Send ▼

**Params** **Authorization** **Headers (6)** **Body** **Pre-request Script** **Tests** **Settings** Cookies

**Query Params**


Key	Value	Bulk Edit
-----	-------	-----------

**Body** Cookies **Headers (5)** **Test Results** 200 OK 452 ms 333 B Save Response ▼

**Pretty** **Raw** **Preview** **Visualize** **JSON** ▼ ≡

```
1 [
2   {
3     "id": 1,
4     "schoolName": "Sudharshini School",
5     "schoolAdress": "Bangalore",
6     "teachers": []
7   },
8   {
9     "id": 2,
10    "schoolName": "Sudharshini School",
11    "schoolAdress": "Bangalore",
12    "teachers": []
13  }
```

\*Get all the schools

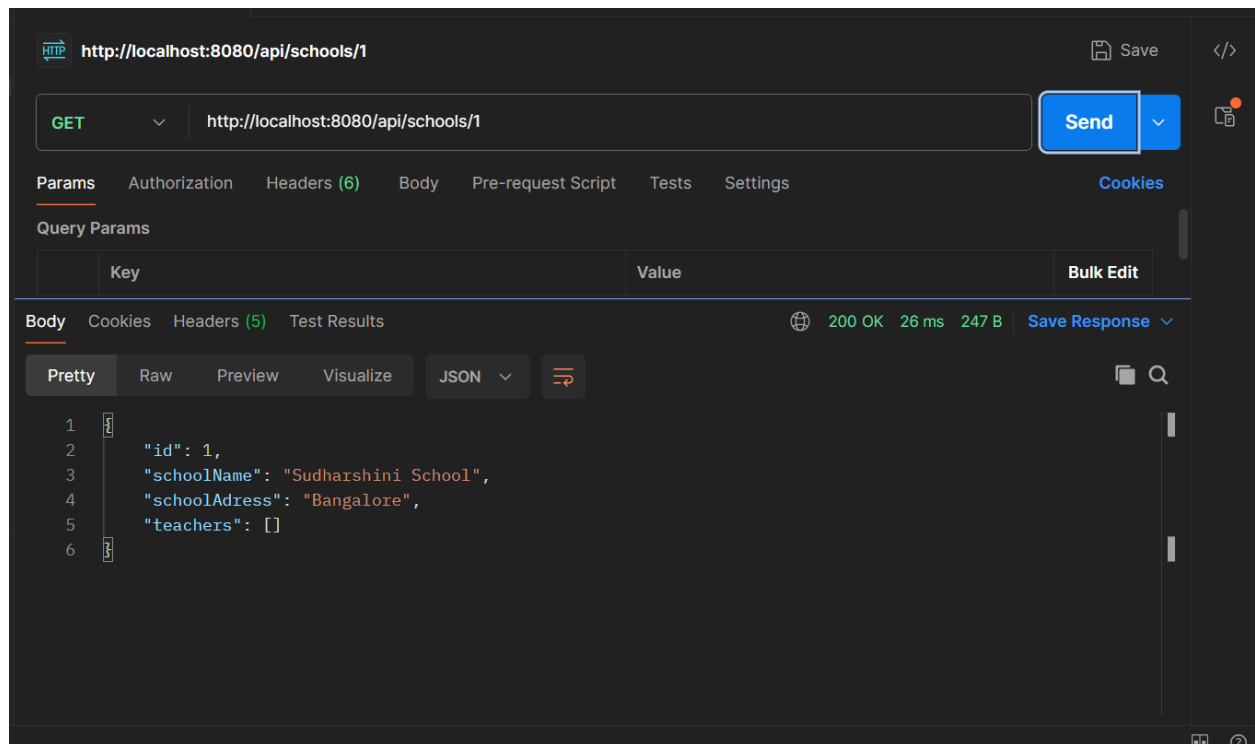

HTTP **http://localhost:8080/api/schools/1** Save </>

**GET** ▼ **http://localhost:8080/api/schools/1** Send ▼

**Params** **Authorization** **Headers (6)** **Body** **Pre-request Script** **Tests** **Settings** Cookies

**Query Params**

Key	Value	Bulk Edit
-----	-------	-----------

**Body** Cookies **Headers (5)** **Test Results** 200 OK 26 ms 247 B Save Response ▼

**Pretty** **Raw** **Preview** **Visualize** **JSON** ▼ ≡

```
1 {
2   "id": 1,
3   "schoolName": "Sudharshini School",
4   "schoolAdress": "Bangalore",
5   "teachers": []
6 }
```

\*Get school by ID.

# School Management Application

POST http://localhost:8080/api/schools

Send

Params Authorization Headers (8) Body Pre-request Script Tests Settings Cookies

none form-data x-www-form-urlencoded raw binary JSON Beautify

```
1 {
2   "schoolName": "Sri Devala Maharshi English High School",
3   "schoolAddress": "Doddaballapur",
4   "teachers": []
5 }
```

Body Cookies Headers (5) Test Results 200 OK 98 ms 272 B Save Response

Pretty Raw Preview Visualize JSON

```
1 {
2   "id": 3,
3   "schoolName": "Sri Devala Maharshi English High School",
4   "schoolAddress": "Doddaballapur",
5   "teachers": []
6 }
```

\*Create school Post Request

DELETE http://localhost:8080/api/schools/3

Send

Params Authorization Headers (8) Body Pre-request Script Tests Settings Cookies

Headers 8 hidden

Key	Value	Bulk Edit
Key	Value	

Body Cookies Headers (5) Test Results 200 OK 89 ms 202 B Save Response

Pretty Raw Preview Visualize Text

```
1 School with ID 3 deleted successfully.
```

\*Delete school by id.

## School Management Application

Postman interface showing a GET request to `http://localhost:8080/api/teachers`. The response is a JSON array with one teacher object.

Headers (8):

Key	Value	Bulk Edit
Key	Value	

Body (JSON):

```
[
  {
    "id": 1,
    "teacherName": "Srinivas",
    "teacherAdress": null,
    "qualification": null,
    "age": 0,
    "dob": null,
    "experience": 0,
    "school": null
  }
]
```

\*Get all Teachers.

Postman interface showing a GET request to `http://localhost:8080/api/teachers/1`. The response is a JSON object for a teacher with id 1.

Headers (8):


Key	Value	Bulk Edit
Key	Value	

Body (JSON):


```
{
  "id": 1,
  "teacherName": "Srinivas",
  "teacherAdress": null,
  "qualification": null,
  "age": 0,
  "dob": null,
  "experience": 0,
  "school": null
}
```

\*Get Teacher by Id.

## School Management Application

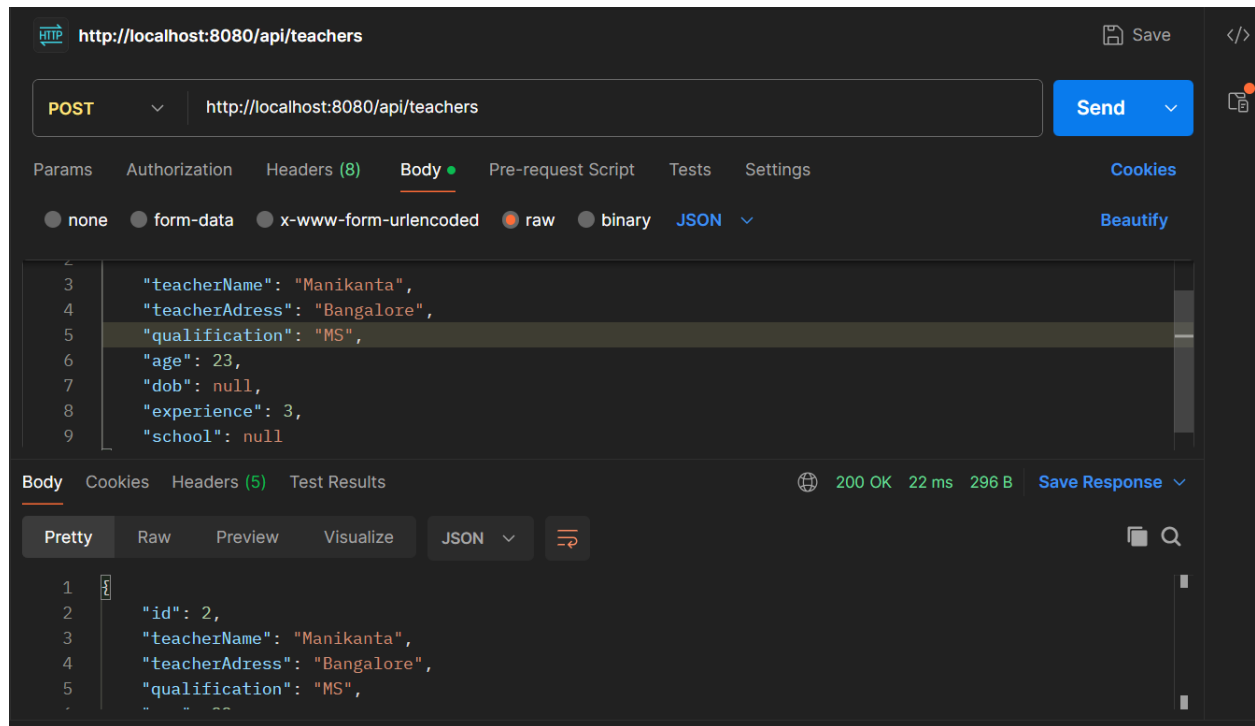

\*Create Teacher

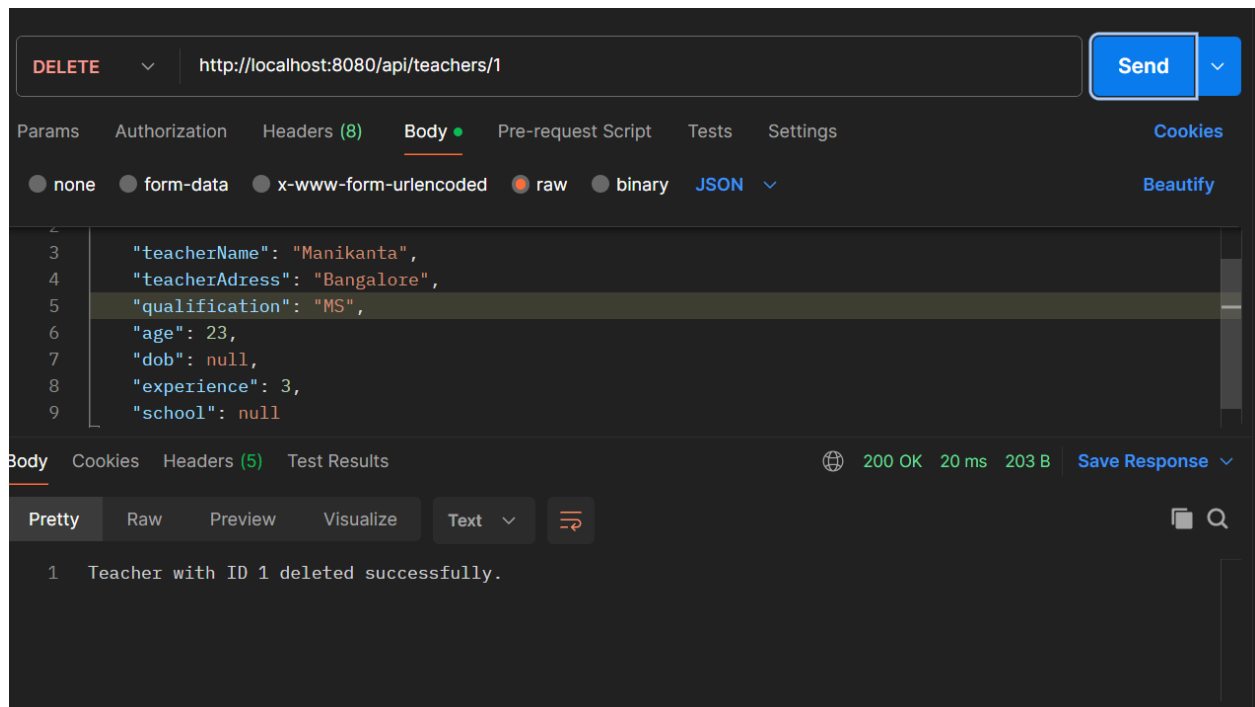

\*Delete Teacher