

Please use the following settings when using Prettier:

Prettier: Arrow Parends

Include parentheses around a sole arrow function parameter.

always

Prettier: Bracket Same Line

☐ Puts the > of a multi-line HTML (HTML, JSX, Vue, Angular) element at the end of the last line instead of being alone on the next line (does not apply to self closing elements).

Prettier: Bracket Spacing

☒ Controls the printing of spaces inside object literals.

Prettier: Config Path

Path to the prettier configuration file.

A list of [glob patterns](#) to register Prettier formatter.

Add Item

Prettier: Embedded Language Formatting

Control whether Prettier formats quoted code embedded in the file.

auto

Prettier: Enable

☒ Controls whether Prettier is enabled or not. Reload required.

Prettier: Enable Debug Logs

☐ Enable debug logs for troubleshooting.

Prettier: End Of Line

Specify the end of line used by prettier.

If



Prettier: Experimental Ternaries

☐

Try prettier's [new ternary formatting](#) before it becomes the default behavior.

Prettier: HTML Whitespace Sensitivity

Specify the global [whitespace sensitivity](#) for HTML files. Valid options:

- `css` - Respect the default value of CSS `display` property.
- `strict` - Whitespaces are considered sensitive.
- `ignore` - Whitespaces are considered insensitive.

css



Prettier: Ignore Path

Prettier: Ignore Path

Path to a `.prettierignore` file.

.prettierignore

Prettier: Insert Pragma

☐

Prettier can insert a special `@format` marker at the top of files specifying that the file has been formatted with prettier. This works well when used in tandem with the `--require-pragma` option. If there is already a docblock at the top of the file then this option will add a newline to it with the `@format` marker.

Prettier: Jsx Single Quote

☐

Use single quotes instead of double quotes in JSX.

Prettier: Prettier Path

Path to the `prettier` module, eg: `./node_modules/prettier`.

Prettier: Print Width

Fit code within this line limit.

Prettier: Prose Wrap

(Markdown) wrap prose over multiple lines.

Prettier: Quote Props

Change when properties in objects are quoted. Valid options:

- `"as-needed"` - Only add quotes around object properties where required.
- `"consistent"` - If at least one property in an object requires quotes, quote all properties.
- `"preserve"` - Respect the input use of quotes in object properties.

Prettier: Require Config

☐ Require a prettier configuration file to format. See [documentation for valid configuration files](#).
Note, untitled files will still be formatted using the VS Code prettier settings even when this setting is set.

Prettier: Require Pragma

☐ Prettier can restrict itself to only format files that contain a special comment, called a pragma, at the top of the file. This is very useful when gradually transitioning large, unformatted codebases to prettier.

Prettier: Resolve Global Modules

- ☐ When enabled, this extension will attempt to use global npm or yarn modules if local modules cannot be resolved.
This setting can have a negative performance impact, particularly on Windows when you have attached network drives. Only enable this if you must use global modules.

Prettier: Semi

- ☒ Whether to add a semicolon at the end of every line.

Prettier: Single Attribute Per Line

- ☐ Enforces single attribute per line in HTML, JSX, Vue and Angular.

Prettier: Single Quote

- ☐ Use single instead of double quotes.

Prettier: Tab Width

Number of spaces it should use per tab.

Prettier: Trailing Comma


Controls the printing of trailing commas wherever possible. Valid options:

- **none** - No trailing commas
- **es5** - Trailing commas where valid in ES5 (objects, arrays, etc)
- **all** - Trailing commas wherever possible (function arguments)



Prettier: Use Editor Config

- ☐ Whether or not to take `.editorconfig` into account when parsing configuration. See the [prettier.resolveConfig](#) docs for details.

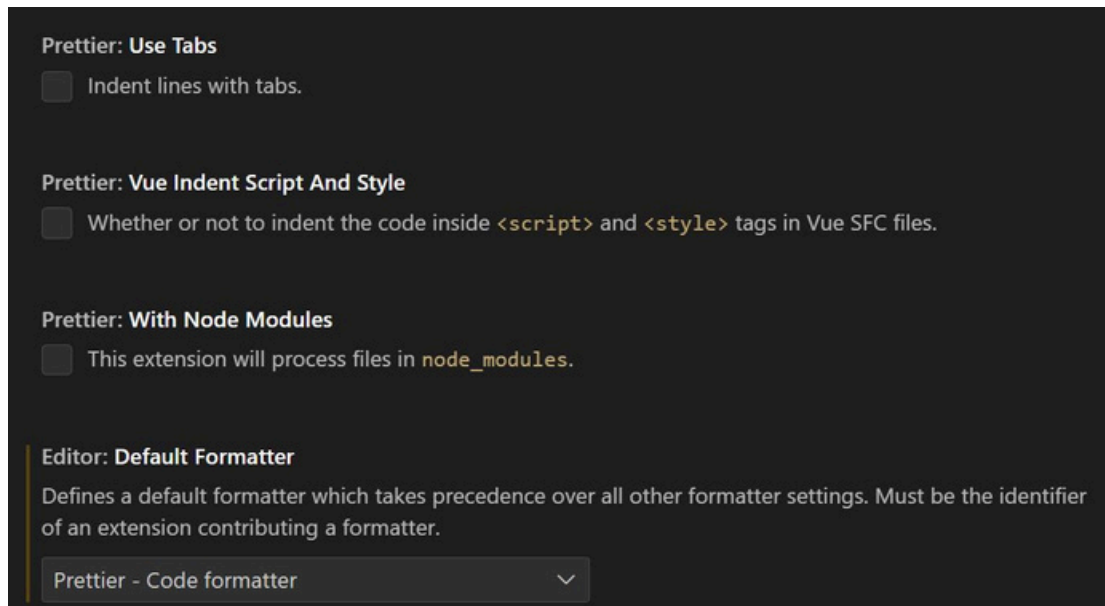

1.Go to Formatting.

2.Make sure whether the format on save is checked.

