Day 41 Adapters, OAuth Token 27th Aug 2026

* We need URL, Authentication (Token - Authorization)
* What is Authentication, it is Secure Authentication

Example: HTTP Adapter flow:

↓

Practicle is done in the System.

iflow name's → Day_41 (All iflows Start With)

* Till now we used for Authentication purpose is Basic Authentication, → Static Username and Password.
* In Realtime we will use Basic Auth (yes or' NO)

↓

NO ✓

* Because here the user name is static and password is also static → So Anybody can hack
* Example: Gmail logged In Scenario ✓
* So here, for security we use OAuth Security which is helpful for Secure the Authentication

It works under **token Based** Approach

→ token will be available only for 1 or 2 hours after that token will Expire

∴ So OAuth is more Secure

* for OAuth Authentication We Require 3 Source's

Remember: (1) token URL, clientID, client Secret

* The above 3 Source's are we will get it from SAP process Integration Runtime

⇒ So here what will happen first we will use above 3 Sources and generate the Token for OAuth Authentication then we will use that token for Authentication purpose in main Interface

* The main point here is whenever we are passing the authentication details it will Pass like Header ⇒ Bearer ——— (token)
(or) Basic ——— (token)

* Till this point we know how to pass the token for Authentication ✓

* Now we need to know how to get the token

-) Eg: Now we need call cpi system using Postman by OAuth credentials

① When need to go to API respective Service Instance (or) Integration related Services. Instance there we can find all 3 Resources.

client ID, client secret, tokenurl ✓

* Important: When we are using OAuth token

There are multiple type's
- = client_credential ✓
- = username_password ✓
- = Authorization_code ✓

↓ We need to pass

clientID, clientSecret, username Password → We need pass ✓

all above are token based Authentication only ✓

* Here the main difference is

Generation of token only ✓

* token type = Bearer (always)

* Default valid time = 6000 (1hr)

* Explained different ways to procen the bearer token ✓ and hit the end point

* If other System's want's to Connect to our System

↓

our iflow endpoint

We need provide ① Endpoint URL

② Service Instance detail's

→ clientID

→ client_Secret

→ token_URL ?

grant type = client_credentials

* So there is only OAuth Based Authentication?

NOW we do have ~~Cred~~ certificate Authentic ation based.

** What type of Authentication do you worked, on?

⇒ I worked on ① Basic Auth
② OAuth Authentication
③ public key (SFTP)
④ certificate Authentication

* from now onward's we need to use OAuth Authentication

* Example: practice Example.

calling Standard API's

↳ ~~API~~ iflow

* For interview he'is Explaining the about What are all the Authentication you have used.

⇒ We need to tell athe mandatory OAuth.

* Explained about Standard API process

⇒ api.sap.com

* If we need to the Standard API, Call, we need URL/api/v1/apiname/Message processingLogs

* If we need to the Standard API call we need.

URL/api/v1_apiname ✓

⇒ Here we can call the different user iflow as well with this process ✓

↳ Request Reply.


* Auto updation of Authentication token will be done by SAP in security material's.

* How the iflow accessed ? where we have created the credential's.

⇒ Based on the Role

* default Role: ESBMessaging.Send.

* Now about custom Roles:

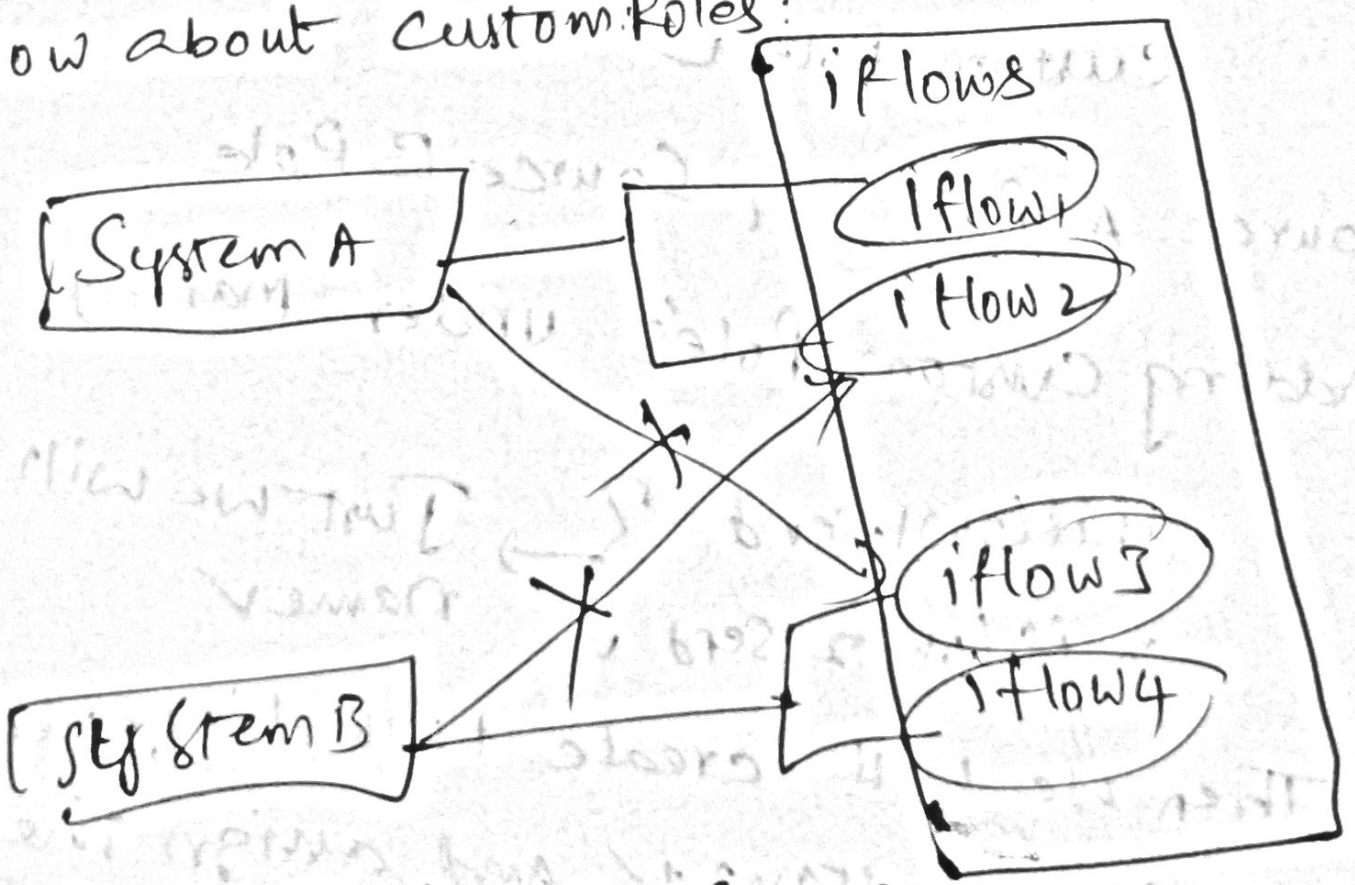

* Here how we can Restric the iflow accessed by use reverse Roles

Step①: We need to create Tenant-level Roles

eg: itflow1.Send ✓
itflow2.Send ✓

Step②: We need to create Service instance Separately in BTP cockpit Based on the Service your are using ✓

Eg: itflow1.Send ✓ → Here we will get Authentication URL's
itflow2.Send ✓ → Here also we will get Authentication details

Step③: After creating the itflow1 & itflow2 there we need to pass Seaperate Custom Roles ✓

* Source A Role & Source B Role
* Adding Custom Roles under Manage user Roles
  * itflow1.send
  * itflow2.send
  } → Just we will provide the name ✓
* Then we will create two different Service Instance ✓ and assign the Required Roles ✓