Day 46 SFTP_Sender_adapter 03/sep/2026

* Discussed about previous POC → Proof of Concept

∴ Non-Authentication usage ✓

* The important point is if you want to call the onpremise system how you will call ?

⇒ The only way is using cloud connector

∴ Now another way is we can call the onpremise system using non-Auth where we need to get the bearer Authentication token inside the iflow and we need to hit the onpremise endpoint by passing the Authorization header ?

* By using cloud connector → we need virtual host name & locationID ✓

* virtual host, virtual port, & location ID to the BTP Admin team Jn order to connect with the onpremise SAP System ✓

* Internal host & proort & protocol ? What type of System ✓

(eg: Non SAP System)

* Why HTTP Adapter doesnot have proxy type? ↵

Internet 'or' onprimise → why.

Because → http → only push (expose)
only we will provide the data
to the external Resource with
out file operation's


→ SFTP → Here with the SFTP
We will do the two operations
Pburn & pull operations.

∴ Difference is triggering point ↵

* http → CPI ⟹ expose the url

SFTP → Soure ⟷ pull → push
(files) CPI files

∴ That's why http adapter doesnot have

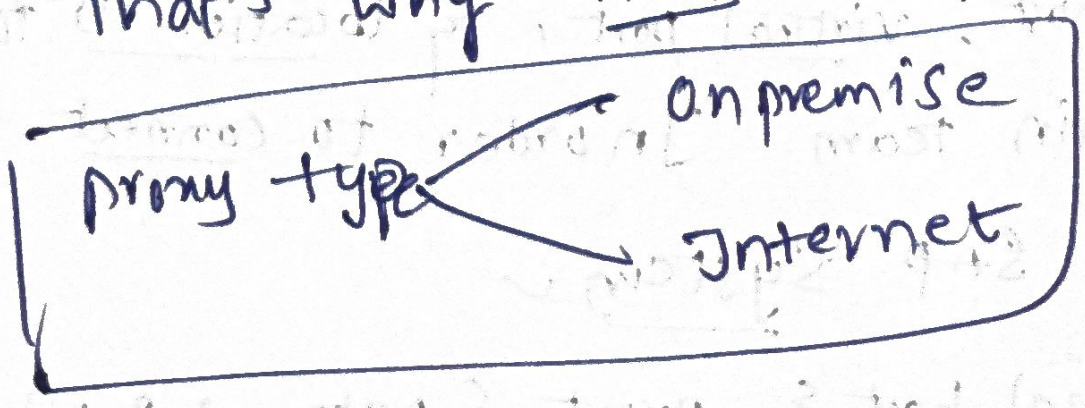

* About Scheduler discussed ↵

* While using http Adapter → We will use Authendication Details

* Where while we are using SFTP we need to Select proxy type and cloud connector is mandatory in Realtime work,

* Schedular: Schedule on Day
: Schedule to Recurring
: Advanced ✓

* Now, processing Tab again:

→ Empty File handling: process Empty File
↳ Skip Empty file ✓
↳ MPL with post processing only
↳ message processing log ✓

eg: 'okb File

- Realtime usage: Empty file ('okb) → mapping error
Flow will be disturbed

→ Read lock Strategy: Source System → SFTP Sever (File have)

* Now file content is writing → Now CPI Picked up File → Now what happens, Now We have Read lock Strategy is the Solution

→ Content change ✓

Read lock check interval (in ms) 5000
↓
'5' sec ✓

eg: file.txt } If these two exist
file.done } then only CPI system will pick the file

→ Done file expected:

$(file:name).done ✓

→ Rename : file to be picked up

: The scenario is it does not pick the actual file but it will rename the file and pick that file the original file will be there itself ✓

* Poll on one worker only: Parallel & Sequential

→ worker nodes


Incomming

⇒ eg: 4 files → each node will pick files and process it

if → worker nodes are 4 available ✓

⇒ If it process it in serial or sequence order then we need check that check box

* Stop on exception: Sequential → stop processing files

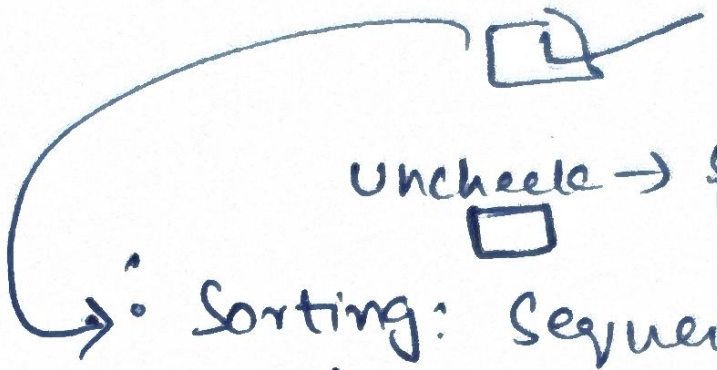

Uncheck → process the files parallel

* Sorting: Sequential order
  - FileName
  - FileSize
  - FileTimestamp

* Max messages per poll: (20) default

* Idle time out (in min): 15 (Default) (minutes)

* Use fast check:

* Include Subdirectories: /output

Suppose file is in temp

/output/sample/test/temp

Scanning or check all directories

* Change Directories stepwise: D
  - ↳ no use we can Ignore