Day 18 :- Message Status

* When we are talking about Status → we need to keepin mind that → We have to Remember → about → 2 Status

① iFlow → Status → eg : iflow → deployed → yes or no
↓
iFlow status

② Message → Status → eg :

① * Manage integration Content : There are 4 types of Status they are ① Started
② Error
③ Starting → it's yet to get deployed
④ Stopping → undeploying the iflow

* NOW the main important topic is message Status
→ There are different types of message Status will be there

* What do you mean by design time and Run time

→ Design time → Where actually you developing it

Runtime → Where the process is running


eg: Bike manufacturing

| Manufacturing the Bike | Showroom Selling the Bike |
| --- | --- |
| Design time | is Runtime (or) Worker node |

* Every itflow is an artifact in CPI

* So in CPI monitor tab it's works on Runtime node

* eg:

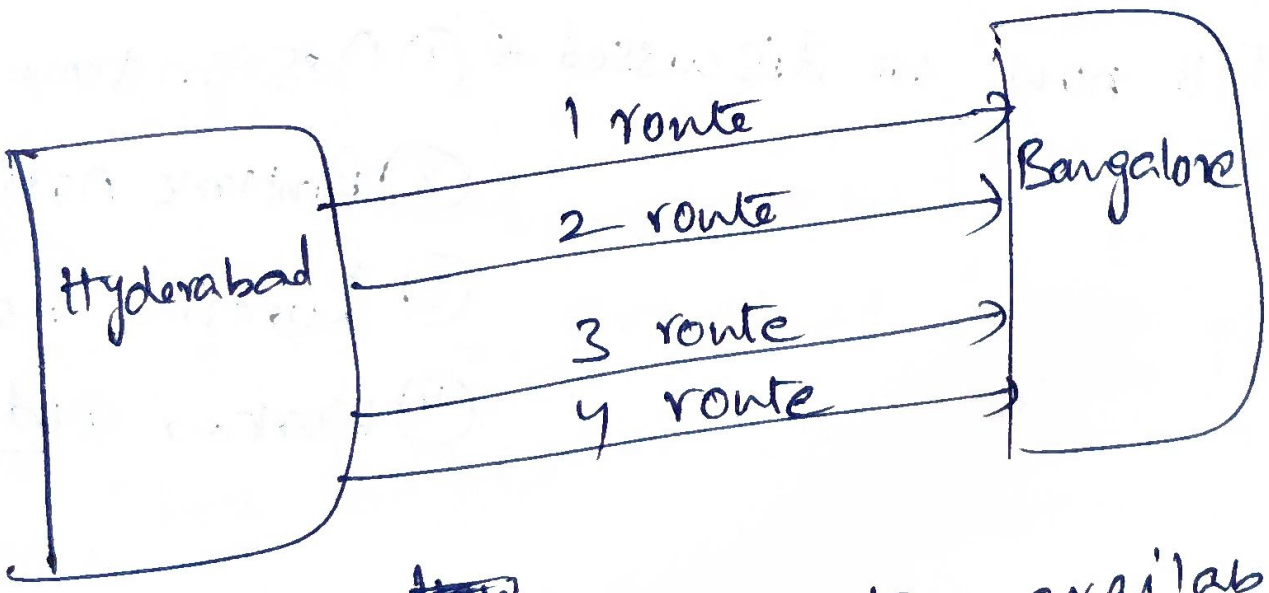


~~How~~

Scenario → 4 routes available

But consumers 10 are there

What will happen?

take example of threads concept?

Worker nodes

Based on the availbilty of nodes, the process will happen

* in cpi you cannot tell how many nodes are available for your tenant

* Then who will manage the traffic?

in SAP cpi → worker nodes will proces that

* SAP cpi → uses → Multi Structure → Tenant → multi

Architecture

* Till now we discussed → ① Design time Artifacts
② Runtime Artifacts
③ Runtime nodes
④ Worker nodes

* Remember about Runtime node and Worker node

* Now about message Status:

→ When ever we processing the message then we need to know what's happened to that message → message Status

Realtime Scenario: if we are working in Support team for SAP CPI Constultant then that person is responsible for getting the Status of all triggged messages

Different types of message Status:

① Completed: If the message is Successfully proceyed to the target Systems

② Failed: If the message i's tailed it mean's it's not reached to the target Systems (its stopped in CPI flow (or) it's called Exception Subprocess) error endevent

→ Then the message will goto the

~~[illegible]~~: Failed Status

(3) processing: Suppose your are working with huge payload → This time processing of message will time to proces it so at that time message status will be in processing (status)

(4) Abandoned: For example if the message is processing state and user deployed or undeployed that same flow then the message status will be in Abandoned status

(5) escalated: If you are using escalated end event then the message status will go to the escalated end event

(6) Discarded:

(Q) → Source → message → CPI (load balance) → Worker node

But

Timer event ? Who will process the message.

* at the same time if we are not using Start message Event instead we are using the timer event - then actually in backend the timer event - then actually in backend @ Same time if two worker node picks the same message the we will get the duplicate record.

→ To avoid this above Scenario →

Suppose we have 4 worker nodes

Worker node ① → already started processing the message

Simply → Discarded means

The message is already processed by another worker node that's why this message is not process

So then in Remaining 3 worker nodes the status of that message will be shown as discarded

( Important point ) ∠

* When ever you are using timer event they you will see discarded Status

(7) Retry: What do you mean by Retry? for Suppose if a message is failed then if you want to resend that message that is nothing But Retry

∴ In cpi default we dont have Retry mechanism, So,

At this situation what we will do is

Queue Concept → Solace Queues
kafka
JMS
:

JMS → Java messaging queues will do an automatic retry ✓

for example: demo

* Interview Question: When you are using JMS adapter then you must and should

Send the body (Remember) otherwise you will get exception

→ InputStream → with null value

(8) Cancelled : If the message in Retry State. in Queues (JMS) the we forcefully altered the queue then Status of that message will be Cancelled