

Day 14 — Main & Local Integration Process, and Process Call

1. Main Integration Process vs. Local Integration Process

	Main Integration Process	Local Integration Process
Purpose	The place where we write all the logic and process the data from one system to another system	To call reusable logic wherever we want within that iFlow only
Starts how?	Triggered by a sender (Start Message event — square/envelope)	Cannot be triggered by a sender; runs only when called (Start Event — circle)
Scope	The main sender → receiver journey	Inside the same iFlow only — not visible to other iFlows

How Do We Identify the Main Integration Process?

By its **symbol** — the Main Integration Process is drawn with the **SAP symbol/label**, and its start/end shapes are the **Start Message / End Message** (envelope) shapes. The Local Integration Process has its own different header and uses **circle** Start/End Events (the square-vs-circle rule from Day 9).

2. Can We Have Multiple Main Integration Processes in One iFlow?

Yes, we can. Question from class: then will that iFlow be considered a **single message or multiple messages?**

Answer: It will be considered as multiple messages — each Integration Process has its own start (its own sender), so each one is triggered and processed on its own as a separate message.

Added detail (verified): each Integration Process or Local Integration Process needs **its own Exception Subprocess** — exceptions are local to the process in which they occur, so one Exception Subprocess cannot catch errors for all of them.


What "Main Integration Flow" Really Means

The main integration process is the one that carries out **sending the data from one system (Source) to the Receiver (Target)** — this is the flow the sender's data must hit.

Small nuance: your notes say the Source → Target transfer should happen **only** in the Main Integration Process. That is right for the **primary journey** (the sender can only enter through the main process). But a Local Integration Process **can still contain calls to other systems** — for example a Request-Reply step calling a SOAP/OData service, or sending a mail — and SAP's own examples do this. So: *the main process owns the sender-to-receiver journey; local processes are helpers that may also call external systems.*

3. The Diagram — Remembering the Symbols

The remembering point is the **symbol** for Main Integration Process and Local Integration Process:

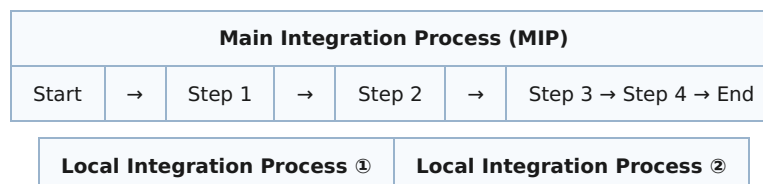

In the sketch, the main process has four steps, and **Local Integration Process ①** and **②** sit beside it, ready to be called.

Interpretation note: your notes say "Main Integration Process has 4 → Local Integration Process". I read this as *the main process has 4 steps, and any of them can call a local process*. If your trainer meant "four local processes", tell me and I'll correct it.

4. Who Can Call a Local Integration Process?

Caller	Allowed?
An outside system (e.g., Postman, another application)	No ✗
From the Main Integration Process	Yes ✓
From an Exception Subprocess	Yes ✓

The call is made using the **Process Call** palette function (Day 9).

Real-time use of the Exception Subprocess → Local Process pattern: build one "send error mail" Local Integration Process, and call it from the Exception Subprocess of your main process (and of any other local process). This ties together Day 8's Mail adapter and Day 9's Exception Subprocess — one alert design, reused everywhere.

5. Calling One iFlow from Another iFlow

Question: if you want to call from the 1st Integration Flow to a 2nd Integration Flow — how? Three options from class:

Option	When It Fits
ProcessDirect adapter	Both iFlows are on the same tenant — direct, no network hop (most common choice)
HTTP adapter	The other iFlow is on a different tenant or is exposed as an HTTP endpoint
JMS	You want asynchronous, queue-based hand-over between the two flows

This is the same idea as the **Process Direct adapter** homework from Day 13 — it is the standard way to modularize across iFlows, just as Process Call modularizes *inside* one iFlow.

6. Important Points

① Can we send data from the Source (Postman) to CPI's Local Integration Process?

Answer: No. The data sent from Postman must hit the **SAP CPI's Main Integration Process only**.

Clarifying the reason: your notes give the reason as "it cannot transfer data from Source System to Target System". The more precise technical reason is: **a Local Integration Process has no Start Message event and no sender channel** — nothing outside can connect to it. The only way into it is a **Process Call** from a main process or an Exception Subprocess. (And, as noted above, a local process can in fact call other systems — so "can't transfer to a target" isn't the real limitation.)

② Simulation vs. Postman — Which Node?

Tool	Node
Simulation	Design Tab (Design node)
Postman	Runtime (Runtime node)

This matches Day 8: the **Design node** is the canvas editor (where Simulation runs, without deployment), and the **Runtime node** is where the *deployed* iFlow runs when Postman calls it.