Day 26 Aggregator

* Sender SFTP: Suppose if you are getting any file from SFTP Server then how we need to read it? → if we want to read that file as a [zip] file how to do that → no we will discuss
→ for that we [Sender SFTP]

* Let's discuss about the SFTP adapter What ever the Configuration you have did it for the Receiver SFTP adaper → Similar Configuration will be there for the [SFTP Sender adapter]

* for example:

Address,
Authentication type,
Directory,
file name

} These are same in Both Adapters

Q→ When you are using ~~Sfter~~ SFTP adapter

CP1 → will go and Connect to the SFTP Server

eg: When your are using Https Adapter → in our case postman is Sending data to CP1

Now, When using Sender SFTP → Why can't SFTP Server push the files to ~~CP1~~ CP1 ?

→ Because, files operations in Sender Side will always works in pull mechanism and never be a push mechanisms

* The extra Operation in SFTP Sender adapter is Scheduler
  - (1) Schedule on Day
  - (2) Schedule ~~on~~ Recurrence
  - (3) Advanced

NO w(Q) → Suppose Scheduler → every → 1 hrs

9Am → ran → Picked up → file
ABC

Now, 10Am → again → ran → how do you → you handle → not picking the same file?

→ processing Tab:


↳ post-processing: * Delete File

Now: ZIP_Decompression

Scenario will be if you are getting a zip file from the Source and you are picking up from the Source folder of SFTP server then you will use ZIP_Decompression

(Q) If we place that zip file in input folder CPI will pick it? Yes (or) no

Demo :

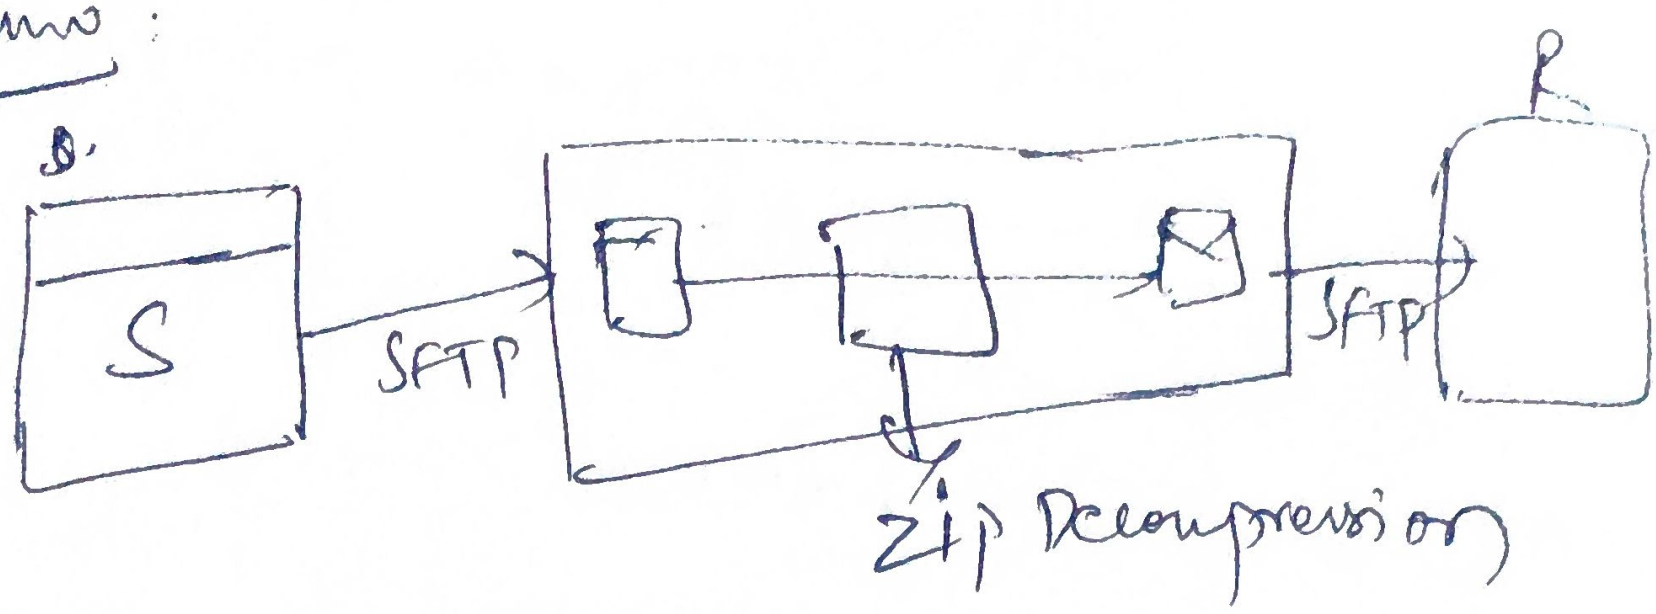

Scenario: Now I → zip → ~~file~~ file → 2 files (xm) (Inside

Now → zip → ~~file~~ file Placed in → input folder

cpi → is → not(x) picking up the file

Why ?

Now → if the file's operation is not happening then you need to go to the monitoring tab →

→ message failed → Because

error :→ zip file has more than 1 entry

Zip Compression → 1 zip file → 1 file inside that ✓

Zip DeCompression → pick zip file → Which has only 1 file inside that.


→ If that zip file has 2 file's inside that then zip Decompression doesn't work

* Now What will be the Solution?

We need to Split the messages →
We got Splitter and Zip Splitter

Zip Splitter → will actually Unzip the file, When you are having multiple files in Single zip file and Send each file as Seperate msgs

That's Why we use zip splitter

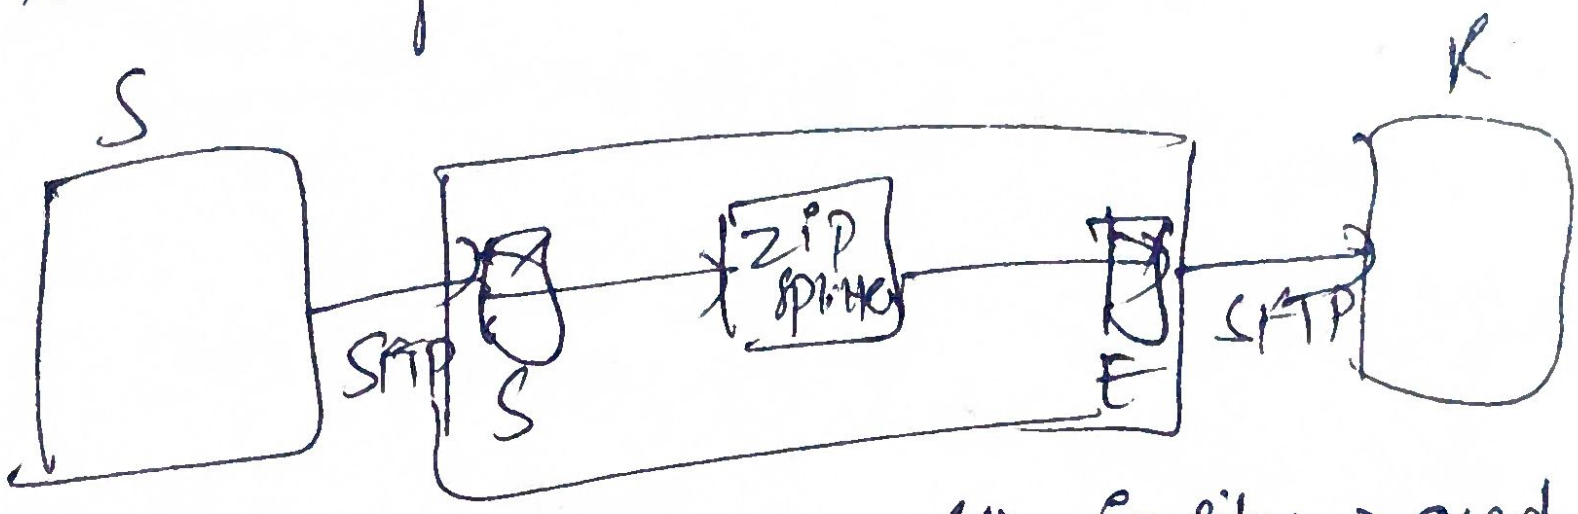

* When you are working with zip files → and inside that zip file if you have multiple files → zipSplitter

* if you want to put multiple files in 1 zip file then we will use gatherer

zip format

* single file & single zip file ⇒ zip

* De compression

* single file → single zip file place

→ zip Compression

~~1~~

1. zip c → f z
   1, 1

1, 2 zip c + Gather → 1 zip
zip → inside 2 files

1/2 2 splitter → 2 files

* **Aggregator** : It is also a one kind of gather only → But → it Combine different Messages

→ Single message ID → Splitter, multicast

Splitter

→ then we will use gather otherwise there won't be any use of gather

don't

→ if you don't have any Splitter and you don't have any multicast then there is no point of using gatherer

gather won't work in that Scenario

*** gather will work for only (→)

Single message ID

Where as. Aggregater will works with Multiple message ID's

→ if you want to Combine a messages in to a single message → then you will use Aggregator

Scenario:

postmat → raw → Body → Xml


```
<EmpData>
    <EmpInfo>
        <EmpID>1</EmpID>
        <EmpName>Bharath</EmpName>
        <Desg>Developer</Desg>
        <Company>Infosys</Company>
        <Contact>Phone</Contact>
    </EmpInfo>
</EmpData>
```

⇒ it in 1hr → if you want to Combine all the messages → triggered → with "Desg" → Developer (only)

or Tester, or manager"

Combine and → send → you will use

Aggregator

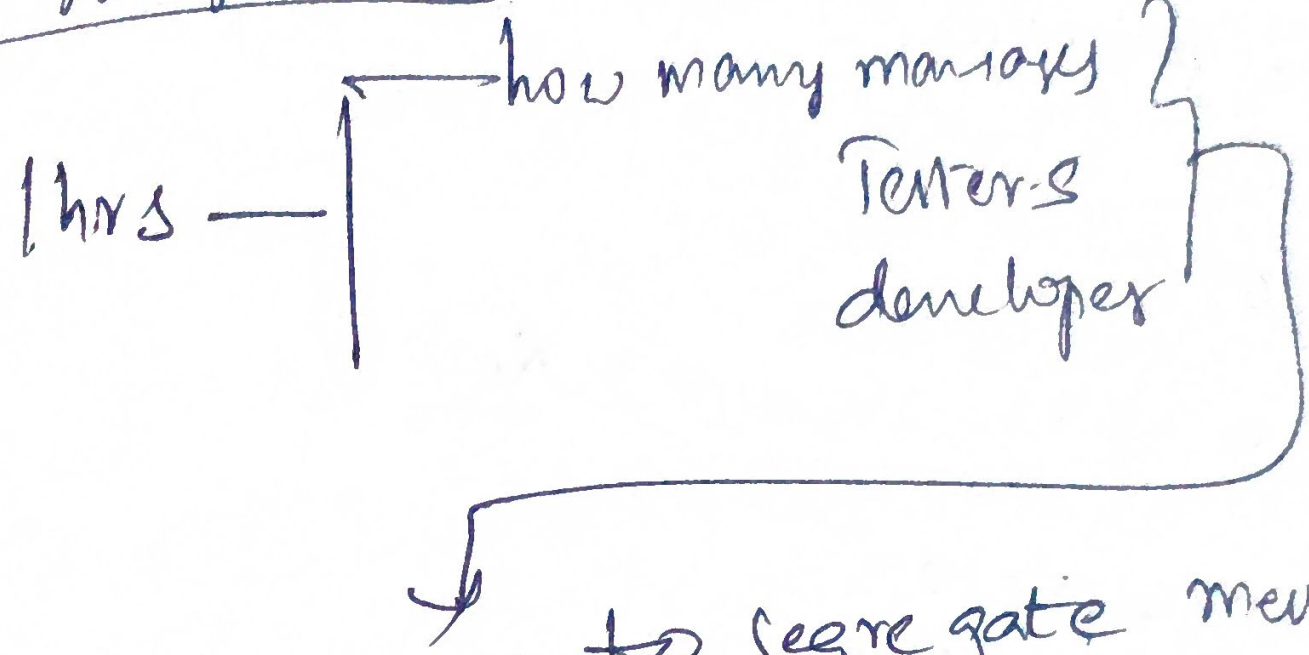

We need to segregate messages Based on a designation and then Combine those messages like

All managers → 1 file
Developers → 2nd file
Testers → 3rd file

etc

* Aggregator will Combine multiple different messages based on a Correlation ID means Based on a Unique ID

and it will work till a particular amount of time

Demo:

postman → HTTPS → Aggregator → SFTP
files (xml)

Aggregator: : Correlation

xpath: //Desg

: Aggregation Strategy:

① Incoming format: xml Same format

② Aggregation Algorithm: Combine

③ Message Sequence Expression (xpath): Combine in seq enabled

④ Last message Condition (xpath): false()

⑤ Completion timeout (in min): 60

⑥ Timeout measured From =

⑦ Data store name:


*** Aggregator only works with XML

Integration process → Transaction management

→ Transaction Handling : Not required
↳ Required for JDBC
Required for JMS

Now: How Backend of aggregation pallete function will work?

① Correlation ID : Uniq-ID, Base on which field you want to segregate the Data → like in our requirement we are segregating the DATA Based on the field

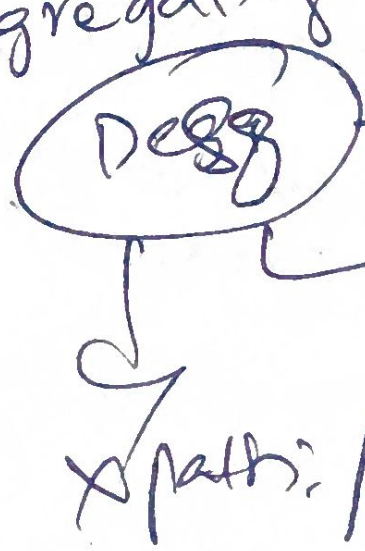

Data store: If you want to store the Data in CPI then we will use Data Store

It will be temperorly only

* in cpl → Where exactly the data is getting store

Monitor tab → manage store → Data stores → This is the place Where Data is getting stored

