Day-27

# Data Store

* Let's Continue with the aggregator, previous topic left over

→ aggregator → it is used to combine the messages from multiple messages Based on the Correlation ID.

→ It will Segregate the data and after that it Combine that Segregated data to the target System

→ for that reason we will aggregator

* Where the data will get Stored ? → data store which is under monitor tab

→ Data store → for storing the data temperorly

Aggregator → store → data → temperorly

→ we will → use → data store

→ Data Store → has → 2 entries →

① → Where all the Messages are placed with msg ID

② → Where the Segregated messages will be there

→ Segre gated messages → will → have → message ID.

eg: payload → 2 managers, 1 Tester


↓

Total 3 entries

payload → record → message ID

↓

Data Store Entry ID (unique ID) → Datastore

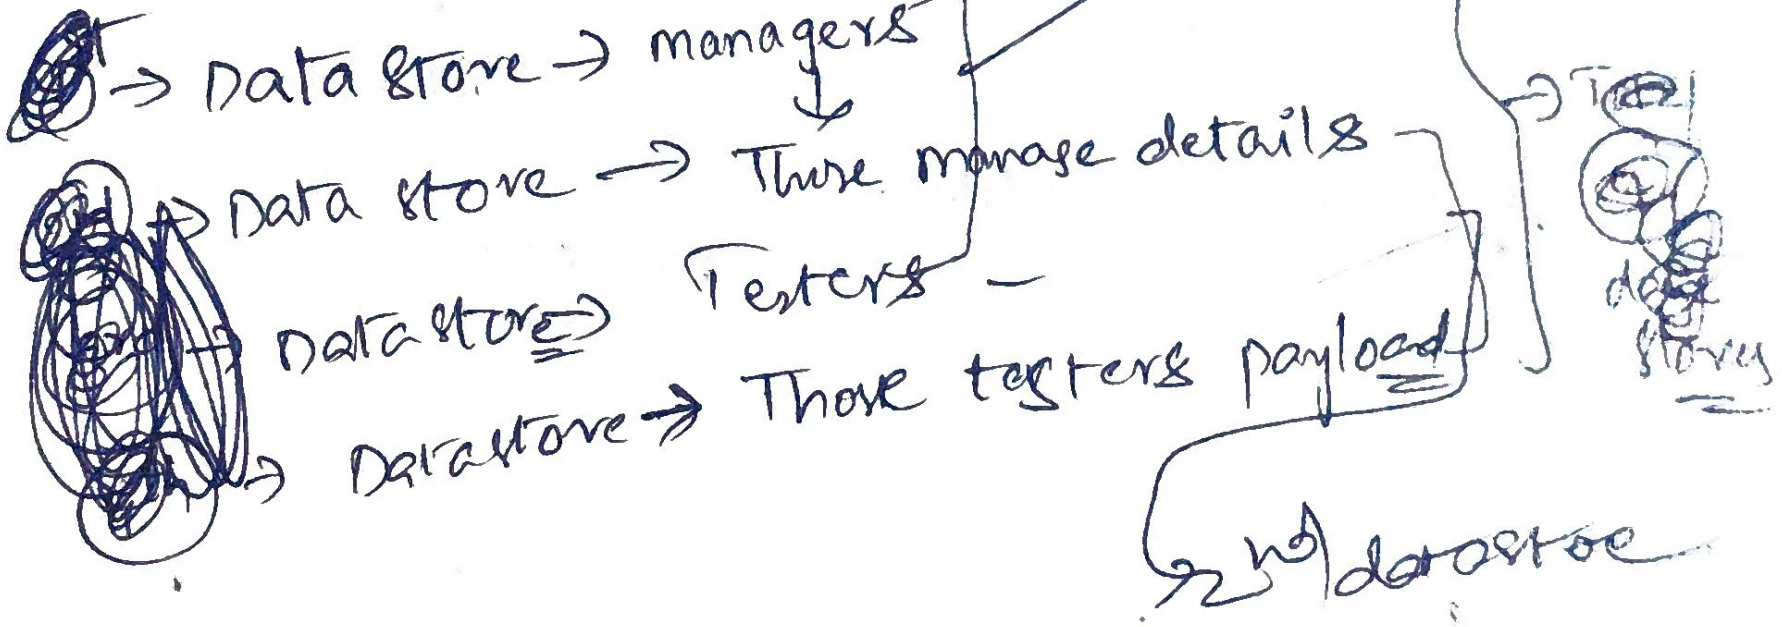


* Aggregation Strategy:

Last message Condition (xpath) : This condition is used to combine the messages

Till that message Recieved (With in that

↓

Last

given time ⏱

→ once that Condition has Satisfied you have to stop processing

like → (Scenario)


eg: if <Active> False </Active)

↳ if the active status is False you have to stop processing

Declaration: `//Active = 'False'` ↓ This is important

If the above condition satisfies then combining of message processing will be stopped

Demo:

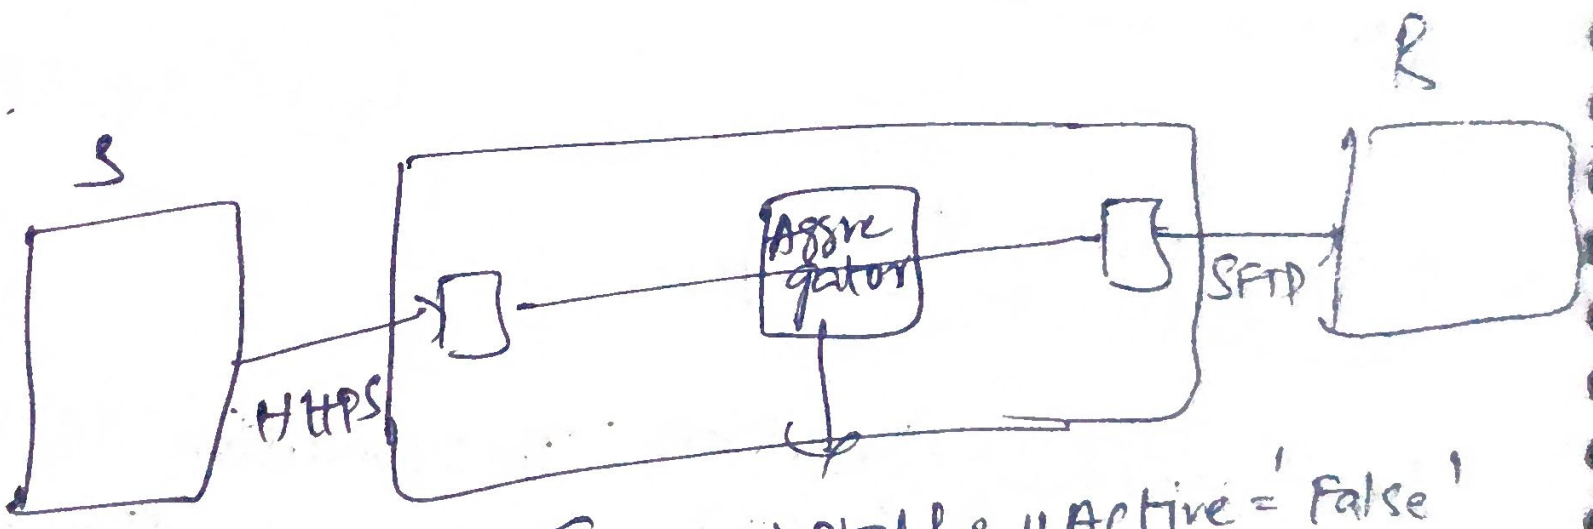


Correct path: //Active = 'False'

Manager status
① → True
② → True ✓
③ → True ✓

Tester
① → True <Status> True </Status>
② → True
③ → True
④ → False <Status> False </Status>

So, if we observe, Automatically the messages Combining will be stopped because → 4th request We Sent "false" → Status

↓

NOW, what will happen to the 6 message's combining for manager payload will it procen or no ? → yes.

But → the output will be processed first → With → Tester details

And After time duration → remaining output will come

→ So if the condition is not satisfied then we cannot stop the flow right So the

Completion Time out is → mandatory (we need to provide the details

This about Aggregator with last message Condition

(*) → Aggregator Algorithm : Combine in Sequence

What is this? if you want to combine a messages in Sequence order, like → Based on aparticular field → ~~you w~~ then you use Combine in Sequence

↳ // EmpID

Correlation // false()

(*) (1st) → data store → Tester

(2nd) → data store → actual payload

(*) (eg) → messages →

| | | |
|---|---|---|
| 5 | True | 1 |
| 7 | True | 2 |
| 2 | True | 4 |
| 9 | True | 5 |
| 4 | True | 7 |
| 8 | True | 8 |
| 1 | True | 9 |

→ Combine Sequence

---

Now → Last message Condition : // Action = Fail

| | | |
|---|---|---|
| 5 | True | 1 |
| 7 | True | 2 |
| 2 | False | 4 |
| 9 | False | 5 |
| 8 | True | 7 |
| 1 | True | 8 |
| | | 9 |

Output '2' — when record '2' Come →

It Won't Consider → and → It is not in sequence
We Cannot Consider → This the response
We will get

Because: with aggregator, Both the conditions should satisfy → What ever we are giving

Both the conditions → combine ---( & last message condition false), Action = False

→ Why CPI will prefer → SAP will update → periodically

eg: Arrival Time of First message for Aggregation
Arrival Time of Last message for Aggregation

→ When the Aggregation will start → Let's Say Rq 1 hr → When the 1st msg recieved → from that point of time it will Consider → 1 hr receiving messages

By default → 9am → 10am

Once the last msg recieved → from that point of time to next 1 hr.

Last message → 10am → 9:30 AM → dropped

* So we have closed the topic of aggregator

## (20) Data Store :

What doo you mean by data store?

if you want to store the data temporarily in cfl → then we will use Data store

* Data store operations: four operations

① Delete → delete data
② Get → get dada
③ Select → select data
④ Write → write data

} data store → we will use these operations

① Write operation : ~~Read~~ When ever you are using the write operation you need to give the Data store name configuration :

① Data store name :
② visibility :
③ Entry ID :

* When ever you are writing data to data store you write it with entry ID

If you are not providing the entry ID, By default ~~you need it~~ CP1 will provide the unique ID for every request.

* Expiration period : maximum → 180 days
  Minimum → 1 day

* Retention threshold : Alerting
  Waiting → ~~pending~~ → red colour
  Overdue