Day 31 — looping process call

Process call: If you want to call any local integration Process with in the same iflow then you will use process call

⇒ Call → local call:

① Idempotent Process call

② Looping process call → multiple times

③ Process call → Single time

* looping process call: If I want to call the local Integration process multiple times.


⇒ Till a particular Condition is satisfied untill then you want to loop the local integration process then you will use looping process call


Scenario: Let's say if you are calling an API and you want to call that API multiple times Instead of calling 1 time then what you will do in that case you will use looping Process call

* Some thing like a for loop → okay

Demo: Scenario: Let's say if you want to call the functionality 5 times, then you can use Number Range → functionality

If low:

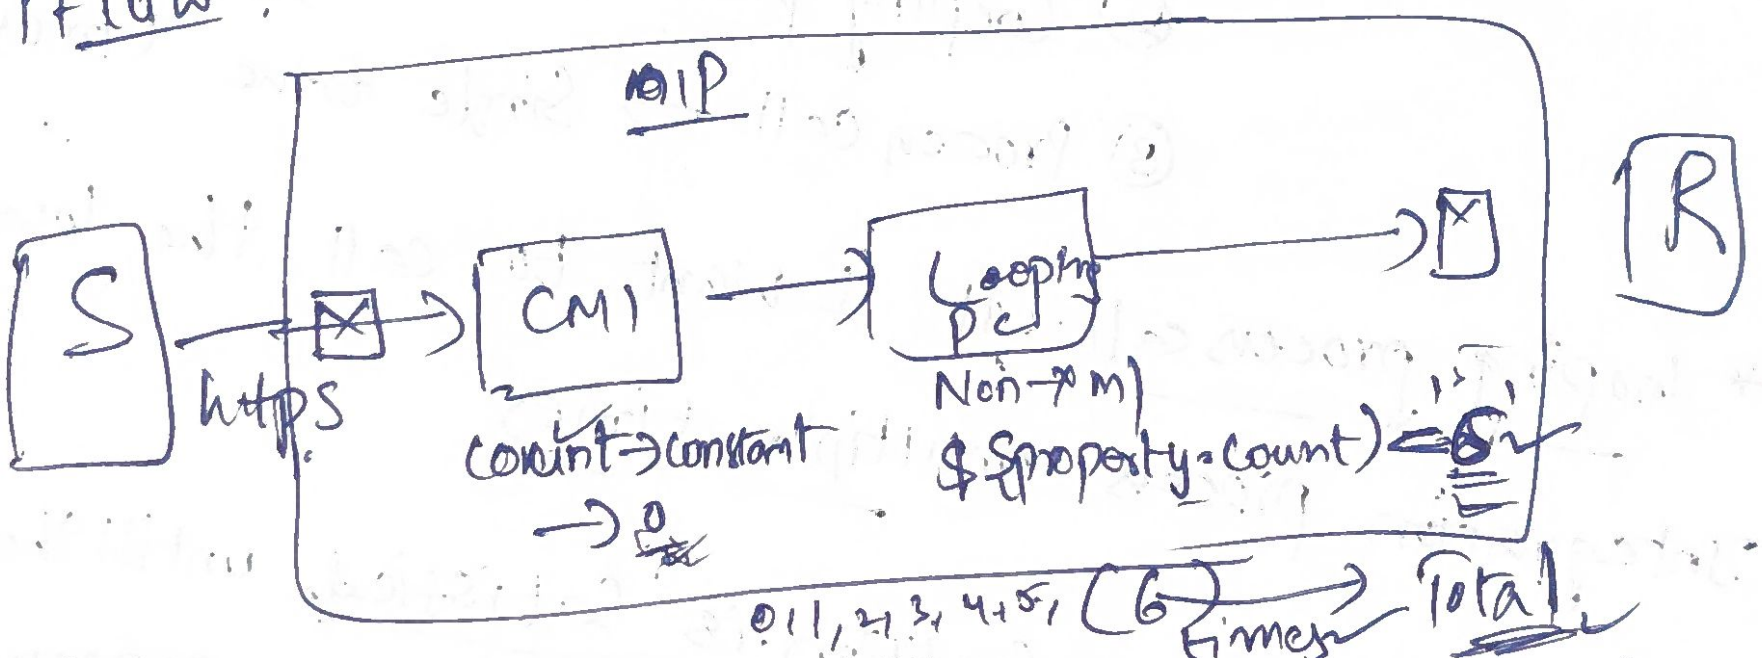

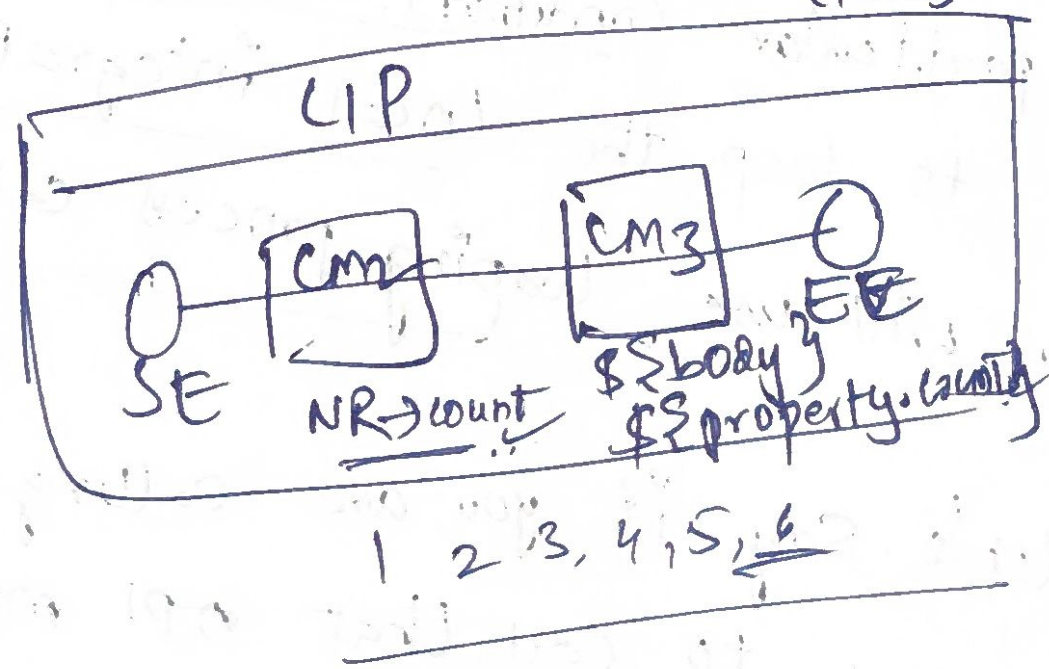

In which Scenario we will use looping process call

Realtime example:

postman → Get Call → Northwind Api → Orders (entity)

Now when you call the above ~~ADO~~ api

here → Total records → 860 records.

But Single Call or request → Api Response is limited → 200 records only

* Now what you will do here → We need to hit that url → 4 times (4x200 = 800) then each and every request we need to skip the → Recieved orders list using top & skip Standar Queries

→ This is Best Realtime example for looping proces Call

Idempotent process call : To Identify the duplicate records

How we will Identify them ?

Idempotent process call : processing.

Idempotent Condition

① local Integration process


② message ID: ${property.empID} (Select)


③ Skip process call for Duplicate : 1

Scenario : if you identity any duplicates call

→ no need call this process call

Demo

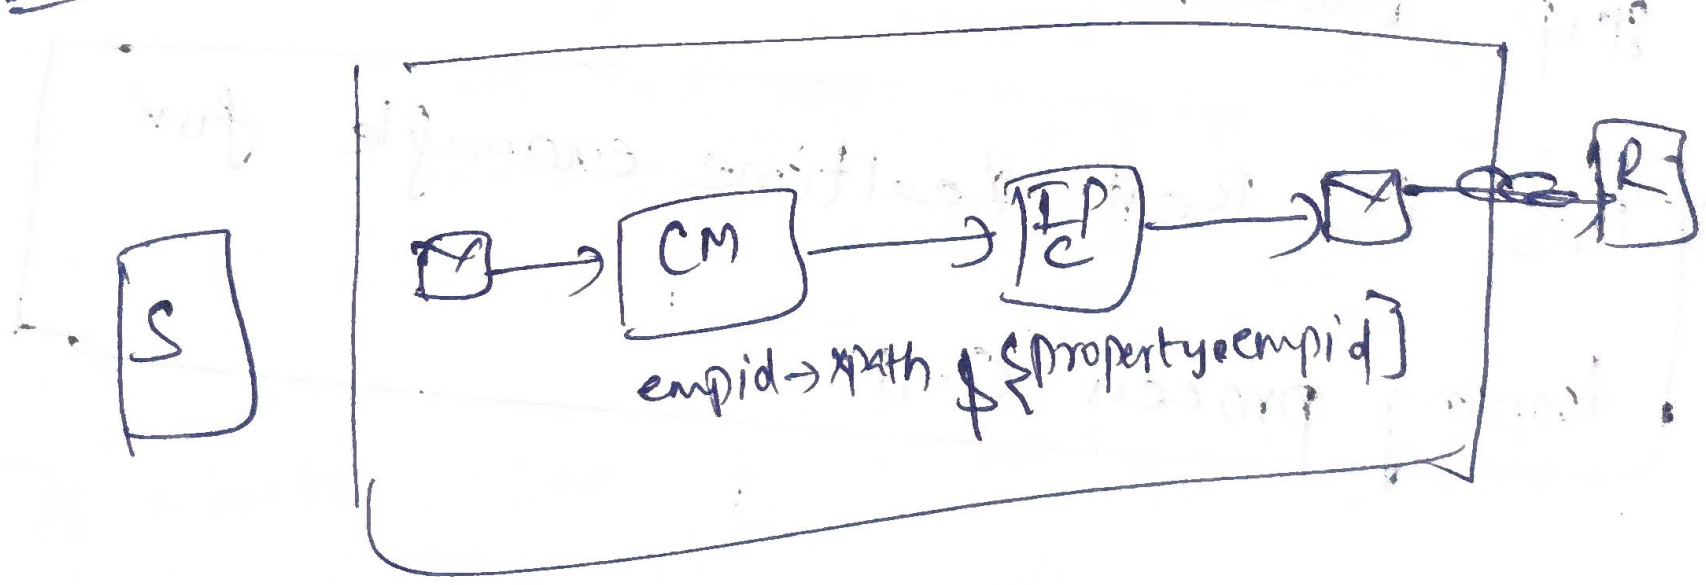

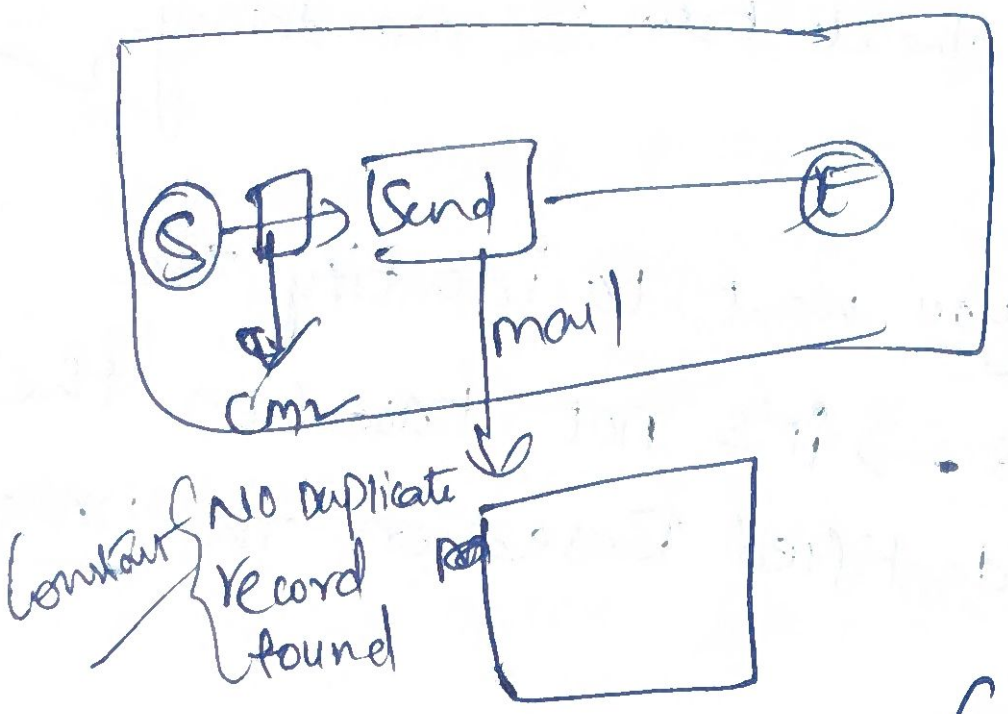

* CamelDuplicatemessage → true (header)

Basically. What's happening in Backend, we do have one Idempotent repository database → whatever the 'message ID" → you are providing in the Idempotent process call → configuration → that will be store in backed database

→So when you are Idempotent process call → and Sending the data to that → the Condition(on) messageID you given that Will be Checked if yes → message will not processed (or) NO → message will be processed.

☑ → This check box is mandatory ✓

skip

* Important: If you want to identify the duplicate records → it's not based on the payload → it's identified Based on the unique ID ✓

Now, Important → What is an XSD

XSD → The schema of that xml file

→ It is used to identify ~~where~~ how many fields do we need get in payload ✓

→ Where each field needs get in payload (location of tags)

→ ~~how~~ which format

* Now I need to validate this xml file

how we can do it in CPI ?

XML validator: It is nothing But, if I want to validate xml file Based on the its XSD then I will use xml validator

validation:

Source: Integration flow

xml Schema: select (upload)

prevent exception on failure: D

* there, in xml validator → what are all the Conditions you can check

→ It will check everything

like →

minOccurs = "1" maxOccurs = "1"

↳ This is one of validator