Day 36 Mapping & Conversions

Conversions: It consist of two functions

① fix values
② value mapping

* fix values: Lets assume

Source	Target
United States	USA ($)
India	IN (INR)
china	CHN (¥)
Australia	AUS ($)
United kingdom	UK (£)

Here we are getting country full name from Source and Target System is requesting to Currency Send data other Codes format

So here the functionality is if you are passing one input and you will get other data as output

eg: India → INR
United states → USA

at this time what we will do ?

We use if Condition and else operation

So, now the Constraint is, every time you will add new data to the if else condition, 'no' then what you will you do?

→ This is the point where we will use

fix values

Structure: Fix values

(input)

Default value (N/A)

Enter value → here we need pass the value

On failure

Advanced → key

use key

Use default value

Throw exception

Value
IND
AUS

India

Australia

* Now, different environments → dev

QA

production

In production you need to add one more key & value

Now if you give fix values how you will add? in production (or) QA (or) dev

There is no possibility to change those fix values with out editing the iflow

=> If yo want to configure any runtime variables at that time we will use value mapping

* value mapping and fix values are same type → like → key value pair. But the difference is

fix values → Inside the iflow

value mapping → out side Iflow and Runtime as well


you can change the values dynamically

* Now how will that happen

=> value mapping is created outside the iflow → like creation of iflow

DT → Artifact

In value mapping main thing is [Agency] & [Identifier]

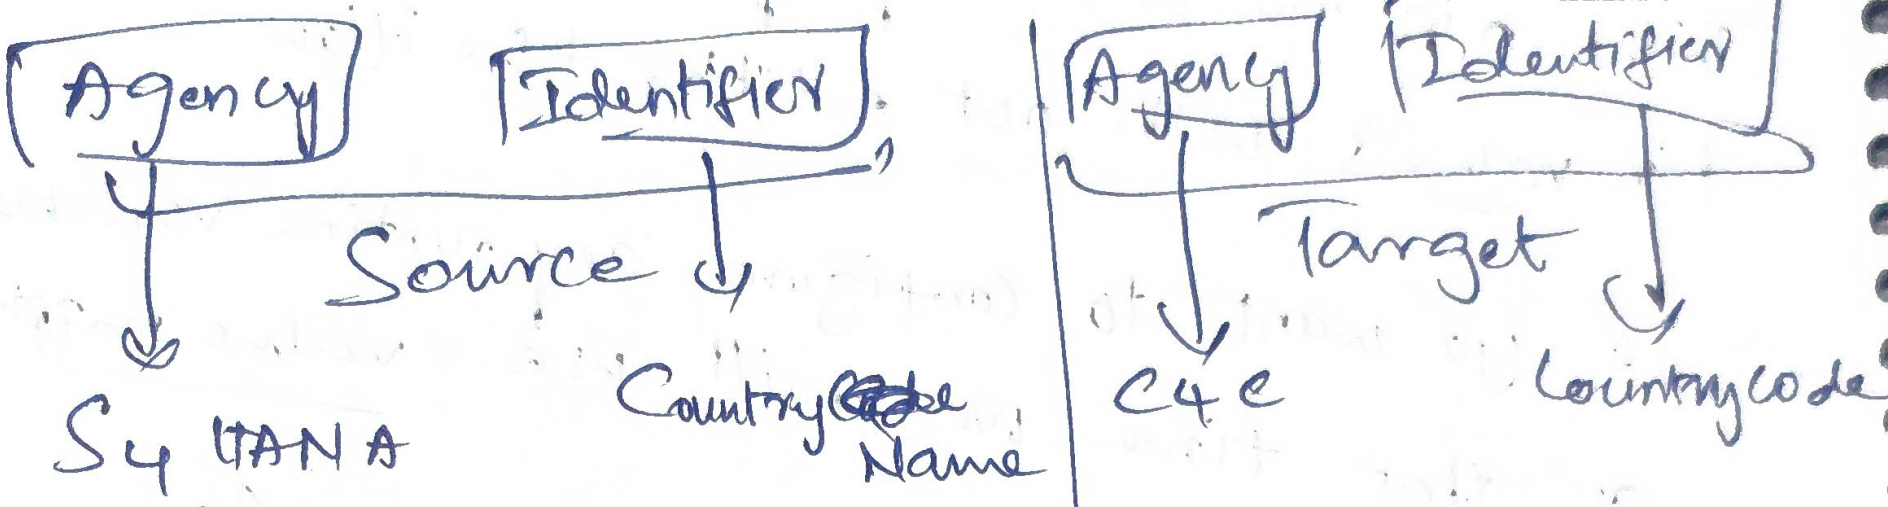

Text functions: operations on Incoming Text (String)

① Substring: if you want take particular or Specified Content from the string