Day-24

Gather and join


Join: Which is used to Combine multiple branches in to a single branch, where it doesn't do anything with the messages.

Demo: ~~Gather~~

postman → http

↓

Employee details → raw → xml

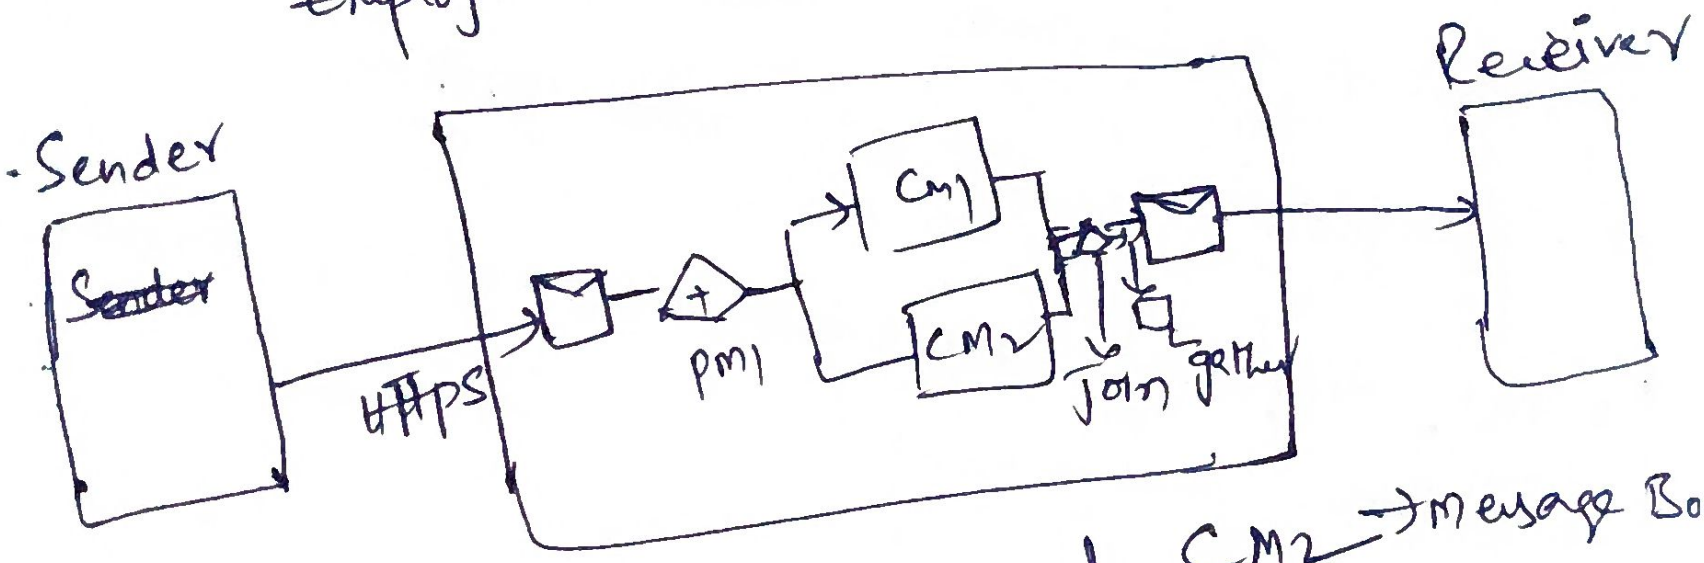

CM1 → Message Body

```
<root>
${body}
<route> Branch1 </route>
</root>
```

CM2 → message Body

```
<root>
${body}
<route> Branch2 </route>
</root
```

Gather: Gather is used to Combine different messages into a ~~Combine~~ single message

at that we will use gather.

* → What are different messages

Use Case : Same

How triggered → Message ID → within this same Message ID → if you used Splitter → Then the incomming message payload will divided into messages → now → to → combine that messages → in again one payload → We will use gather.

* not different, different message ID's messages from

* messages(x) → source → x


cpi → messages → will Combine (Gather)

Demo:

Sending multiple Records from postman like row → xml (Body)

Employee xml data

Demo:

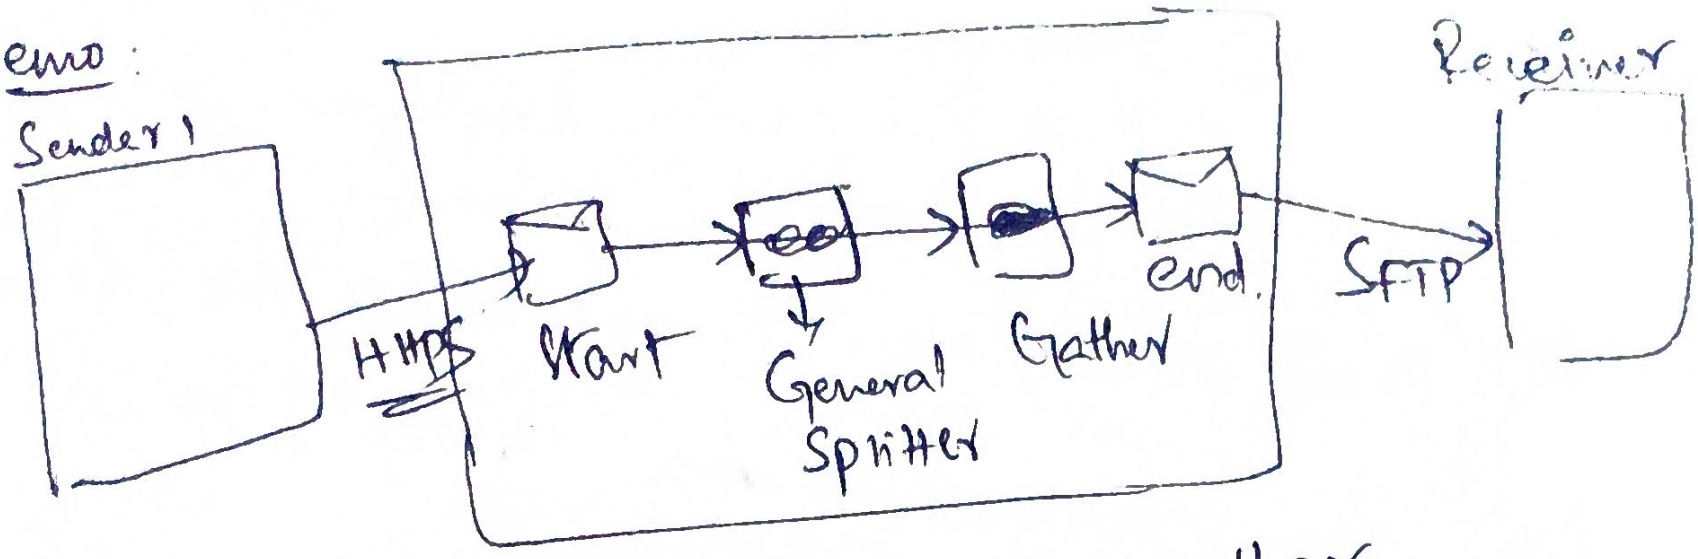

What is the use → Splitter and gather

Actual in this scenario no use, But if there is addition of any concept in between (functional)

→ How many messages split → Should combine

the we can use gather

eg: Scenario: northwind api

Input → read → Input 1 (Employee info) → read

Emp①

Emp②

→ Call OData north wind → Combine → Send

Open Source api


Single message

Requirement: From Source → 2 Employee → Records.

for those 2 employees I need fetch the data from the northwind API then I need to combine those data ODATA and send it back as Single Response Back to the Source ✓ ⇒

What we will do → Assuming in a single Call we can get only 1 data

API → call → Single data

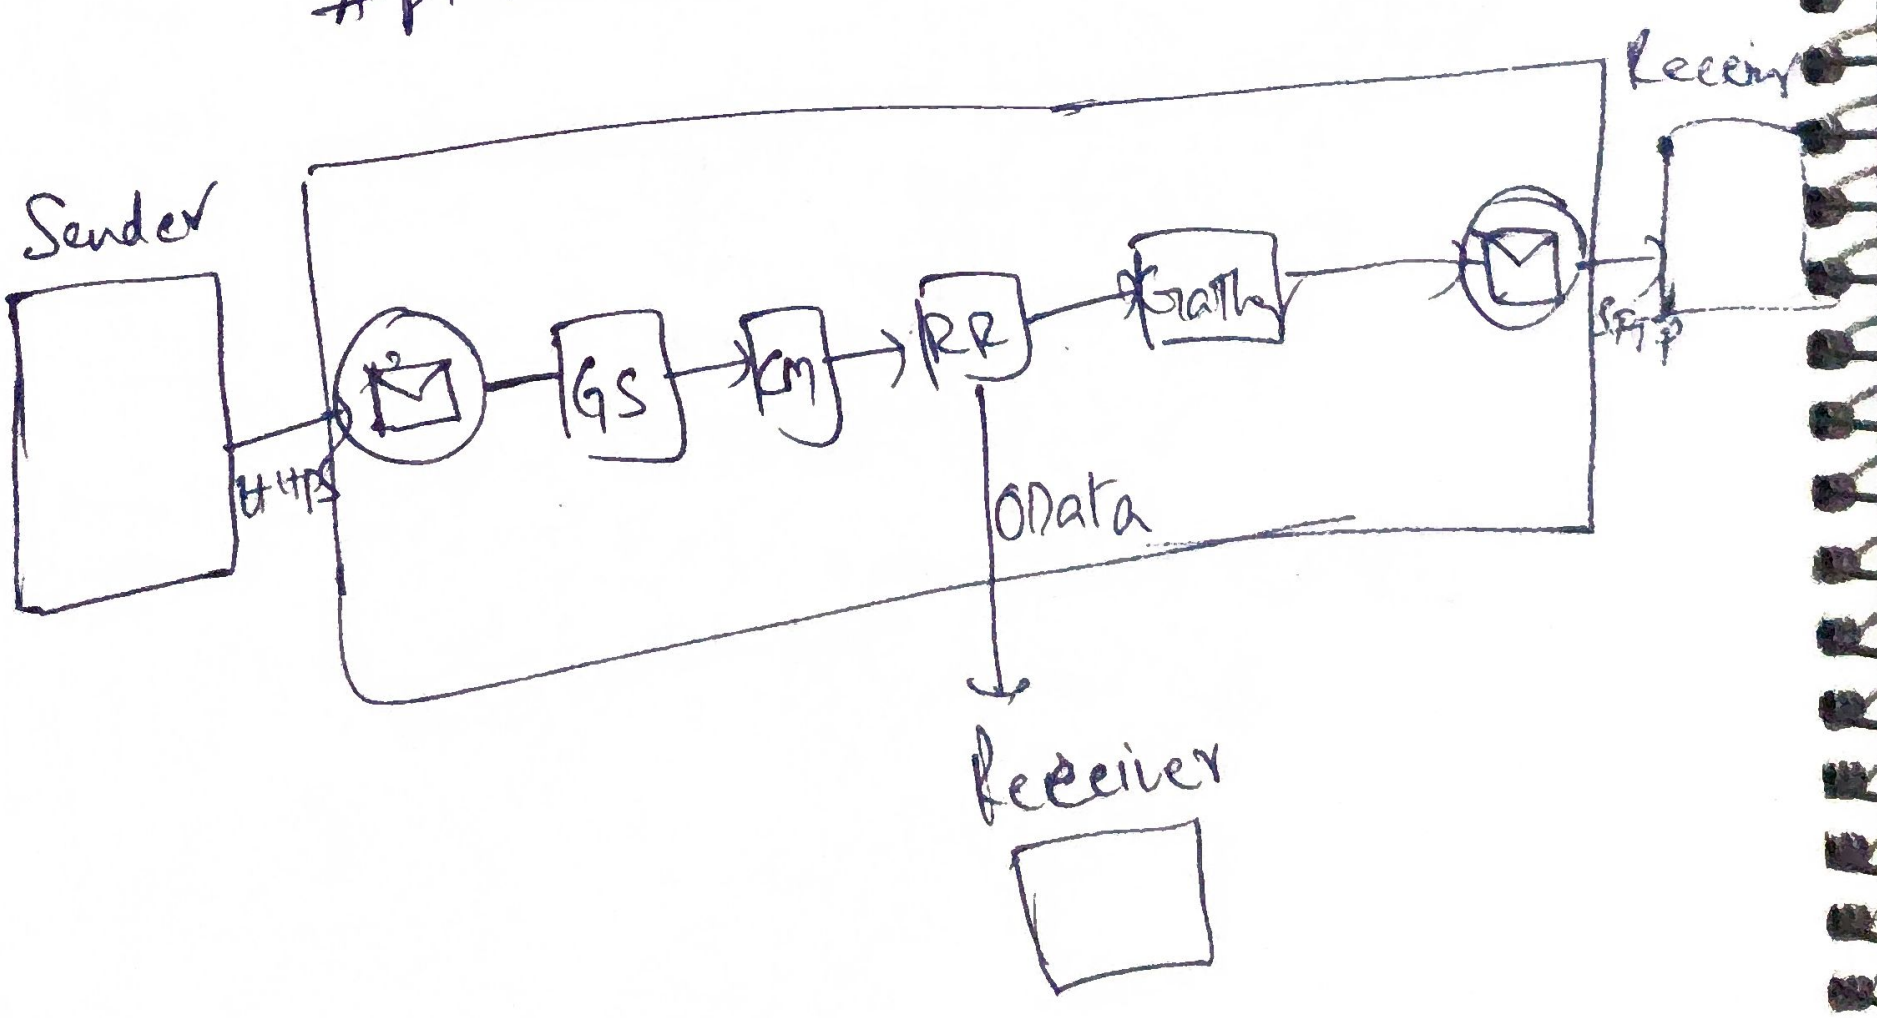


* Same Requirement But let's assume the data is coming from multiple Branches

Here, Gather doesn't work when you are giving multiple inputs

So, to over come this situation we will use Join

iflow

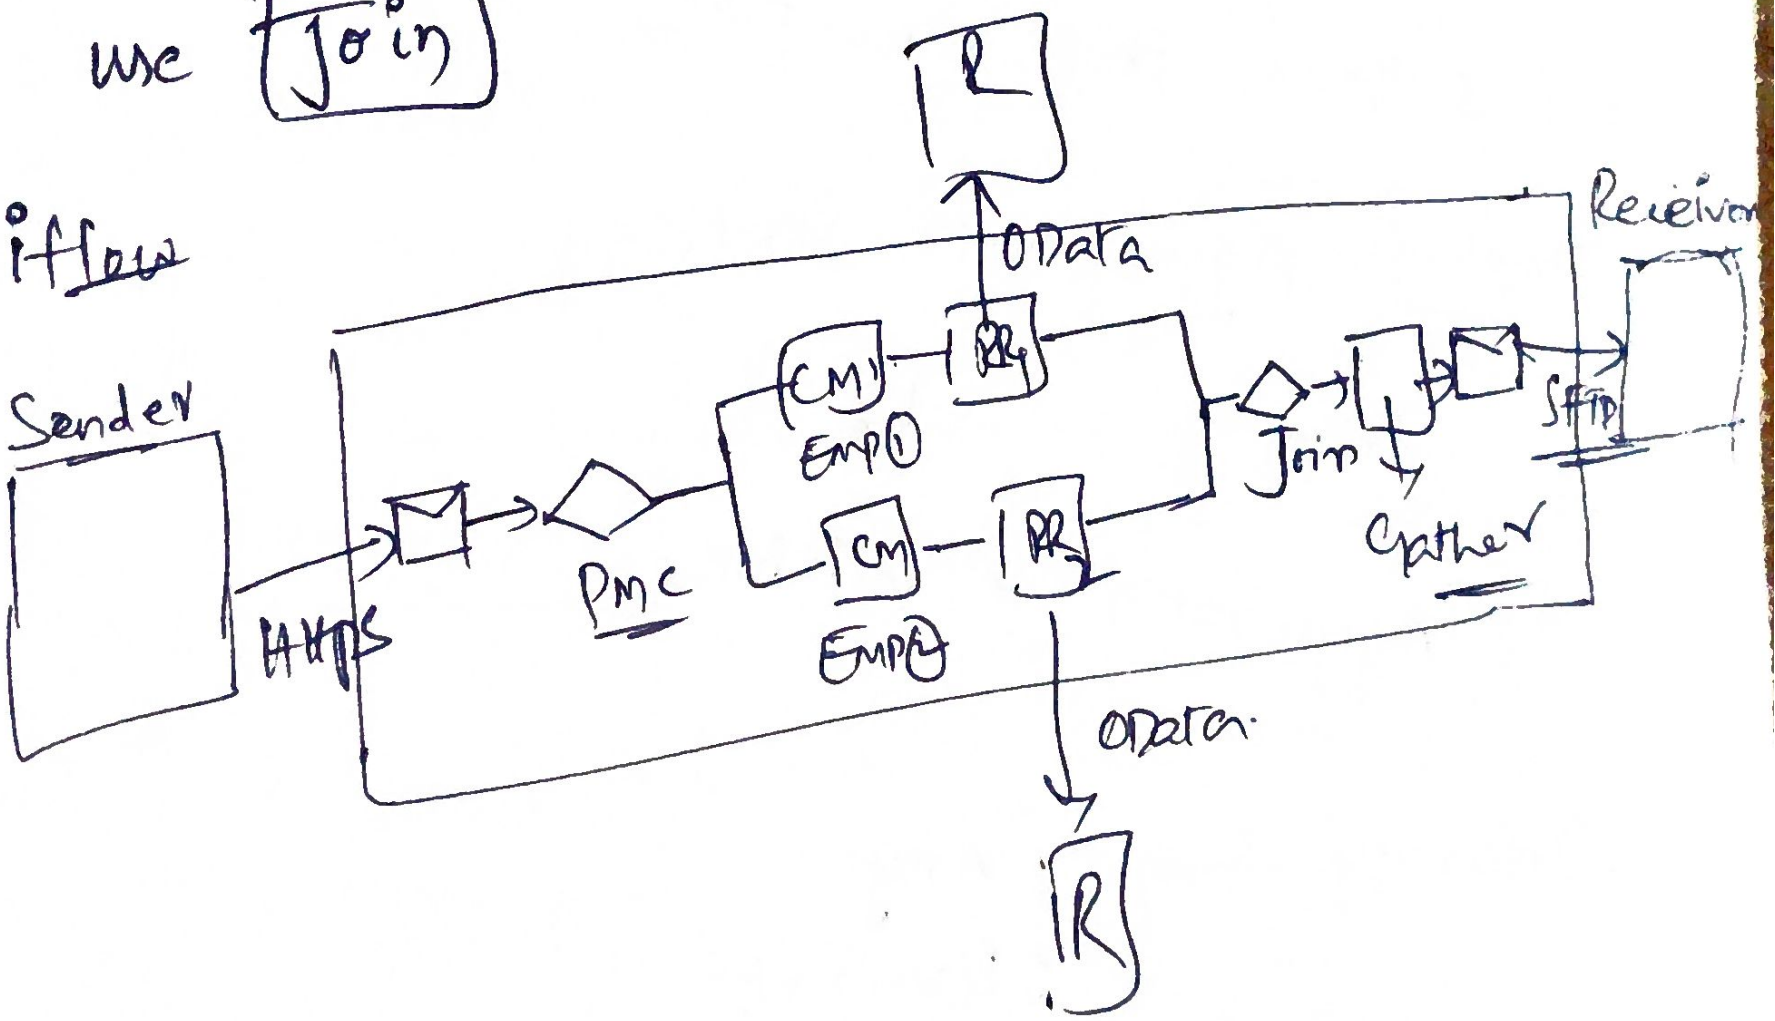

Join: Join will Combine multiple branches to a single branch

* Whenever you are using multicast → you Should ~~you~~ use Join and gather together

Now, how the gather will Combine

How gather will know → What type of message it's recieving - ?

→ Let's take that examples,

Gather: Aggregation Strategy

Incoming Format: _____

Aggregation Algorithm: _____

(1) Incoming format: ~~Any~~
: Plain Text
: xml (Different Format)
: xml (Same Format)

(P1 → mainly → works → with → xml

① xml → Same Format

a. Combine ✓

b. Combine at xpath ✓

c. Tar }
d. zip }

② xml → Different Format

ⓐ Combine ✓

ⓑ Tar }
ⓒ zip }

③ Plain Text:

ⓐ Tar }
ⓑ zip }
ⓒ Concatenate ✓ (Text data)

abc + efg

Concatenate

④ Any:

ⓐ Tar }
ⓑ zip }

→ 2 xml → Combine → . ✓

What is the difference between general Splitter and Iterating Splitter ✓

General Splitter → It return us entire payload

"Preserve" the encapsulating nodes or elements with each Split message ✓

Iterating Splitter → It "does not" preserve the encapsulating elements or nodes

And also → multimap messaging important ✓

↓

it was developed sap

<multimap: message1>

</multimap: message1>