


Day 08: first iflow, https & mail adapters usage

* Iflow creation, Day_08_https-mail-adapter

* Talking about version → Draft

Integration Process

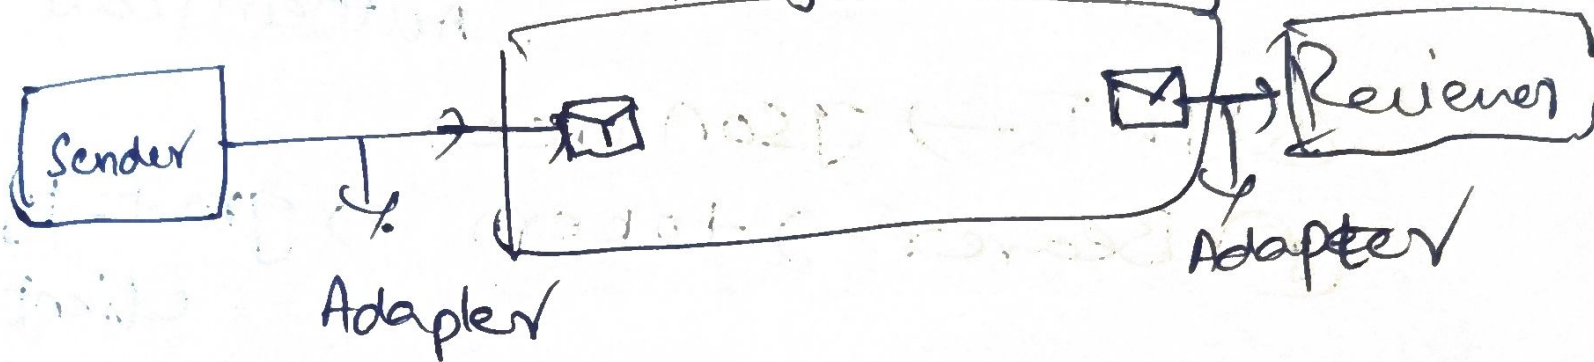

* Two types of nodes

- Design node
- Runtime node (monitor Tab)

→ Design node → Canvas editor Design Tab

→ monitor → Runtime node

* Adapter's → already developed Backend

* CPI → Run's on Apache Camel framework

↓
Java programming language

* Pallet functions usage

* NOW Basic flow creation

* HTTPS Adapter: Connection Tab

Request processing

Address: *

Authorization:

User Role:

CSRF protected

* Sender to CPI → we created Address ✓

* Endpoint created → rt → runtime ✓
trail → Design

* unique name we will give to create endpoint ✓

* service key explanation ✓

* About postman tool ✓

* Sender → data → validate in POSTMAN whether
the data is receiving correctly or not ✓

* Sample iflow created and Tested from postman

200: OK Status Code ✓

* After Success seen is monitor when we need

to see the message ✓

CPI doesn't store the data ✓

* log Configuration → Trace option ✓

* Overview → messages → log level → {Trace}
{Info}

→ message Content

* we need to leave starting point ✓

* production level → we should not On Trace

eg: Hi all, BTP is →
Welcome to CPI class
Sender

CPI

Receiver
System

Content modifier
message body

↓
Hi every one,
Welcome to ~~CPI~~
BTP CPI is class

Transformation ✓

* here all is replaced by everyone ✓
transformed

* Trace → once enabled → It will be available

10 min's

→ Content captured it will be
available (ihr)

