Day 30

Filter

What do you mean by Filter? (extract)

As per the name Suggest if you want to filter out the required information then we will use Filter

Demo:

postman

Body → xml → payload → multiple employee records

filtering out by <Status> Active </Status>

<Status> Inactive </Status>

Filter

Processing:

→ /root/EmpDetails[/Status='Active'] ←

xpath Expression: //status = 'Active' (X)

Value Type : Node List

→ /root/EmployeeDetails[Status = 'Active'] ←

* Node List : multiple list of nodes will get in Result Set

* Node : only a single node

* Remember one thing → If you are using Filter pallete function → The in the result you don't get root → tag

Only the node list or node will come in output

⇒ So, when ever you are working with filter Pallete function, you please be note that Where the tag you are doing filter only that particular node will come → you don't get any other node

This is about Filter pallete function

* String: it Suppose if you want to read String content of any particular variable or value

→ /root/Employeedetails/Address/State

→ valueType: String

Output: HYD

Integer: if you want read Integer from inpnt payload then you will use

value type: Integer ←

Boolean: it will check it the field exist or not

eg: EMPid (X) → Removed

output → false

Recommendation → using filter pallet function for main nodelist & Node operations

value types

filter: ① xpath : —

② @ NodeList

ⓑ Node

ⓒ String

ⓓ Numeric

ⓔ Bodean

* ⓕ This filter pallete function will work only with XML data

XML Modifier : As per the name Suggest it will modify the incoming xml message, But it will not modify the payload

→ for example: you are getting a xml content with xml version Tag

→ <?xml version="1.0" encoding="UTF-8"?>

↓

xml declaration → tag

* Some Scenarios we have to remove this declaration tags → because all the systems cannot accept that declaration tags so at that time we need to remove

xml modifier :

processing :

Remove xml Declaration

Remove External DTD's :D


Invalid xml Character Handling : None

DTD's → external document references

```
<!Doctype Employee[
 _ _ _ _
 _ _ _ _ _ _
 _ _ _ _
 _
]>
```

Use cases: When you are Combing the payload in Content modifier

Demo:

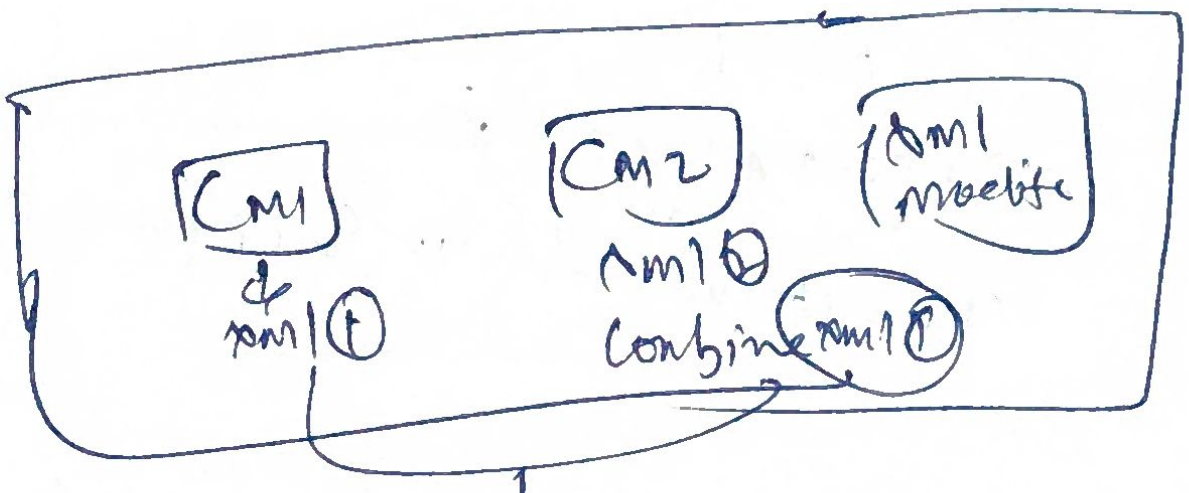

↓

Both xml have xml → declaration

↓

While Combining also Both xml declerations will come in output so to remove these → we need → xml → modifier

Message Digest → if you want to generate the hash payload what you are sending then you will use message digest

What it will do →

Processing:

Filter (path): _____

Canonicalization method: _____

Digest Algorithm: _____

Target header: Sap:messageDigest

It won't do anything with the payload

NOW what is the use

When you observe for Target header

Sap Message digest: random data

That's it for the payload

Why we need to generate the Groovy code for that payload?

⇒ Scenario → xml payload → Sending →
Target → xml payload → not modified

How can you confirm that when you are sending data → to the target System with out any modifications (or) change →

How can you firm ← Important

So at this time we will use Message Digest pallet function →

It will generate Groovy function for the payload you are sending

↓

Groovy MessageDigest:

Now we will send this message header with the payload to the target System

What target System will → do

They will also generate the hash function to the payload what they have received → and they will validate with the Received digest code