

Day 10

Content-modifier

* It is located under Transformation Palette functions

→ Content modifier

* Message Transformation

- Connectivity
- message transformation

∴ So here by using all these Palette functions
We will do the second process (message transformation)

* Content modifier → Incoming message → modified
(which is used to add additional message
to the Incoming payload) (add, modify, delete)

* Data will be added at message header,
message property and message body.
(exchange)

* Message header & Exchange property (No Difference)

Headers

Action

Name

Source type

Source value

Data type

* What message header & exchange property will do

message header:


Difference: What ever the variables that are created in message header those will reach the Target System (Receiver)

exchange property: What ever the variables that are created in exchange property those will be used with in the Integration flow

* generic reason?


Suppose → Sender (Zomato) → Delivery agent

Zomato
Satish (delivery agent)

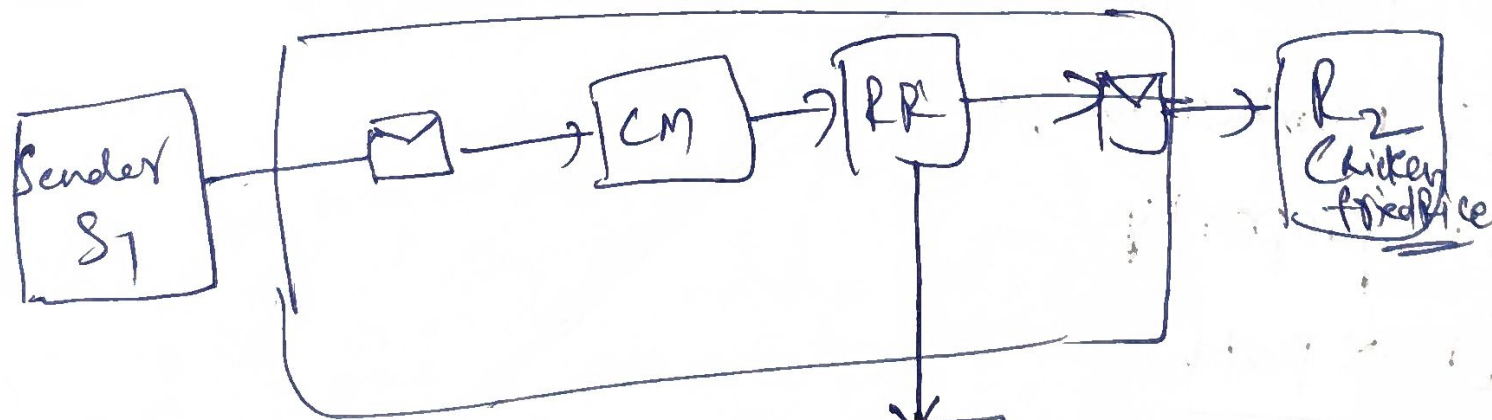


Content modifier
headers

Scenario:

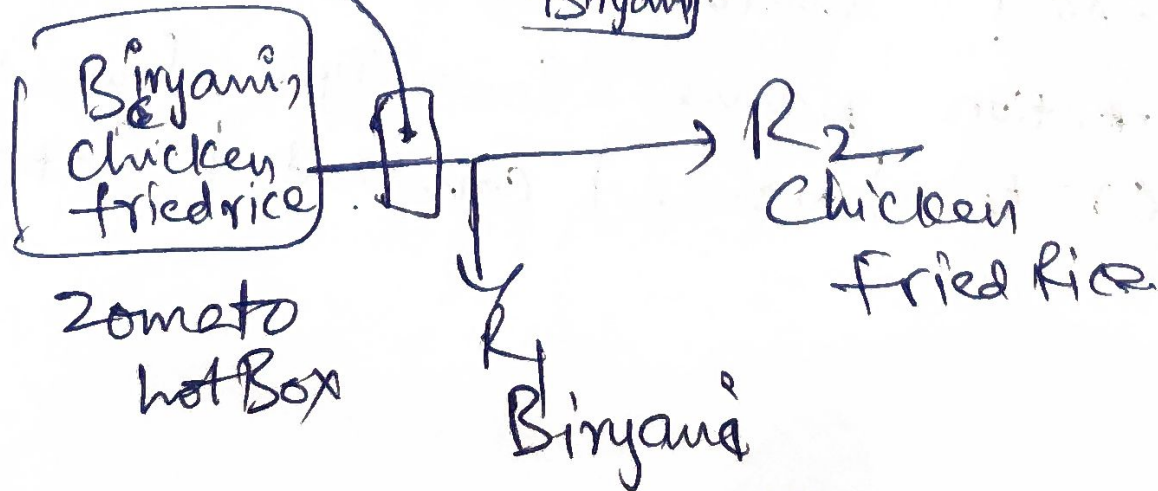

* here the concept is we will store the

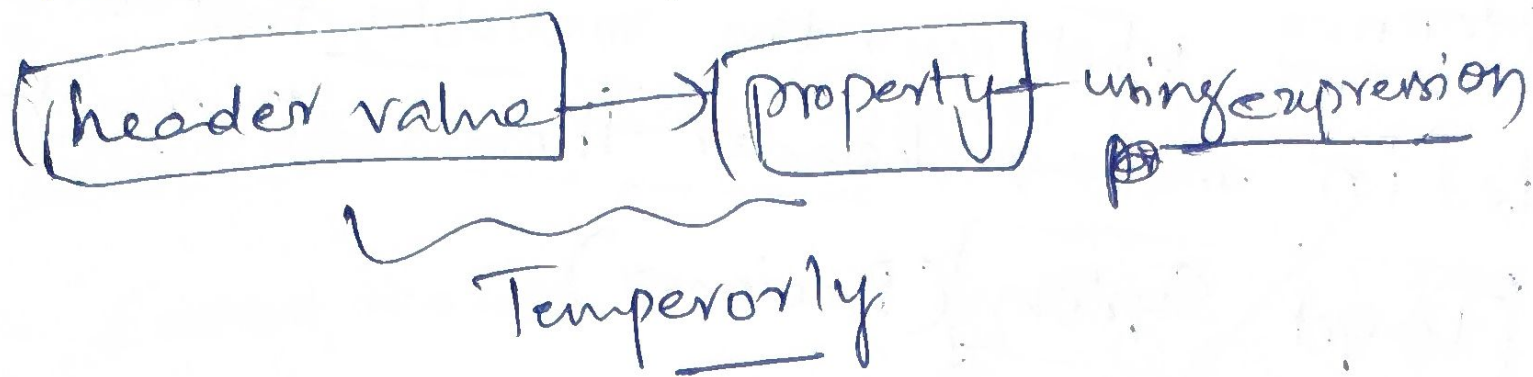

* Source types → By using this source type only

We will pass the data

- ① Constant ✓
- ② Expression ✓
- ③ Global variable
- ④ header ✓
- ⑤ local variable
- ⑥ Number range
- ⑦ property
- ⑧ X path

* Constant: Custom value → created by user


Action	Name	Source Type	Source value	Path
Create	Name	constant	Satish	

Trace: end to end to process flow

demo: postman → deployed URL → post

Body → raw → xml

```
<orders>
  <od-name> Iron </od-name>
  <od-price> 234 </od-price>
</orders>
```

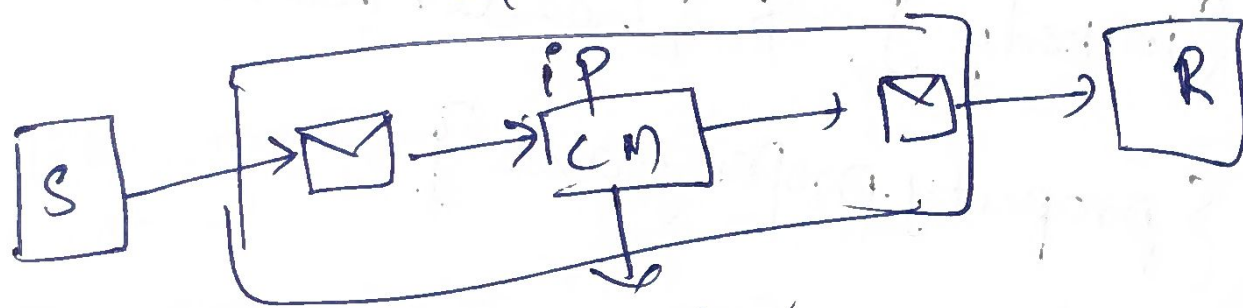

create Name ST SV dtype
 ~~Bharath~~ Constant Bharath String
 Name

→ So → in postman after doing the above changes.
We will get the additional header called as

Name : Bharath

Now, Second Scenario → writing → message Body
{ {in.body} } (expression)

→ CP1 → works → Apache Framework

expressions will be called with $\boxed{\$ \{ \} }$

* Suppose you want to call field (or) variable that is created in header to body then

$\$ \{ \text{header.name} \}$

⇒ $\$ \{ \text{in.body} \}$, $\$ \{ \text{header.headername} \}$

$\$ \{ \text{property.propertyname} \}$

* Now property,

Create , order-price, constant, 12345

Question is → Now the property will be visible in postman (yes or no) →

Answer → 'no' (It is restricted only if low itself)

If we want to use any exchange property name in header, Then what you will do?

We need to create another Content ~~on~~ modifier
In that we need to create New Variable under
header(message) → Source will be from the.
before exchange variable name
Property

* Message header:

Action	Name	Source type Expression	Source value \${property} — } Data type java.lang.String
Create	?		

Requirement

→ Source → middleSystem → Target
(RequestReply)

* Explained about → custom headers allowing

(*), Username
→ Allowed header's }