

LAB PROGRAM

7. Python Program to Implement Breadth First Search (BFS)

Aim

To implement the **Breadth First Search (BFS)** algorithm in Python to traverse all the vertices of a graph level by level.

Algorithm

1. Create a graph using an adjacency list.
2. Choose the starting node.
3. Create an empty queue and a visited set.
4. Add the starting node to both the queue and visited set.
5. While the queue is not empty:
 - Remove the front node from the queue.
 - Display the node.
 - Visit all unvisited adjacent nodes.
 - Add them to the queue and mark them as visited.
6. Stop when all reachable nodes are visited.

Pseudo Code

START

Create graph

Choose start node

Create empty queue

Create visited set

Enqueue start node


```
Mark start node as visited
WHILE queue is not empty
    Dequeue a node
    Print the node
    FOR each adjacent node
        IF node is not visited
            Mark as visited
            Enqueue node
        END IF
    END FOR
END WHILE
STOP
```

Python Code

```
from collections import deque
# BFS Function
def bfs(graph, start):
    visited = set()
    queue = deque([start])
    visited.add(start)
    while queue:
        node = queue.popleft()
        print(node, end=" ")
        for neighbour in graph[node]:
            if neighbour not in visited:
                visited.add(neighbour)
                queue.append(neighbour)
```

```
graph = {  
    'A': ['B', 'C'],  
    'B': ['D', 'E'],  
    'C': ['F'],  
    'D': [],  
    'E': ['F'],  
    'F': []  
}  
  
print("BFS Traversal:")  
bfs(graph, 'A')
```

Output

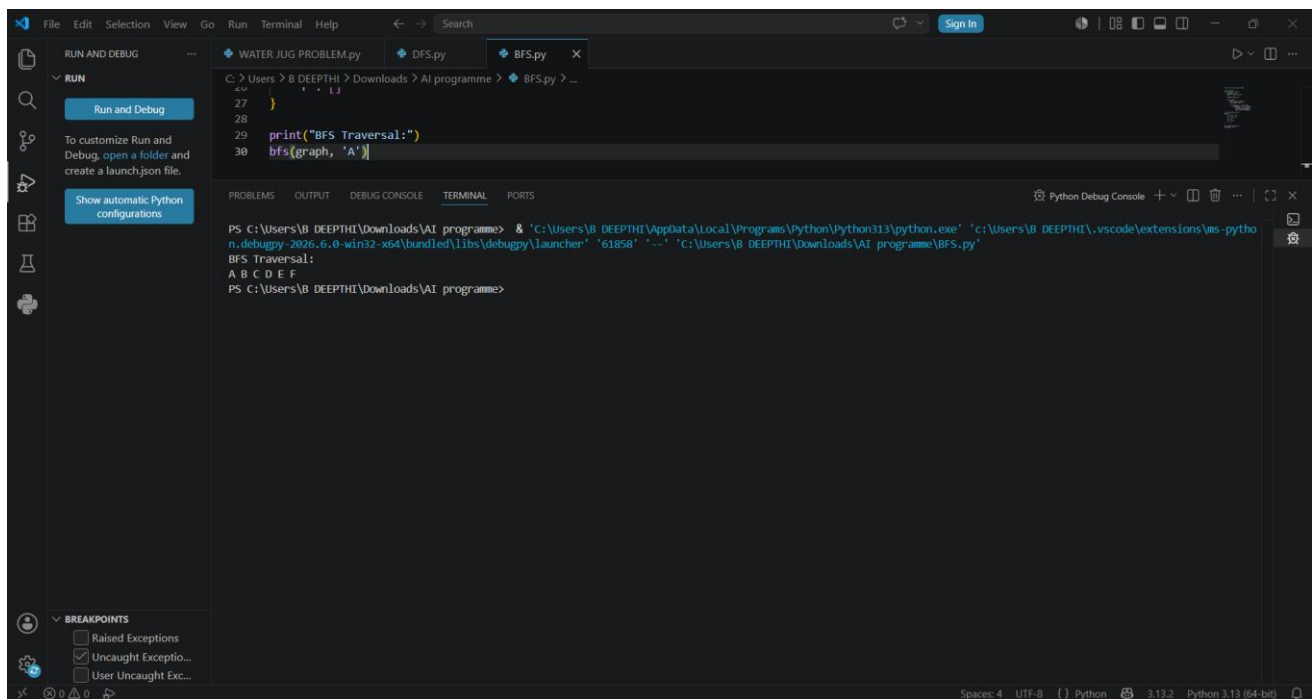

```
File Edit Selection View Go Run Terminal Help  
C:\Users\B DEEPTHI\Downloads\AI programme> BFS.py  
27 }  
28  
29 print("BFS Traversal:")  
30 bfs(graph, 'A')  
  
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS  
Python Debug Console  
PS C:\Users\B DEEPTHI\Downloads\AI programme> & 'C:\Users\B DEEPTHI\AppData\Local\Programs\Python\Python313\python.exe' 'c:\Users\B DEEPTHI\.vscode\extensions\ms-python.n.debugpy-2026.6.0-win32-x64\bundled\libs\debugpy\launcher' '61858' '-...' 'C:\Users\B DEEPTHI\Downloads\AI programme\BFS.py'  
BFS Traversal:  
A B C D E F  
PS C:\Users\B DEEPTHI\Downloads\AI programme>  
  
BREAKPOINTS  
[ ] Raised Exceptions  
[x] Uncaught Exception...  
[ ] User Uncaught Exc...
```

Result

The **Breadth First Search (BFS)** algorithm was successfully implemented in Python, and the graph was traversed in **level-by-level order** starting from the given source node.

8. Python Program to Implement Depth First Search (DFS)

Aim

To implement the **Depth First Search (DFS)** algorithm in Python to traverse all the vertices of a graph using depth-first traversal.

Algorithm

1. Create a graph using an adjacency list.
2. Choose the starting node.
3. Create an empty visited set.
4. Visit the starting node and mark it as visited.
5. Print the current node.
6. Recursively visit each unvisited adjacent node.
7. Repeat until all reachable nodes are visited.

Pseudo Code

START

Create graph

Choose start node

Create empty visited set

FUNCTION DFS(node)

 Mark node as visited

 Print node

 FOR each adjacent node

 IF adjacent node is not visited

 DFS(adjacent node)

 END IF

 END FOR

END FUNCTION


Call DFS(start node)

STOP

Python Code

```
def dfs(graph, node, visited):  
    if node not in visited:  
        print(node, end=" ")  
        visited.add(node)  
        for neighbour in graph[node]:  
            dfs(graph, neighbour, visited)  
  
graph = {  
    'A': ['B', 'C'],  
    'B': ['D', 'E'],  
    'C': ['F'],  
    'D': [],  
    'E': ['F'],  
    'F': []  
}  
  
visited = set()  
print("DFS Traversal:")  
dfs(graph, 'A', visited)
```

Output :

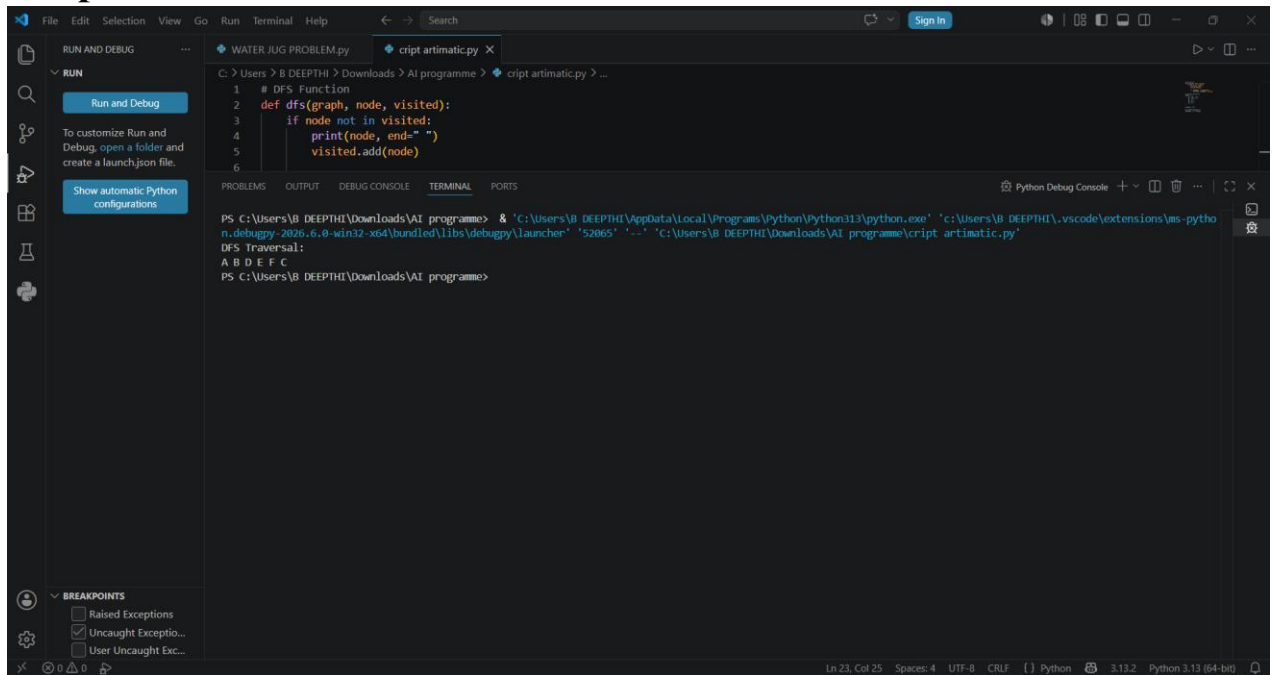

The screenshot shows the Visual Studio Code interface with a Python file named `cript artimatic.py` open. The code implements a Depth First Search (DFS) function. The terminal output shows the command to run the script and the resulting DFS traversal sequence: `A B D E F C`.

```
1 # DFS Function
2 def dfs(graph, node, visited):
3     if node not in visited:
4         print(node, end=" ")
5         visited.add(node)
6         dfs(graph, node, visited)
```

```
PS C:\Users\B DEEPHI\Downloads\AI programme> & 'C:\Users\B DEEPHI\AppData\Local\Programs\Python\Python313\python.exe' 'c:\Users\B DEEPHI\.vscode\extensions\ms-python.debugpy-2026.6.0-win32-x64\bundle\libs\debugpy\launcher' '52865' '-' 'c:\Users\B DEEPHI\Downloads\AI programme\cript artimatic.py'
DFS Traversal:
A B D E F C
PS C:\Users\B DEEPHI\Downloads\AI programme>
```

Result

The **Depth First Search (DFS)** algorithm was successfully implemented in Python, and the graph was traversed in **depth-first order** starting from the given source node.