


Configure Veeam Backup and replications-63


Download the veeam backup run the .exe as administrator




Click on install

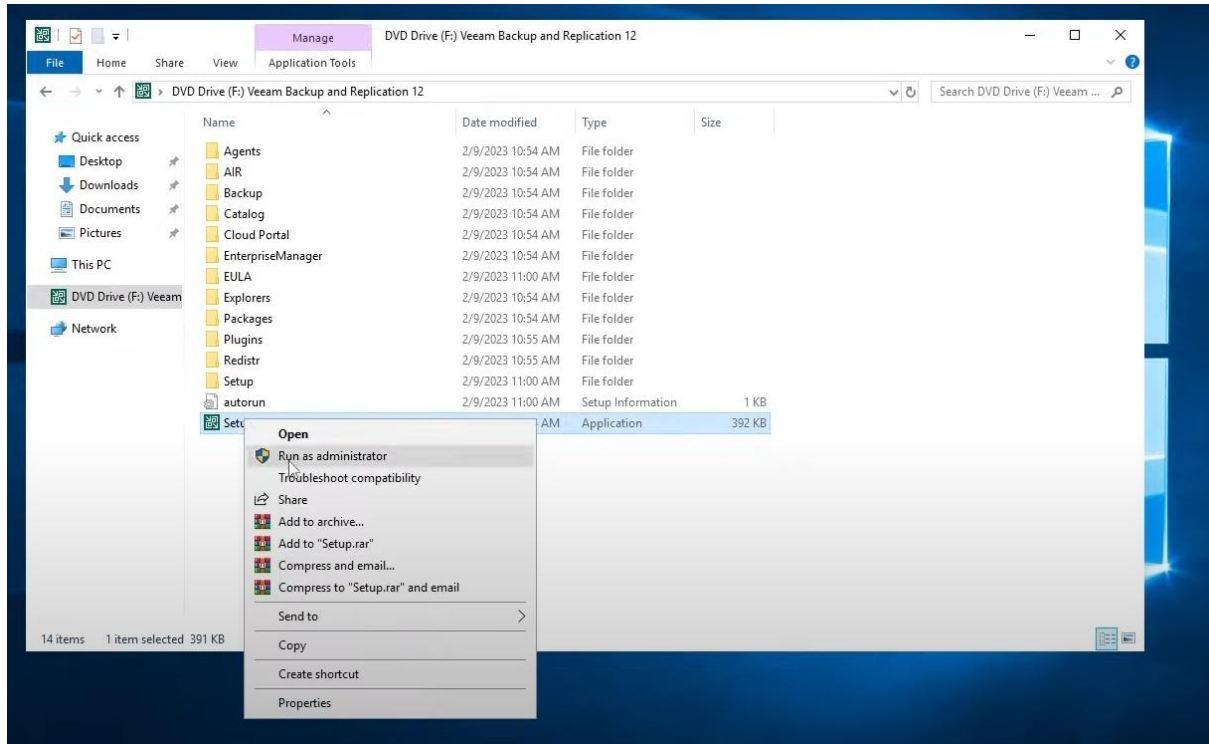


Here install with veeam backup and replication

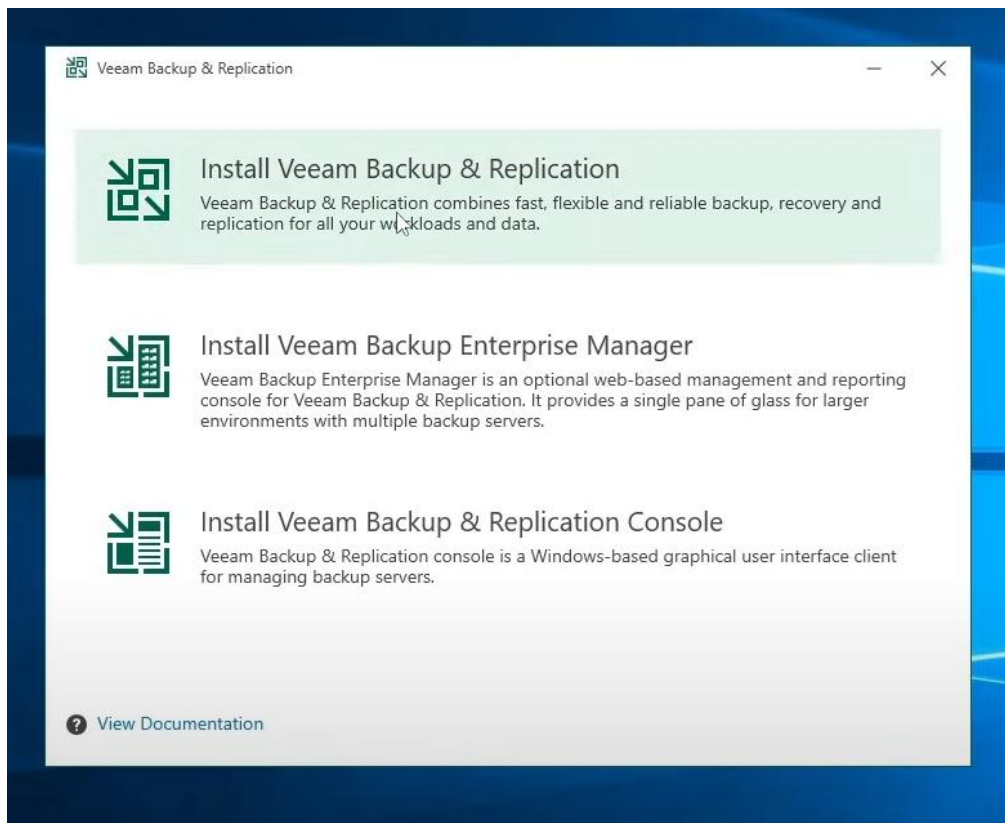


License agreement click on I accept

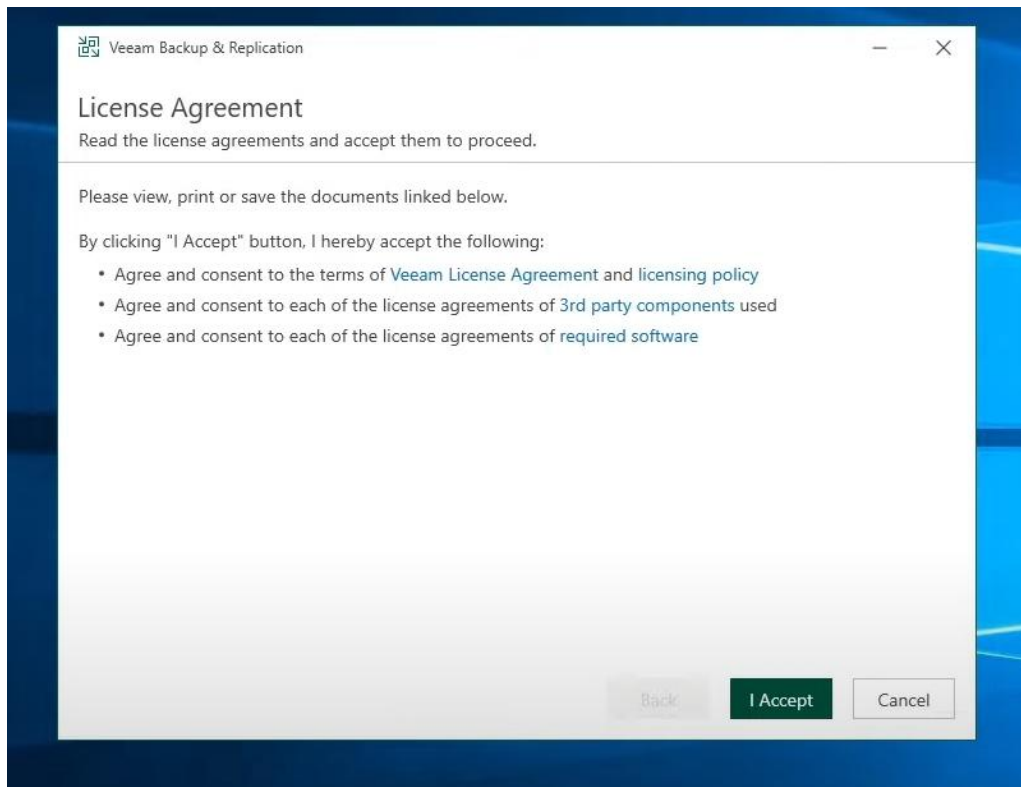


Here we can skip the license file we are going to use it free click on next

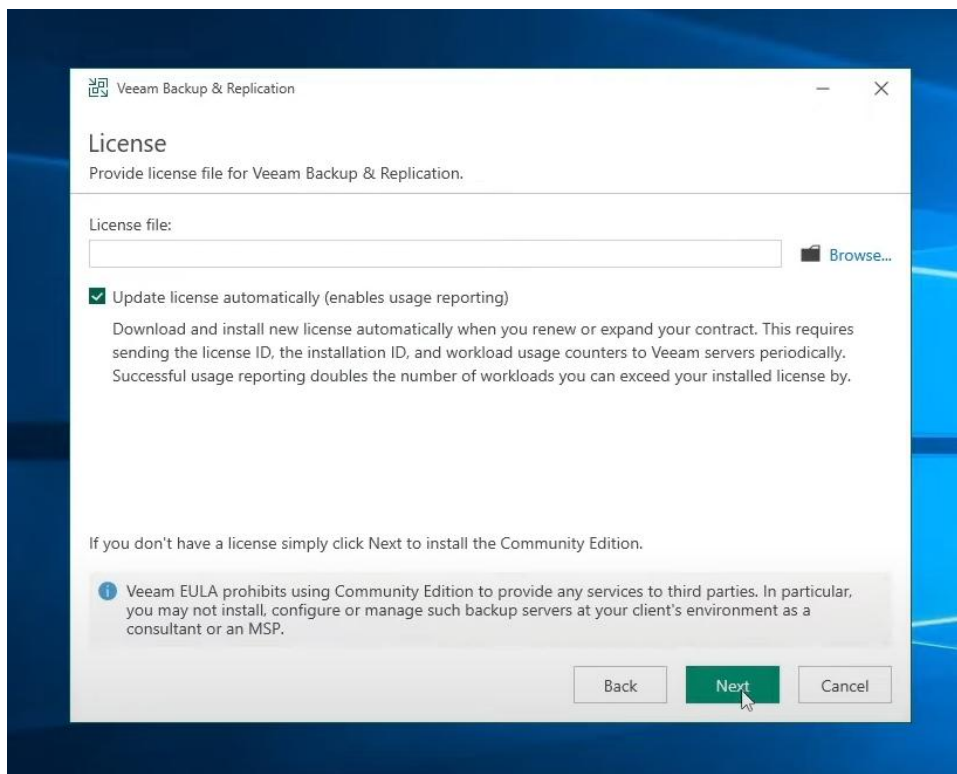


Now you will see the configurations but In real tome use we have to customize it for organization needs

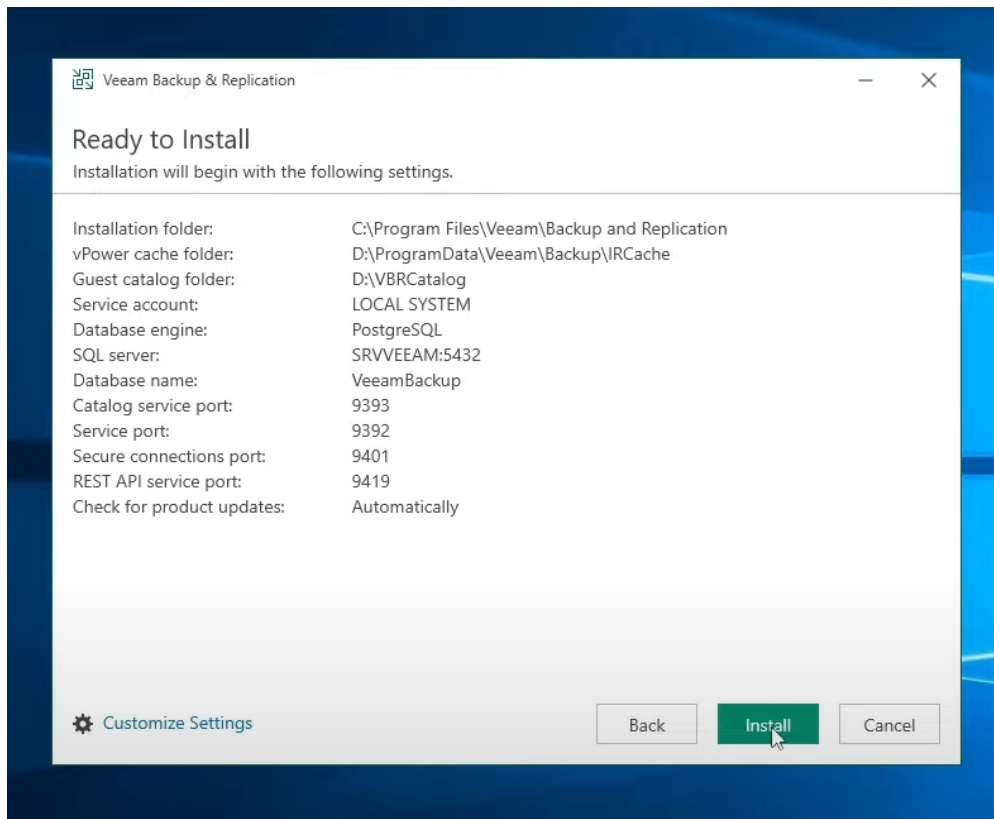


Wait for the 7 steps to complete

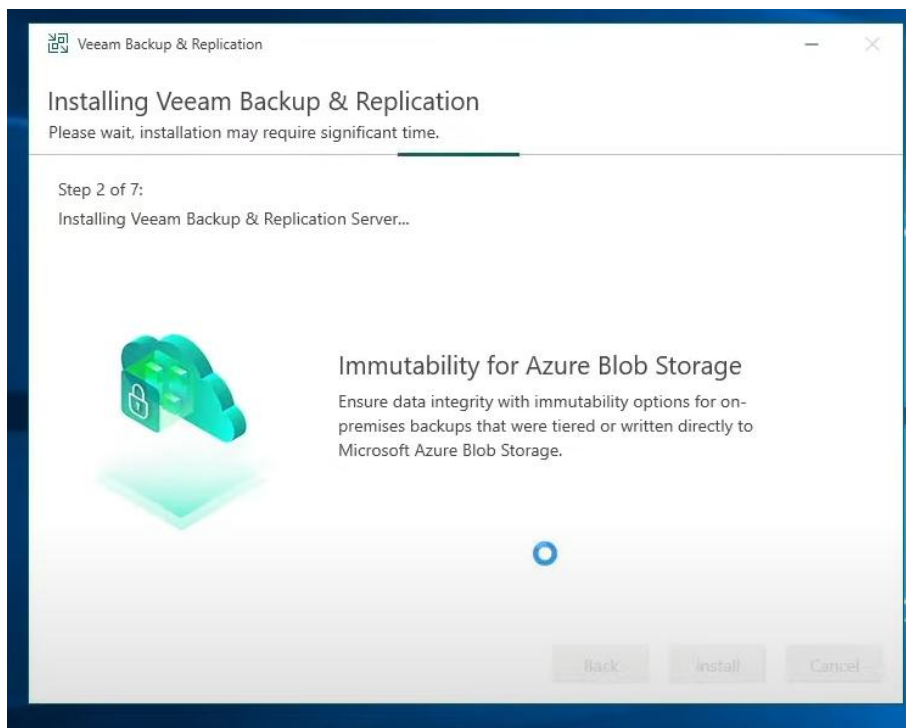


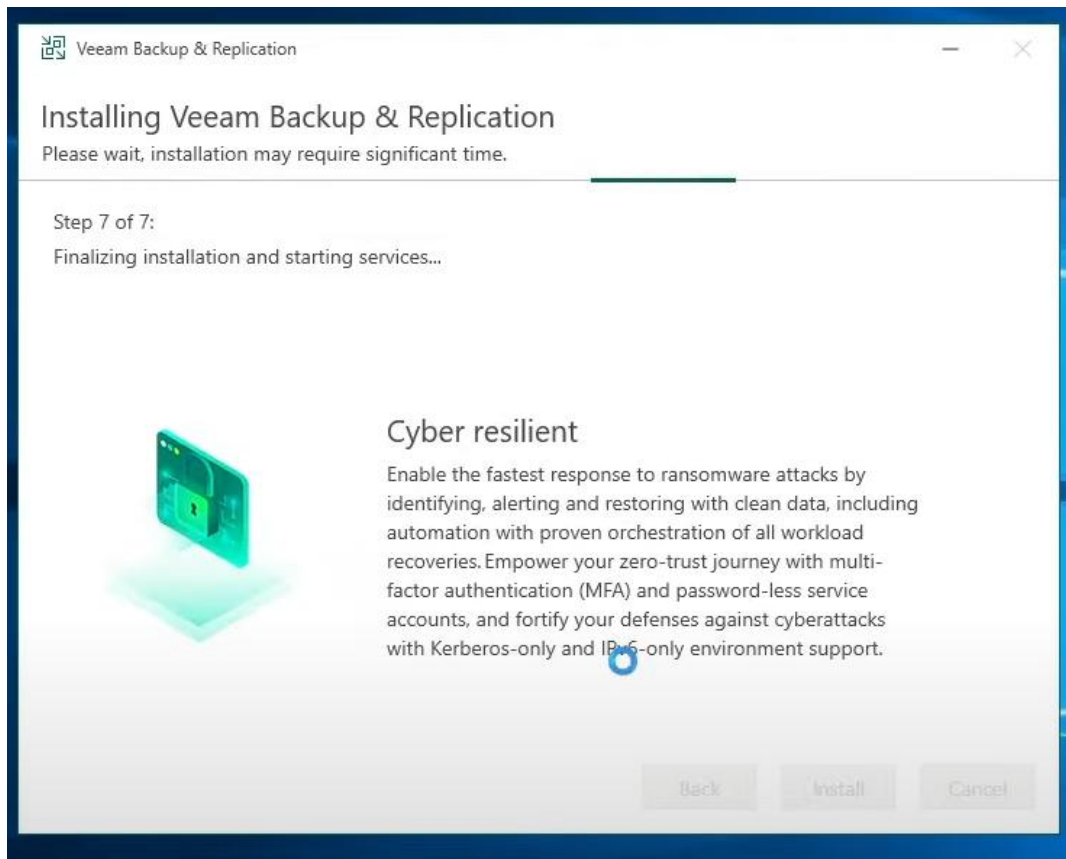


Now you'll see icon on the desktop created and finish the installation

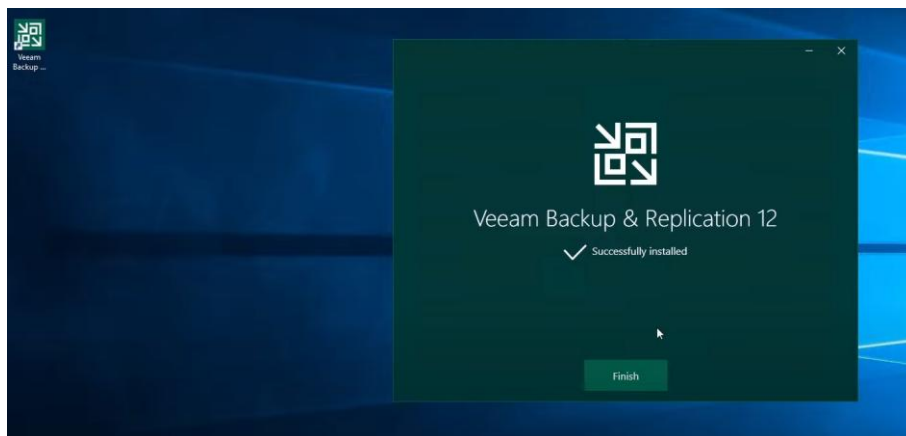


Now open the veeam by double clicking on it and click on connect

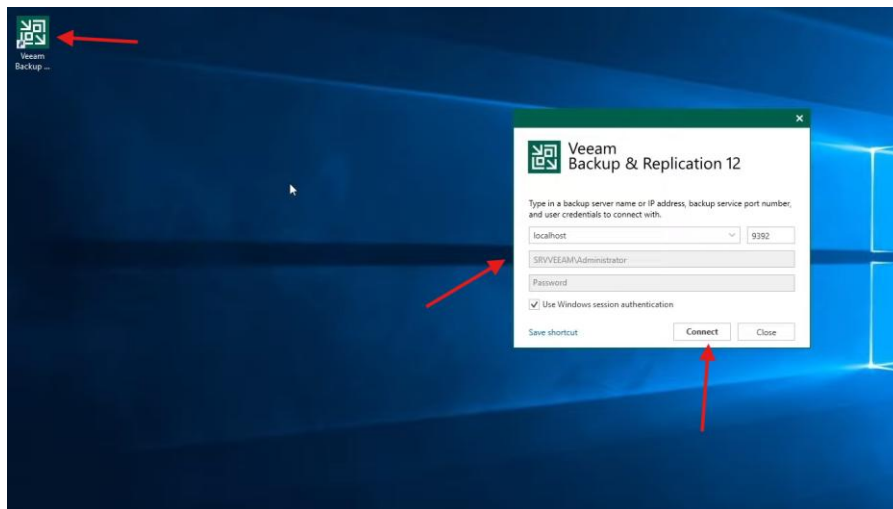


This is how it will look like inside click on backup infrastructure

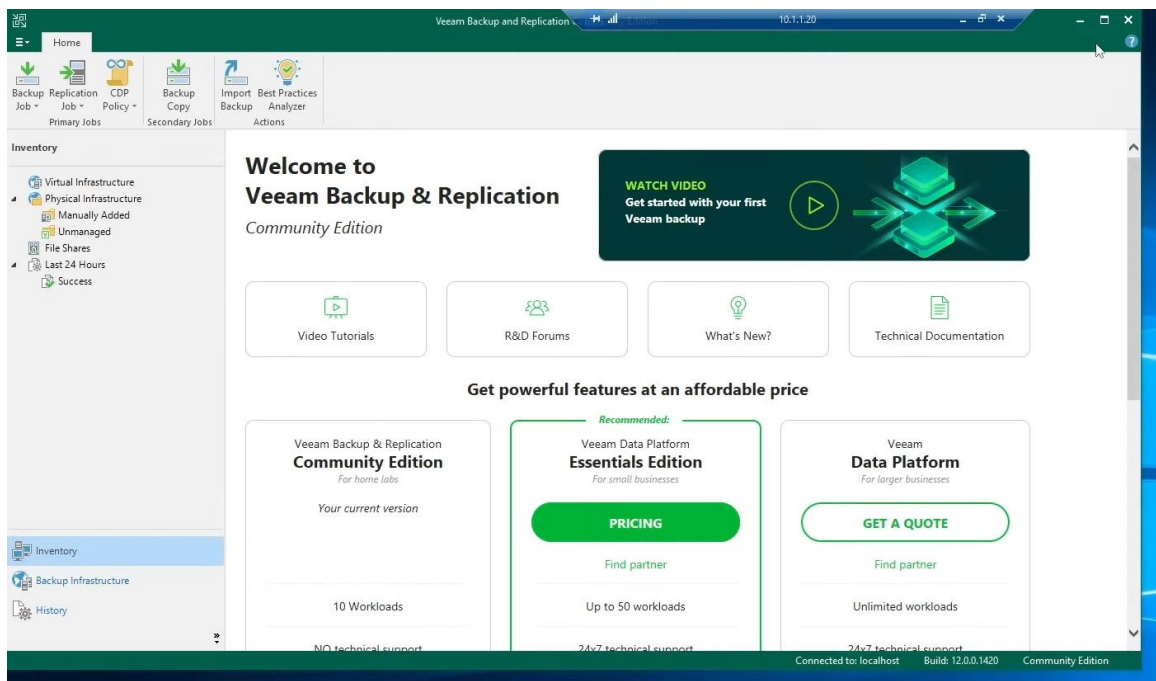


Create a repository in backup replication by right clicking on white space

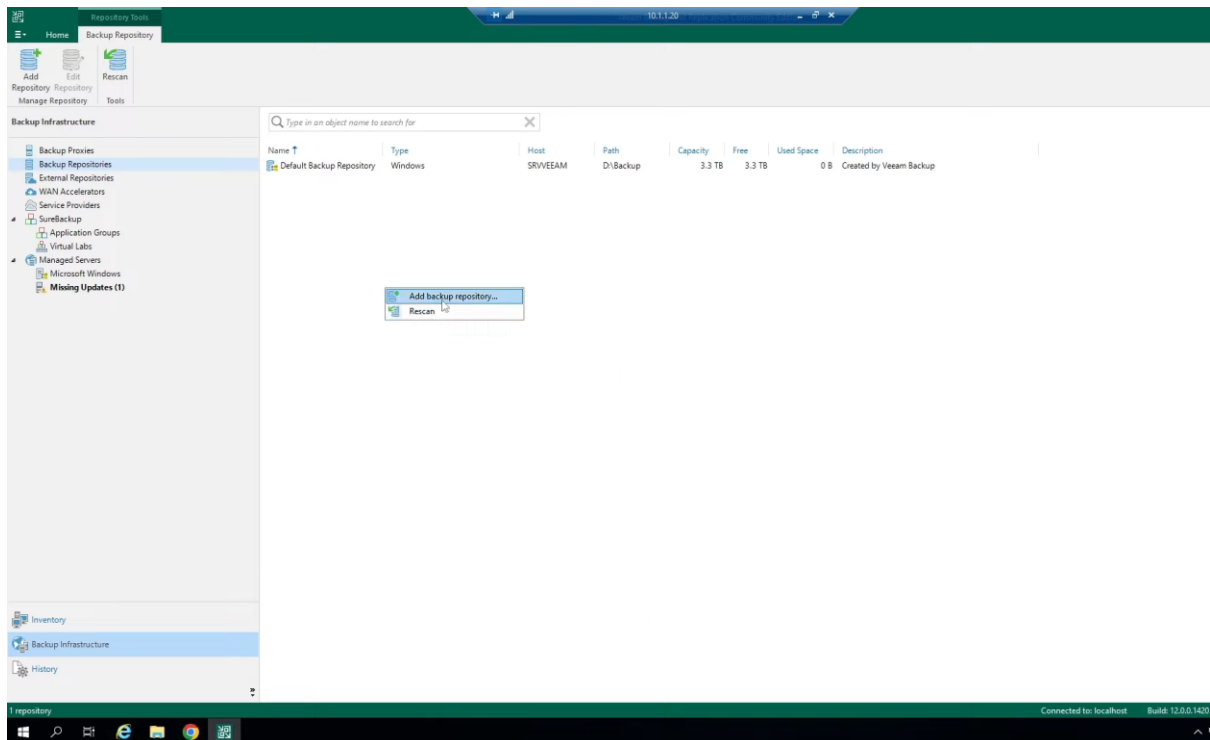

Select direct attached storage

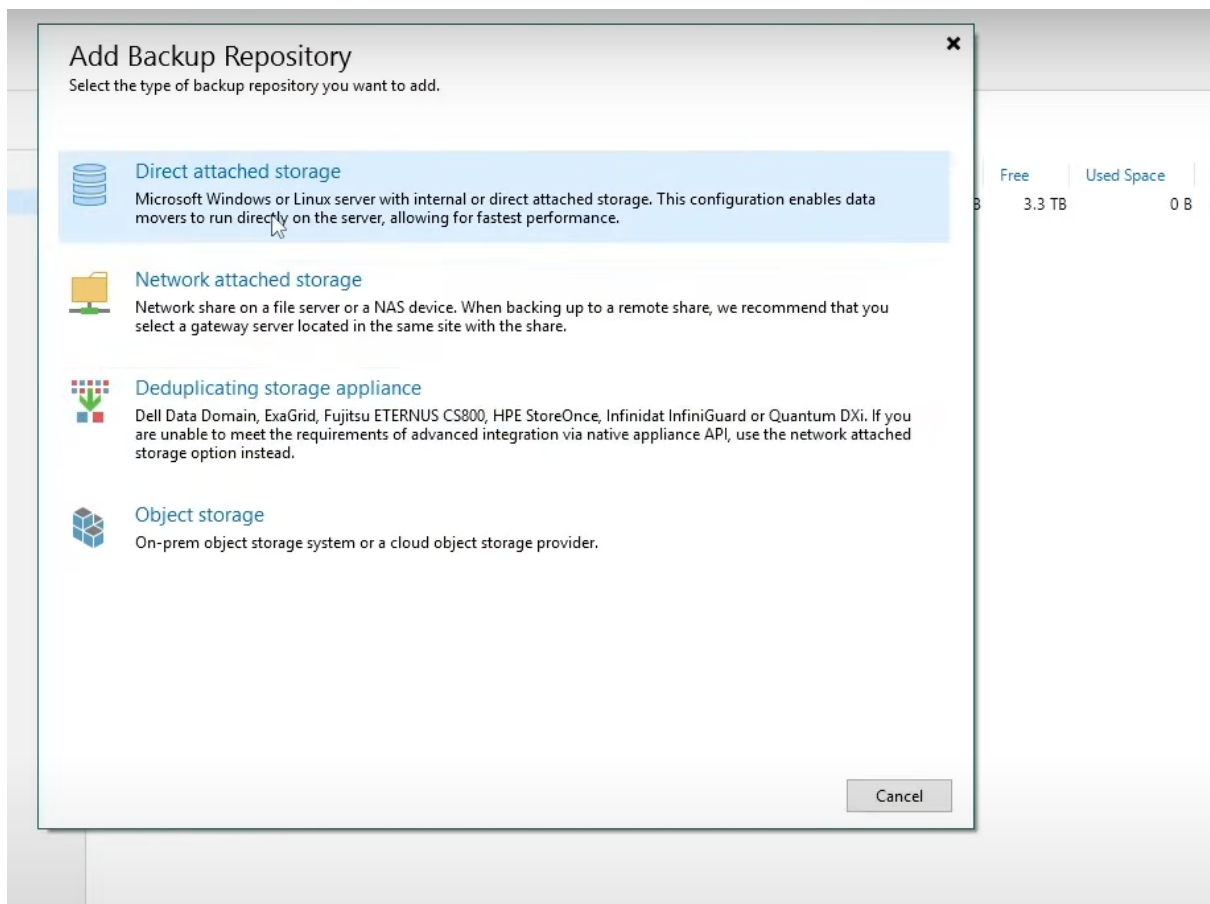

Use windows or linux your preference

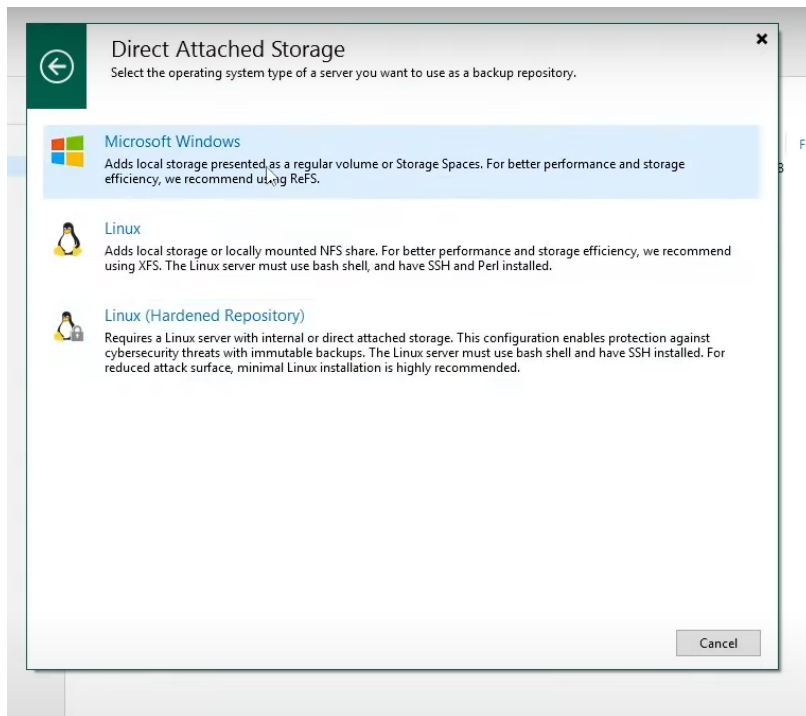

Give name for it and next


	Type	Host	Path	Capacity	Free	Used Space	Description
Backup Repository	Windows	SRVVEEAM	D:\Backup	3.3 TB	3.3 TB	0 B	Created by Veeam Backup

New Backup Repository


 **Name**
Type in a name and description for this backup repository.


Name	Name:
Server	QNAP1
Repository	Description:
Mount Server	Created by SRVVEEAM\Administrator at 11/12/2023 10:24 PM.
Review	
Apply	
Summary	

< Previous **Next >** Finish Cancel

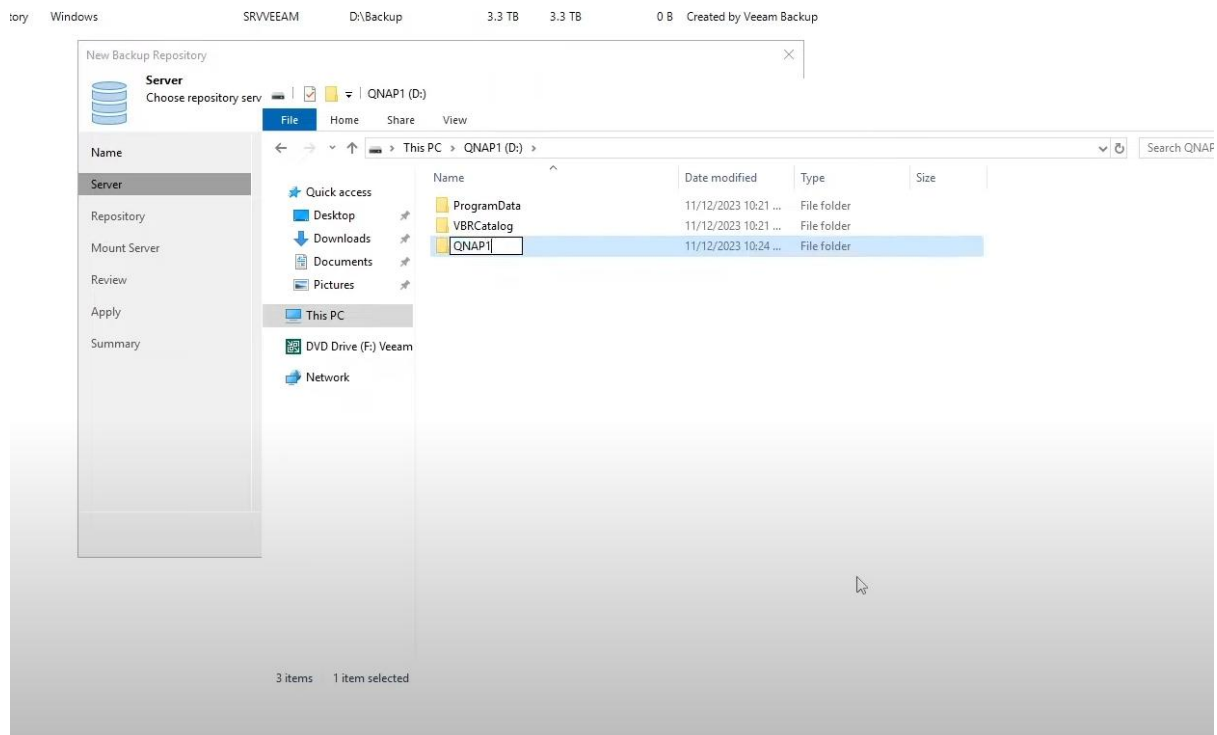


Here select the path folder that you have created just now

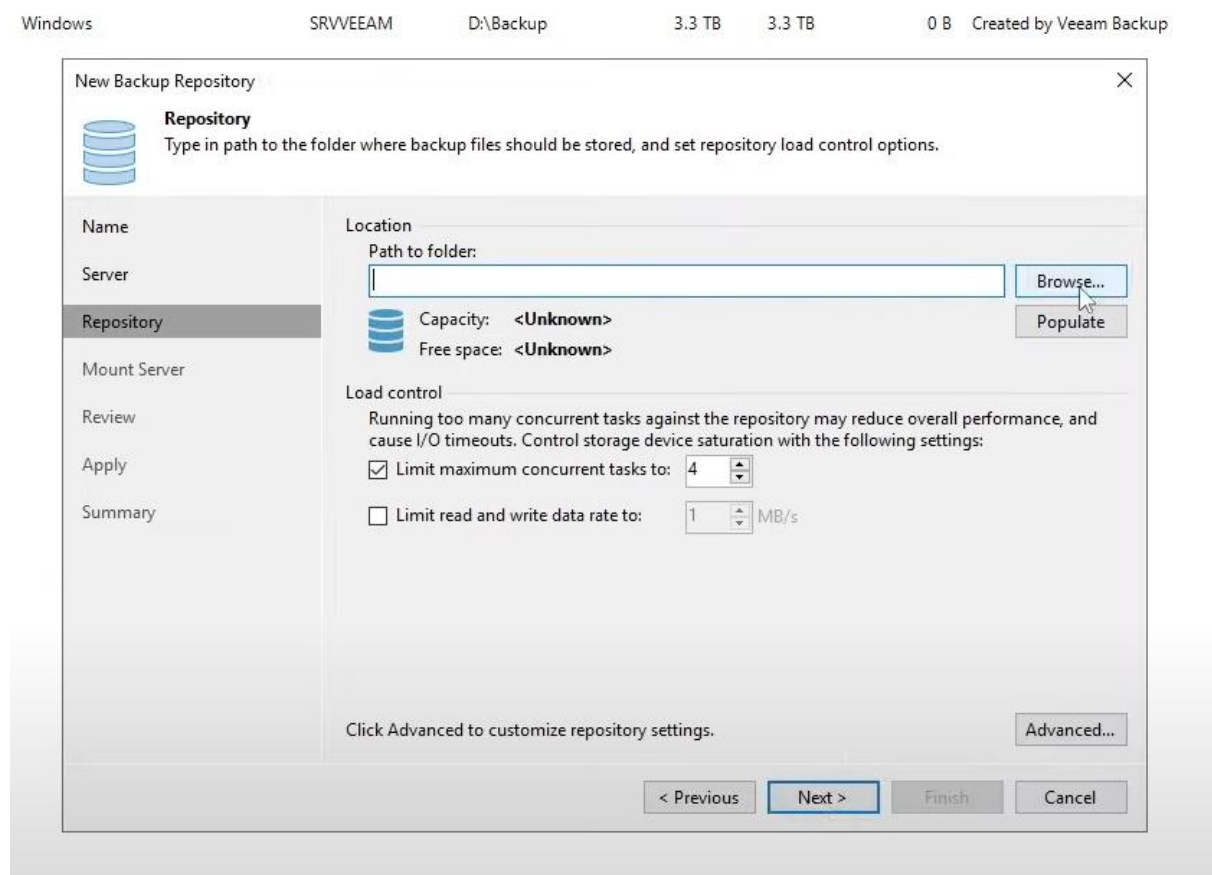

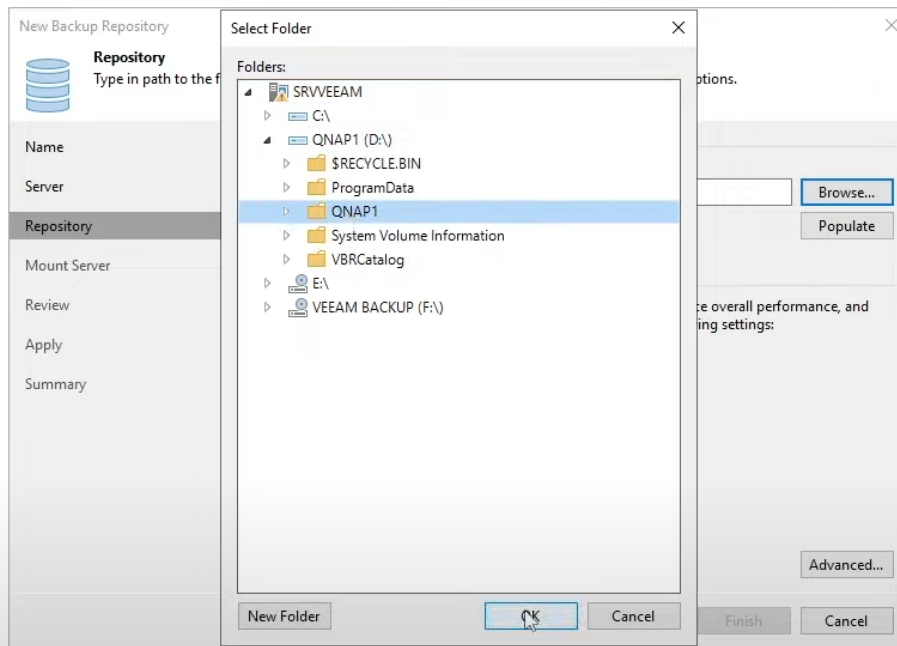

Click on next

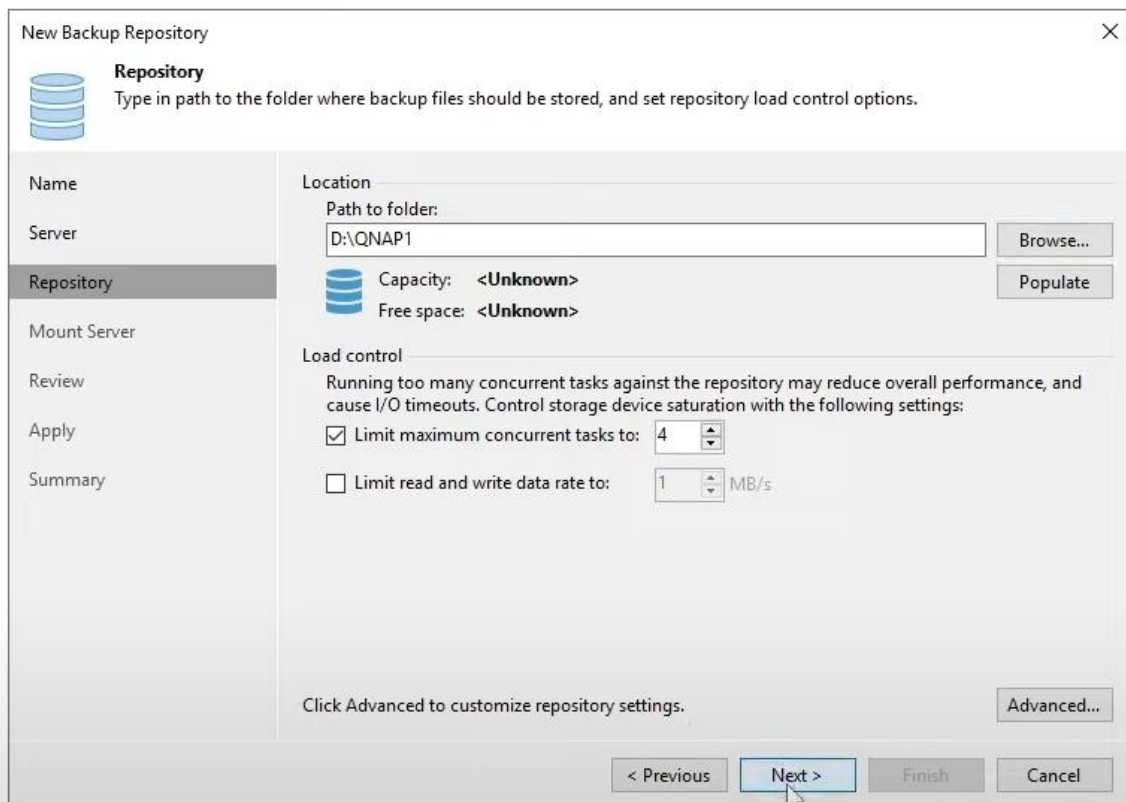

Enable the Vpower NFS and next

New Backup Repository

Mount Server

Specify a server to mount backups to when performing advanced restores (file, application item and instant VM recoveries). Instant recoveries require a write cache folder to store changed disk blocks in.

Name

Server

Repository

Mount Server

Review

Apply

Summary

Mount server:

SRVVEEAM (Backup server)

Add New...

Instant recovery write cache folder:

D:\ProgramData\Veeam\Backup\IRCache\

Browse...

Ensure that the selected volume has sufficient free disk space to store changed disk blocks of instantly recovered machines. We recommend placing the write cache folder on an SSD drive.

☒ Enable vPower NFS service on the mount server (recommended)

Ports...

Unlocks instant recovery of any backup (physical, virtual or cloud) to a VMware vSphere VM. vPower NFS service is not used for instant recovery to a Microsoft Hyper-V VM.

< Previous

Next >

Finish

Cancel

WindowsSRVVEEAMD:\Backup3.3 TB3.3 TB0 BCreated by Veeam Backup

New Backup Repository

Review

Please review the settings, and click Apply to continue.

Name

Server

Repository

Mount Server

Review

Apply

Summary

The following components will be processed on server SRVVEEAM:

Component name	Status
Transport	already exists
vPower NFS	already exists
Mount Server	already exists

☐ Search the repository for existing backups and import them automatically

☐ Import guest file system index data to the catalog


< Previous

Apply


Finish

Cancel



Apply everything and wait

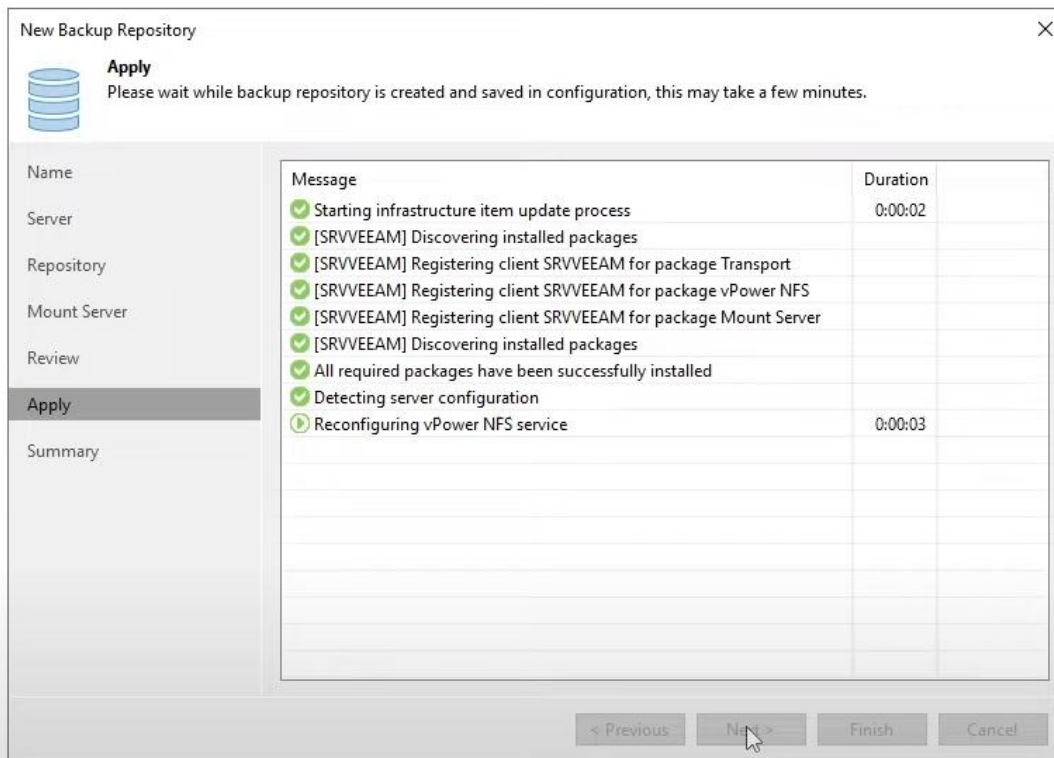

Next

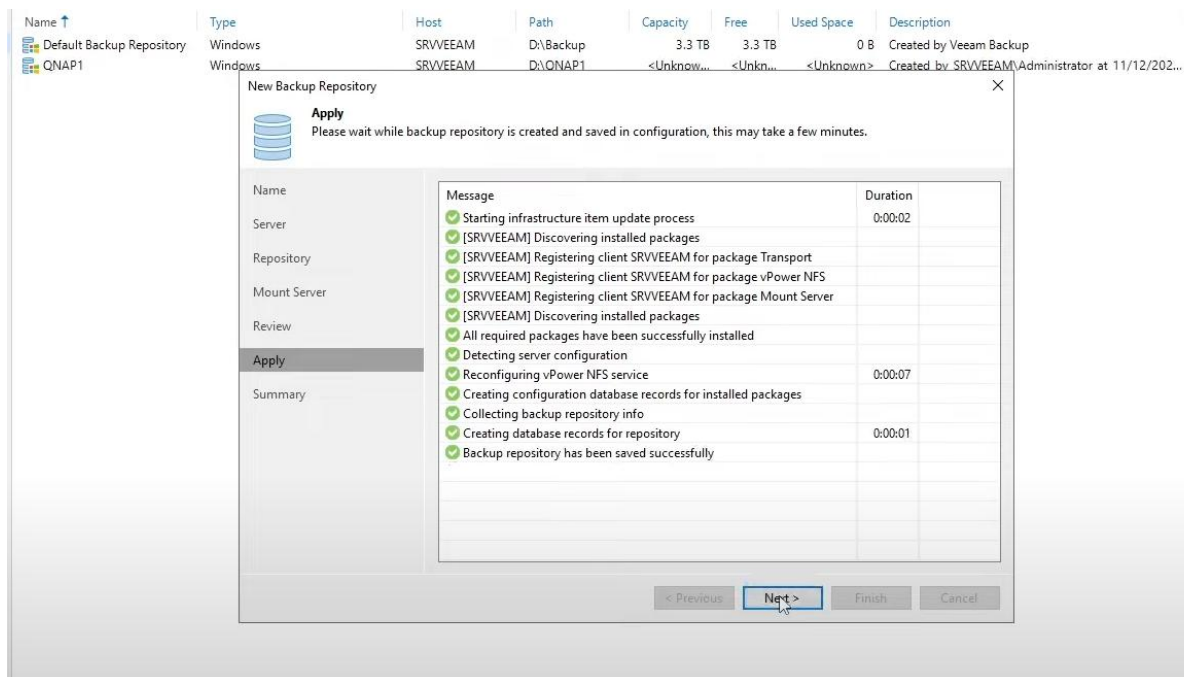


Now its finished

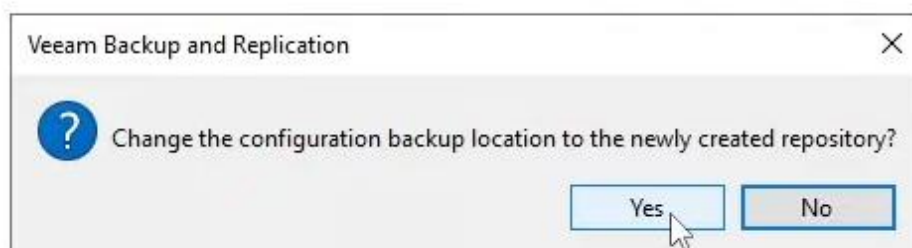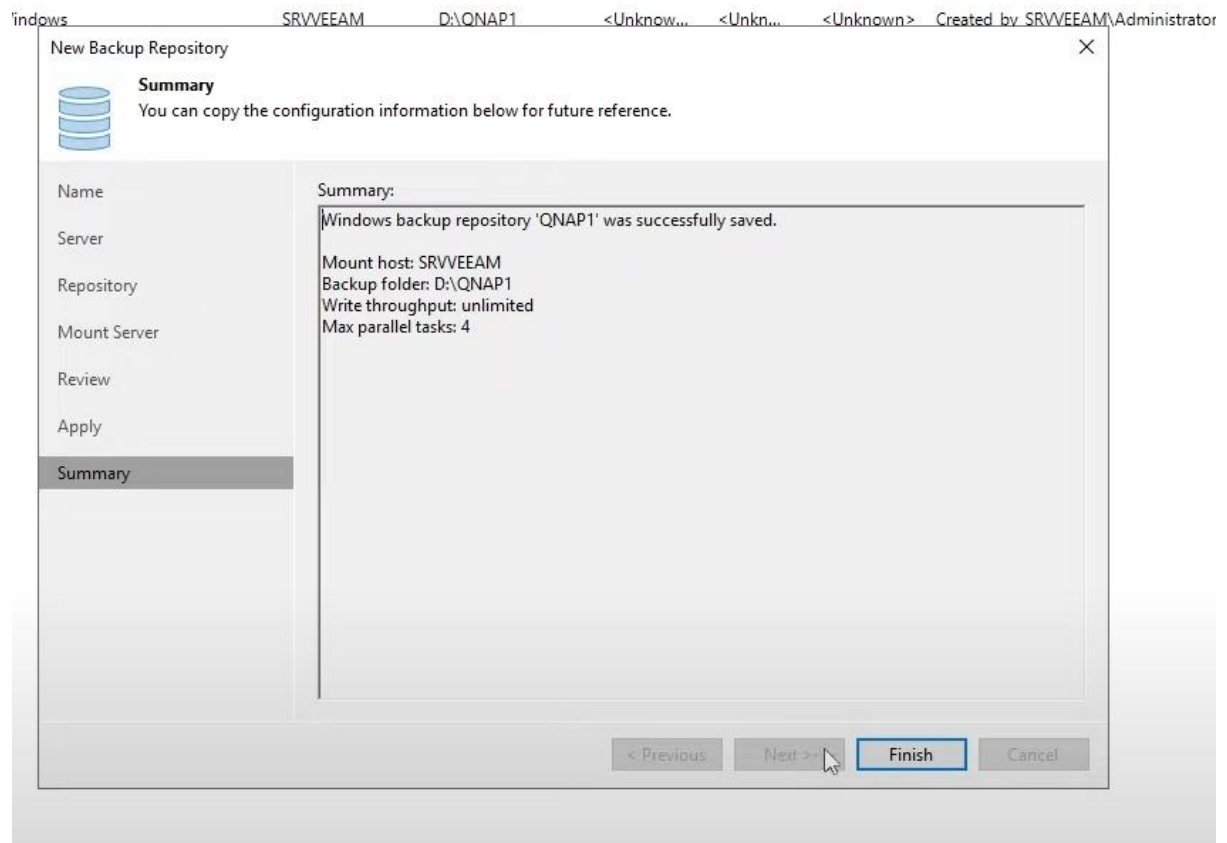


Click on yes


Here delete the one that automatically created

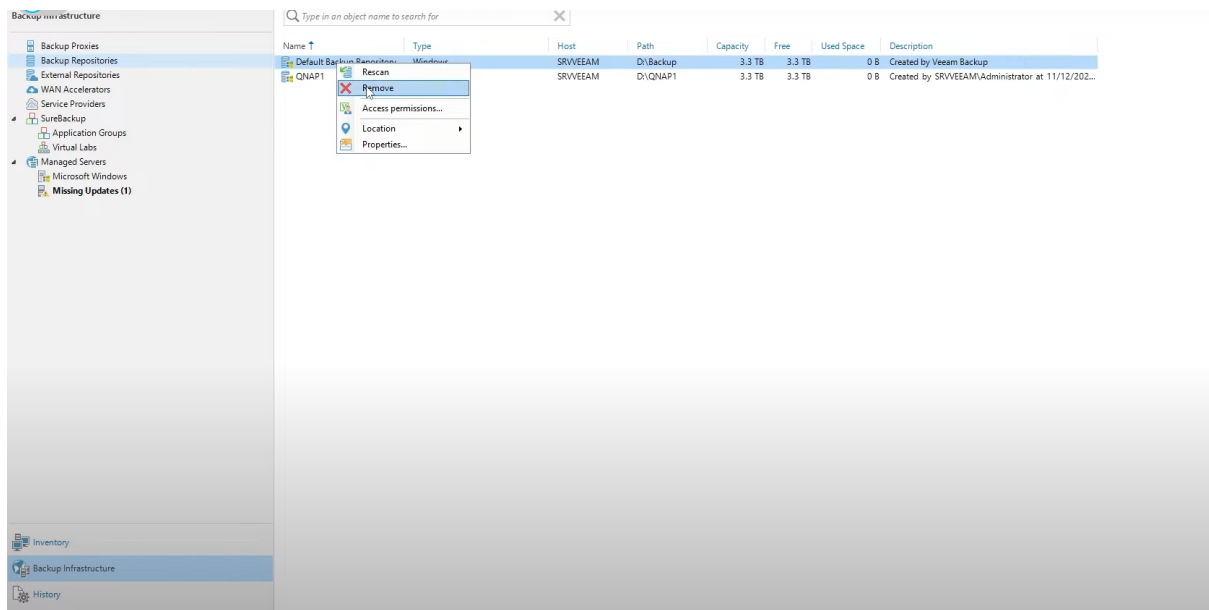


Now in inventory click on add server

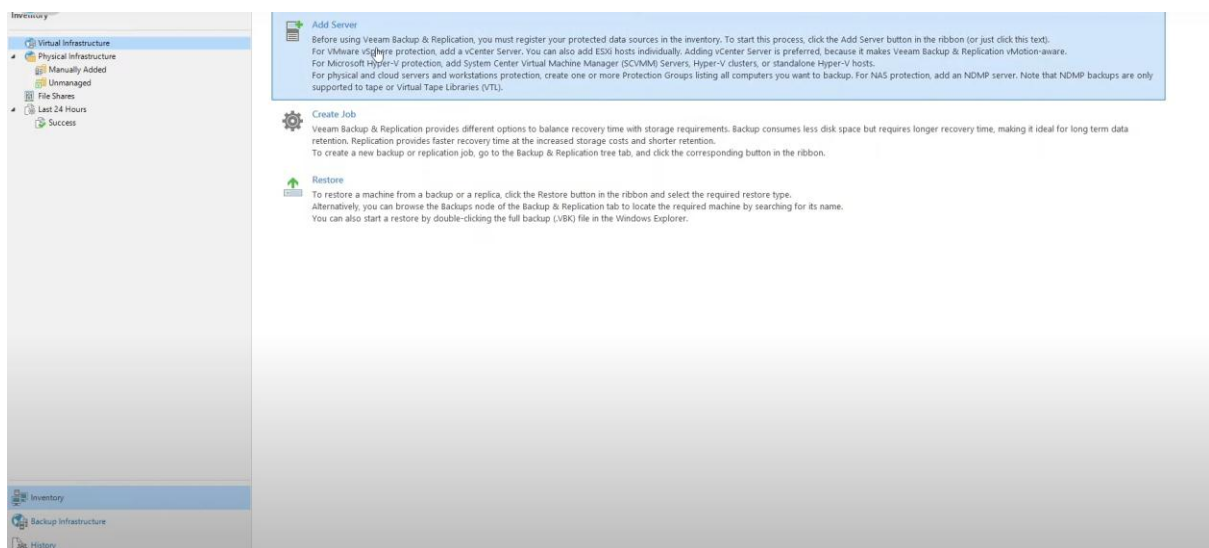

Select any server VMware or Hyper-v we'll use VMware

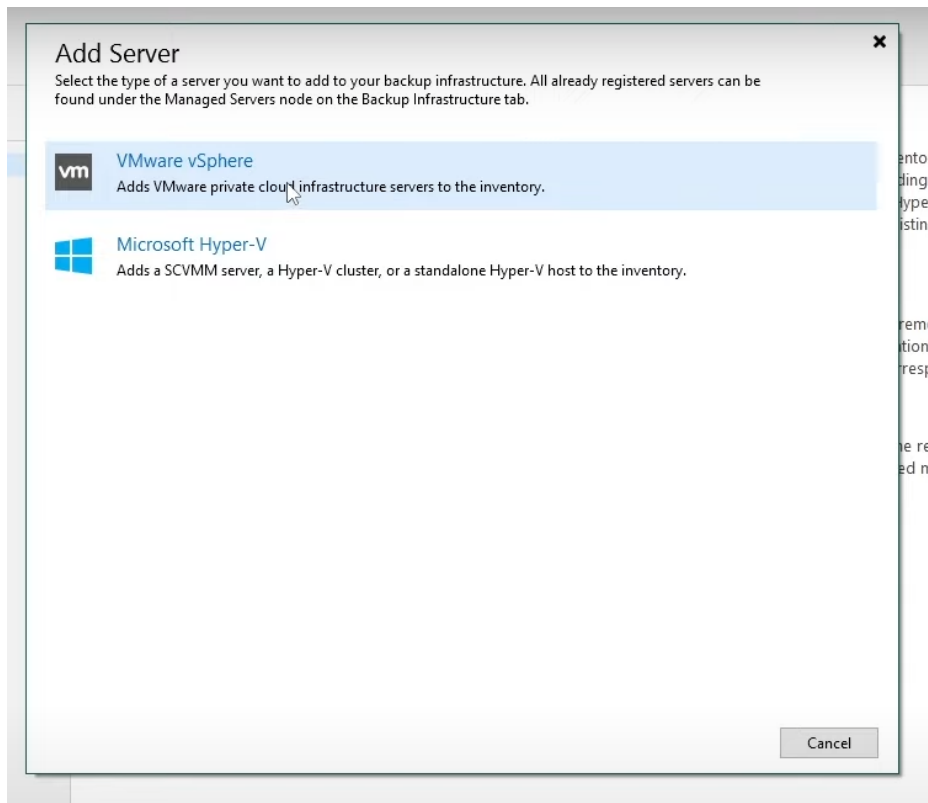

Select vsphere

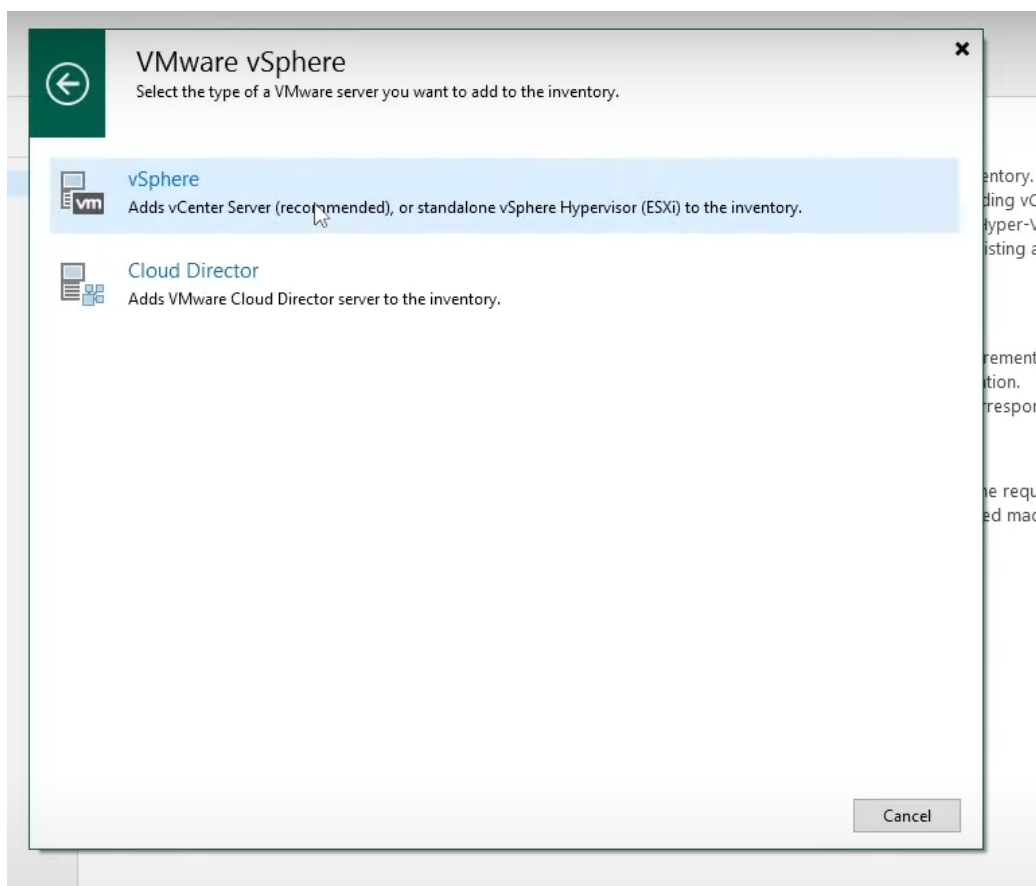

Add the DNS name or ip address of the vsphere

Add Server

Before using Veeam Backup & Replication, you must register your protected data sources in the inventory. To start this process, click the Add Server button in the ribbon (For VMware vSphere protection, add a vCenter Server. You can also add ESXi hosts individually. Adding vCenter Server is preferred, because it makes Veeam Backup & Replication easier to manage. For Microsoft Hyper-V protection, add System Center Virtual Machine Manager (SCVMM) Servers, Hyper-V clusters, or standalone Hyper-V hosts. For physical and cloud storage, add tape or disk devices.)

Create Job

To create a new backup job, click the Create Job button in the ribbon. The wizard will guide you through the process of creating a new backup job. You can also start a new backup job by clicking the Create Job button in the ribbon.

Restore

To restore a machine, click the Restore button in the ribbon. Alternatively, you can click the Restore button in the ribbon. You can also start a new restore job by clicking the Restore button in the ribbon.

New VMware Server

Name
Specify DNS name or IP address of VMware server.


Name

DNS name or IP address:
10.1.1.11

Description:
Created by SRVVEAM\Administrator at 11/12/2023 10:26 PM.



< Previous Next > Finish Cancel

Before going to the next in vsphere in manager security and users create a user in the user like veeam and give a password

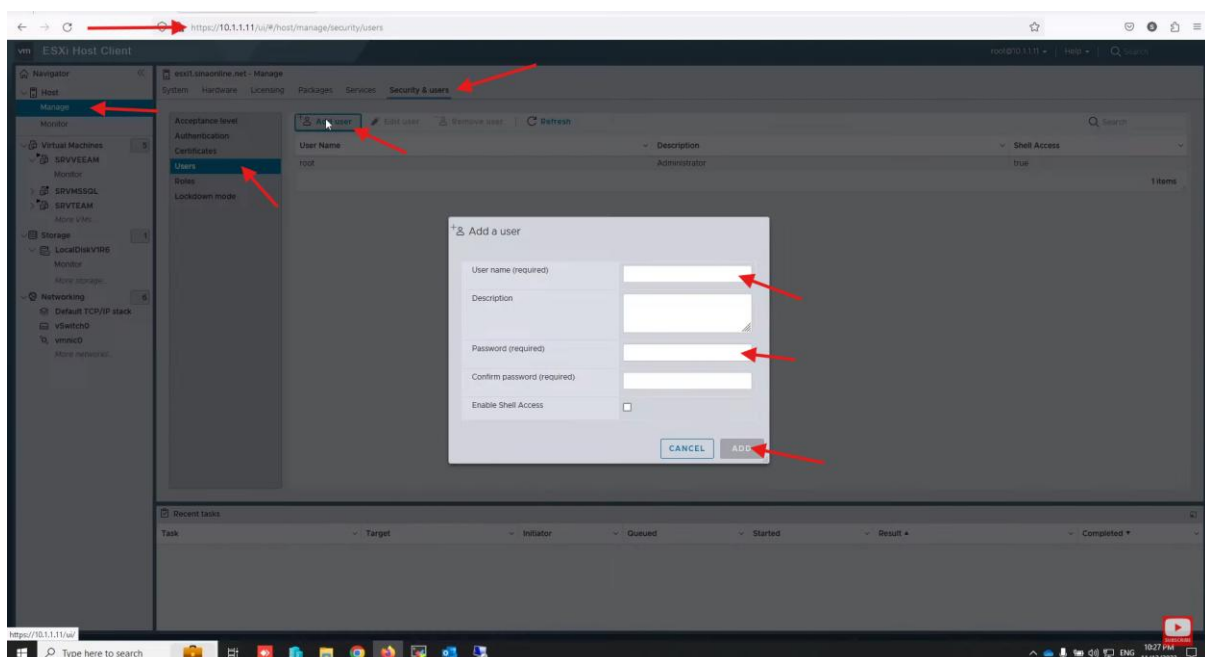


Now go and add that user in the next phase of the veeam installation


to protect Hyper-V protection, add System Center Virtual Machine Manager (SCVMM) Servers, Hyper-V clusters, or standalone Hyper-V hosts.

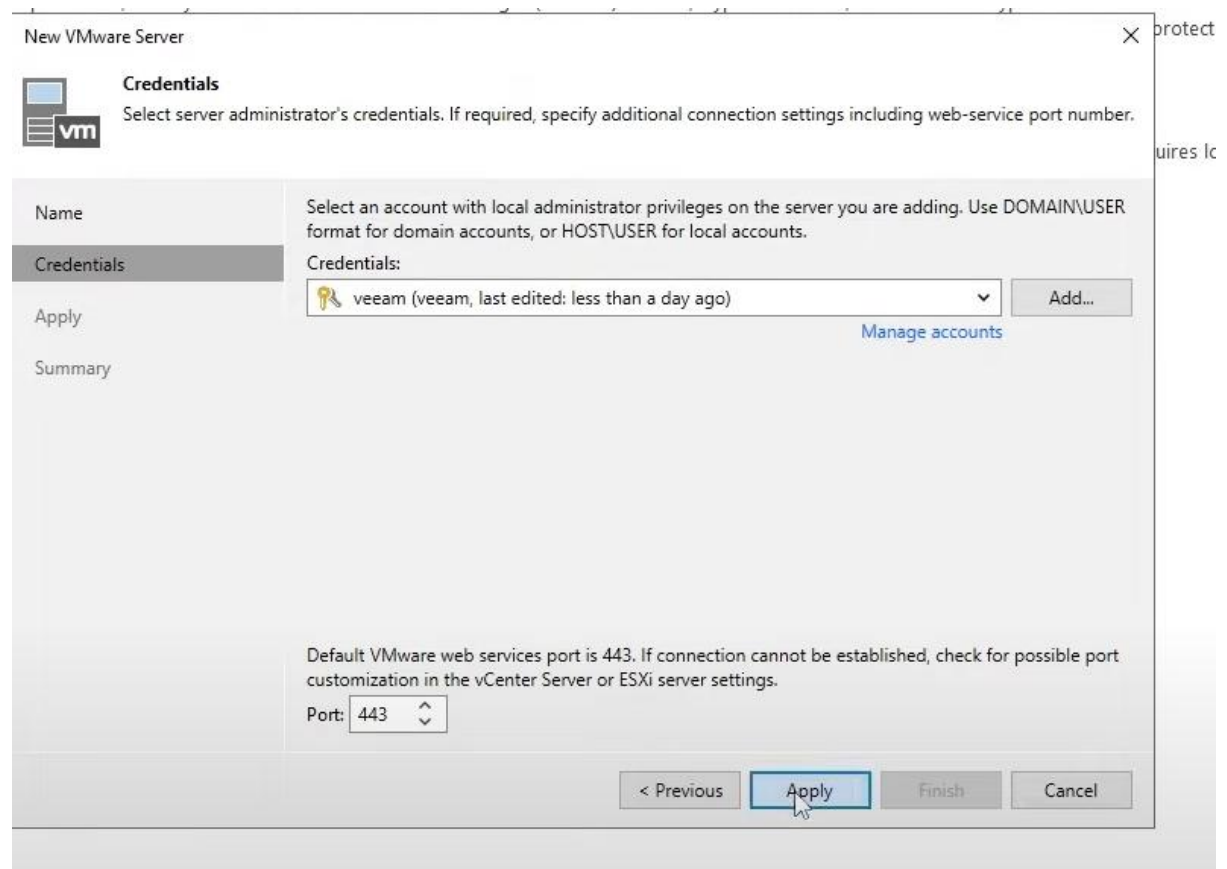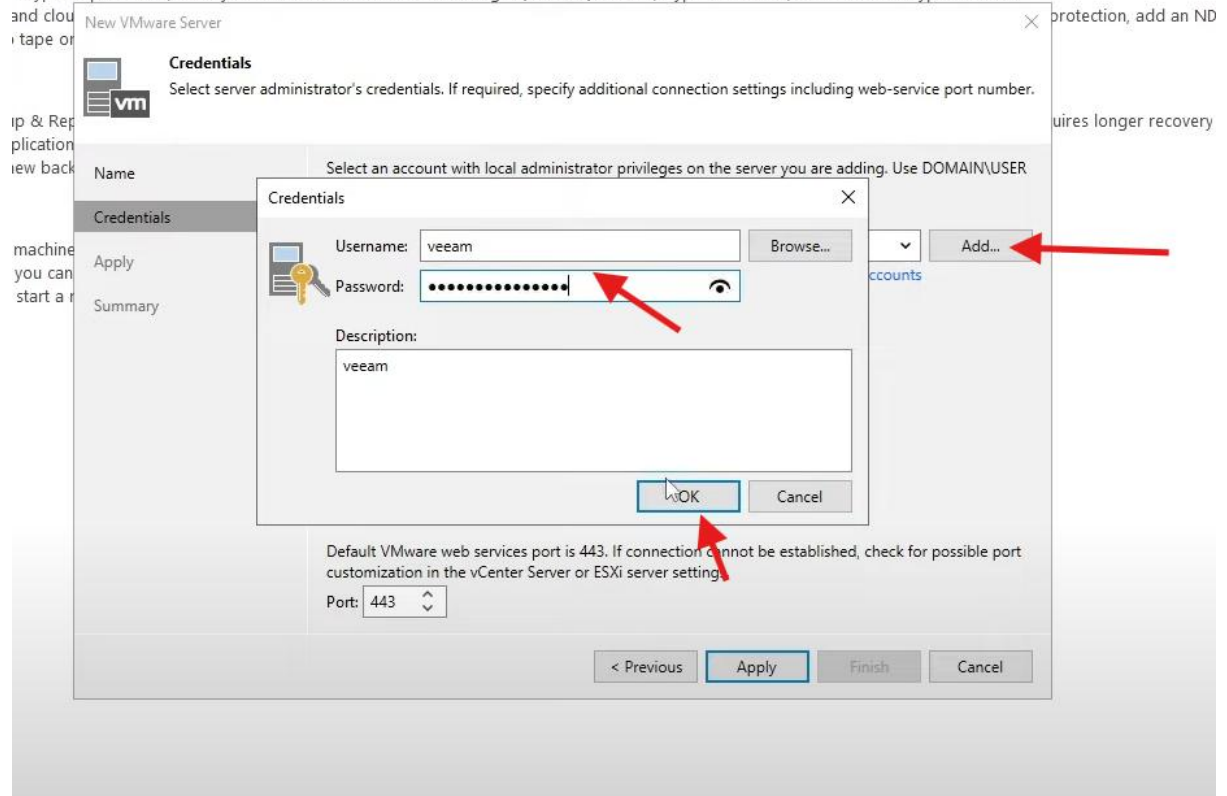


After clicking apply and continue

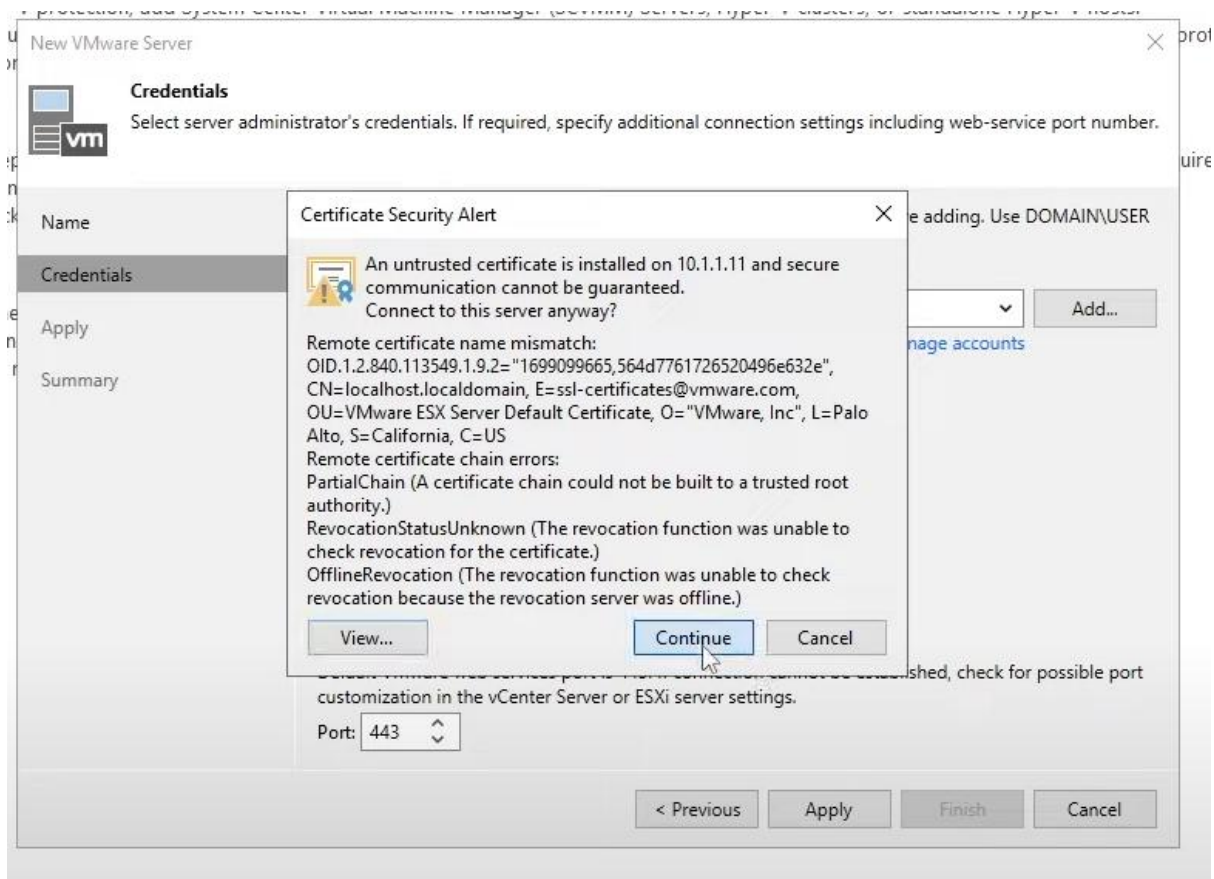


You will see permission denied now got to the vsphere

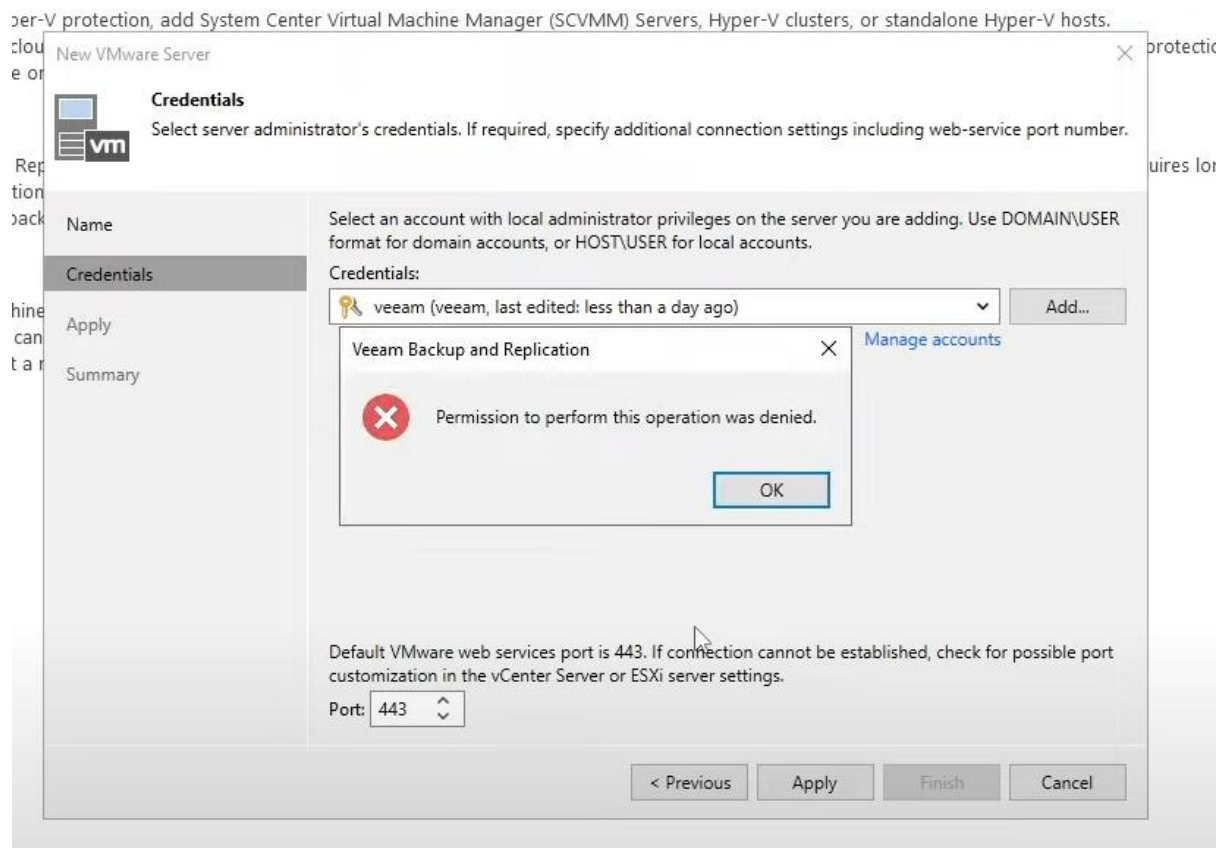



In host actions click on permissions

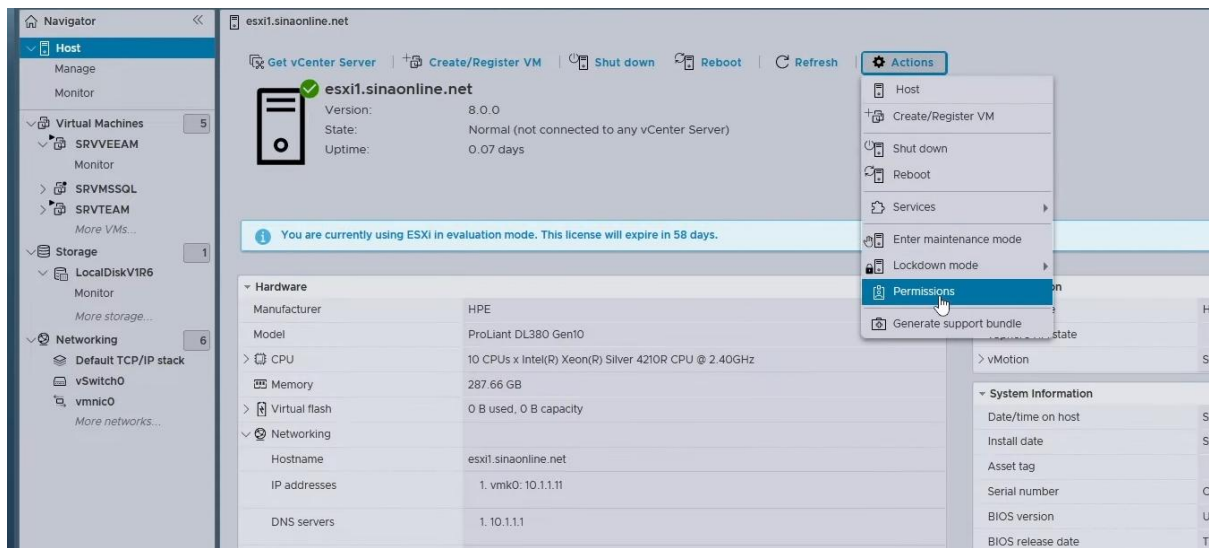


Here add the user that you have created veeam

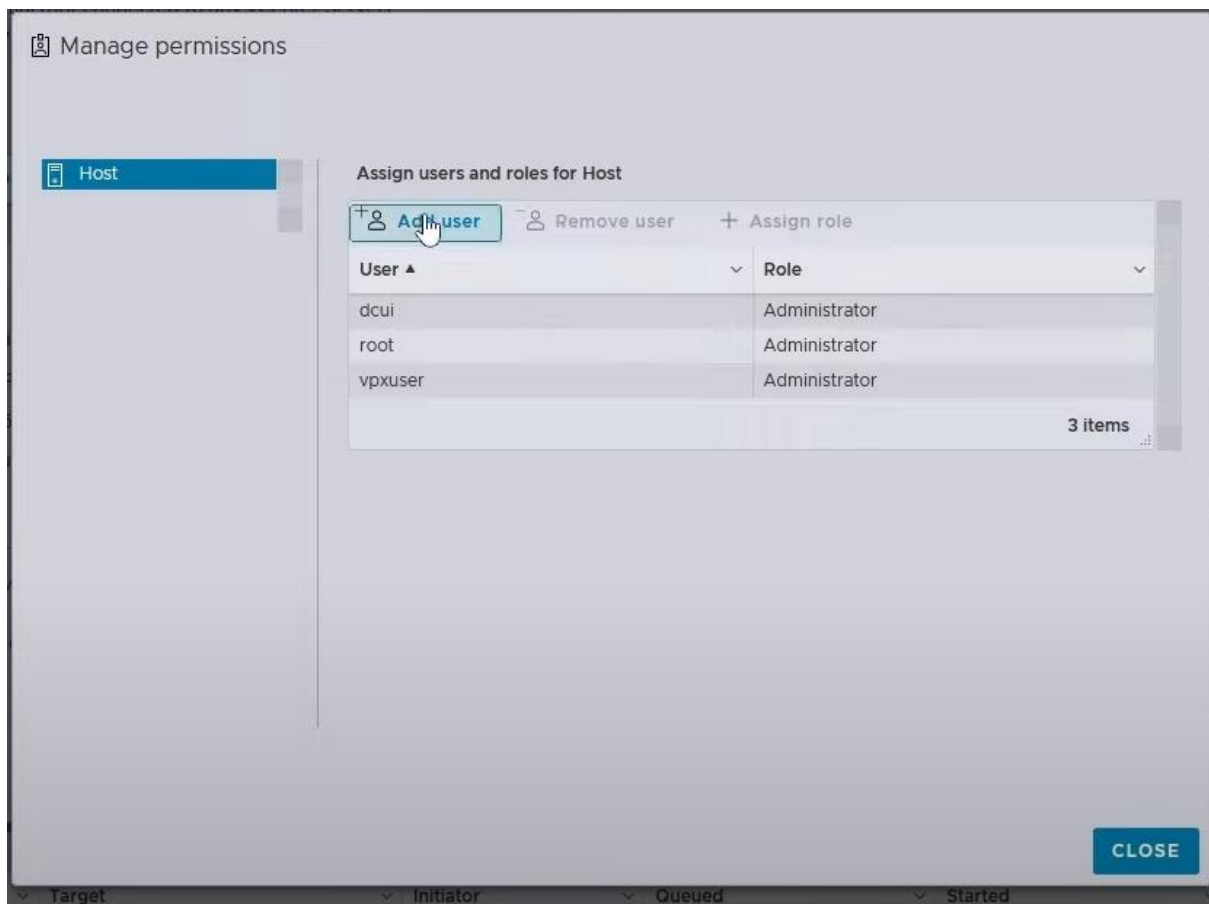


You have to select administrator and add the user

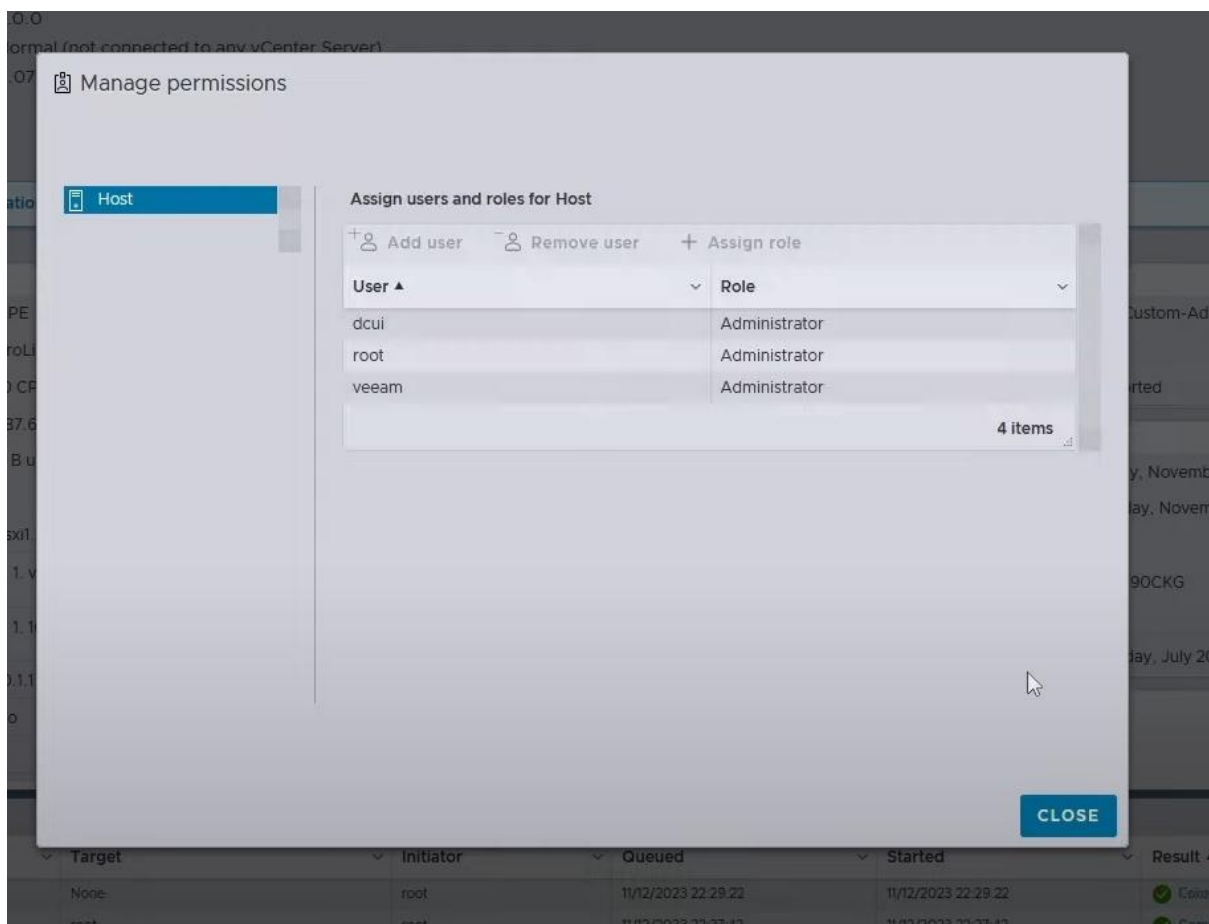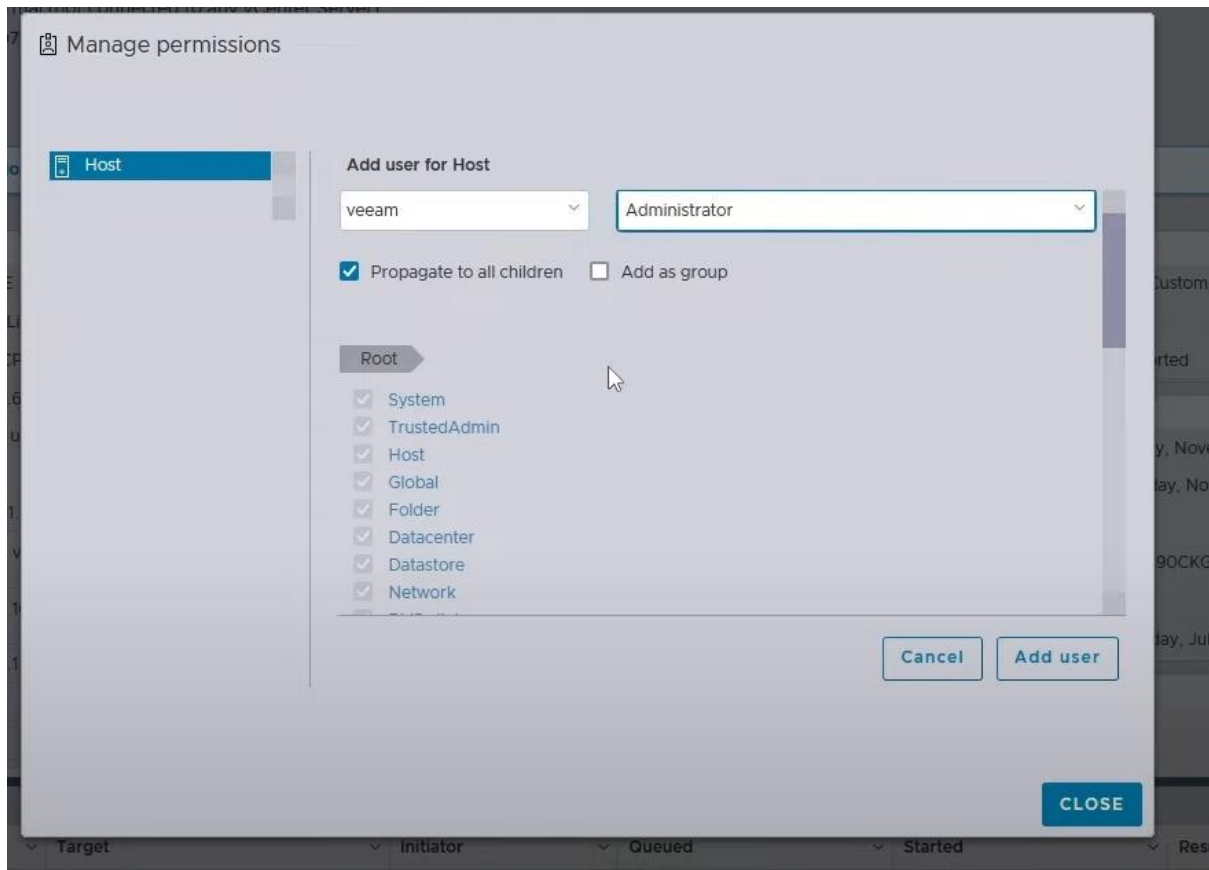


Now after adding veeam user as administrator again apply and continue

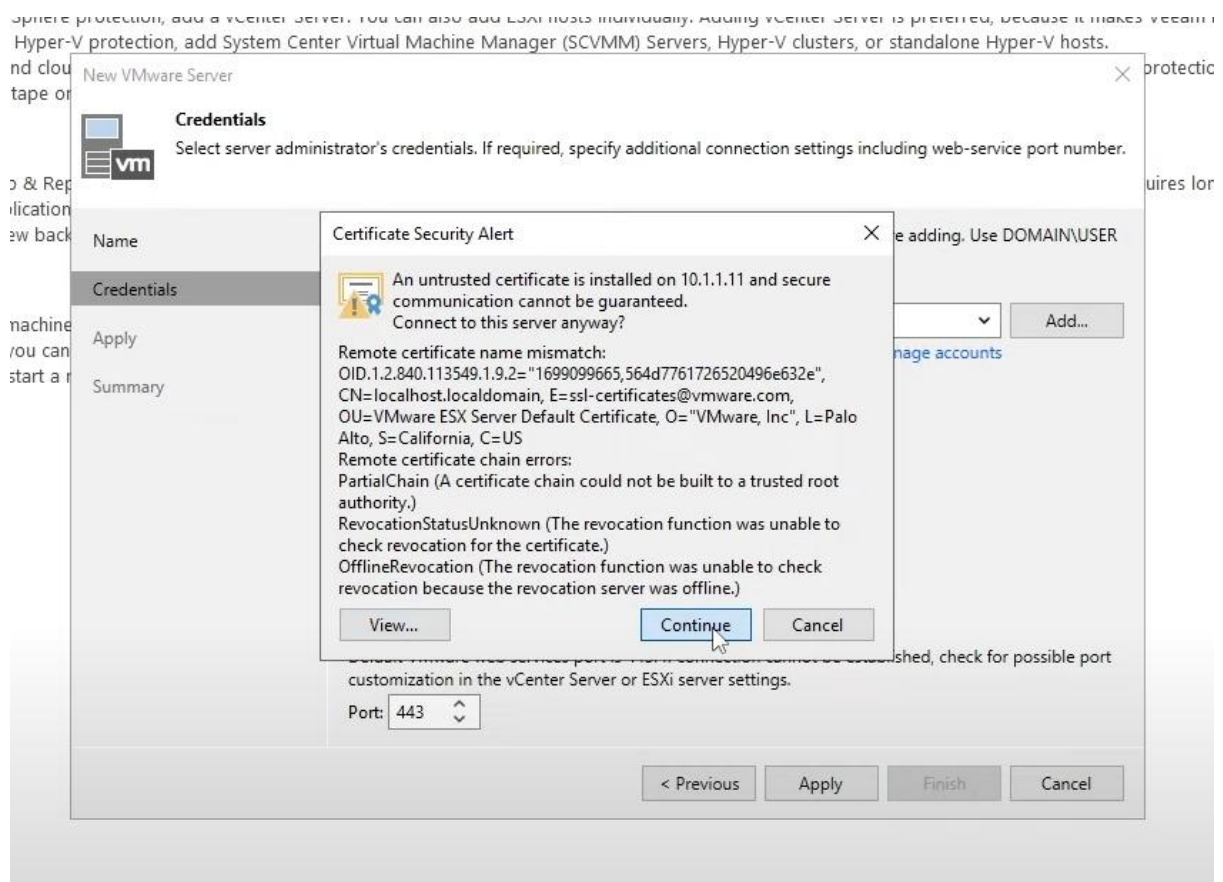


It will apply all the things and display it in the message panel and then click on next

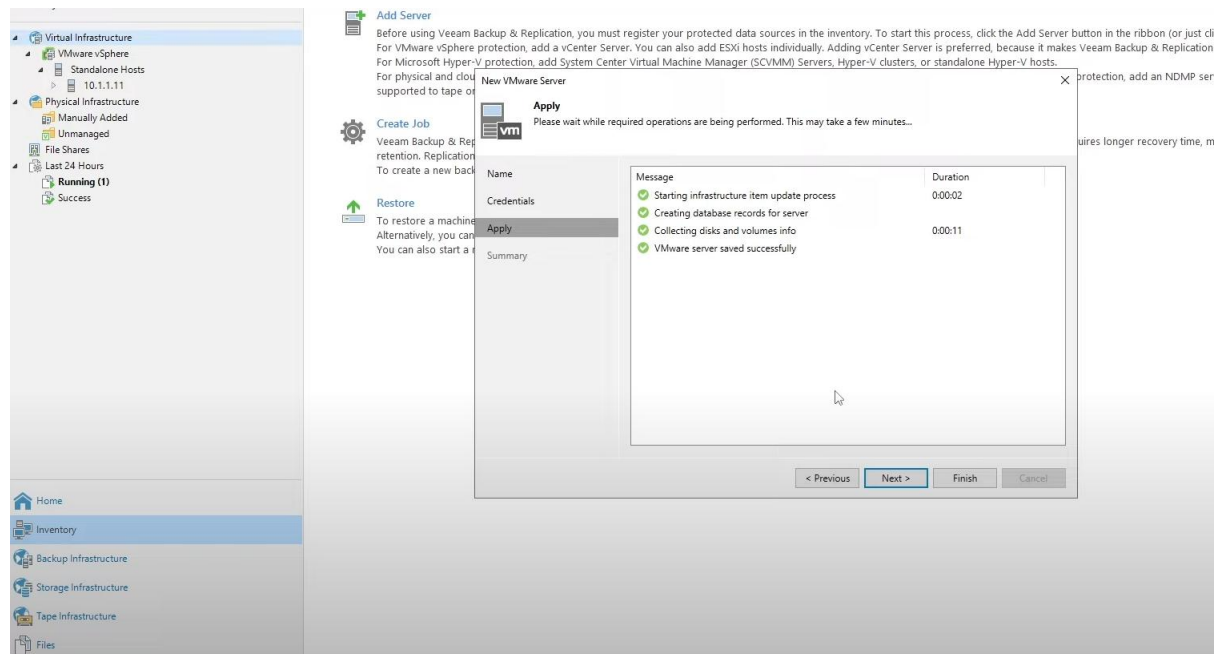

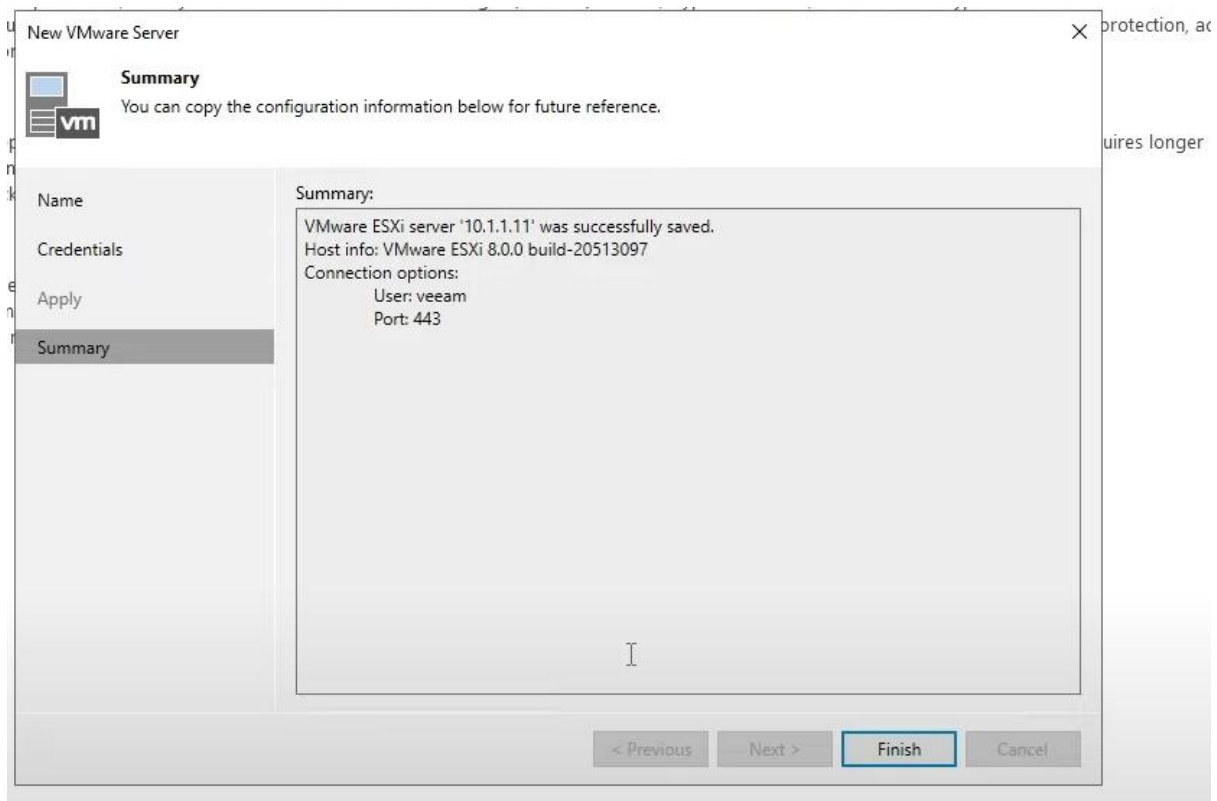

Click on finish after that go to home right click on white space and click on backup in that VM

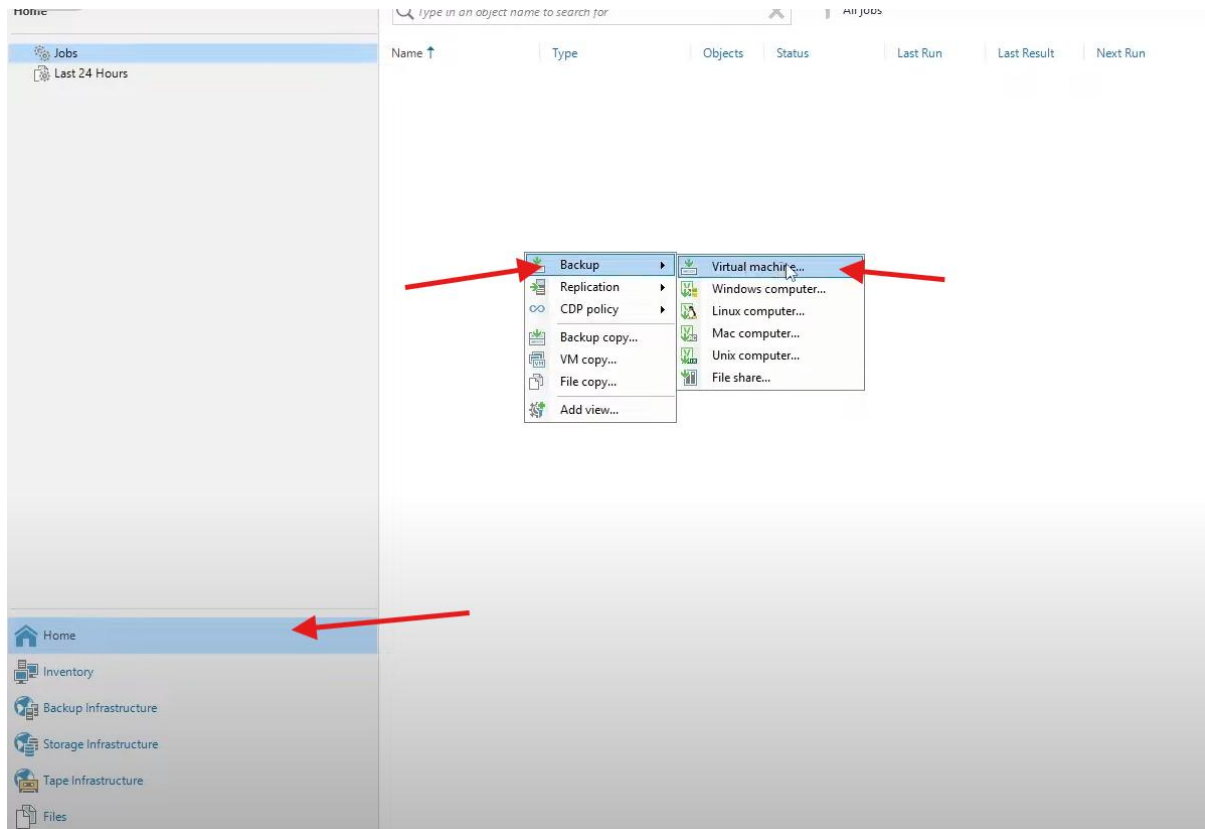

Create a back up job and you can name it back up job or anything then click on next

New Backup Job

 **Name**
Type in a name and description for this backup job.

Name:
Back Up Job

Description:
Created by SRVVEAM\Administrator at 11/12/2023 10:30 PM.

☒ High priority
Backup infrastructure resources are offered to high priority jobs first. Use this option for jobs sensitive to the start time, or jobs with strict RPO requirements.

< Previous Next > Finish Cancel

Now add the Vm that are in the host of our Vsphere and click on add

New Backup Job

 **Virtual Machines**
Select virtual machines as you add them.

Add Objects

Select objects:

- Hosts and Clusters
 - 10.1.1.11
 - SRVFILE
 - SRVLCRA
 - SRVMSSQL
 - SRVTEAM
 - SRVVEAM

SRVFILE

Add...

Remove

Exclusions...

Up

Down


Recalculate

Total size: 0 B


Type in an object name to search for

Add Cancel

Finish Cancel

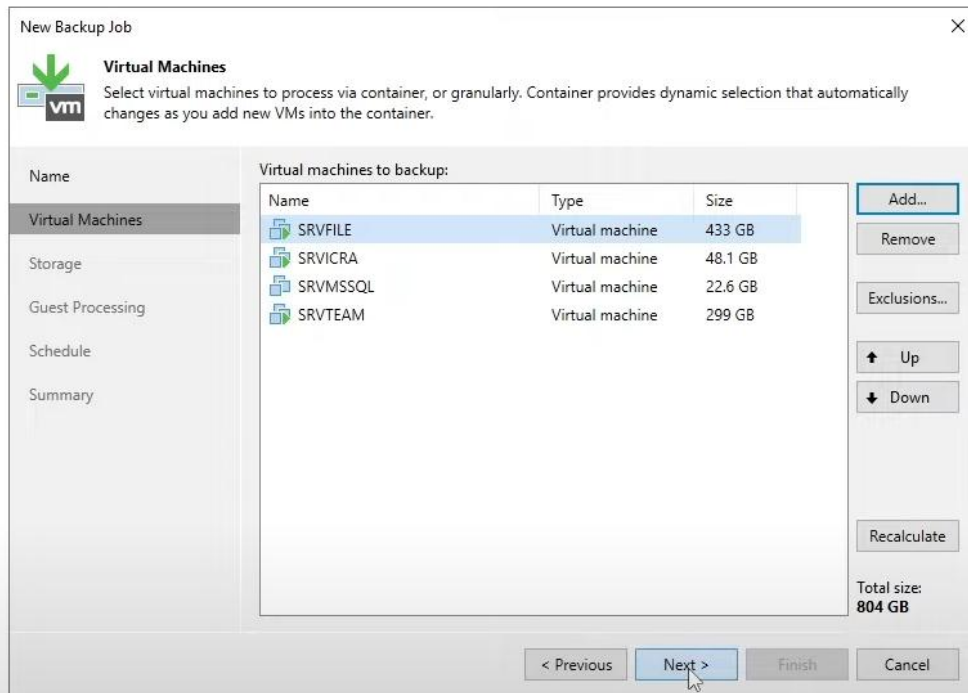

After adding the vm's click next and here in storage retention policy can be 10 days or your choice in advance you can change it to your preference

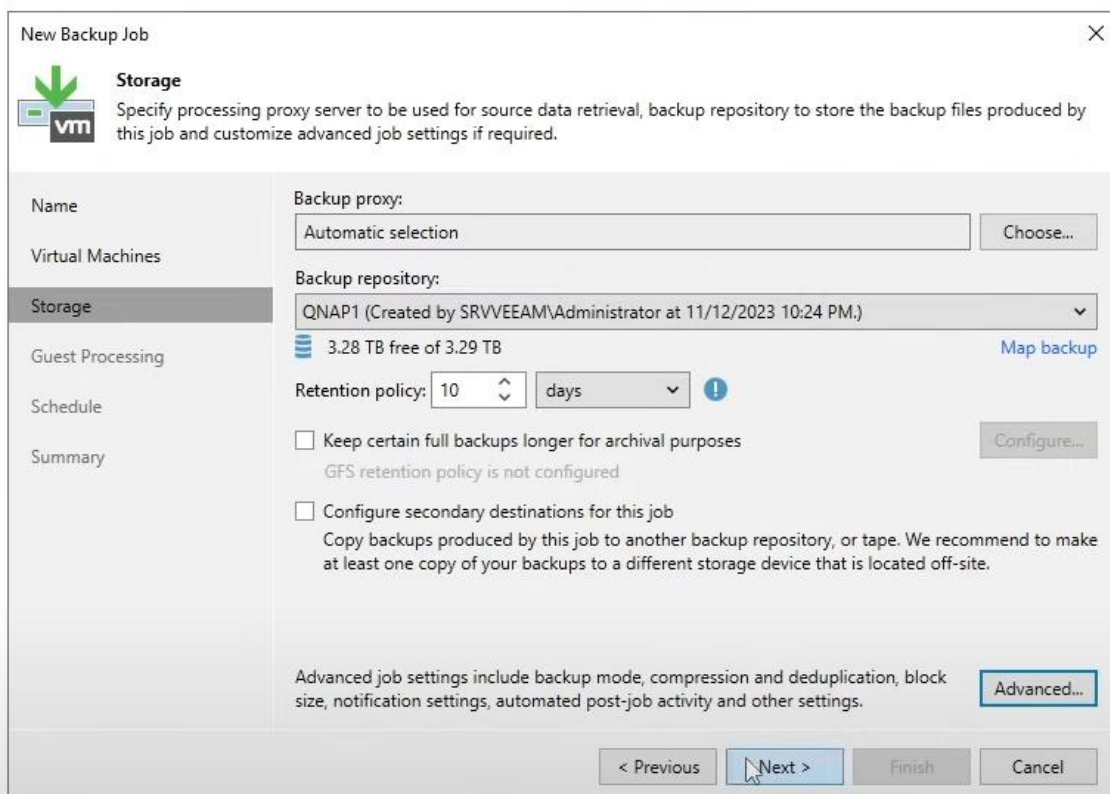

Don't need to enable anything here click on next

New Backup Job

Guest Processing
Choose guest OS processing options available for running VMs.

Name

Virtual Machines

Storage

Guest Processing

Schedule

Summary

☐ **Enable application-aware processing**
Detects and prepares applications for consistent backup, performs transaction logs processing, and configures the OS to perform required application restore steps upon first boot.
Customize application handling options for individual machines and applications Applications...

☐ **Enable guest file system indexing**
Creates catalog of guest files to enable browsing, searching and 1-click restores of individual files. Indexing is optional, and is not required to perform instant file level recoveries.
Customize advanced guest file system indexing options for individual machines Indexing...

Guest OS credentials:
Select existing credentials or add new Add...
Manage accounts
Customize guest OS credentials for individual machines and operating systems Credentials...
Verify network connectivity and credentials for each machine included in the job Test Now

< Previous Next > Finish Cancel

Here in the sheduele you can set your job to when it should run and everyday or week you choice and then click on apply

New Backup Job

Schedule
Specify the job scheduling options. If you do not set the schedule, the job will need to be controlled manually.

Name

Virtual Machines

Storage

Guest Processing

Schedule

Summary

☒ **Run the job automatically**

☒ **Daily at this time:** 11:00 PM Everyday Days...

☐ **Monthly at this time:** 10:00 PM Fourth Saturday Months...

☐ **Periodically every:** 1 Hours Schedule...

☐ **After this job:**

Automatic retry

☒ **Retry failed items processing:** 3 times


Wait before each retry attempt for: 10 minutes

Backup window

☐ **Terminate the job outside of the allowed backup window**
Long running or accidentally started jobs will be terminated to prevent impact on your production infrastructure during busy hours. Window...

< Previous Apply Finish Cancel

Here you can see all the summary of you have selected click on finish

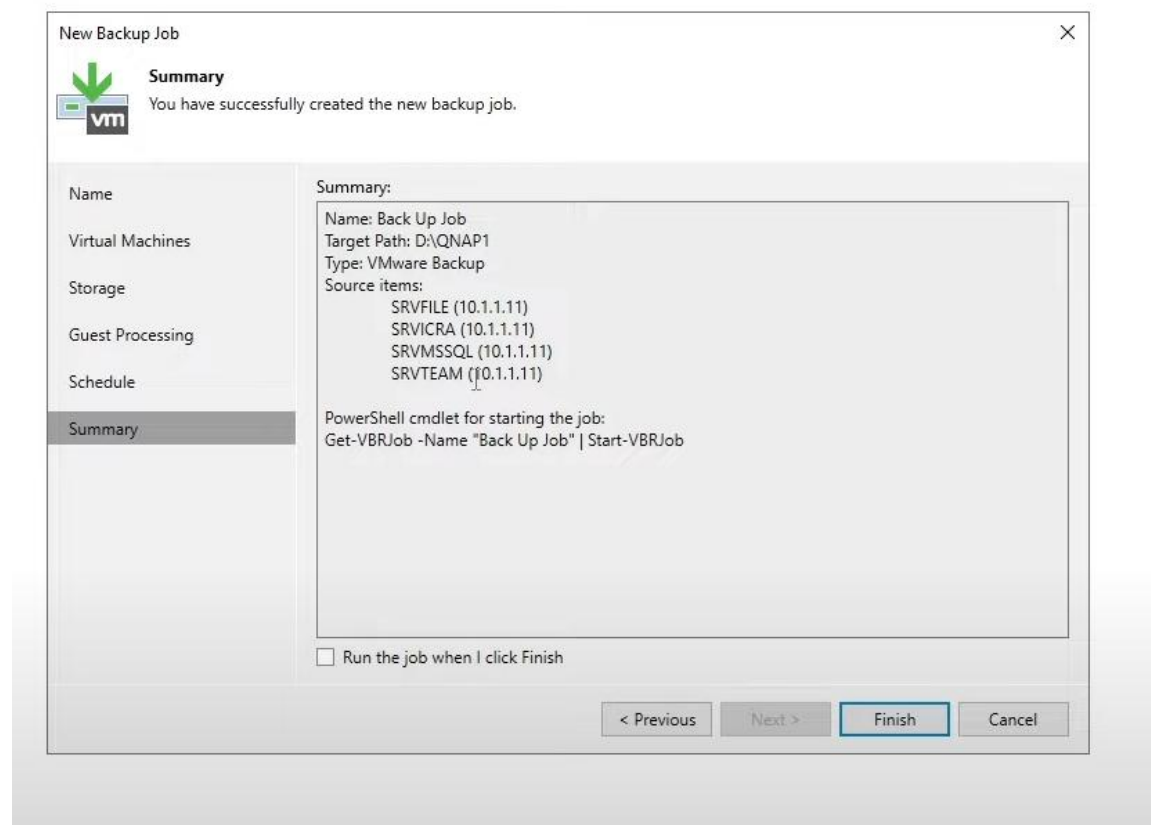

Here you can see that a back up job has been created

