


Install WordPress in Centos8-76

First install the Apache server if not

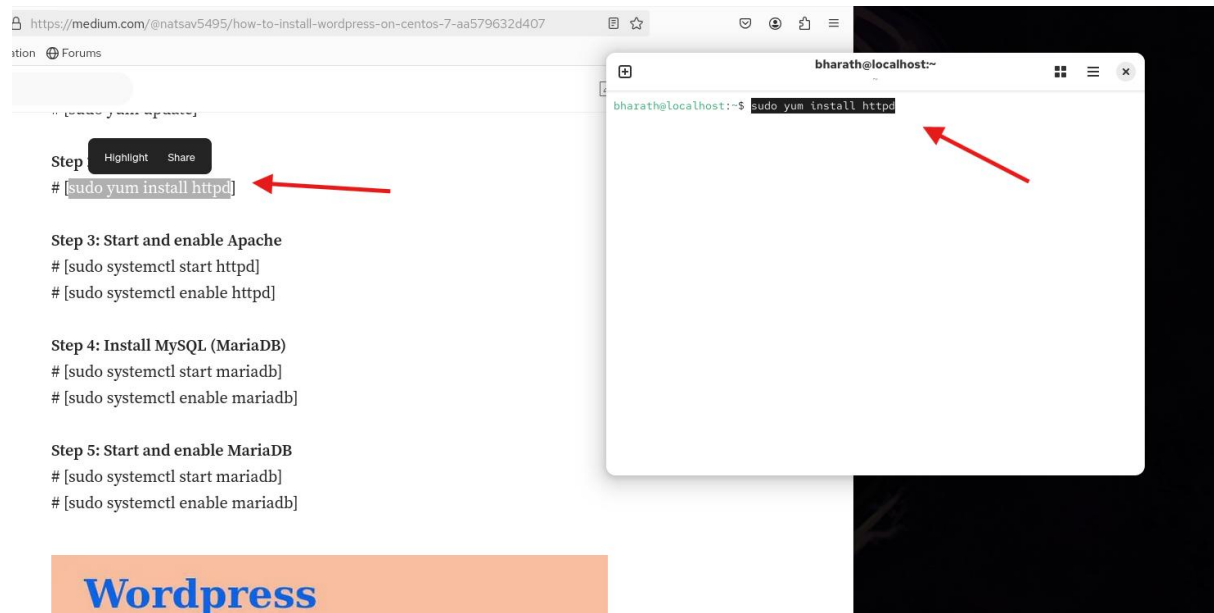

```
bharath@localhost:~ -- sudo yum install httpd

Total download size: 3.0 M
Installed size: 7.4 M
Is this ok [y/N]: y
Downloading Packages:
(1/11): apr-util-ldb-1.6.3-21.el10.x86_64.rpm 4.3 kB/s | 15 kB 00:03
(2/11): apr-util-openssl-1.6.3-21.el10.x86_64.r 43 kB/s | 17 kB 00:00
(3/11): apr-util-1.6.3-21.el10.x86_64.rpm 22 kB/s | 99 kB 00:04
(4/11): apr-1.7.5-2.el10.x86_64.rpm 28 kB/s | 129 kB 00:04
(5/11): httpd-2.4.63-4.el10.x86_64.rpm 124 kB/s | 49 kB 00:00
(6/11): httpd-filesystem-2.4.63-4.el10.noarch.r 64 kB/s | 13 kB 00:00
(7/11): httpd-tools-2.4.63-4.el10.x86_64.rpm 134 kB/s | 82 kB 00:00
(8/11): mod_http2-2.0.29-3.el10.x86_64.rpm 263 kB/s | 164 kB 00:00
(9/11): mod_lua-2.4.63-4.el10.x86_64.rpm 299 kB/s | 59 kB 00:00
(10/11): centos-logos-httpd-100.2-3.el10.noarch 148 kB/s | 855 kB 00:05
(11/11): httpd-core-2.4.63-4.el10.x86_64.rpm 183 kB/s | 1.5 MB 00:08
-----
Total 200 kB/s | 3.0 MB 00:15
CentOS Stream 10 - AppStream 482 kB/s | 1.6 kB 00:00
Importing GPG key 0x8483C65D:
  Userid      : "CentOS (CentOS Official Signing Key) <security@centos.org>"
  Fingerprint: 99DB 70FA E1D7 CE22 7FB6 4882 05B5 55B3 8483 C65D
  From        : /etc/pki/rpm-gpg/RPM-GPG-KEY-centosofficial-SHA256
Is this ok [y/N]: y
```

Wait for it to install and then start and enable the Apache server

<https://medium.com/@natsav5495/how-to-install-wordpress-on-centos-7-aa579632d407>

on Forums

Step 2: Install Apache

```
# [sudo yum install httpd]
```

Step 3: Start and enable Apache

```
# [sudo systemctl start httpd]
# [sudo systemctl enable httpd]
```

Step 4: Install MySQL (MariaDB)

```
# [sudo systemctl start mariadb]
# [sudo systemctl enable mariadb]
```

Step 5: Start and enable MariaDB

```
# [sudo systemctl start mariadb]
# [sudo systemctl enable mariadb]
```

```
bharath@localhost:~ -- sudo systemctl status httpd

bharath@localhost:~$ sudo systemctl start httpd
bharath@localhost:~$ sudo systemctl enable httpd
Created symlink '/etc/systemd/system/multi-user.target.wants/httpd.service' → '/usr/lib/systemd/system/httpd.service'.
bharath@localhost:~$ sudo systemctl status httpd

● httpd.service - The Apache HTTP Server
   Loaded: loaded (/usr/lib/systemd/system/httpd.service; enabled; preset: disabled)
   Active: active (running) since Sun 2025-08-31 18:16:34 IST; 4s ago
     Invocato: 1e6ea57a3591471b94b1b9e2197f20ca
       Docs: man:httpd.service(8)
    Main PID: 5547 (httpd)
   Status: "Total requests: 0; Idle/Busy workers 100/0; Requests/sec: 0; Bytes served: 0"
     Tasks: 177 (limit: 48580)
    Memory: 13.8M (peak: 14M)
       CPU: 265ms
   CGroup: /system.slice/httpd.service
           └─5547 /usr/sbin/httpd -DFOREGROUND
             └─5548 /usr/sbin/httpd -DFOREGROUND
               └─5549 /usr/sbin/httpd -DFOREGROUND
                 └─5550 /usr/sbin/httpd -DFOREGROUND
                   └─5551 /usr/sbin/httpd -DFOREGROUND

Aug 31 18:16:34 localhost.localdomain systemd[1]: Starting httpd.service - The Apache HTTP Server:
Aug 31 18:16:34 localhost.localdomain (httpd)[5547]: httpd.service: Referenced by unit file: httpd.service
Aug 31 18:16:34 localhost.localdomain httpd[5547]: AH00558: httpd: Could not resolve to name 'localhost.localdomain'
Aug 31 18:16:34 localhost.localdomain httpd[5547]: Server configured, listening on *
Aug 31 18:16:34 localhost.localdomain systemd[1]: Started httpd.service - The Apache HTTP Server:

```

Wordpress

Now install the MariaDB and MariaDB-server

```
bharath@localhost:~  
* Maybe you meant: mariadb  
Error: Unable to find a match: MariaDB  
root@localhost:/home/bharath# exit  
exit  
bharath@localhost:~$ sudo yum install MariaDB  
[sudo] password for bharath:  
Last metadata expiration check: 1:42:32 ago on Sunday 31 August 2025 04:49:31 PM  
.  
No match for argument: MariaDB  
* Maybe you meant: mariadb  
Error: Unable to find a match: MariaDB  
bharath@localhost:~$ sudo dnf install MariaDB  
Last metadata expiration check: 1:42:51 ago on Sunday 31 August 2025 04:49:31 PM  
.  
No match for argument: MariaDB  
* Maybe you meant: mariadb  
Error: Unable to find a match: MariaDB  
bharath@localhost:~$ vi /etc/yum.repos.d/MariaDB.repo  
[1]+  Stopped                  vi /etc/yum.repos.d/MariaDB.repo  
bharath@localhost:~$ catt /etc/centos-release  
bash: catt: command not found...  
Similar command is: 'cat'  
bharath@localhost:~$ cat /etc/centos-release  
CentOS Stream release 10 (Coughlan)  
bharath@localhost:~$ sudo dnf install mariadb-server mariadb -y
```

After completion start the mariadb and enable it

<https://netshopisp.medium.com/how-to-install-wordpress-on-centos-7-with-mariadb-10-nginx-and->

Forums

Install MariaDB 10.3 on CentOS 7

- `yum install MariaDB-server MariaDB-client`

Start & Enable MariaDB on CentOS 7

Once the installation is done, you can start and enable MariaDB to run on system boot by executing the commands below:

Highlight Share

- `systemctl start mariadb`
- `systemctl enable mariadb`

Set MariaDB Root Password

- `mysql_secure_installation`

The first prompt would be to set the root password. however, if you have set it above, just enter the password and proceed.

In order to log into MariaDB to secure it, we'll need the current

```
bharath@localhost:~  
Installing      : mariadb-gssapi-server-3:10.11.11-1.el10.x86_64 12/14  
Running scriptlet: mariadb-server-3:10.11.11-1.el10.x86_64 13/14  
Installing      : mariadb-server-3:10.11.11-1.el10.x86_64 13/14  
Running scriptlet: mariadb-server-3:10.11.11-1.el10.x86_64 13/14  
Installing      : mariadb-server-utils-3:10.11.11-1.el10.x86_64 14/14  
Running scriptlet: mysql-selinux-1.0.13-2.el10.noarch 14/14  
Running scriptlet: mariadb-server-utils-3:10.11.11-1.el10.x86_64 14/14  
  
Installed:  
mariadb-3:10.11.11-1.el10.x86_64  
mariadb-backup-3:10.11.11-1.el10.x86_64  
mariadb-client-utils-3:10.11.11-1.el10.x86_64  
mariadb-common-3:10.11.11-1.el10.noarch  
mariadb-connector-c-3.4.4-1.el10.x86_64  
mariadb-connector-c-config-3.4.4-1.el10.noarch  
mariadb-errmsg-3:10.11.11-1.el10.noarch  
mariadb-gssapi-server-3:10.11.11-1.el10.x86_64  
mariadb-server-3:10.11.11-1.el10.x86_64  
mariadb-server-utils-3:10.11.11-1.el10.x86_64  
mysql-selinux-1.0.13-2.el10.noarch  
perl-DBD-MariaDB-1.23-10.el10.x86_64  
perl-File-Copy-2.41-514.el10.noarch  
perl-Sys-Hostname-1.25-514.el10.x86_64  
  
Complete!  
bharath@localhost:~$ sudo systemctl start mariadb
```

```
bharath@localhost:~  
Installed:  
mariadb-3:10.11.11-1.el10.x86_64  
mariadb-backup-3:10.11.11-1.el10.x86_64  
mariadb-client-utils-3:10.11.11-1.el10.x86_64  
mariadb-common-3:10.11.11-1.el10.noarch  
mariadb-connector-c-3.4.4-1.el10.x86_64  
mariadb-connector-c-config-3.4.4-1.el10.noarch  
mariadb-errmsg-3:10.11.11-1.el10.noarch  
mariadb-gssapi-server-3:10.11.11-1.el10.x86_64  
mariadb-server-3:10.11.11-1.el10.x86_64  
mariadb-server-utils-3:10.11.11-1.el10.x86_64  
mysql-selinux-1.0.13-2.el10.noarch  
perl-DBD-MariaDB-1.23-10.el10.x86_64  
perl-File-Copy-2.41-514.el10.noarch  
perl-Sys-Hostname-1.25-514.el10.x86_64  
  
Complete!  
bharath@localhost:~$ sudo systemctl start mariadb  
bharath@localhost:~$ sudo systemctl enable mariadb  
Created symlink '/etc/systemd/system/mysql.service' → '/usr/lib/systemd/system/mariadb.service'.  
Created symlink '/etc/systemd/system/mysqld.service' → '/usr/lib/systemd/system/mariadb.service'.  
Created symlink '/etc/systemd/system/multi-user.target.wants/mariadb.service' → '/usr/lib/systemd/system/mariadb.service'.  
bharath@localhost:~$
```

Check it's status using the status command

```
bharath@localhost:~ -- sudo systemctl status mariadb  
  
bharath@localhost:~$ sudo systemctl status mariadb  
● mariadb.service - MariaDB 10.11 database server  
   Loaded: loaded (/usr/lib/systemd/system/mariadb.service; enabled; preset: >  
   Active: active (running) since Sun 2025-08-31 18:42:31 IST; 47s ago  
 Invocation: 2faa05f8c31f4e92a76a0a39ee1359f6  
    Docs: man:mariadb(8)  
          https://mariadb.com/kb/en/library/systemd/  
 Main PID: 27786 (mariabdd)  
   Status: "Taking your SQL requests now..."  
    Tasks: 11 (limit: 48580)  
  Memory: 203.8M (peak: 231.2M)  
     CPU: 6.665s  
   CGroup: /system.slice/mariadb.service  
           └─27786 /usr/libexec/mariabdd --basedir=/usr  
  
Aug 31 18:42:31 localhost.localdomain mariadb-prepare-db-dir[27739]: you need t>  
Aug 31 18:42:31 localhost.localdomain mariadb-prepare-db-dir[27739]: After conn>  
Aug 31 18:42:31 localhost.localdomain mariadb-prepare-db-dir[27739]: able to co>  
Aug 31 18:42:31 localhost.localdomain mariadb-prepare-db-dir[27739]: See the Ma>  
Aug 31 18:42:31 localhost.localdomain mariadb-prepare-db-dir[27739]: Please rep>  
Aug 31 18:42:31 localhost.localdomain mariadb-prepare-db-dir[27739]: The latest>  
Aug 31 18:42:31 localhost.localdomain mariadb-prepare-db-dir[27739]: Consider j>  
Aug 31 18:42:31 localhost.localdomain mariadb-prepare-db-dir[27739]: https://ma>  
Aug 31 18:42:31 localhost.localdomain (mariabdd)[27786]: mariadb.service: Refer>  
Aug 31 18:42:31 localhost.localdomain systemd[1]: Started mariadb.service - Mar>  
lines 1-24/24 (END)
```

Login into your root of mysql

<https://netshopisp.medium.com/how-to-install-wordpress-on-centos-7-with-mariadb-10-nginx-and>

For more successfully installed mariadb 10.11 on CentOS 7 server then you proceed with the next steps.

Create WordPress Database and WordPress DB User


Login to the MySQL shell by executing the following command:

```
mysql -u root -p
```

Now create the database, user and grant user to database privileges by executing the following commands. We will use 'wpdb' as the database name in our example and 'wpuser' for the database username.

- CREATE DATABASE wpdb CHARACTER SET utf8mb4 COLLATE utf8mb4_general_ci;
- GRANT ALL ON wpdb.* TO 'wpuser'@'localhost' IDENTIFIED BY 'enter-strong-password-here';
- FLUSH PRIVILEGES;
- EXIT;

Install PHP 7.3

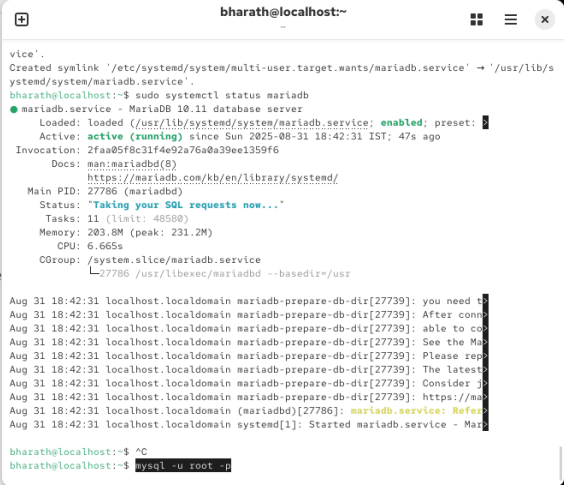

The terminal screenshot shows the command `sudo systemctl status mariadb` being executed, displaying the service status as 'active (running)'. It also shows several log messages from the MariaDB daemon, including 'you need to' and 'After conn'. At the bottom, the user attempts to log in to MySQL with `mysql -u root -p`.

Create a database and grant user with all the privileges

root@localhost:/home/bharath – sudo su

```
Aug 31 18:42:31 localhost.localdomain mariadb-prepare-db-dir[27739]: https://ma
Aug 31 18:42:31 localhost.localdomain (mariabdb)[27786]: mariadb.service: Refer
Aug 31 18:42:31 localhost.localdomain systemd[1]: Started mariadb.service - Mar


bharath@localhost:~$ ^C
bharath@localhost:~$ mysql -u root -p
Enter password:
ERROR 1698 (28000): Access denied for user 'root'@'localhost'
bharath@localhost:~$ sudo su
root@localhost:/home/bharath# mysql -u root -p
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 4
Server version: 10.11.11-MariaDB MariaDB Server

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> show databases;
+-----+
| Database |
+-----+
| information_schema |
| mysql |
| performance_schema |
| sys |
+-----+
4 rows in set (0.001 sec)

MariaDB [(none)]>
```

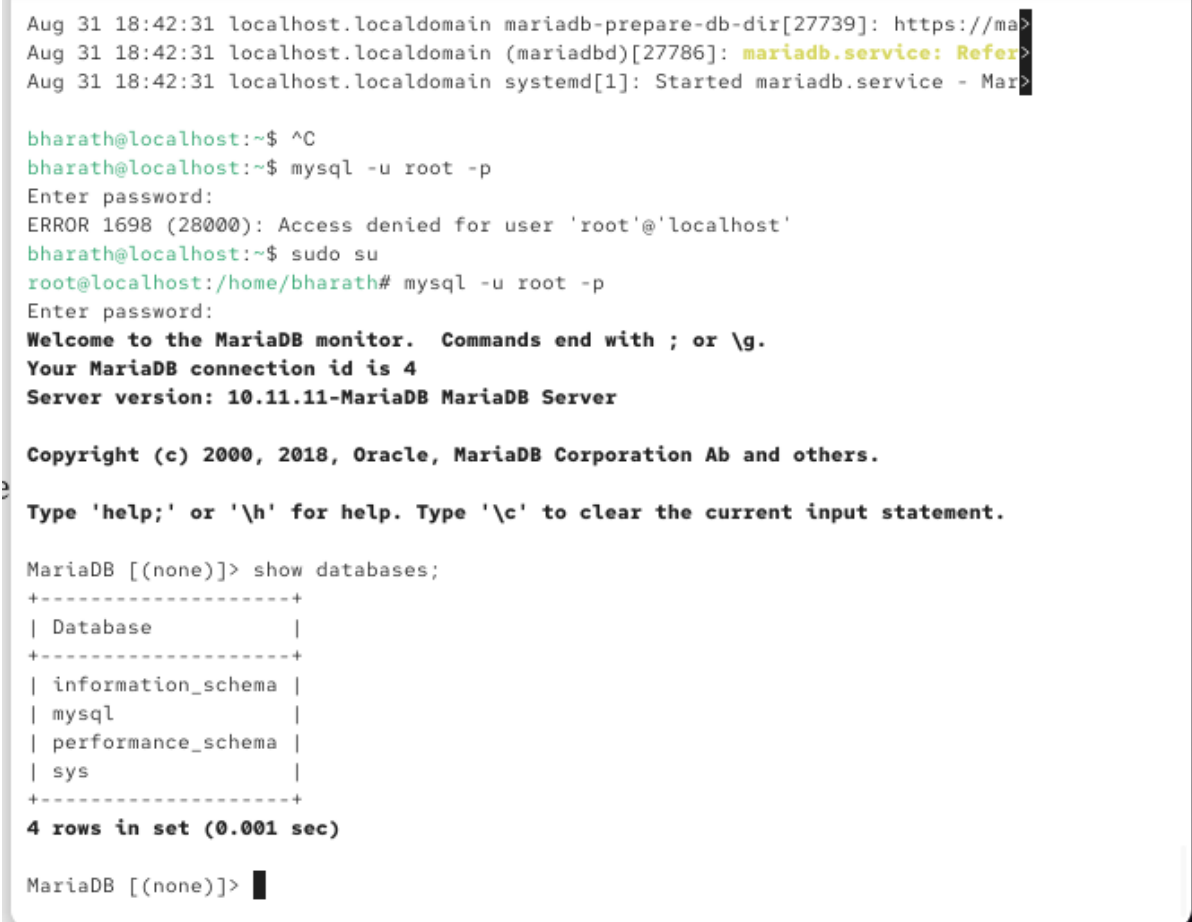

The terminal screenshot shows the user attempting to log in to MySQL as root, which is denied. They then use `sudo su` to become root and attempt to log in again. The terminal output shows the MariaDB monitor interface, where the user runs `show databases;` and sees a list of databases: `information_schema`, `mysql`, `performance_schema`, and `sys`.

Here this is the MariaDB in terminal we can see databases also

Here creating a database

https://netshopisp.medium.com/how-to-install-wordpress-on-centos-7-with-mariadb-10-nginx-and-
n Forums

Login to the MySQL shell by executing the following command:

- `mysql -u root -p`

Now create the database, user and grant user to database privileges by executing the following commands. We will use 'wpdb' as the database name in our example and 'wpuser' for the database username.

Highlight Share

- `CREATE DATABASE wpdb CHARACTER SET utf8mb4 COLLATE utf8mb4_general_ci;`
- `GRANT ALL ON wpdb.* TO 'wpuser'@'localhost' IDENTIFIED BY 'enter-strong-password-here';`
- `FLUSH PRIVILEGES;`
- `EXIT;`

Install PHP 7.3

To install PHP and all required PHP extensions run the following commands:

- `yum install epel-release yum-utils`

```
root@localhost:/home/bharath - sudo su
Aug 31 18:42:31 localhost.localdomain mariadb-prepare-db-dir[27739]: https://ma
Aug 31 18:42:31 localhost.localdomain (mariadb)[27786]: mariadb.service: Refe
Aug 31 18:42:31 localhost.localdomain systemd[1]: Started mariadb.service - Mari

bharath@localhost:~$ ^C
bharath@localhost:~$ mysql -u root -p
Enter password:
ERROR 1698 (28000): Access denied for user 'root'@'localhost'
bharath@localhost:~$ sudo su
root@localhost:/home/bharath# mysql -u root -p
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 4
Server version: 10.11.11-MariaDB MariaDB Server

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> show databases;
+-----+
| Database |
+-----+
| information_schema |
| mysql |
| performance_schema |
| sys |
+-----+
4 rows in set (0.001 sec)

MariaDB [(none)]> CREATE DATABASE wpdb CHARACTER SET utf8mb4 COLLATE utf8mb4_general_ci;
```

And grant all privileges to a user

https://netshopisp.medium.com/how-to-install-wordpress-on-centos-7-with-mariadb-10-nginx-and-
n Forums

Login to the MySQL shell by executing the following command:

- `mysql -u root -p`

Now create the database, user and grant user to database privileges by executing the following commands. We will use 'wpdb' as the database name in our example and 'wpuser' for the database username.

- `CREATE DATABASE wpdb CHARACTER SET utf8mb4 COLLATE utf8mb4_general_ci;`
- `GRANT ALL ON wpdb.* TO 'wpuser'@'localhost' IDENTIFIED BY 'enter-strong-password-here';`

Highlight Share

- `LEGES;`
- `EXIT;`

Install PHP 7.3

To install PHP and all required PHP extensions run the following commands:

- `yum install epel-release yum-utils`

```
root@localhost:/home/bharath - sudo su

root@localhost:/home/bharath# mysql -u root -p
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 4
Server version: 10.11.11-MariaDB MariaDB Server

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> show databases;
+-----+
| Database |
+-----+
| information_schema |
| mysql |
| performance_schema |
| sys |
+-----+
4 rows in set (0.001 sec)

MariaDB [(none)]> CREATE DATABASE wpdb CHARACTER SET utf8mb4 COLLATE utf8mb4_general_ci;
Query OK, 1 row affected (0.001 sec)

MariaDB [(none)]> GRANT ALL ON wpdb.* TO 'wpuser'@'localhost' IDENTIFIED BY 'Admin@1234';
Query OK, 0 rows affected (0.002 sec)

MariaDB [(none)]> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0.001 sec)

MariaDB [(none)]> EXIT;
```

Exit from the mariaDB

Here install epel-release and yum utils

<https://netshopisp.medium.com/how-to-install-wordpress-on-centos-7-with-mariadb-10-nginx-and->

Forums

- FLUSH PRIVILEGES;

- EXIT;

Install PHP 7.3

To install PHP and all required PHP extensions run the following commands:

- `yum install epel-release yum-utils`
- `yum install http://rpms.remirepo.net/enterprise/remi-release-7.rpm`
- `yum-config-manager --enable remi-php73`
- `yum install php-cli php-fpm php-mysql php-json php-opcache php-mbstring php-xml php-gd php-curl`

PHP FPM has now been installed and we will be using Nginx as a web server. By default PHP FPM will run as user apache on port 9000. We'll change the user to nginx and switch from TCP socket to Unix socket. To do so open the `/etc/php-fpm.d/www.conf` file edit the lines mentioned below:

```
root@localhost/home/bharath ~ sudo su
MariaDB [(none)]> EXIT;
Bye
root@localhost/home/bharath# yum install epel-release yum-utils
Last metadata expiration check: 1:58:35 ago on Sunday 31 August 2025 04:49:31 PM.
Dependencies resolved.
=====
Package             Architecture Version      Repository      Size
=====
Installing:
epel-release         noarch      10-5.el10s    extras-common   18 k
yum-utils            noarch      4.7.0-9.el10 baseos          38 k
=====
Transaction Summary
=====
Install 2 Packages

Total download size: 57 k
Installed size: 46 k
Is this ok [y/N]: y
Downloading Packages:
(3/2): yum-utils-4.7.0-9.el10.noarch.rpm      14 kB/s | 38 kB  00:02
(2/2): epel-release-10-5.el10s.noarch.rpm     3.0 kB/s | 18 kB  00:06
=====
Total                               5.6 kB/s | 57 kB  00:10
CentOS Stream 10 - Extras packages    1.4 MB/s | 2.1 kB  00:00
Importing GPG key 0x1D997668:
Userid : "CentOS Extras SIG (https://wiki.centos.org/SpecialInterestGroup) <security@centos.org>"
Fingerprint: 363F 0097 2F64 B699 AED3 968E 1FF6 A217 1D99 7668
From : /etc/pki/rpm-gpg/RPM-GPG-KEY-CentOS-SIG-Extras-SHA512
Is this ok [y/N]:
```

Here install rpms remi repo or remi release 7 install all the necessary php things like

`sudo dnf install -y httpd php php-mysqlnd php-json php-gd php-xml php-mbstring php-curl`

Forums

- FLUSH PRIVILEGES;

- EXIT;

Install PHP 7.3

To install PHP and all required PHP extensions run the following commands:

- `yum install epel-release`
- `yum install http://rpms.remirepo.net/enterprise/remi-release-7.rpm`
- `yum-config-manager --enable remi-php73`
- `yum install php-cli php-fpm php-mysql php-json php-opcache php-mbstring php-xml php-gd php-curl`

PHP FPM has now been installed and we will be using Nginx as a web server. By default PHP FPM will run as user apache on port 9000. We'll change the user to nginx and switch from TCP socket to Unix socket. To do so open the `/etc/php-fpm.d/www.conf` file edit the lines mentioned below:

```
root@localhost/home/bharath ~ sudo su
CentOS Stream 10 - Extras packages    1.4 MB/s | 2.1 kB  00:00
Importing GPG key 0x1D997668:
Userid : "CentOS Extras SIG (https://wiki.centos.org/SpecialInterestGroup) <security@centos.org>"
Fingerprint: 363F 0097 2F64 B699 AED3 968E 1FF6 A217 1D99 7668
From : /etc/pki/rpm-gpg/RPM-GPG-KEY-CentOS-SIG-Extras-SHA512
Is this ok [y/N]: y
warning: Certificate 1FF6A2171D997668:
Policy rejects subkey 8B5CB11FCA5D0FF: Policy rejected non-revocation signature (Primary KeyBinding) requiring second pre-image resistance
Key imported successfully
Running transaction check
Transaction check succeeded.
Running transaction test
Transaction test succeeded.
Running transaction
  Preparing      : 1/1
  Installing     : epel-release-10-5.el10s.noarch 1/2
  Running scriptlet: epel-release-10-5.el10s.noarch 1/2
Many EPEL packages require the CodeReady Builder (CRB) repository.
It is recommended that you run /usr/bin/crb enable to enable the CRB repository.
  Installing     : yum-utils-4.7.0-9.el10.noarch 2/2
  Running scriptlet: yum-utils-4.7.0-9.el10.noarch 2/2
Installed:
epel-release-10-5.el10s.noarch      yum-utils-4.7.0-9.el10.noarch
Complete!
root@localhost/home/bharath# yum install http://rpms.remirepo.net/enterprise/remi-release-7.rpm
```

```
root@localhost:/home/bharath - sudo su

missing groups or modules: php:8.2
root@localhost:/home/bharath# sudo dnf install -y php-cli php-fpm php-mysqlnd php-json php-
opcache php-mbstring php-xml php-gd php-curl
Last metadata expiration check: 0:03:27 ago on Sunday 31 August 2025 06:49:14 PM.
Dependencies resolved.

=====
Package                Architecture Version      Repository    Size
=====
Installing:
php-cli                x86_64      8.3.19-1.el10 appstream     3.6 M
php-common              x86_64      8.3.19-1.el10 appstream     717 k
php-fpm                x86_64      8.3.19-1.el10 appstream     1.9 M
php-gd                  x86_64      8.3.19-1.el10 appstream     42 k
php-mbstring            x86_64      8.3.19-1.el10 appstream     522 k
php-mysqlnd             x86_64      8.3.19-1.el10 appstream     141 k
php-opcache             x86_64      8.3.19-1.el10 appstream     367 k
php-xml                 x86_64      8.3.19-1.el10 appstream     151 k
Installing dependencies:
capstone                x86_64      5.0.1-6.el10 appstream     1.0 M
nginxfilesystem         noarch      2:1.26.3-1.el10 appstream     12 k
php-pdo                 x86_64      8.3.19-1.el10 appstream     89 k
=====

Transaction Summary
=====
Install 11 Packages

Total download size: 8.4 M
Installed size: 50 M
Downloading Packages:
(1/11): nginxfilesystem-1.26.3-1.el10.noarch.rpm 4.4 kB/s | 12 kB 00:02
(2-4/11): php-cli-8.3.19-1.el10.x86_64.rpm 644 kB/s | 1.6 MB 00:10 ETA
=====
```

```
root@localhost:/home/bharath - sudo su

Installing      : php-common-8.3.19-1.el10.x86_64 1/11
Installing      : php-pdo-8.3.19-1.el10.x86_64 2/11
Running scriptlet: nginxfilesystem-2:1.26.3-1.el10.noarch 3/11
Installing      : nginxfilesystem-2:1.26.3-1.el10.noarch 3/11
Installing      : capstone-5.0.1-6.el10.x86_64 4/11
Installing      : php-opcache-8.3.19-1.el10.x86_64 5/11
Installing      : php-fpm-8.3.19-1.el10.x86_64 6/11
Running scriptlet: php-fpm-8.3.19-1.el10.x86_64 6/11
Installing      : php-mysqlnd-8.3.19-1.el10.x86_64 7/11
Installing      : php-cli-8.3.19-1.el10.x86_64 8/11
Installing      : php-gd-8.3.19-1.el10.x86_64 9/11
Installing      : php-mbstring-8.3.19-1.el10.x86_64 10/11
Installing      : php-xml-8.3.19-1.el10.x86_64 11/11
Running scriptlet: php-xml-8.3.19-1.el10.x86_64 11/11

Installed:
capstone-5.0.1-6.el10.x86_64      nginxfilesystem-2:1.26.3-1.el10.noarch
php-cli-8.3.19-1.el10.x86_64      php-common-8.3.19-1.el10.x86_64
php-fpm-8.3.19-1.el10.x86_64      php-gd-8.3.19-1.el10.x86_64
php-mbstring-8.3.19-1.el10.x86_64 php-mysqlnd-8.3.19-1.el10.x86_64
php-opcache-8.3.19-1.el10.x86_64 php-pdo-8.3.19-1.el10.x86_64
php-xml-8.3.19-1.el10.x86_64

Complete!
root@localhost:/home/bharath# gedit /etc/php-fpm.d/www.conf
bash: gedit: command not found...
^[[A^[[A^[[B
^C
root@localhost:/home/bharath# nano /etc/php-fpm.d/www.conf
root@localhost:/home/bharath# systemctl enable php-fpm
systemctl start php-fpm
```

Now start the php and enable it

```
root@localhost:/home/bharath - sudo su

^[[A^[[A^[[B
^C
root@localhost:/home/bharath# nano /etc/php-fpm.d/www.conf
root@localhost:/home/bharath# systemctl enable php-fpm
systemctl start php-fpm
Created symlink '/etc/systemd/system/multi-user.target.wants/php-fpm.service' -> '/usr/lib/s
systemd/system/php-fpm.service'.
root@localhost:/home/bharath# systemctl status php-fpm
● php-fpm.service - The PHP FastCGI Process Manager
   Loaded: loaded (/usr/lib/systemd/system/php-fpm.service; enabled; preset: disabled)
   Active: active (running) since Sun 2025-08-31 18:55:34 IST; 10s ago
 Invocation: 185a319a98ce4281bd0a5628bbd46f5f
    Main PID: 29046 (php-fpm)
   Status: "Ready to handle connections"
     Tasks: 6 (limit: 48500)
    Memory: 15.2M (peak: 15.4M)
       CPU: 223ms
    CGroup: /system.slice/php-fpm.service
            └─29046 "php-fpm: master process (/etc/php-fpm.conf)"
              └─29048 "php-fpm: pool www"
                └─29049 "php-fpm: pool www"
                  └─29050 "php-fpm: pool www"
                    └─29051 "php-fpm: pool www"
                      └─29052 "php-fpm: pool www"

Aug 31 18:55:33 localhost.localdomain systemd[1]: Starting php-fpm.service - The PHP FastCG
Aug 31 18:55:34 localhost.localdomain systemd[1]: Started php-fpm.service - The PHP FastCG

root@localhost:/home/bharath# ^C
root@localhost:/home/bharath# ^C
root@localhost:/home/bharath# sudo mkdir -p /var/www/html/example.com
```


Make a directory of /var/www/html/example.com

Now, the WordPress Part...

Before downloading the WordPress archive, you should create a directory in which we will place the WordPress files:

- `sudo mkdir -p /var/www/html/example.com`

The next step is to download the latest version of WordPress from the WordPress download page using the following `wget` command :

- `wget https://wordpress.org/latest.tar.gz`

Once the wordpress archive file downloading completes, decompress the downloaded file and move the files into the directory you have created from the previous step:

- `tar xf latest.tar.gz`
- `sudo mv /tmp/wordpress/* /var/www/html/example.com/`

```
root@localhost:~# nano /etc/php-fpm.d/www.conf
root@localhost:~# systemctl enable php-fpm
root@localhost:~# systemctl start php-fpm
Created symlink '/etc/systemd/system/multi-user.target.wants/php-fpm.service' → '/usr/lib/systemd/system/php-fpm.service'.
root@localhost:~# systemctl status php-fpm
● php-fpm.service - The PHP FastCGI Process Manager
   Loaded: loaded (/usr/lib/systemd/system/php-fpm.service; enabled; preset: disabled)
   Active: active (running) since Sun 2025-08-31 18:55:34 IST; 18s ago
     Invocation: 185a319a98ce4281bd8a5628bbd6f5f
       Main PID: 29046 (php-fpm)
     Status: "Ready to handle connections"
       Tasks: 6 (limit: 4096)
      Memory: 15.2M (peak: 15.4M)
         CPU: 223ms
      CGroup: /system.slice/php-fpm.service
              └─29046 php-fpm: master process (/etc/php-fpm.conf)
                 └─29048 php-fpm: pool www
                    └─29049 php-fpm: pool www
                       └─29050 php-fpm: pool www
                          └─29051 php-fpm: pool www
                             └─29052 php-fpm: pool www

Aug 31 18:55:33 localhost.localdomain systemd[1]: Starting php-fpm.service - The PHP FastCGI Process Manager:
Aug 31 18:55:34 localhost.localdomain systemd[1]: Started php-fpm.service - The PHP FastCGI Process Manager:
root@localhost:~# ^C
root@localhost:~# ^C
root@localhost:~# sudo mkdir -p /var/www/html/example.com
root@localhost:~# cd /tmp
root@localhost:~# wget https://wordpress.org/latest.tar.gz
```

Now change directory to /tmp and get wordpress latest tar file using

Wget <https://wordpress.org/latest.tar.gz>

Now decompress that file

Tar xf latest.tar.gz

WordPress download page using the following `wget` command :

- `cd /tmp`
- `wget https://wordpress.org/latest.tar.gz`

Once the wordpress archive file downloading completes, decompress the downloaded file and move the files into the directory you have created from the previous step:

- `tar xf latest.tar.gz`
- `sudo mv /tmp/wordpress/* /var/www/html/example.com/`

Set the correct permissions so that the web server can have full access to the site's files and directories:

- `sudo chown -R nginx: /var/www/html/example.com`

Nginx Configuration Instructions

Create a new file with name "example.com.conf" under /etc/nginx/conf.d as

```
root@localhost:~# cd /tmp
root@localhost:~# wget https://wordpress.org/latest.tar.gz
--2025-08-31 18:57:12-- https://wordpress.org/latest.tar.gz
Resolving wordpress.org (wordpress.org)... 198.143.164.252
Connecting to wordpress.org (wordpress.org)[198.143.164.252]:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 26925441 (26M) [application/octet-stream]
Saving to: 'latest.tar.gz'

latest.tar.gz      100%[=====] 25.68M  2.30MB/s   in 12s

2025-08-31 18:57:27 (2.13 MB/s) - 'latest.tar.gz' saved [26925441/26925441]

root@localhost:~# tar xf latest.tar.gz
```

You don't need to set the Nginx ownership if you don't want to run the WordPress on Nginx here we are using the Apache for it so we don't need to set permissions for Nginx

Forums

WordPress download page using the following `wget` command :

- `cd /tmp`
- `wget https://wordpress.org/latest.tar.gz`

Once the wordpress archive file downloading completes, decompress the downloaded file and move the files into the directory you have created from the previous step:

- `tar xf latest.tar.gz`
- `sudo mv /tmp/wordpress/* /var/www/html/example.com/`

Set the correct permissions so that the web server can have full access to the site's files and directories:

HighlightShare

- `sudo chown -R nginx: /var/www/html/example.com`

Nginx Configuration Instructions

Create a new file with name "example.com.conf" under /etc/nginx/conf.d as

```
root@localhost:/tmp - sudo su
CGroup: /system.slice/php-fpm.service
└─29046 php-fpm: master process (/etc/php-fpm.conf)
└─29048 php-fpm: pool www
└─29049 php-fpm: pool www
└─29050 php-fpm: pool www
└─29051 php-fpm: pool www
└─29052 php-fpm: pool www

Aug 31 18:55:33 localhost.localdomain systemd[1]: Starting php-fpm.service - The PHP FastCGI
Aug 31 18:55:34 localhost.localdomain systemd[1]: Started php-fpm.service - The PHP FastCGI

root@localhost:/home/bharath# ^C
root@localhost:/home/bharath# ^C
root@localhost:/home/bharath# sudo mkdir -p /var/www/html/example.com
root@localhost:/home/bharath# cd /tmp
root@localhost:/tmp# wget https://wordpress.org/latest.tar.gz
--2025-08-31 18:57:12-- https://wordpress.org/latest.tar.gz
Resolving wordpress.org (wordpress.org)... 198.143.164.252
Connecting to wordpress.org (wordpress.org)[198.143.164.252]:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 26925441 (26M) [application/octet-stream]
Saving to: 'latest.tar.gz'

latest.tar.gz      100%[=====] 25.68M  2.30MB/s   in 12s

2025-08-31 18:57:27 (2.13 MB/s) - 'latest.tar.gz' saved [26925441/26925441]

root@localhost:/tmp# tar xf latest.tar.gz
root@localhost:/tmp# sudo mv /tmp/wordpress/* /var/www/html/example.com/
root@localhost:/tmp# sudo chown -R nginx: /var/www/html/example.com
root@localhost:/tmp#
```

https://netshopisp.medium.com/how-to-install-wordpress-on-centos-7-with-mariadb-10-nginx-and-...

Forums

Create a new file with name "example.com.conf" under /etc/nginx/conf.d as follows:

HighlightShare

- `sudo nano /etc/nginx/conf.d/example.com.conf`

Paste the following block and then save the file:

```
# Redirect HTTP -> HTTPS
#server {
#    listen 80;
#    server_name www.example.com example.com;

#    include snippets/letsencrypt.conf;
#    return 301 https://example.com$request_uri;
#}

# Redirect WWW -> NON WWW
#server {
#    listen 443 ssl http2;
#    server_name www.example.com;

#    ssl_certificate /etc/letsencrypt/live/example.com/fullchain.pem;
#    ssl_certificate_key /etc/letsencrypt/live/example.com/privkey.pem;
#    ssl_trusted_certificate /etc/letsencrypt/live/example.com/chain.pem;
#    include snippets/ssl.conf;
#    return 301 https://example.com$request_uri;
#}
```

```
root@localhost:/tmp - sudo su
CGroup: /system.slice/php-fpm.service
└─29046 php-fpm: master process (/etc/php-fpm.conf)
└─29048 php-fpm: pool www
└─29049 php-fpm: pool www
└─29050 php-fpm: pool www
└─29051 php-fpm: pool www
└─29052 php-fpm: pool www

Aug 31 18:55:33 localhost.localdomain systemd[1]: Starting php-fpm.service - The PHP FastCGI
Aug 31 18:55:34 localhost.localdomain systemd[1]: Started php-fpm.service - The PHP FastCGI

root@localhost:/home/bharath# ^C
root@localhost:/home/bharath# ^C
root@localhost:/home/bharath# sudo mkdir -p /var/www/html/example.com
root@localhost:/home/bharath# cd /tmp
root@localhost:/tmp# wget https://wordpress.org/latest.tar.gz
--2025-08-31 18:57:12-- https://wordpress.org/latest.tar.gz
Resolving wordpress.org (wordpress.org)... 198.143.164.252
Connecting to wordpress.org (wordpress.org)[198.143.164.252]:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 26925441 (26M) [application/octet-stream]
Saving to: 'latest.tar.gz'

latest.tar.gz      100%[=====] 25.68M  2.30MB/s   in 12s

2025-08-31 18:57:27 (2.13 MB/s) - 'latest.tar.gz' saved [26925441/26925441]

root@localhost:/tmp# tar xf latest.tar.gz
root@localhost:/tmp# sudo mv /tmp/wordpress/* /var/www/html/example.com/
root@localhost:/tmp# sudo chown -R nginx: /var/www/html/example.com
root@localhost:/tmp# sudo nano /etc/nginx/conf.d/example.com.conf
```

Now configure the WordPress file the we have created earlier and in that paste this

```
Aug 31 19:32
root@localhost:~ - sudo su
root@localhost:~ - sudo su
bharath@localhost:~

Package php-common-8.3.19-1.el10.x86_64 is already installed.
Package php-gd-8.3.19-1.el10.x86_64 is already installed.
Package php-xml-8.3.19-1.el10.x86_64 is already installed.
Package php-mbstring-8.3.19-1.el10.x86_64 is already installed.
Package php-common-8.3.19-1.el10.x86_64 is already installed.
Dependencies resolved.
Nothing to do.
Complete!
root@localhost:~# sudo systemctl enable httpd
sudo systemctl start httpd
root@localhost:~# sudo cp -r wordpress/* /var/www/html/
sudo chown -R apache:apache /var/www/html/
cp: cannot stat 'wordpress/*': No such file or directory
root@localhost:~# ls
anaconda-ks.cfg
root@localhost:~# cp -r wordpress/* /var/www/html/
cp: cannot stat 'wordpress/*': No such file or directory
root@localhost:~# sudo chown -R apache:apache /var/www/html/example.com/
root@localhost:~# sudo chcon -t httpd_sys_rw_content_t /var/www/html/example.com/ -R
root@localhost:~# sudo vi /etc/httpd/conf.d/example.com.conf
root@localhost:~# sudo dnf install -y mod_httpd
# usually rewrite is built-in, but enable if needed
Last metadata expiration check: 0:37:29 ago on Sunday 31 August 2025 06:49:14 PM.
No match for argument: mod_httpd
Error: Unable to find a match: mod_httpd
root@localhost:~# sudo systemctl restart httpd
root@localhost:~# nano /etc/hosts/
root@localhost:~#
root@localhost:~# nano /etc/httpd/conf.d/example.com.conf
root@localhost:~#
```

<VirtualHost *:80>

ServerName example.com

ServerAlias www.example.com

DocumentRoot /var/www/html/example.com

<Directory /var/www/html/example.com>

AllowOverride All

Require all granted

</Directory>

ErrorLog /var/log/httpd/example.com_error.log

CustomLog /var/log/httpd/example.com_access.log combined

</VirtualHost>

```
GNU nano 8.1 /etc/httpd/conf.d/example.com.conf
<VirtualHost *:80>
    ServerName example.com
    ServerAlias www.example.com
    DocumentRoot /var/www/html/example.com

    <Directory /var/www/html/example.com>
        AllowOverride All
        Require all granted
    </Directory>

    ErrorLog /var/log/httpd/example.com_error.log
    CustomLog /var/log/httpd/example.com_access.log combined
</VirtualHost>
```

After configuring this know your IP address using **ip addr** in terminal

My ip address is <https://192.168.176.129> search this in the browser

WordPress - How to install WordPress - HTTP Server Test

192.168.176.129/wp-admin/setup-config.php


Welcome to WordPress. Before getting started, you will need to set up a database.

1. Database name
2. Database username
3. Database password
4. Database host
5. Table prefix (if you want to run more than one WordPress)

This information is being used to create a wp-config.php file.

```
bharath@localhost:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: ens160: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 00:0c:29:7d:c7:58 brd ff:ff:ff:ff:ff:ff
    altnam enp3s0
    inet 192.168.176.129/24 brd 192.168.176.255 scope global dynamic noprefixroute ens160
        valid_lft 168sec preferred_lft 1685sec
    inet6 fe80::20c:1fff:fe7d:c758/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
bharath@localhost:~$
```

Your WordPress will open

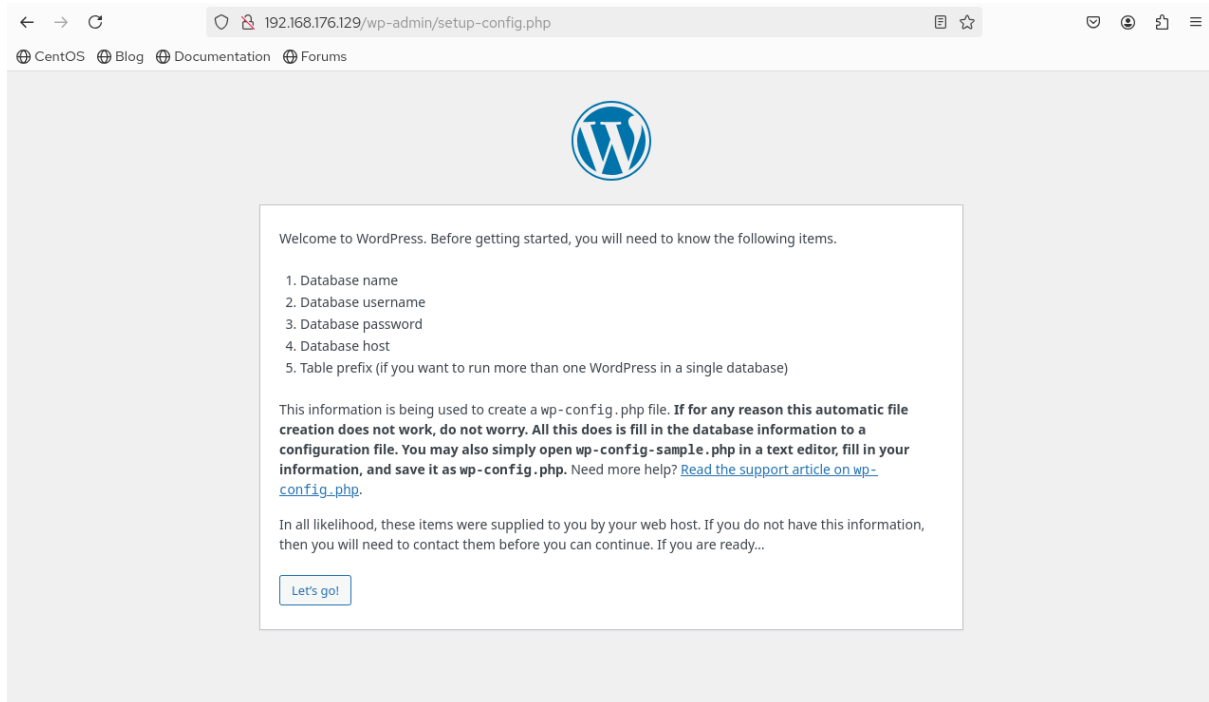

← → ↻ 192.168.176.129/wp-admin/setup-config.php

CentOS Blog Documentation Forums



Welcome to WordPress. Before getting started, you will need to know the following items.


1. Database name
2. Database username
3. Database password
4. Database host
5. Table prefix (if you want to run more than one WordPress in a single database)

This information is being used to create a wp-config.php file. **If for any reason this automatic file creation does not work, do not worry. All this does is fill in the database information to a configuration file. You may also simply open wp-config-sample.php in a text editor, fill in your information, and save it as wp-config.php.** Need more help? [Read the support article on wp-config.php.](#)

In all likelihood, these items were supplied to you by your web host. If you do not have this information, then you will need to contact them before you can continue. If you are ready...

[Let's go!](#)

Earlier we have created a database and granted a user all privileges use those database name username password here

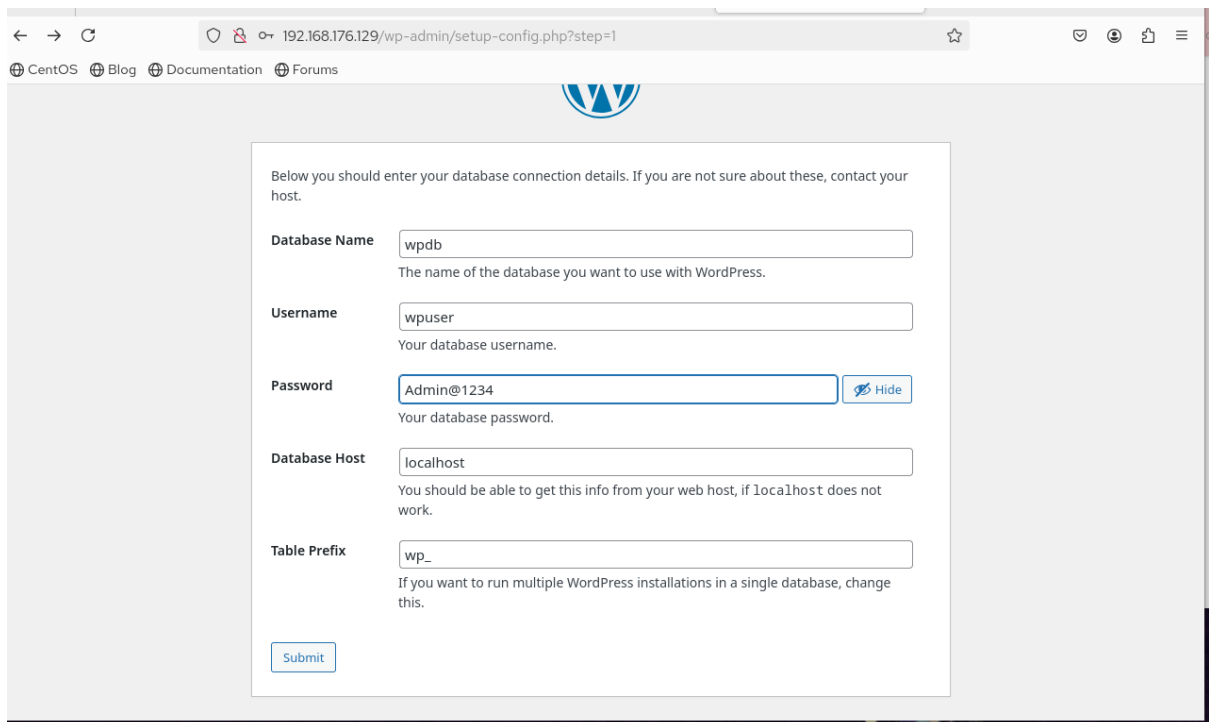

← → ↻ 192.168.176.129/wp-admin/setup-config.php?step=1

CentOS Blog Documentation Forums



Below you should enter your database connection details. If you are not sure about these, contact your host.

Database Name
The name of the database you want to use with WordPress.

Username
Your database username.


Password [Hide](#)
Your database password.

Database Host
You should be able to get this info from your web host, if localhost does not work.


Table Prefix
If you want to run multiple WordPress installations in a single database, change this.

[Submit](#)


After that you need to run the installation

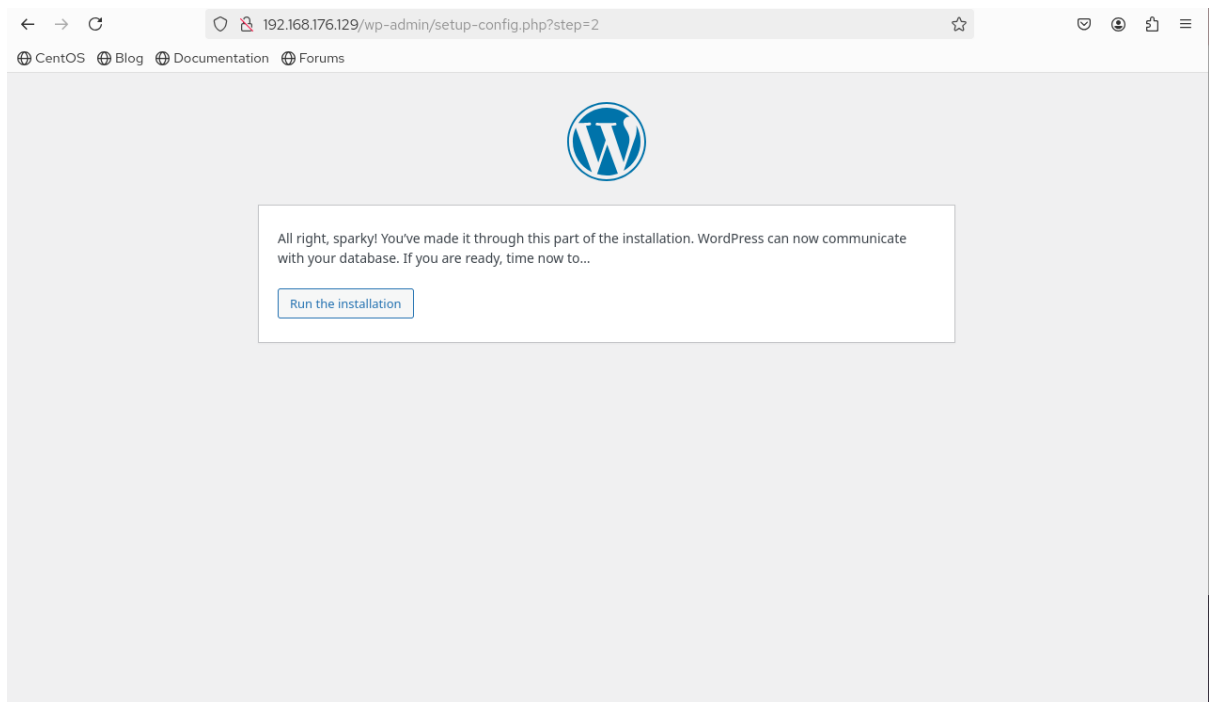


And then you can create a title page name and give username and password with an email then install the wordpress

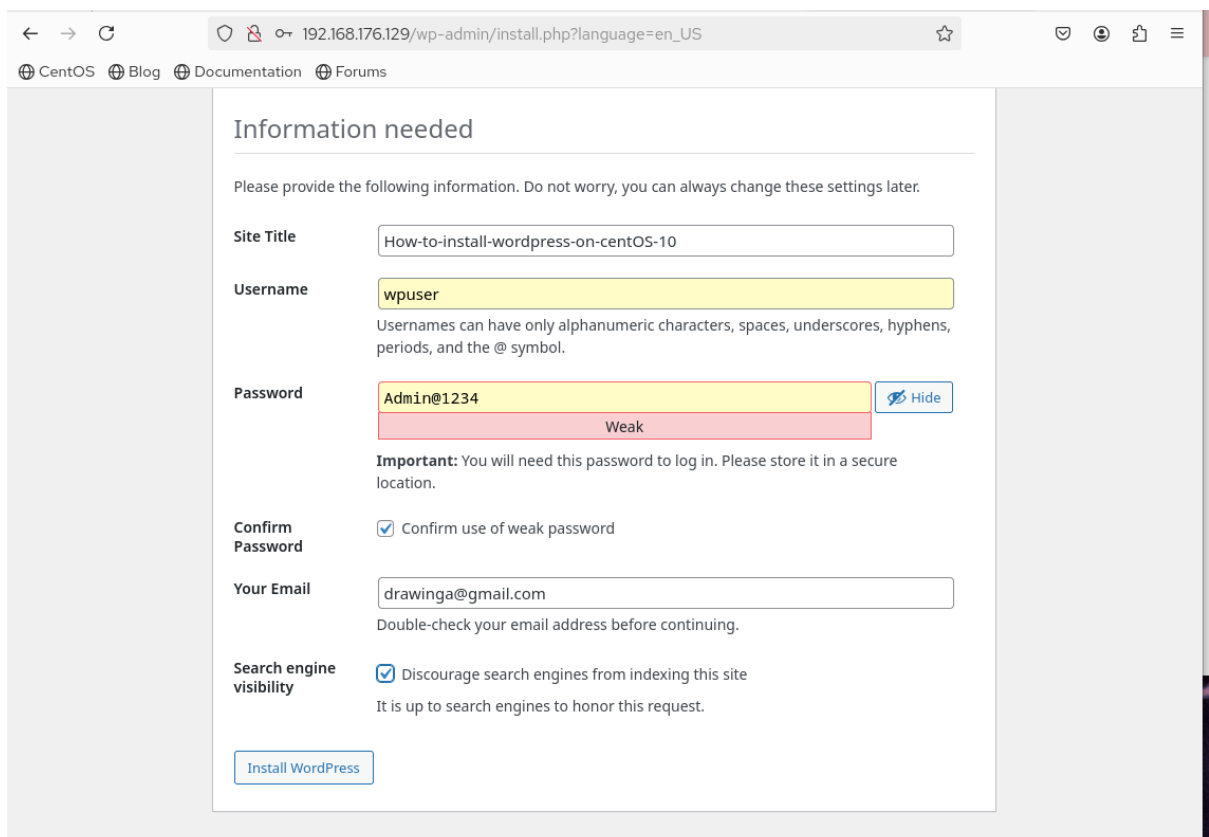

You have successfully installed the wordpress you can login

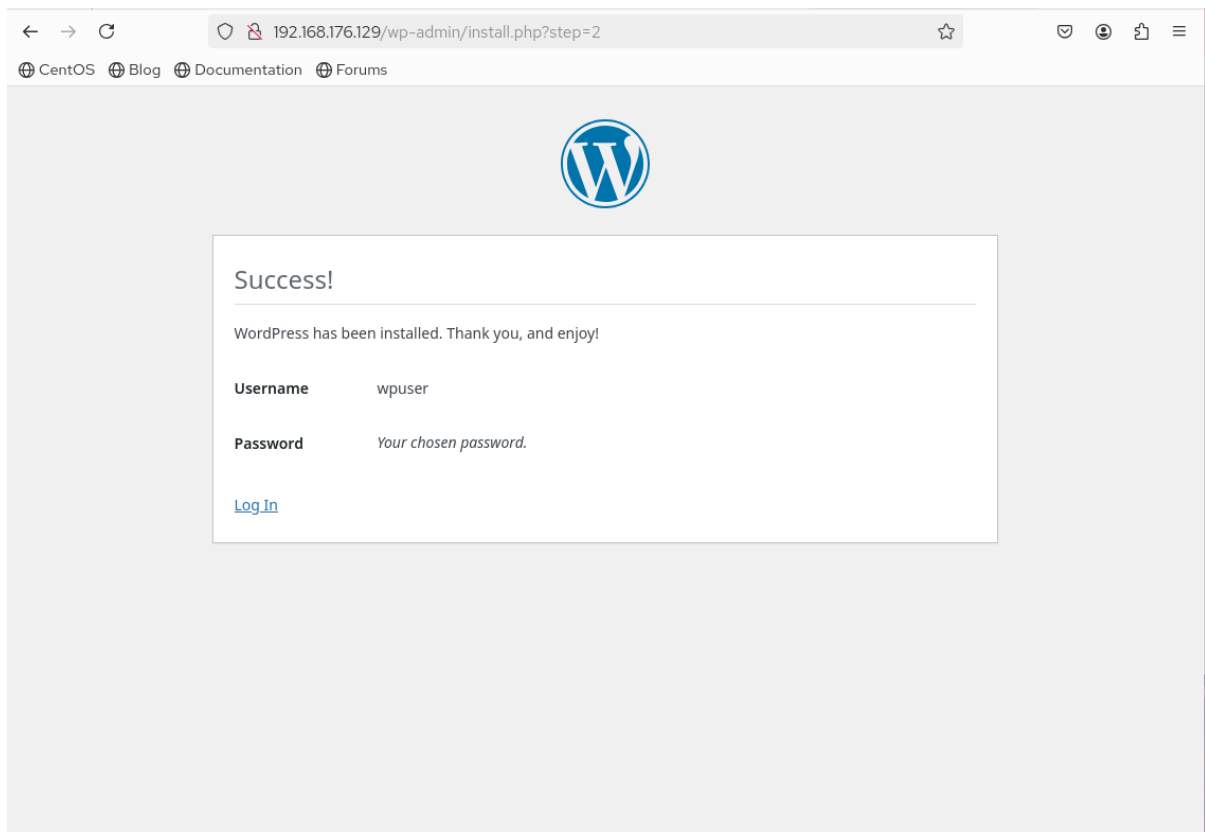

Give the username and password

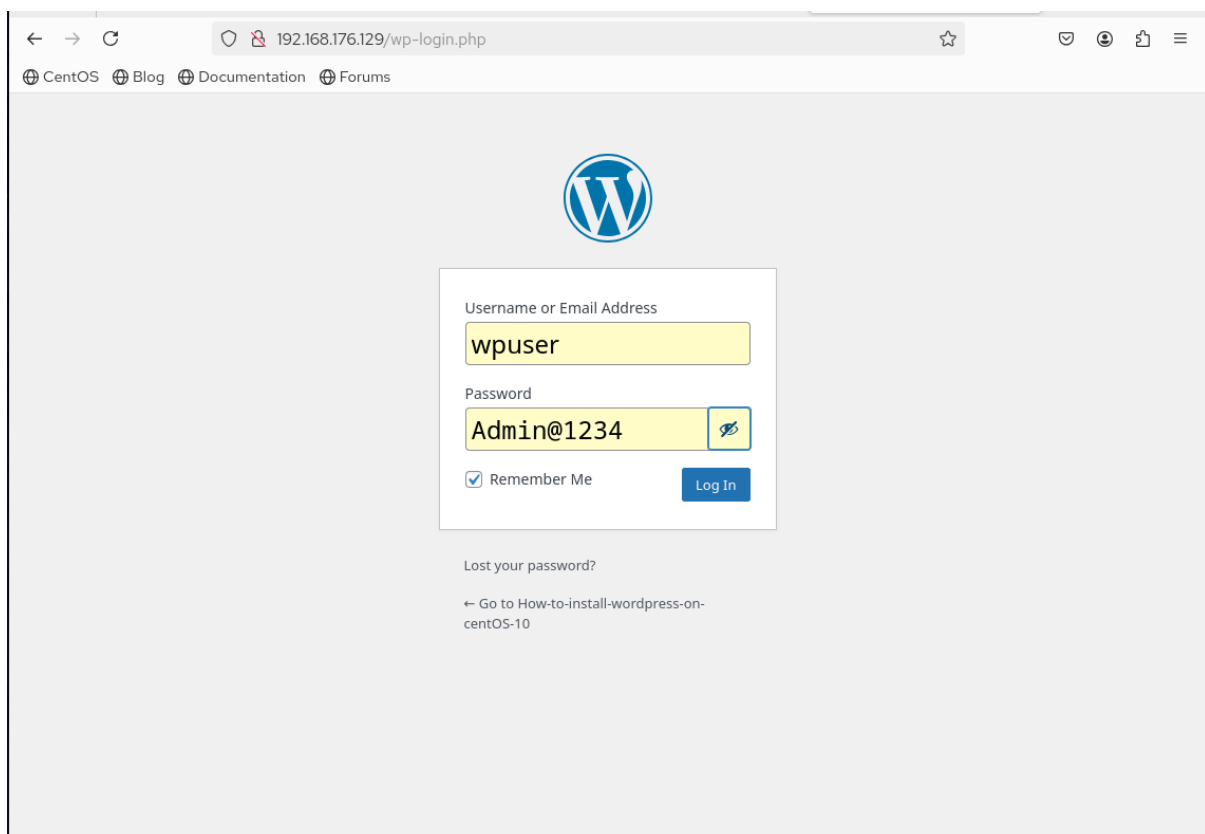

Here you will be greeted with WordPress and you can install plugins you like and post them

