Feature-graph topologies from the first training fold

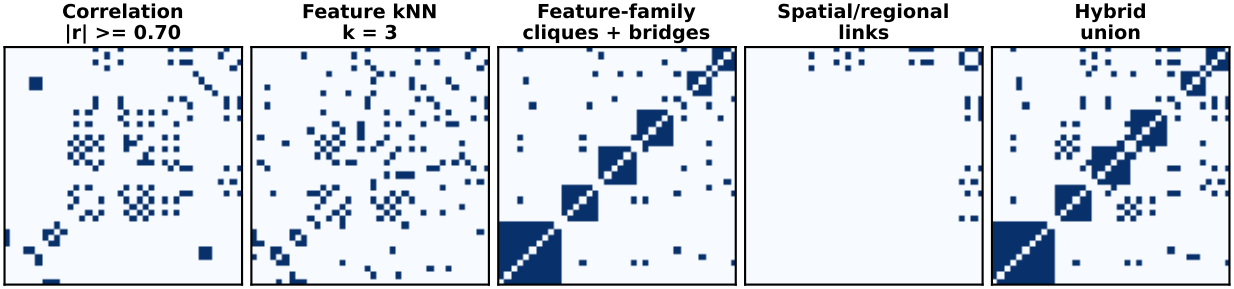

All graphs contain the same 38 descriptor nodes; off-diagonal marks indicate undirected edges.