


UML Use Case Diagram – OpenAPI Mock Server Generator

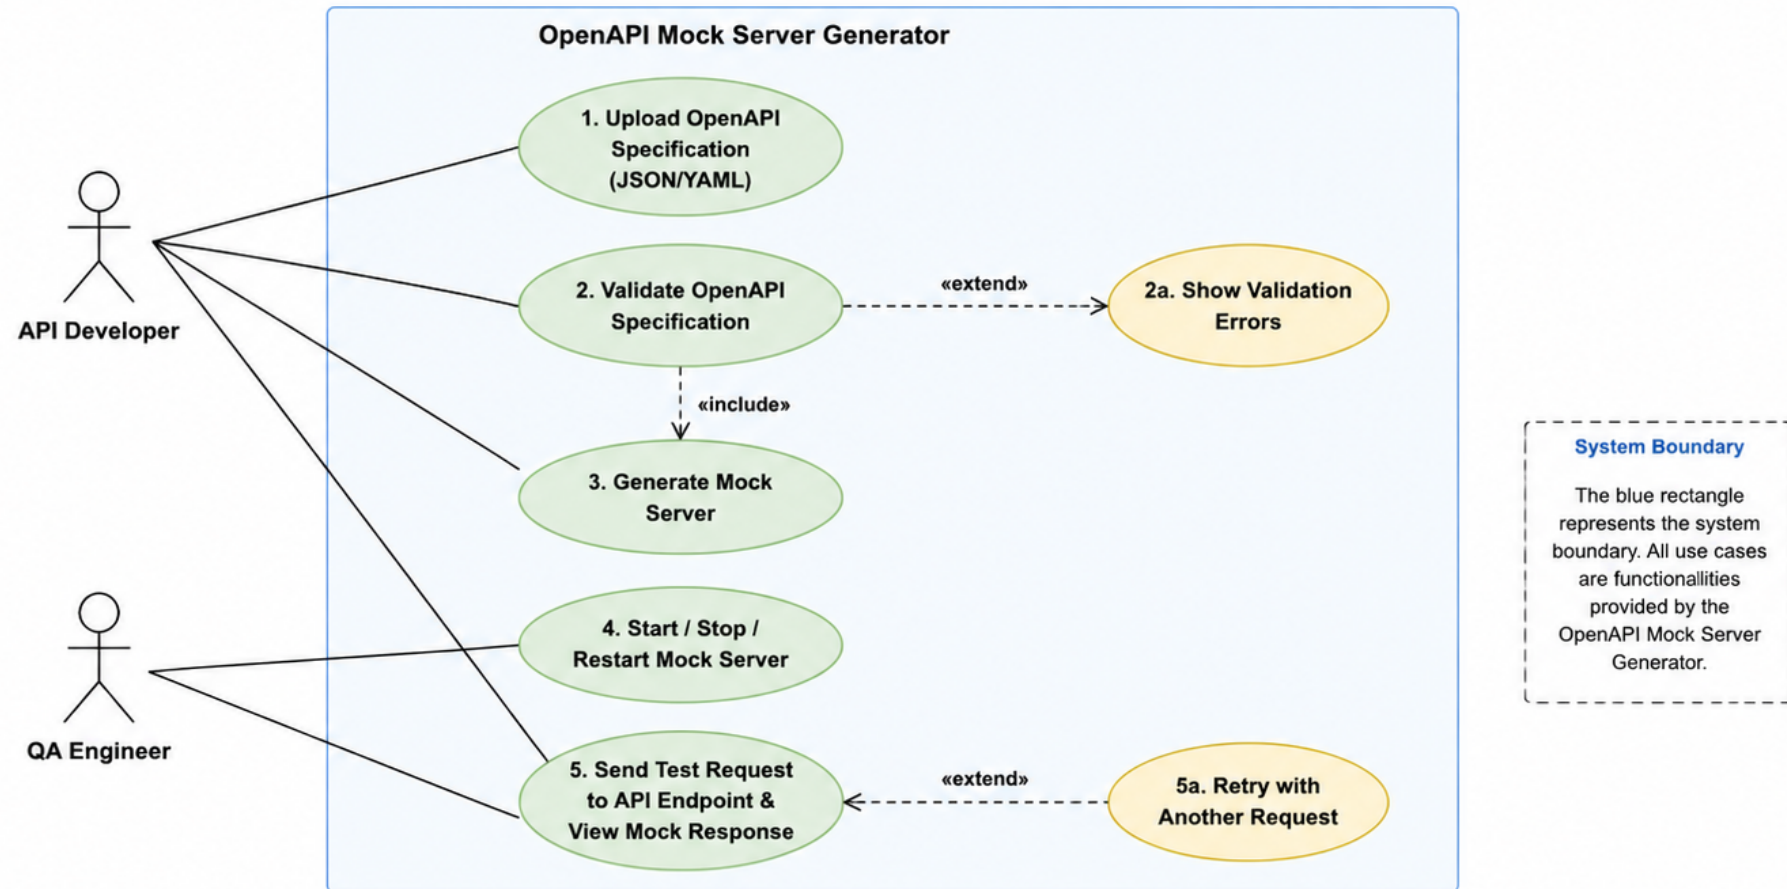

Legend

- Actor
- Use Case (System Function)
- Association (Actor -> Use Case)
- «include» Mandatory inclusion
- «extend» Optional / Conditional extension

Use Cases (Functional Requirements)

1. Upload OpenAPI Specification – The system shall allow a user to upload or provide a valid OpenAPI specification in JSON or YAML format.
2. Validate OpenAPI Specification – The system shall validate the uploaded OpenAPI specification and show validation errors if invalid.
3. Generate Mock Server – The system shall generate a mock server containing endpoints defined in the valid OpenAPI specification.
4. Start / Stop / Restart Mock Server – The system shall allow the user to start, stop, and restart the generated mock server.
5. Send Test Request to API Endpoint & View Mock Response – The system shall allow the user to send requests to generated API endpoints and display the corresponding mock responses.

Include: Use case 3 includes use case 2 (validation is mandatory before generation).

Extend: Use case 2 can be extended by 2a (show errors); Use case 5 can be extended by 5a (retry).