Command line Arguments

Module-1



Dr.M. Sivakumar

Professor & Technical Trainer / CSE

Saveetha School of Engineering, SIMATS

sivakumarm.sse@saveetha.com

+91-9500600868

Command Line Arguments

- Command line arguments are the arguments passed at run time to java program.
- Arguments are used as input for the program.
- Any number of command line arguments can be passed to the program.
- ***Command line arguments are be received by main method's string type array, so they are string by default.***
- Example :


```
1  class A
2  {
3    public static void main(String args[])
4    {
5
6     System.out.println(args[0]);
7     System.out.println(args[1]);
8
9
10   }
11 }
```

Command Line Arguments

How to provide input through command prompt?

- The main() method of a Java program only accepts the data with the string type arguments.
- During runtime, using 'java' tool in command prompt it is possible to provide input.

java NumericArguments 10 20

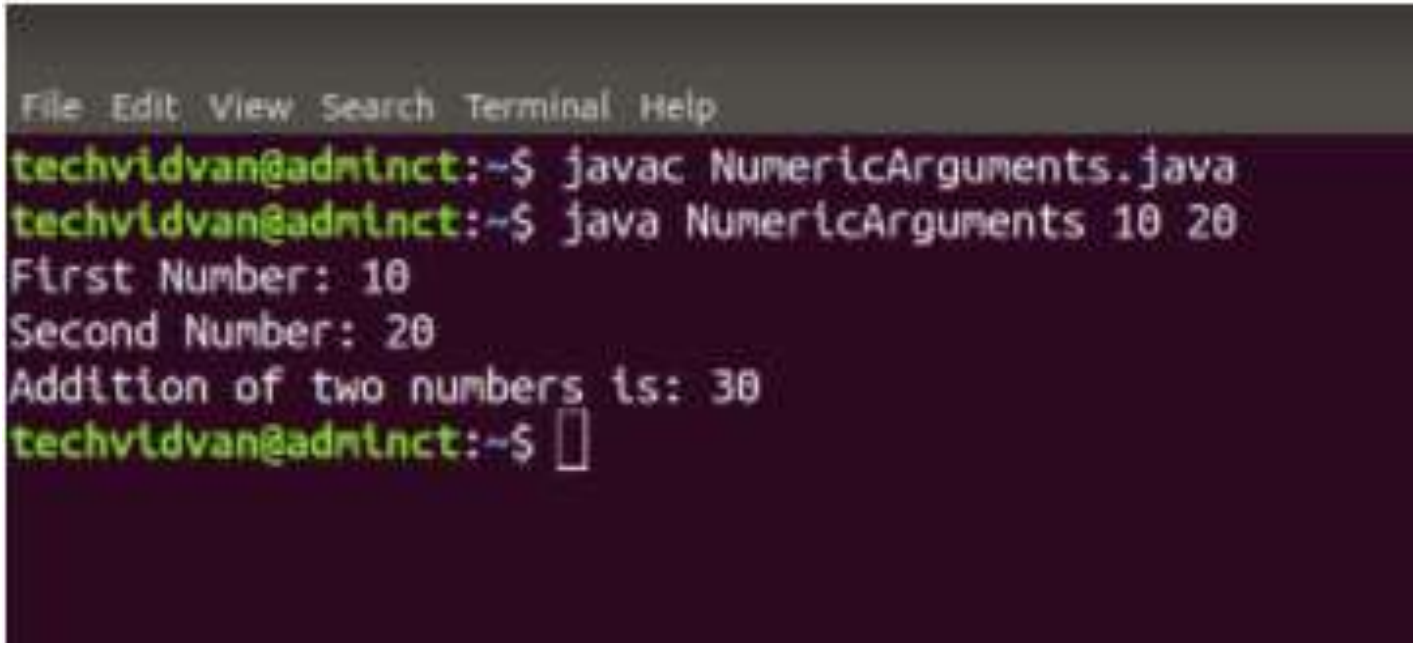

Command Line Arguments

How to provide input through command prompt?

```
public class NumericArguments
{
    public static void main(String[] args)
    {
        // convert into integer type
        int number1 = Integer.parseInt(args[0]);
        System.out.println("First Number: " +number1);


        int number2 = Integer.parseInt(args[1]);
        System.out.println("Second Number: " +number2);
        int result = number1 + number2;
        System.out.println("Addition of two numbers is: " +result);
    }
}
```

Command Line Arguments

How to pass input in Netbeans IDE?

Step 1

- Right-click (on Windows) or Control-Click (on a Mac) the project branch in the NetBeans Projects pane. In the resulting context menu, select Properties.

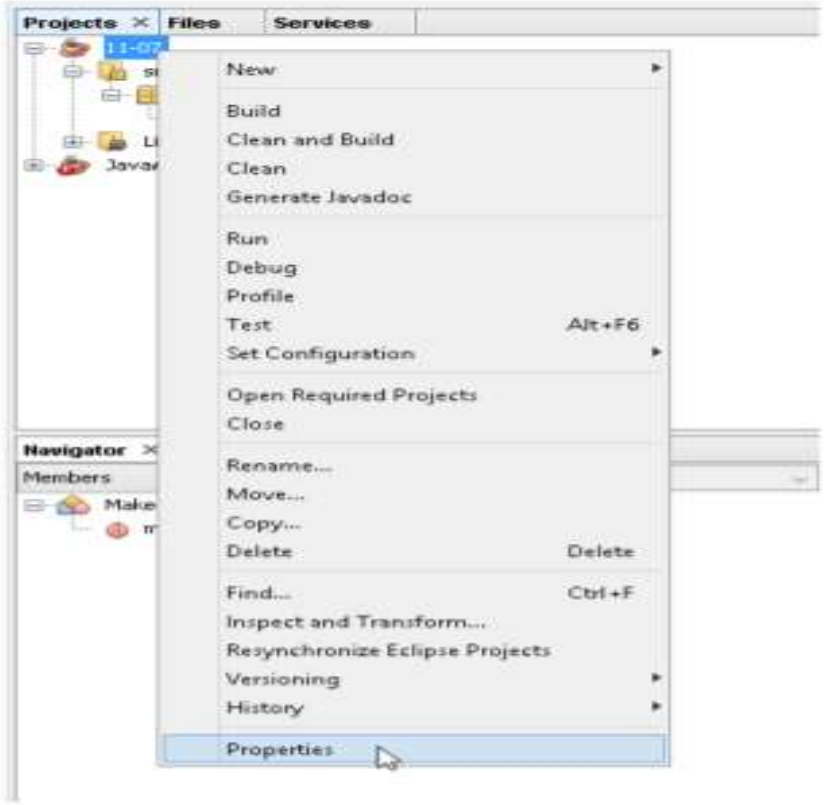

Command Line Arguments

Step 2

- As a result, the Project Properties dialog box opens. On the left side of the Project Properties dialog box, select Run and provide inputs in Arguments field.

