



SRM INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

18CSS101J – Programming for Problem Solving

Unit I





SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

COURSE LEARNING RATIONALE (CLR)	<i>The purpose of learning this course is to:</i>
CLR -1:	Think and evolve a logically to construct an algorithm into a flowchart and a pseudocode that can be programmed
CLR -2:	Utilize the logical operators and expressions to solve problems in engineering and real-time
CLR -3:	Store and retrieve data in a single and multidimensional array
CLR -4:	Utilize custom designed functions that can be used to perform tasks and can be repeatedly used in any application
CLR -5:	Create storage constructs using structure and unions. Create and Utilize files to store and retrieve information
CLR -6:	Create a logical mindset to solve various engineering applications using programming constructs in C



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

COURSE LEARNING OUTCOMES (CLO)

At the end of this course, learners will be able to:

CLO -1:

Identify methods to solve a problem through computer programming. List the basic data types and variables in C

CLO -2:

Apply the logic operators and expressions. Use loop constructs and recursion. Use array to store and retrieve data

CLO -3:

Analyze programs that need storage and form single and multi-dimensional arrays. Use preprocessor constructs in C

CLO -4:

Create user defined functions for mathematical and other logical operations. Use pointer to address memory and data

CLO -5:

Create structures and unions to represent data constructs. Use files to store and retrieve data

CLO -6:

Apply programming concepts to solve problems. Learn about how C programming can be effectively used for solutions



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

LEARNING RESOURCES

S. No	TEXT BOOKS
1.	<i>Zed A Shaw, Learn C the Hard Way: Practical Exercises on the Computational Subjects You Keep Avoiding (Like C), Addison Wesley, 2015</i>
2.	<i>W. Kernighan, Dennis M. Ritchie, The C Programming Language, 2nd ed. Prentice Hall, 1996</i>
3.	<i>Bharat Kinariwala, Tep Dobry, Programming in C, eBook</i>
4.	<i>http://www.c4learn.com/learn-c-programming-language/</i>



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

UNIT I

INTRODUCTION

Evolution of Programming & Languages - Problem Solving through Programming - Creating Algorithms - Drawing Flowcharts - Writing Pseudocode - Evolution of C language, its usage history - Input and output functions: Printf and scanf - Variables and identifiers - Expressions - Single line and multiline comments - Constants, Keywords - Values, Names, Scope, Binding, Storage Classes - Numeric Data types: **integer** -



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

UNIT I

INTRODUCTION

floating point - Non-Numeric Data types: char and string -
Increment and decrement operator - Comma, Arrow and
Assignment operator - Bitwise and Sizeof operator



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.


1. 1 Evolution of Programming & Languages

- ❑ A Computer needs to be given instructions in a programming language that it understands
- ❑ Programming Language
 - ❑ Artificial language that controls the behavior of computer
 - ❑ Defined through the use of syntactic and semantic rules
 - ❑ Used to facilitate communication about the task of organizing and manipulating information
 - ❑ Used to express algorithms precisely

Evolution of programming languages

Functional

Imperative

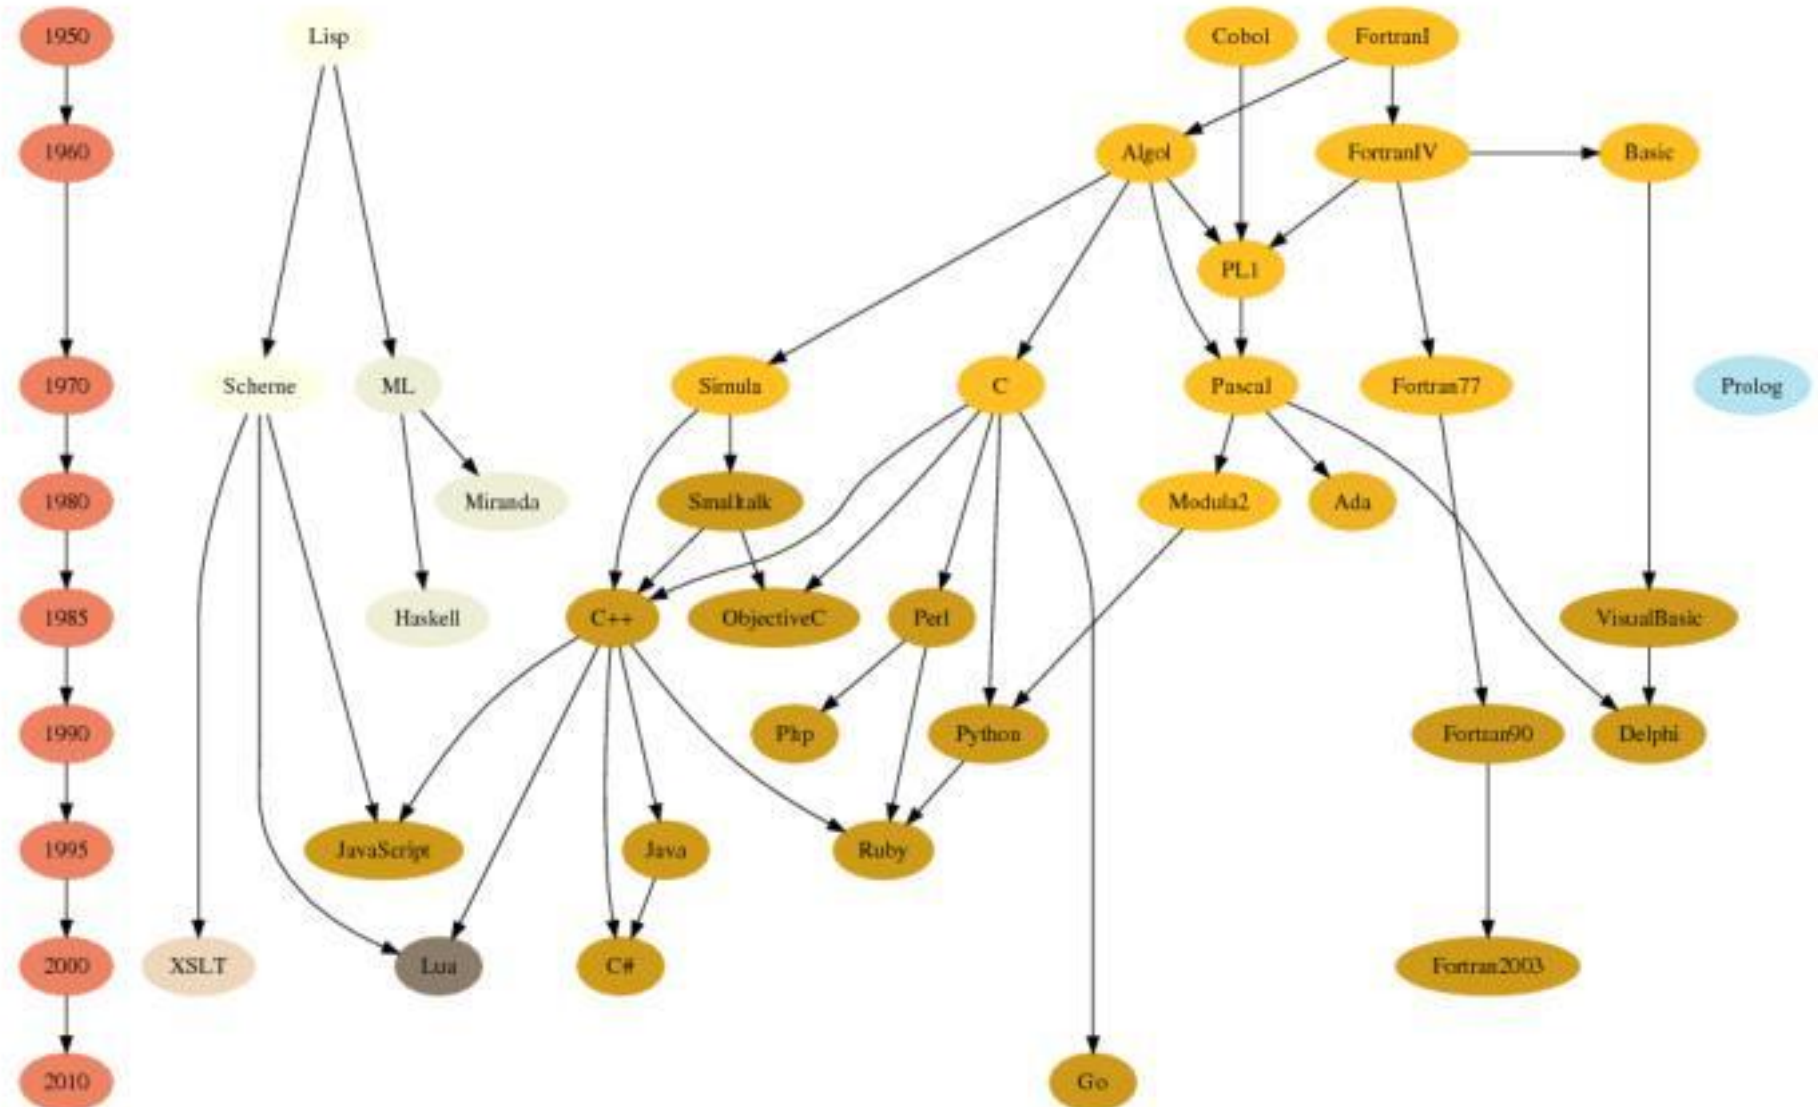



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 1 Evolution of Programming & Languages Contd...

Period	Programming Languages
1950's	Creation of high-level languages
1960's	Forth. Simula I. Lisp, Cobol
1970's	Pascal, C language
1980's	ML. Smalltalk, C++
1990's	Java, Perl, Python languages
2000	Internet Programming
2010	Concurrency and asynchronicity. JavaScript and Go language



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 2 Problem Solving through Programming

- ❑ ***Problem*** - Defined as any question, something involving doubt, uncertainty, difficulty, situation whose solution is not immediately obvious
- ❑ ***Computer Problem Solving***
 - ❑ Understand and apply logic
 - ❑ Success in solving any problem is only possible after we have made the effort to understand the problem at hand
 - ❑ Extract from the problem statement a set of precisely defined tasks



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 2 Problem Solving through Programming Contd...

i. Creative Thinking

- ☐ Proven method for approaching a challenge or opportunity in an imaginative way
- ☐ Process for innovation that helps explore and reframe the problems faced, come up with new, innovative responses and solutions and then take action
- ☐ It is generative, nonjudgmental and expansive
- ☐ Thinking creatively, a lists of new ideas are generated



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 2 Problem Solving through Programming Contd...

ii. Critical Thinking


- ☐ Engages a diverse range of intellectual skills and activities that are concerned with evaluating information, our assumptions and our thinking processes in a disciplined way so that we can think and assess information more comprehensively
- ☐ It is Analytical, Judgmental and Selective
- ☐ Thinking critically allows a programmer in making choices



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 2 Problem Solving through Programming Contd...

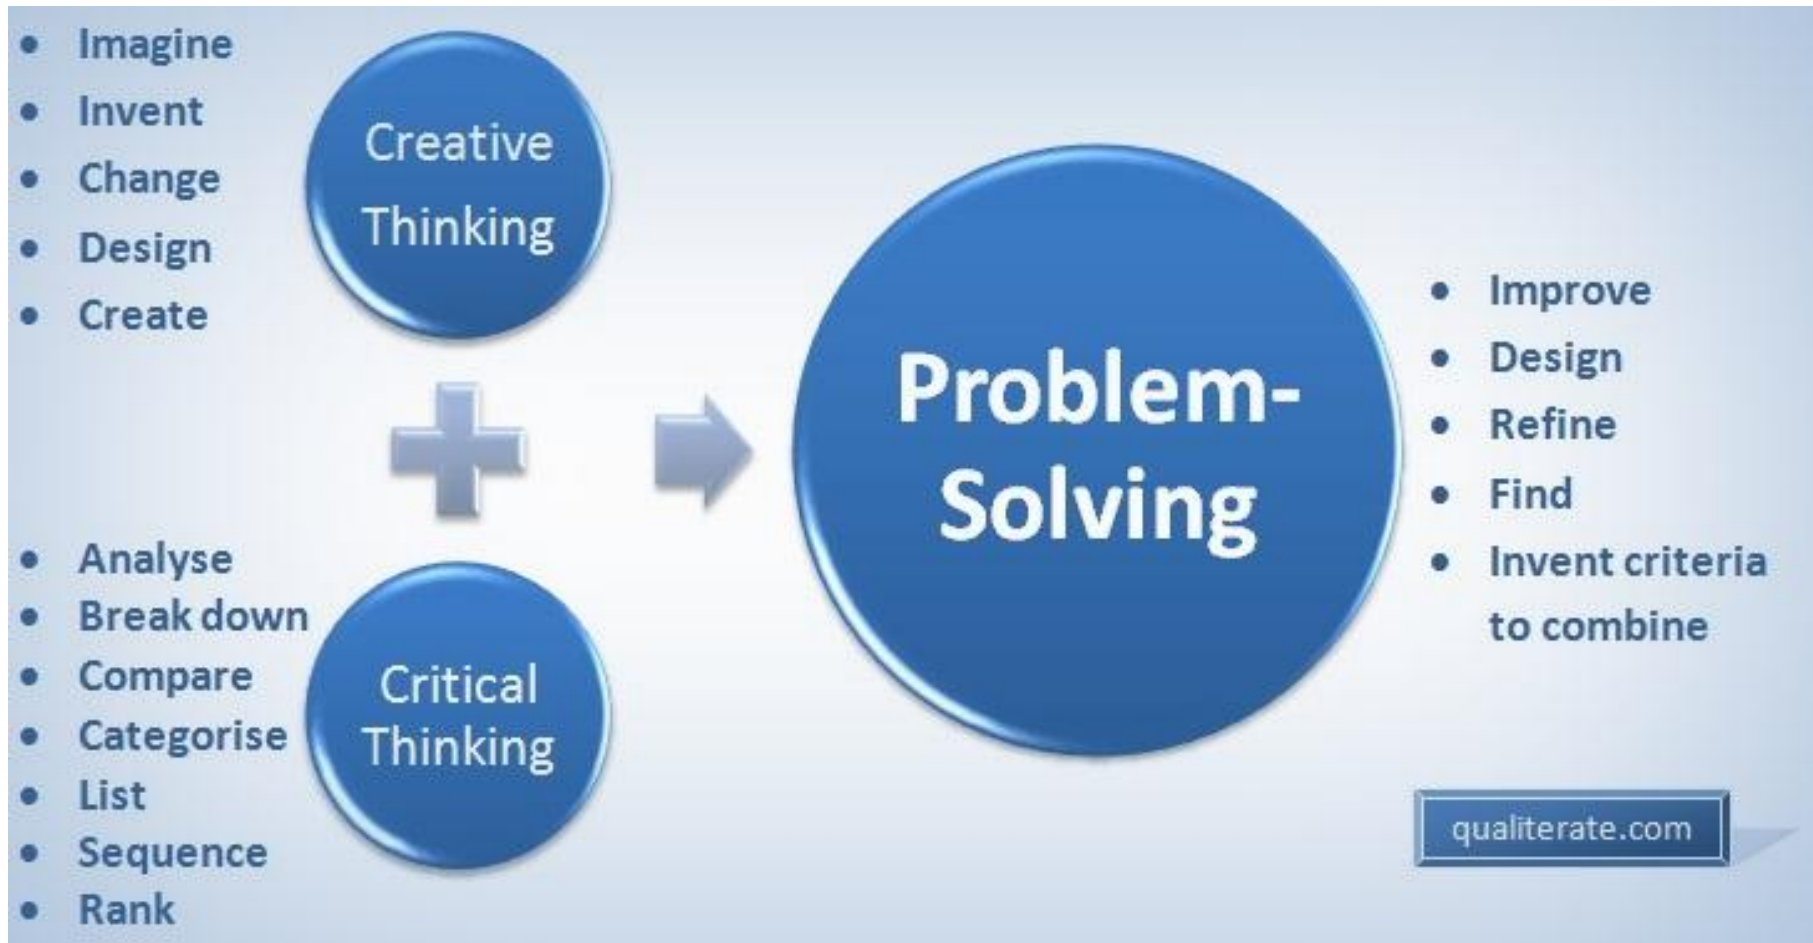



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 2 Problem Solving through Programming Contd...

❑ **Program** - Set of instructions that instructs the computer to do a task

❑ **Programming Process**


- a) *Defining* the Problem
- b) *Planning* the Solution
- c) *Coding* the Program
- d) *Testing* the Program
- e) *Documenting* the Program



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 2 Problem Solving through Programming Contd...

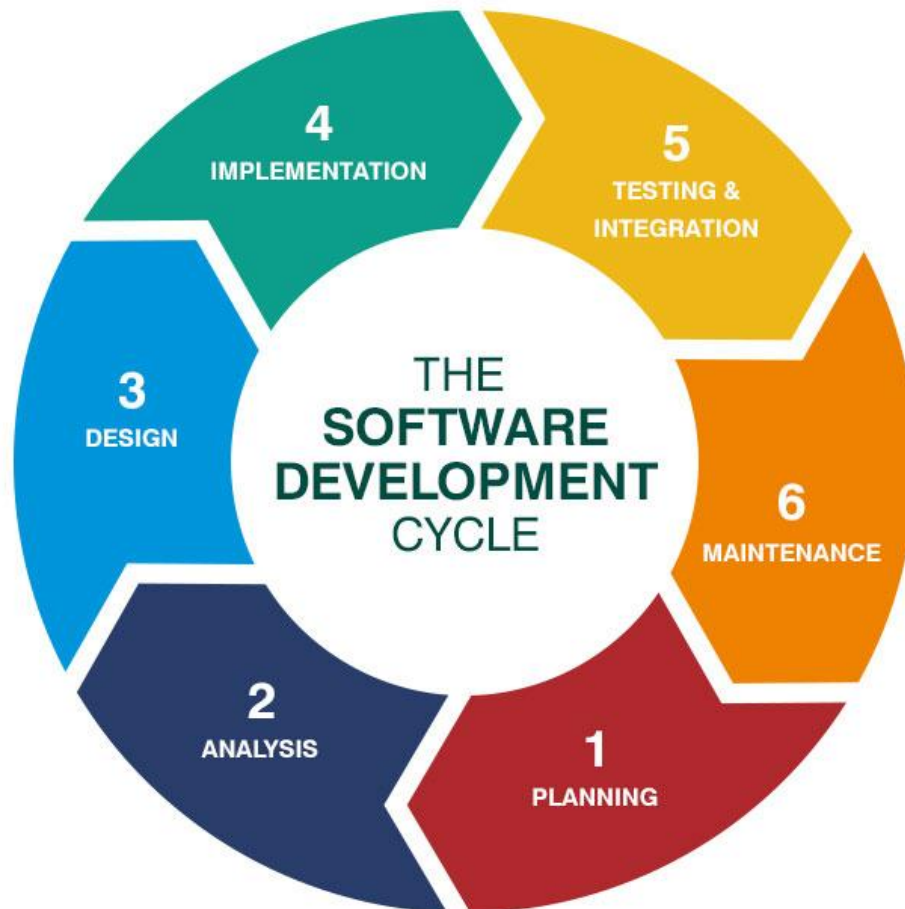



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 2 Problem Solving through Programming Contd...

❑ A typical programming task can be divided into two phases:

i. Problem solving phase

❑ Produce an ordered sequence of steps that describe solution of problem this sequence of steps is called an ***Algorithm***

ii. Implementation phase

❑ Implement the program in some programming language

❑ *Steps in Problem Solving*

a) Produce a general algorithm (one can use ***pseudocode***)



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 2 Problem Solving through Programming Contd...

- b) Refine the algorithm successively to get step by step detailed *algorithm* that is very close to a computer language
- c) *Pseudocode* is an artificial and informal language that helps programmers develop algorithms
 - ❑ Pseudocode is very similar to everyday English



SRM


INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 3 Creating Algorithms

- ❑ An informal definition of an algorithm is:



Algorithm: a step-by-step method for solving a problem or doing a task.

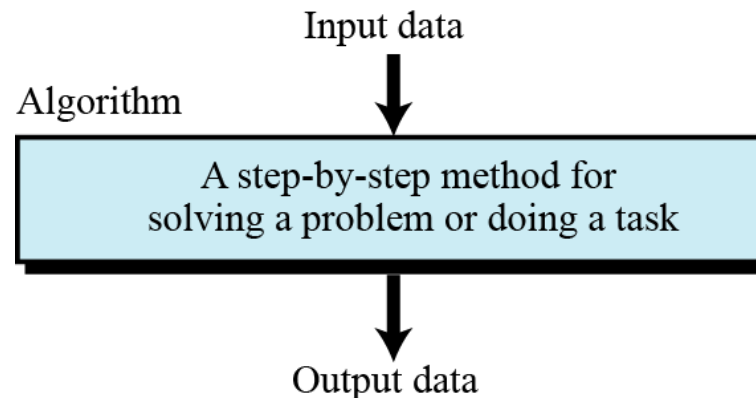



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 3 Creating Algorithms Contd...

- ❑ What are Algorithms for?
 - ❑ A way to communicate about your problem/solution with others
 - ❑ A possible way to solve a given problem
 - ❑ A "formalization" of a method, that will be proved
 - ❑ A mandatory first step before implementing a solution
- ❑ **Algorithm Definition** - “A finite sequence of unambiguous, executable steps or instructions, which, if followed would ultimately terminate and give the solution of the problem”



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 3 Creating Algorithms

☐ **Notations**

- ☐ Starting point
- ☐ Step Numbers – Positions in Algorithm
- ☐ Incoming Information - Input
- ☐ Control Flow – Order of evaluating Instructions
- ☐ Statements
- ☐ Outgoing Information - Output
- ☐ Ending Point



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 3 Creating Algorithms Contd...

☐ *Properties of an algorithm*

- ☐ **Finite:** The algorithm must eventually terminate
- ☐ **Complete:** Always give a solution when one exists
- ☐ **Correct (sound):** Always give a correct solution

☐ *Rules of Writing an Algorithm*

- ☐ Be consistent
- ☐ Have well Defined input and output
- ☐ Do not use any syntax of any specific programming language



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 3 Creating Algorithms Contd...

- ❑ Algorithm development process consists of five major steps
 - ❑ **Step 1:** Obtain a description of the problem
 - ❑ **Step 2:** Analyze the problem
 - ❑ **Step 3:** Develop a high-level algorithm
 - ❑ **Step 4:** Refine the algorithm by adding more detail
 - ❑ **Step 5:** Review the algorithm



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 3 Creating Algorithms Contd...

Example

□ *Problem*

- a) Develop an algorithm for finding the largest integer among a list of positive integers
- b) The algorithm should find the largest integer among a list of any values
- c) The algorithm should be general and not depend on the number of integers



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 3 Creating Algorithms Contd...

❑ *Solution*


- a) To solve this problem, we need an intuitive approach
- b) First use a small number of integers (for example, five), then extend the solution to any number of integers
- c) The algorithm receives a list of five integers as input and gives the largest integer as output



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

(12 8 13 9 11) **Input data**

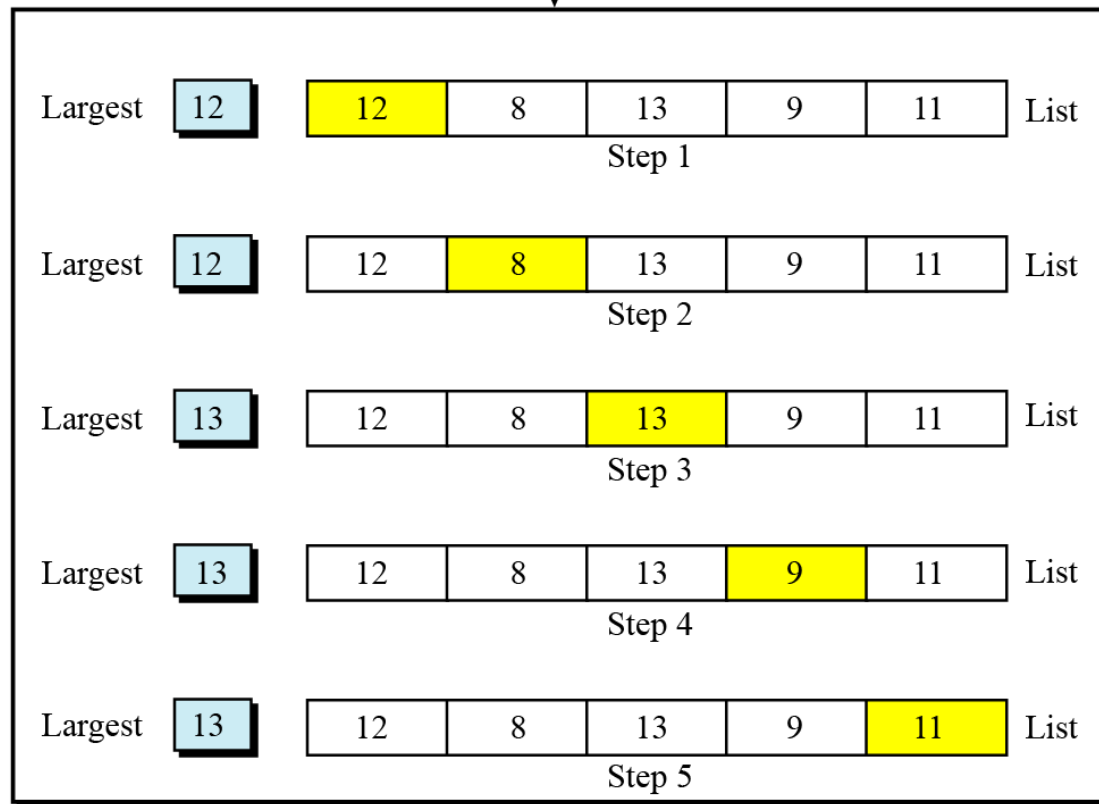

FindLargest



(13) **Output data**



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

(12 8 13 9 11) **Input data**



Set Largest to the first number.

Step 1

If the second number is greater than Largest, set Largest to the second number.

Step 2

If the third number is greater than Largest, set Largest to the third number.

Step 3

If the fourth number is greater than Largest, set Largest to the fourth number.

Step 4

If the fifth number is greater than Largest, set Largest to the fifth number.

Step 5

FindLargest



(13) **Output data**



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

(12 8 13 9 11) **Input data**



Step 0

Set Largest to $-\infty$

Step 1

If the current number is greater than Largest, set Largest to the current number.

⋮

Step 5

If the current number is greater than Largest, set Largest to the current number.

FindLargest



(13) **Output data**



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

Input data (n integers)



Set Largest to $-\infty$

Repeat the following step n times:

If the current integer is greater than Largest, set Largest to the current integer.

FindLargest



Largest



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 3 Creating Algorithms Contd...

***Example 2:* Print 1 to 20**

- ❑ **Step 1:** Start
- ❑ **Step 2:** Initialize X as 0,
- ❑ **Step 3:** Increment X by 1,
- ❑ **Step 4:** Print X,
- ❑ **Step 5:** If X is less than 20 then go back to step 2.
- ❑ **Step 6:** Stop



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 3 Creating Algorithms Contd...

Example 3

Convert Temperature from Fahrenheit (°F) to Celsius (°C)

- ❑ **Step 1:** Start
- ❑ **Step 2:** Read temperature in Fahrenheit
- ❑ **Step 3:** Calculate temperature with formula $C = 5/9 * (F - 32)$
- ❑ **Step 4:** Print C
- ❑ **Step 5:** Stop



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 3 Creating Algorithms Contd...

Example 4

Algorithm to Add Two Numbers Entered by User

- ❑ **Step 1:** Start
- ❑ **Step 2:** Declare variables num1, num2 and sum.
- ❑ **Step 3:** Read values num1 and num2.
- ❑ **Step 4:** Add num1 and num2 and assign the result to sum.

$\text{sum} \leftarrow \text{num1} + \text{num2}$

- ❑ **Step 5:** Display sum Step 6: Stop



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 3 Creating Algorithms Contd...

□ Write an Algorithm to:

- 1) Find the Largest among three different numbers
- 2) Find the roots of a Quadratic Equation
- 3) Find the Factorial of a Number
- 4) Check whether a number entered is Prime or not
- 5) Find the Fibonacci Series



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 3 Drawing Flowcharts

- ❑ Diagrammatic representation
- ❑ Illustrates sequence of operations to be performed
- ❑ Each step represented by a different symbol
 - ❑ Each Symbol contains short description of the Process
- ❑ Symbols linked together by arrows
- ❑ Easy to understand diagrams
- ❑ Clear Documentation
- ❑ Helps clarify the understanding of the process

Flowchart Symbols

Flowcharts are used to illustrate algorithms in order to aid in the visualisation of a program.

Flowcharts are to be read top to bottom and left to right in order to follow an algorithms logic from start to finish. Below is an outline of symbols used in flowcharts.



Terminator

Used to represent the Start and end of a program with the Keywords **BEGIN** and **END**.




Decision

Used to split the flowchart sequence into multiple paths in order to represent **SELECTION** and **REPETITION**.



Process

An instruction that is to be carried out by the program.



Input / Output

Used to represent **data entry** by a user or the **display** of data by the program.



Arrow

Indicates the flow of the algorithm pathways.



Subprogram


References another program within the program.



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 3 Drawing Flowcharts Contd...

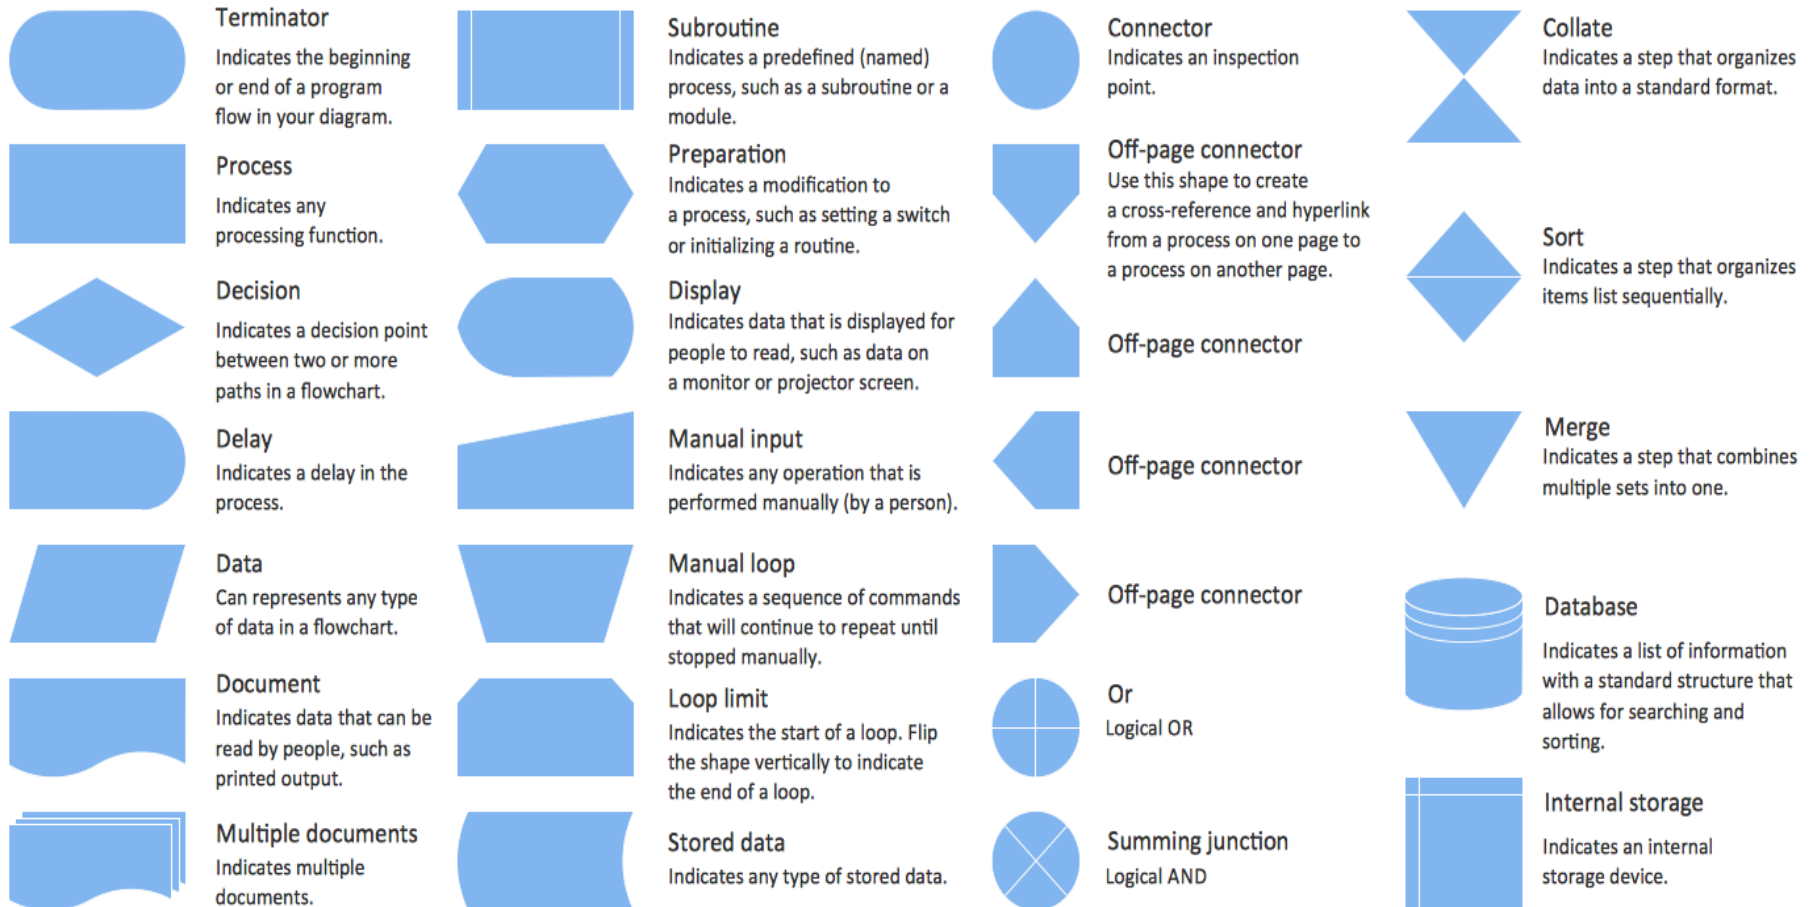



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 3 Drawing Flowcharts Contd...

☐ **Guidelines for Preparing Flowchart**

- ☐ Logical order of requirements
- ☐ Ensure that Flowchart has logical *Start* and *Stop*
- ☐ Direction is from Top to bottom
- ☐ Only one flow line is used with Terminal Symbol
- ☐ Only one flow line should come out of a Process symbol
- ☐ Only one flow line should enter a Decision symbol but multiple lines may leave the Decision symbol



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 3 Drawing Flowcharts Contd...


- ❑ **Guidelines for Preparing Flowchart Contd...**
 - ❑ Write briefly within Symbols
 - ❑ Use connectors to reduce number of flow lines
 - ❑ Avoid intersection of flow lines
 - ❑ Test Flowchart through simple test data
 - ❑ Clear, Neat and easy to follow





SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 3 Drawing Flowcharts Contd...

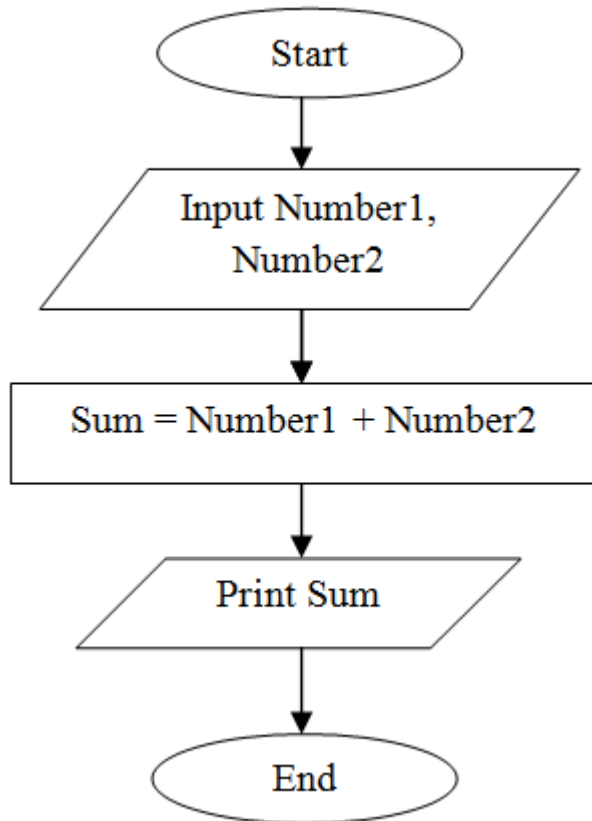

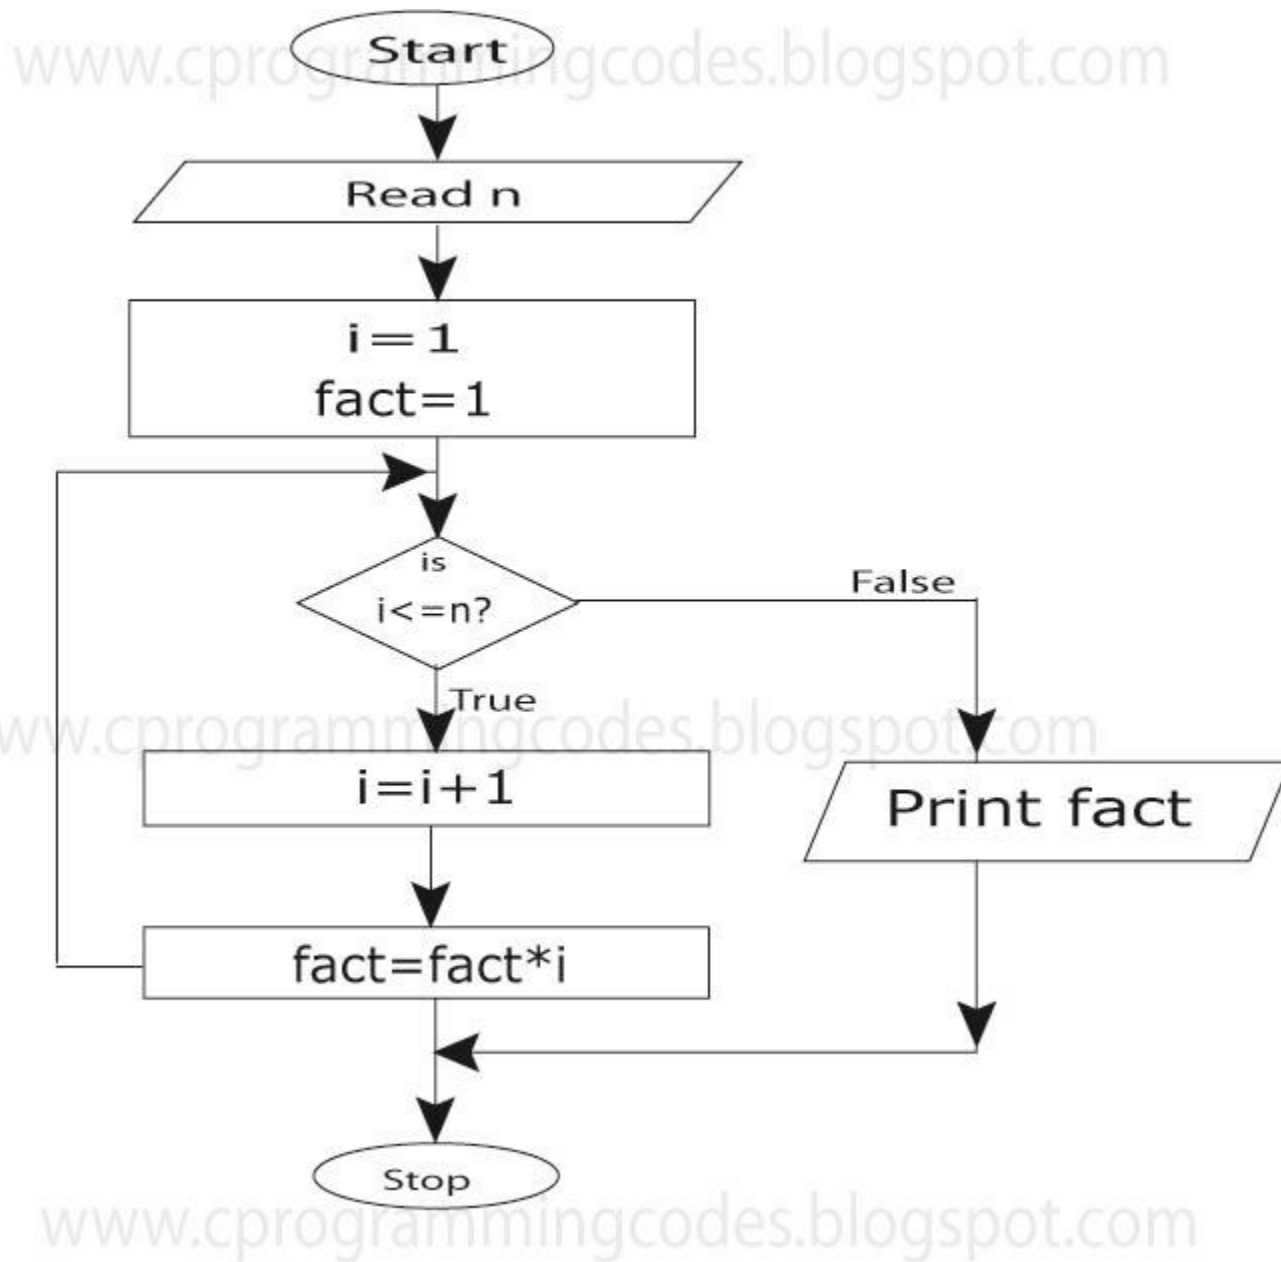

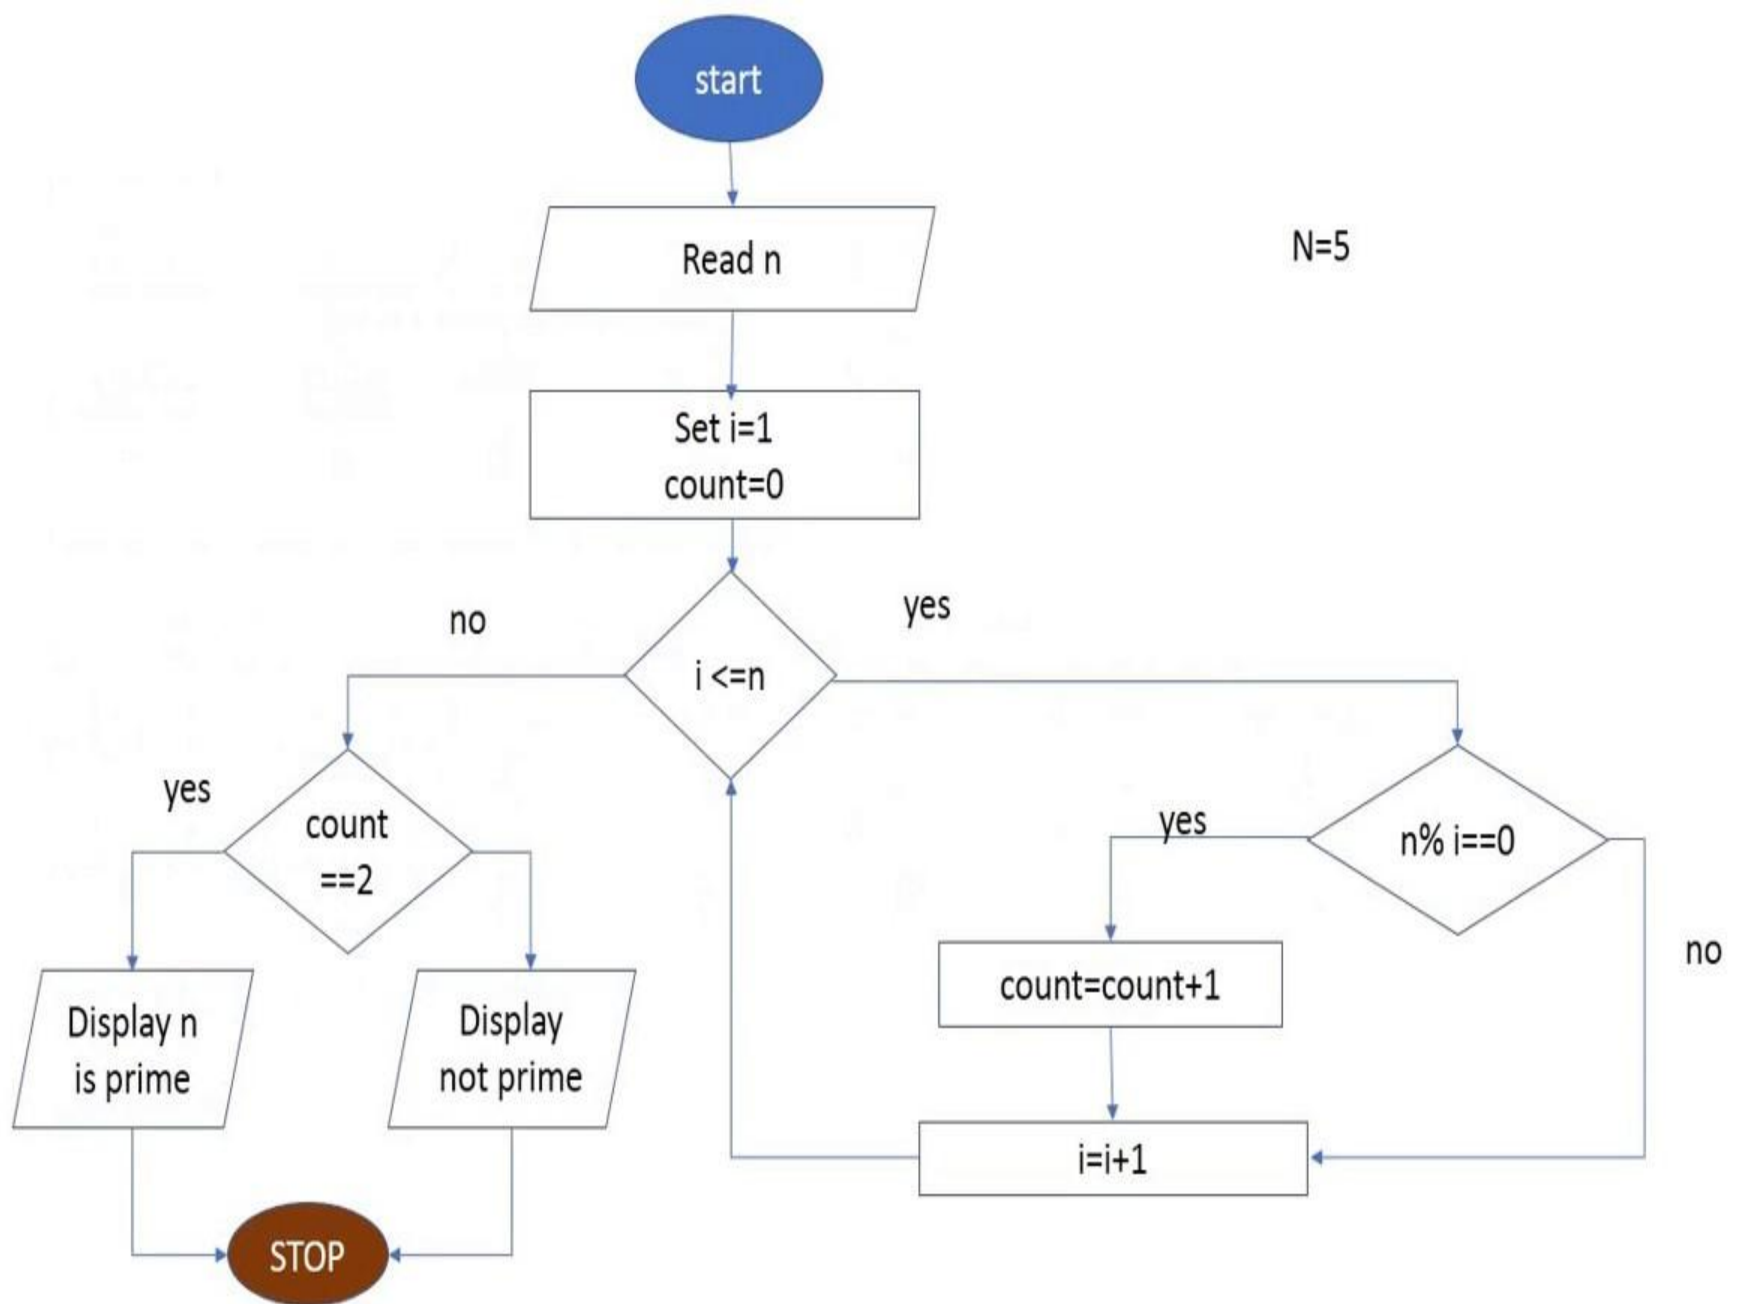



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 4 Writing Pseudocode

- ❑ Pseudo – Imitation / False
- ❑ Code – Instructions
- ❑ **Goal:** To provide a high level description of the Algorithm
- ❑ **Benefit:** Enables programmer to concentrate on Algorithm
- ❑ Similar to programming code
- ❑ Description of the Algorithm
- ❑ No specific Programming language notations
- ❑ Pseudo Code transformed into actual program code



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 4 Writing Pseudocode Contd...

a) Guidelines for Writing Pseudo Code

❑ Write only one Statement per line

❑ Example – Pseudo Code for calculating Salary

1. **READ** name, hourly rate, hours worked, deduction rate
2. Gross pay = hourly rate * hours worked
3. deduction = gross pay * deduction rate
4. net pay = gross pay – deduction
5. **WRITE** name, gross, deduction, net pay



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 4 Writing Pseudocode Contd...

b) Capitalize Initial Keyword

- ☐ Keywords to be written in capital letters
- ☐ Examples: **READ, WRITE, IF, ELSE, WHILE, REPEAT, PRINT**

c) Indent to show Hierarchy

- ☐ Indentation shows the structure boundaries
- ☐ Sequence
- ☐ Selection
- ☐ Looping



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 4 Writing Pseudocode Contd...

d) End Multiline structures

- ☐ Each structure must end properly
- ☐ Example: IF statement must end with ENDIF

e) Keep Statements Language independent

- ☐ Resist the urge to write Pseudo Code in any programming language



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 4 Writing Pseudocode Contd...

☐ **Advantages**

- ☐ Easily typed in a Word document
- ☐ Easily modified
- ☐ Simple to Use and understand
- ☐ Implements Structured Concepts
- ☐ No special symbols are used
- ☐ No specific syntax is used
- ☐ Easy to translate into Program



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 4 Writing Pseudocode Contd...

☐ **Disadvantages**

- ☐ No accepted Standard
- ☐ Cannot be compiled and executed



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 4 Writing Pseudocode Contd...

❑ Write an Pseudo Code to:

- 1) Add three numbers and Display the result
- 2) Calculate Sum and product of two numbers
- 3) Input examination marks and award grades according to the following criteria:
 - a) ≥ 80 Distinction
 - b) ≥ 60 First Class
 - c) ≥ 50 Second Class
 - d) < 40 Fail



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 4 Writing Pseudocode Contd...

1. Pseudo Code to Add Three Numbers

- Use Variables: sum, num1, num2, num3 of type integer
- ACCEPT num1,num2,num3
- $\text{Sum} = \text{num1} + \text{num2} + \text{num3}$
- Print sum
- End Program



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 4 Writing Pseudocode Contd...

2. Calculate Sum and product of two numbers

- Use Variables: sum, product, num1, num2 of type real
- DISPLAY “Input two Numbers”
- ACCEPT num1,num2
- $\text{Sum} = \text{num1} + \text{num2}$
- Print “The sum is”, sum
- $\text{product} = \text{num1} * \text{num2}$
- Print “The product is”, product
- End Program



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 4 Writing Pseudocode Contd...

3. Input examination marks and award grades

- Use Variables: mark of type integer
- If mark ≥ 80 DISPLAY “Distinction”
- If mark ≥ 60 and mark < 80 DISPLAY “First Class”
- If mark ≥ 50 and mark < 60 DISPLAY “Second Class”
- If mark < 50 DISPLAY “Fail”
- End Program




SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 5 History & Evolution of C

- ❑ C – General Purpose Programming Language
- ❑ Developed by Dennis Ritchie in 1972
- ❑ Developed at Bell Laboratories
- ❑ Principles taken from BCPL and CPL
- ❑ Structured Programming Language
- ❑ C Program
 - ❑ Collection of Functions
 - ❑ Supported by C library

Dennis Ritchie
1941-2011

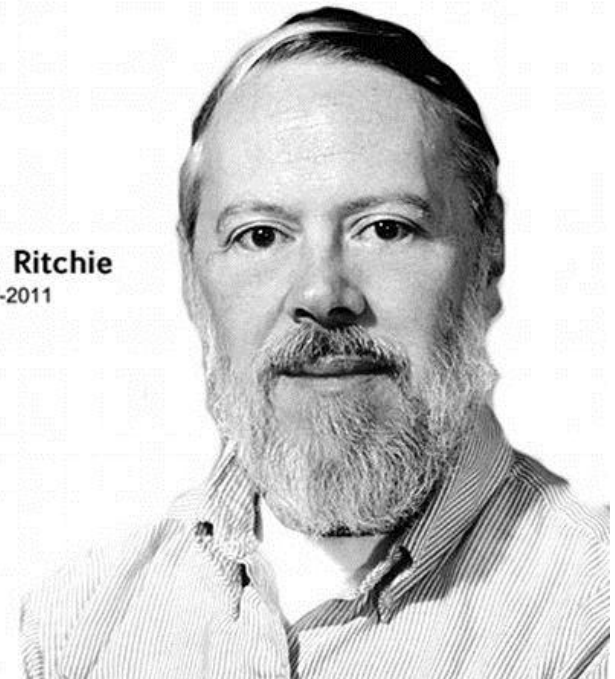



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 5 History & Evolution of C Cont...

Father of C Programming : Dennis Ritchie

Born On	September 9 1941
Born in	Bronxville – New York
Full Name	Dennis MacAlistair Ritchie
Nickname	DMR
Nationality	American
Graduate From	Harvard University
Graduate In	Physics and Applied Mathematics
Webpage	http://cm.bell-labs.com/who/dmr/
Dead On	October 12 2011



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 5 History & Evolution of C Cont...

1960	Algol	• International Group
1967	BCPL	• Martin Richards
1970	B	• Ken Thomson
1972	Traditional C	• Dennis Ritchie
1978	K&R C	• kernighan & Ritchie
1989	ANSI C	• ANSI Commitee
1990	ANSI/ISO C	• ISO Commitee
1999	C99	• Standerd Commitee

Evolution of C



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 5 History & Evolution of C Cont...

☐ *Why the Name “C” was given ?*

- ☐ Many of C's principles and ideas were derived from the earlier language B
- ☐ BCPL and CPL are the earlier ancestors of B Language (CPL is common Programming Language)
- ☐ In 1967, BCPL Language (Basic CPL) was created as a scaled down version of CPL
- ☐ As many of the **features** were derived from “B” Language **the new language was named as “C”.**



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 5 History & Evolution of C Cont...

☐ **Characteristics of 'C'**

- ☐ Low Level Language Support
- ☐ Structured Programming
- ☐ Extensive use of Functions
- ☐ Efficient use of Pointers
- ☐ Compactness
- ☐ Program Portability
- ☐ Loose Typing



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 5 History & Evolution of C Cont...

☐ **Advantages of C**

- ☐ Compiler based Language
- ☐ Programming – Easy & Fast
- ☐ Powerful and Efficient
- ☐ Portable
- ☐ Supports Graphics
- ☐ Supports large number of Operators
- ☐ Used to Implement Datastructures



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 5 History & Evolution of C Cont...

☐ **Disadvantages of C**

- ☐ Not a strongly typed Language
- ☐ Use of Same operator for multiple purposes
- ☐ Not Object Oriented



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 6 Structure of 'C' Program

☐ Structure based on Set of rules defined by the Compiler

☐ **Sections**

1) Documentation

2) Preprocessor

3) Global Declaration

4) main() function

5) Local Declaration

6) Program Statements



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 6 Structure of 'C' Program Contd...

☐ Rules for Writing a C Program

- a) All statements should be written in lower case
- b) All statements should end with a semicolon
- c) Upper case letters are used for symbolic constants
- d) Blank spaces can be inserted between words
- e) No blank space while declaring a variable, keyword, constant
- f) Can write one or more statement in same line separated by comma
- g) Opening and closing of braces should be balanced



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 6 Structure of 'C' Program Contd...

```
/* Program to Find Area of Circle */
```

Comment

```
#include <stdio.h>  
#include <conio.h>
```

Preprocessor Directives

```
const float pi = 3.14;
```

Global Declaration

```
void main( )
```

main Function

```
{
```

```
float area;  
int r;
```

Local Declaration & Initialization

```
printf("Enter the Radius of the Circle");  
scanf("%d", &r);  
area = pi * r * r;  
printf("The area of the Circle is %f", area);  
getch( );
```

Execution

```
}
```



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 6 Structure of 'C' Program Contd...

1) Documentation Section

- ☐ Used for providing Comments
- ☐ Comment treated as a single white space by Compiler
- ☐ Ignored at time of Execution: Not Executable
- ☐ Comment: Sequence of Characters given between **/*** and ***/**
- ☐ **Example:** Program Name, Statement description

/* Program to Find Area of a Circle*/



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 6 Structure of 'C' Program Contd...

2) Preprocessor Section

- ☐ Also called as Preprocessor Directive
- ☐ Also called as Header Files
- ☐ Not a part of Compiler
- ☐ Separate step in Compilation Process
- ☐ Instructs Compiler to do required Preprocessing
- ☐ Begins with # symbol
- ☐ Preprocessor written within < >



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 6 Structure of 'C' Program Contd...

☐ Examples

- ☐ `#include <stdio.h>`
- ☐ `#include <conio.h>`
- ☐ `#include <math.h>`
- ☐ `#include <stdlib.h>`
- ☐ `#define PI 3.1412`



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 6 Structure of 'C' Program Contd...

Directive	Description
#define	Substitutes a preprocessor macro.
#include	Inserts a particular header from another file.
#undef	Undefines a preprocessor macro.
#ifdef	Returns true if this macro is defined.
#ifndef	Returns true if this macro is not defined.
#if	Tests if a compile time condition is true.
#else	The alternative for #if.
#elif	#else and #if in one statement.
#endif	Ends preprocessor conditional.



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 6 Structure of 'C' Program Contd...

Directive	Description
<code>#error</code>	Prints error message on stderr.
<code>#pragma</code>	Issues special commands to the compiler, using a standardized method.



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 6 Structure of 'C' Program Contd...

3) Global Declaration Section

- ☐ Used to Declare Global variable (or) Public variable
- ☐ Variables are declared outside all functions
- ☐ Variables can be accessed by all functions in the program
- ☐ Same variable used by more than one function



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 6 Structure of 'C' Program Contd...

4) **main() Section**

- ☐ main() written in all small letters (No Capital Letters)
- ☐ Execution starts with a Opening Brace : {
- ☐ Divided into two sections: Declaration & Execution
 - ☐ **Declaration** : Declare Variables
 - ☐ **Executable**: Statements within the Braces
- ☐ Execution ends with a Closing Brace : }
- ☐ **Note**: main() does not end with a semicolon



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 6 Structure of 'C' Program Contd...

5) Local Declaration Section

- ☐ Variables declared within the main() program
- ☐ These variables are called Local Variables
- ☐ Variables initialized with basic data types




SRM


INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 8 C Programming Fundamentals

Steps in Learning English Language

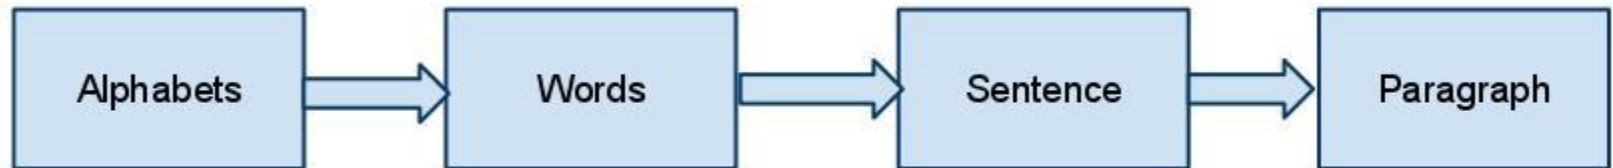

Steps in Learning C

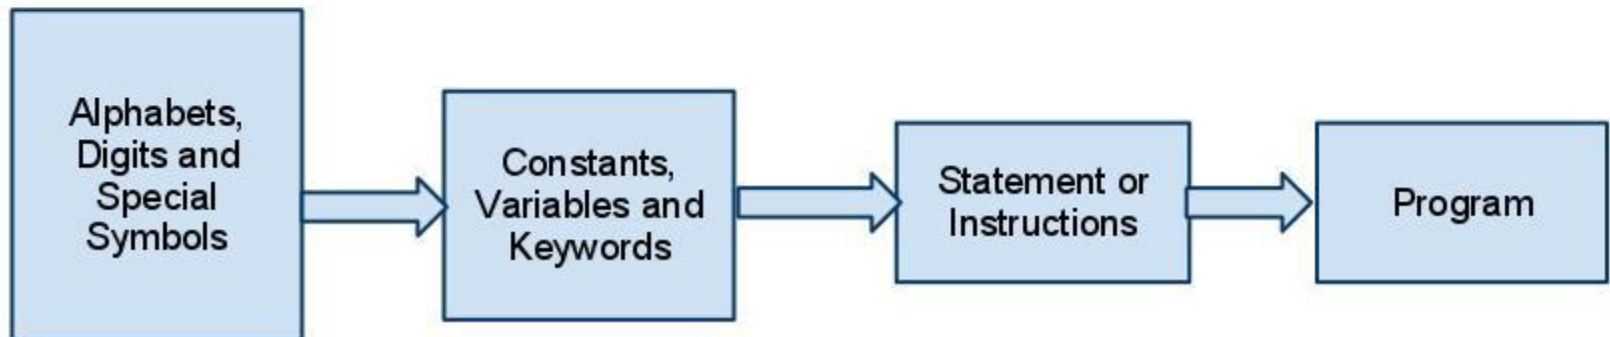



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 8 C Programming Fundamentals Contd...

Alphabets	A, B,, Y, Z a, b,, y, z
Digits	0, 1, 2, 3, 4, 5, 6, 7, 8, 9
Special symbols	~ ' ! @ # % ^ & * () _ - + = \ { } [] : ; " ' < > , . ? /




SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 8 C Programming Fundamentals Contd...

- ❑ **C Token** - Smallest individual unit of a C program
- ❑ C program broken into many C tokens
- ❑ Building Blocks of C program

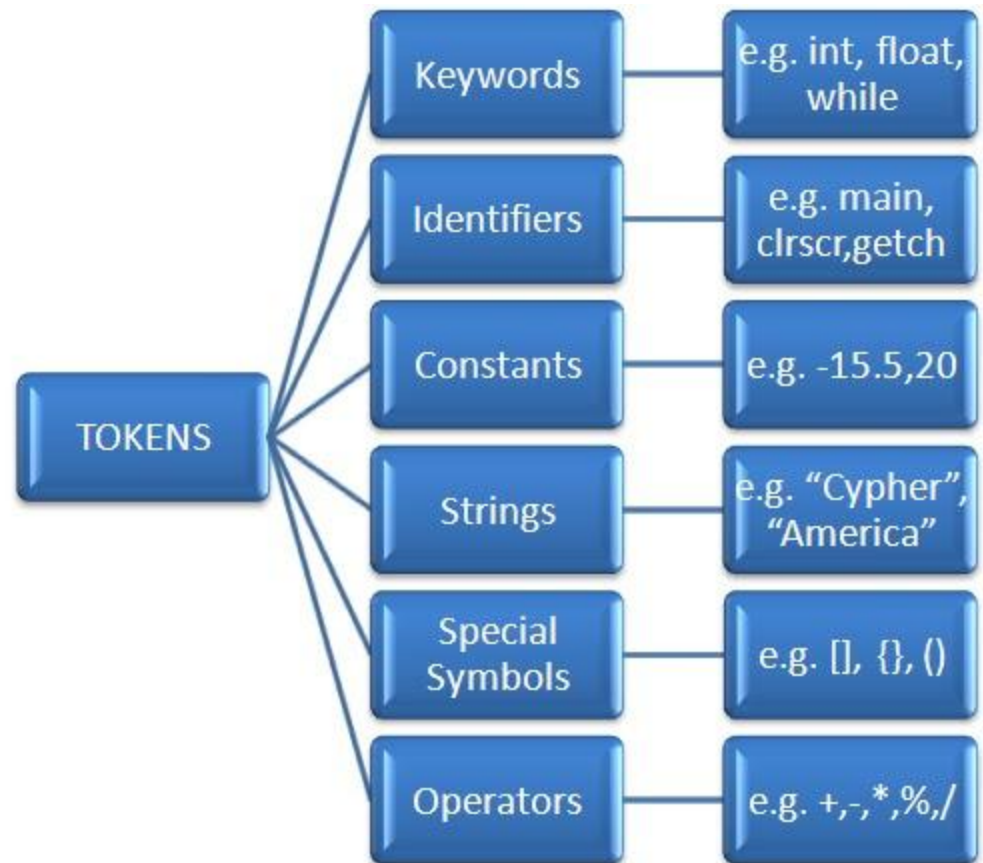



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 9 Keywords

- ❑ **Keywords** – Conveys special meaning to Compiler
- ❑ Cannot be used as variable names

auto	double	int	struct
break	else	long	switch
case	enum	register	typedef
char	extern	return	union
const	float	short	unsigned
continue	for	signed	void
default	goto	sizeof	volatile
do	if	static	



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 10 Constants


- ☐ Definition :Value does not change during execution
- ☐ Can be a Number (or) a Letter
- ☐ **Types**
 - ☐ Integer Constants
 - ☐ Real Constants
 - ☐ Character Constant
 - ☐ Single Character Constants
 - ☐ String Constants



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 10 Constants Contd...

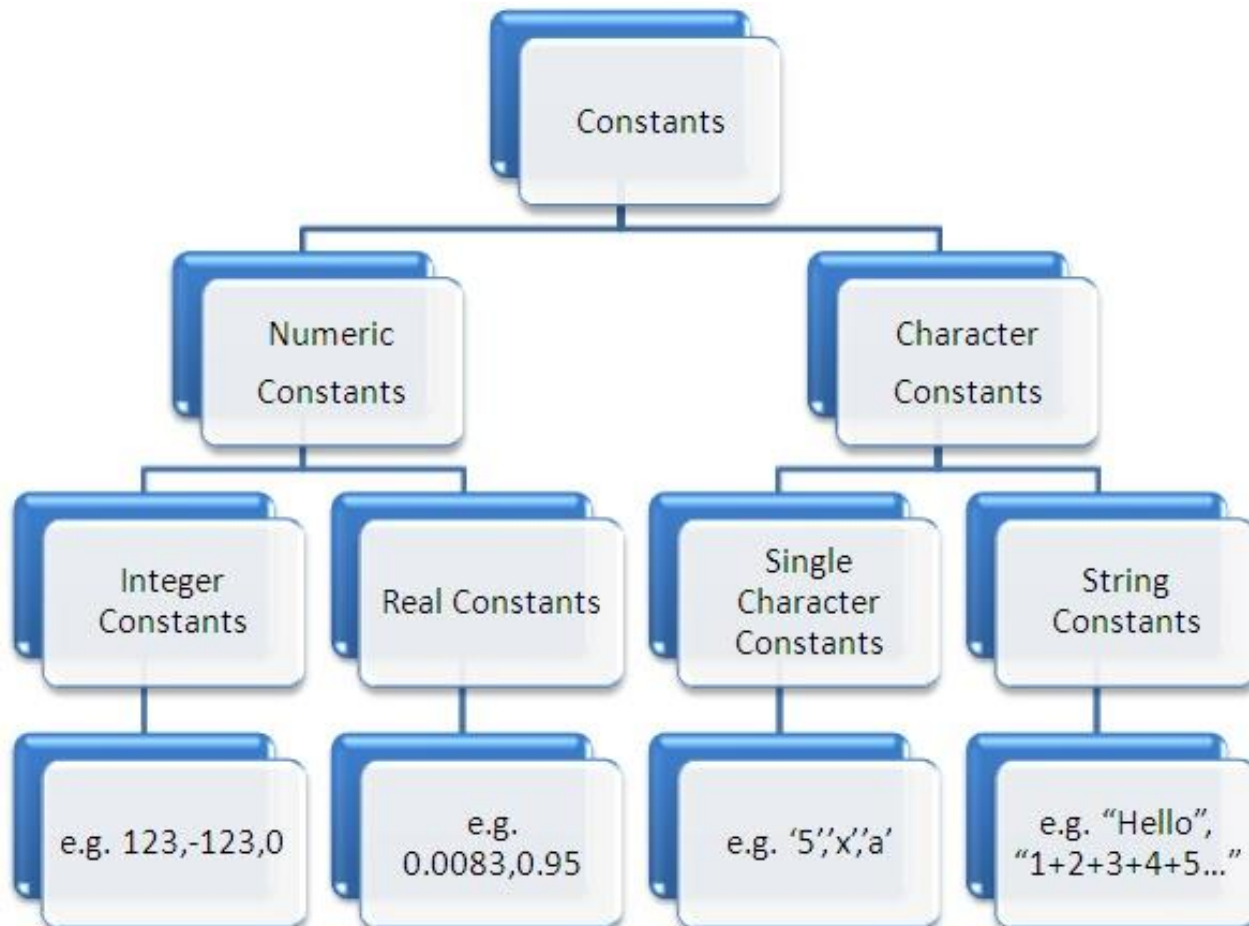



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 11 Variables & Identifiers

❑ *Identifier*

- ❑ A string of alphanumeric characters that begins with an alphabetic character or an underscore character
- ❑ There are 63 alphanumeric characters, i.e., 53 alphabetic characters and 10 digits (i.e., 0-9)
- ❑ Used to represent various programming elements such as variables, functions, arrays, structures, unions
- ❑ The underscore character is considered as a letter in identifiers (Usually used in the middle of an identifier)



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 11 Variables & Identifiers Contd...

☐ **Rules for Identifiers**

- ☐ Combination of alphabets, digits (or) underscore
- ☐ First character should be a Alphabet
- ☐ No special characters other than underscore can be used
- ☐ No comma / spaces allowed within variable name
- ☐ A variable name cannot be a keyword
- ☐ Variable names are case sensitive

☐ ***Variable Definition*** :Value changes during execution

☐ Identifier for a memory location where data is stored



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 11 Variables & Identifiers Contd...

- ☐ Variable name length cannot be more than 31 characters
- ☐ **Examples:** AVERAGE, height, a, b, sum, mark_1, gross_pay
- ☐ **Variable Declaration**
 - ☐ A variable must be declared before it is used
 - ☐ Declaration consists of a data type followed by one or more variable names separated by commas.
 - ☐ Syntax

datatype variablename;



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 11 Variables & Identifiers Contd...

☐ Examples

int a, b, c, sum;

float avg;

char name;

☐ **Variable Initialization**

☐ Assigning a value to the declared variable

☐ Values assigned during declaration / after declaration



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 11 Variables & Identifiers Contd...

☐ Examples

i. int a, b, c;

a=10, b=20, c=30;

ii. int a=10, b=10, c=10;

☐ **Scope of Variables**

☐ Local Variables

☐ Global Variables



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 12 Scope of Variables

❑ *Definition*

- ❑ A scope in any programming is a region of the program where a defined variable can have its existence and beyond that variable it cannot be accessed
- ❑ **Variable Scope** is a region in a program where a variable is declared and used
- ❑ The *scope* of a variable is the range of program statements that can access that variable
- ❑ A variable is *visible* within its scope and *invisible* outside it



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 12 Scope of Variables Contd...

- ❑ There are three places where variables can be declared
 - a) Inside a function or a block which is called **local** variables
 - b) Outside of all functions which is called **global** variables
 - c) In the definition of function parameters which are called **formal** parameters



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 12 Scope of Variables Contd...

a) Local Variables

- ☐ Variables that are declared inside a function or block are called local variables
- ☐ They can be used only by statements that are inside that function or block of code
- ☐ Local variables are created when the control reaches the block or function containing the local variables and then they get destroyed after that
- ☐ Local variables are not known to functions outside their own

/ Program for Demonstrating Local Variables*/*

```
#include <stdio.h>
```

```
int main ( )
```

```
{
```

```
    /* local variable declaration */
```

```
    int a, b;
```

```
    int c;
```

```
    /* actual initialization */
```

```
    a = 10; b = 20;
```

```
    c = a + b;
```

```
    printf ("value of a = %d, b = %d and c = %d\n", a, b, c);
```

```
    return 0;
```

```
}
```



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 12 Scope of Variables Contd...

b) Global Variables

- ☐ Defined outside a function, usually on top of the program
- ☐ Hold their values throughout the lifetime of the program
- ☐ Can be accessed inside any of the functions defined for the program
- ☐ Can be accessed by any function
 - ☐ That is, a global variable is available for use throughout the entire program after its declaration

`/* Program for Demonstrating Global Variables*/`

```
#include <stdio.h>
```

```
/* global variable declaration */
```

```
int g;
```

```
int main ( )
```

```
{
```

```
/* local variable declaration */
```

```
int a, b;
```

```
/* actual initialization */
```

```
a = 10; b = 20;
```

```
g = a + b;
```

```
printf ("value of a = %d, b = %d and g = %d\n", a, b, g);
```

```
return 0;
```

```
}
```



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 12 Scope of Variables Contd...

- ❑ **Note:** A program can have same name for local and global variables but the value of local variable inside a function will take preference



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 12 Datatypes

- ☐ Defines a variable before use
- ☐ Specifies the type of data to be stored in variables
- ☐ Basic Data Types – 4 Classes
 - a) int – Signed or unsigned number
 - b) float – Signed or unsigned number having Decimal Point
 - c) double – Double Precision Floating point number
 - d) char – A Character in the character Set
- ☐ Qualifiers



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 12 Datatypes Contd...

Variable Type	Keyword	Bytes Required	Range	Format
Character (signed)	Char	1	-128 to +127	%c
Integer (signed)	Int	2	-32768 to +32767	%d
Float (signed)	Float	4	-3.4e38 to +3.4e38	%f
Double	Double	8	-1.7e308 to +1.7e308	%lf
Long integer (signed)	Long	4	2,147,483,648 to 2,147,438,647	%ld
Character (unsigned)	Unsigned char	1	0 to 255	%c
Integer (unsigned)	Unsigned int	2	0 to 65535	%u
Unsigned long integer	unsigned long	4	0 to 4,294,967,295	%lu
Long double	Long double	10	-1.7e932 to +1.7e932	%Lf



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 12 Datatypes Contd...

a) Integer Data Type

- ☐ Whole numbers with a range
- ☐ No fractional parts
- ☐ Integer variable holds integer values only
- ☐ **Keyword:** int
- ☐ **Memory:** 2 Bytes (16 bits) or 4 Bytes (32 bits)
- ☐ **Qualifiers:** Signed, unsigned, short, long
- ☐ **Examples:** 34012, 0, -2457



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 12 Datatypes Contd...

b) Floating Point Data Type

- ☐ Numbers having Fractional part
- ☐ Float provides precision of 6 digits
- ☐ Integer variable holds integer values only
- ☐ **Keyword:** float
- ☐ **Memory:** 4 Bytes (32 bits)
- ☐ **Examples:** 5.6, 0.375, 3.14756



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 12 Datatypes Contd...

c) Double Data Type

- ☐ Also handles floating point numbers
- ☐ Double provides precision of 14 digits
- ☐ Integer variable holds integer values only
- ☐ **Keyword:** float
- ☐ **Memory:** 8 Bytes (64 bits) or 10 Bytes (80 bits)
- ☐ **Qualifiers:** long, short



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 12 Datatypes Contd...

d) Character Data Type

- ☐ handles one character at a time
- ☐ **Keyword: char**
- ☐ **Memory: 1 Byte (8 bits)**



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 13 Expressions

- ❑ **Expression** : An Expression is a collection of operators and operands that represents a specific value
- ❑ **Operator** : A symbol which performs tasks like arithmetic operations, logical operations and conditional operations
- ❑ **Operands** : The values on which the operators perform the task
- ❑ Expression Types in C
 - a) Infix Expression
 - b) Postfix Expression
 - c) Prefix Expression



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 13 Expressions Contd...

a) Infix Expression

- ☐ The operator is used between operands
- ☐ **General Structure :** Operand1 Operator Operand2
- ☐ **Example :** $a + b$

b) Postfix Expression

- ☐ Operator is used after operands
- ☐ **General Structure :** Operand1 Operand2 Operator
- ☐ **Example :** $ab+$



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 13 Expressions Contd...

c) Prefix Expression

- ☐ Operator is used before operands
- ☐ ***General Structure :*** Operator Operand1 Operand2
- ☐ ***Example :*** +ab



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 14 Input and Output Functions

- ☐ Ability to Communicate with Users during execution
- ☐ **Input Operation**
 - ☐ Feeding data into program
 - ☐ Data Transfer from Input device to Memory
- ☐ **Output Operation**
 - ☐ Getting result from Program
 - ☐ Data Transfer from Memory to Output device
- ☐ Header File : #include<**stdio.h**>



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 14 Input and Output Functions Contd...

☐ Input / Output Function Types

- a) Formatted Input / Output Statements
- b) Unformatted Input / Output Statements

Console Input / Output Functions

Formatted Functions

Type	Input	Output
Char	scanf()	printf()
Int	scanf()	printf()
Float	scanf()	printf()
String	scanf()	printf()

Unformatted Functions

Type	Input	Output
char	getch()	putch()
	getche()	putchar()
	getchar()	
int	-	-
float	-	-
string	gets()	puts()



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 14 Input and Output Functions Contd...

a) Formatted Input / Output Statements

- ☐ Reads and writes all types of data values
- ☐ Arranges data in particular format
- ☐ Requires **Format Specifier** to identify Data type
- ☐ Basic Format Specifiers
 - ☐ %d – Integer
 - ☐ %f – Float
 - ☐ %c – Character
 - ☐ %s - String



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 14 Input and Output Functions Contd...

i. The scanf () Function

- ☐ Reads all types of input data
- ☐ Assignment of value to variable during Runtime

☐ Syntax

scanf(“Control String/Format Specifier”, &arg1, &arg2,... &argn)

- ☐ Control String / Format Specifier
- ☐ arg1, arg2,,, arg n – Arguments (Variables)
- ☐ & - Address



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 14 Input and Output Functions Contd...

/ Giving Direct Input in
Program */*

```
#include<stdio.h>
#include<conio.h>
void main( )
{
    int a;
    a=10;
}
```

*/*Getting Input using scanf ()
function */*

```
#include<stdio.h>
#include<conio.h>
void main( )
{
    int a;
    scanf("%d", &a);
}
```



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 14 Input and Output Functions Contd...

/ Getting Multiple Input using
scanf () function */*

```
#include<stdio.h>
#include<conio.h>
void main( )
{
    int a, b, c;
    scanf("%d%d%d",&a,&b,&c);
}
```

/ Getting Multiple Different Inputs
using scanf () function */*

```
#include<stdio.h>
#include<conio.h>
void main( )
{
    int a, b;
    float c;
    scanf("%d%d%f",&a,&b,&c);
}
```



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 14 Input and Output Functions Contd...

/ Getting Multiple Input using scanf () function */*

```
#include<stdio.h>
#include<conio.h>
void main( )
{
    int a, b;
    float c;
    scanf("%d %d", &a, &b);
    scanf("%f ", &c);
}
```



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 14 Input and Output Functions Contd...

ii. The printf () Function

- ☐ To print Instructions / Output onto the Screen
- ☐ Requires Format Specifiers & Variable names to print data

☐ Syntax

printf(“Control String/Format Specifier”,arg1,arg2,... argn)

- ☐ Control String / Format Specifier
- ☐ arg1, arg2,, arg n – Arguments (Variables)



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 14 Input and Output Functions Contd...

/ Example 1 – Using printf () & scanf () function */*

```
#include<stdio.h>
```

```
#include<conio.h>
```

```
void main( )
```

```
{
```

```
    int a;
```

```
    printf("Enter the Value of a");
```

```
    scanf("%d", &a);
```

```
    printf("Value of a is %d", a);
```

```
    getch( );
```

```
}
```



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 14 Input and Output Functions Contd...

/ Example 2 – Using printf () & scanf () function */*

```
#include<stdio.h>
```

```
#include<conio.h>
```

```
void main( )
```

```
{
```

```
    int a, b, c;
```

```
    printf("Enter the Value of a, b & c");
```

```
    scanf("%d %d %d", &a, &b, &c);
```

```
    printf("Value of a, b & c is %d%d%d", a, b, c);
```

```
    getch ( );
```

```
}
```

/ Example 3 – Using printf () & scanf () function */*

```
#include<stdio.h>
```

```
#include<conio.h>
```

```
void main( )
```

```
{
```

```
    int a, b;
```

```
    float c;
```

```
    printf("Enter the Value of a & b");
```

```
    scanf("%d %d", &a, &b);
```

```
    printf("Enter the Value of a & b");
```

```
    scanf("%f ", &c);
```

```
    printf("Value of a, b is %d%d", a, b);
```

```
    printf("Value of c is %f", c);
```

```
    getch ( );
```

```
}
```



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 14 Input and Output Functions Contd...

/ Example 4 – Using printf () & scanf () function */*

```
#include<stdio.h>
```

```
#include<conio.h>
```

```
void main( )
```

```
{
```

```
    int a, b;
```

```
    float c;
```

```
    printf("Enter the Value of a, b & c");
```

```
    scanf("%d %d%f", &a, &b, &c);
```

```
    printf("Value of a, b & c is %d%d%f", a, b, c);
```

```
    getch ( );
```

```
}
```



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 14 Input and Output Functions Contd...

❑ **Try it Out Yourself ! Write a C program to:**

- 1) Add two numbers
- 2) To Multiply two floating point numbers
- 3) To compute Quotient and Remainder
- 4) To Swap two numbers



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 14 Input and Output Functions Contd...

b) Unformatted Input / Output Statements

- ☐ Works only with Character Data type
- ☐ No need of Format Specifier

☐ Unformatted Input Statements

- i. **getch ()** – Reads alphanumeric characters from Keyboard
- ii. **getchar ()** – Reads one character at a time till enter key is pressed



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 14 Input and Output Functions Contd...

iii. gets () – Accepts any string from Keyboard until Enter Key is pressed

☐ Unformatted Output Statements

i. putchar () – Writes alphanumeric characters to Monitor (Output Device)

ii. putchar () – Prints one character at a time

iii. puts () – Prints a String to Monitor (Output Device)



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 16 Single Line and Multiline Comments

☐ **Comment – Definition**

- ☐ Used to provide information about lines of code
- ☐ Provide clarity to the C source code
- ☐ Allows others to better understand what the code was intended to
- ☐ Helps in debugging the code
- ☐ Important in large projects containing hundreds or thousands of lines of source code
- ☐ Types – Single line and multiline comment



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 16 Single Line and Multiline Comments Contd...

a) Single Line Comment

- ❑ Represented by double slash //

```
#include<stdio.h>

int main( ){

    //printing information
    printf("Hello C");

    return 0;

}
```



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 16 Single Line and Multiline Comments Contd...

b) Multi-Line Comment

- ❑ Represented by slash asterisk * ... *\

```
#include<stdio.h>

int main( ){

    /*printing information
    Multi Line Comment*/
    printf("Hello C");

    return 0;

}
```



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 16 Single Line and Multiline Comments Contd...

Single-Line Comments	Multi-Line Comment
Starts with <code>/*</code> and ends with <code>*/</code>	Starts with <code>//</code>
All Words and Statements written between <code>/*</code> and <code>*/</code> are ignored	Statements after the symbol <code>//</code> upto the end of line are ignored
Comment ends when <code>*/</code> Occures	Comment Ends whenever ENTER is Pressed and New Line Starts
e.g <code>/* Program for Factorial */</code>	e.g <code>// Program for Fibonacci</code>



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 15 Operators in C

- ☐ C supports rich set of built in Operators
- ☐ Used to manipulate Constants (Data) & Variables
- ☐ Part of Mathematical (or) Logical expressions
- ☐ Operators vs Operands
- ☐ **Operator – Definition**
 - ☐ Symbol (or) Special character that instructs the compiler to perform mathematical (or) Logical operations



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 15 Operators in C Contd...

❑ **Classification of Operators**

- a) Increment & Decrement Operators
- b) Comma Operator
- c) Arrow Operator
- d) Assignment Operators
- e) Bitwise Operators
- f) Sizeof Operator



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 15 Operators in C Contd...

a) Increment and Decrement Operators

- ☐ Increment and decrement operators are unary operators that add or subtract one from their operand
- ☐ C languages feature two versions (pre- and post-) of each operator
 - ☐ Operator placed before variable (Pre)
 - ☐ Operator placed after variable (Post)
- ☐ The increment operator is written as ++ and the decrement operator is written as --



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 15 Operators in C Contd...

a) Increment and Decrement Operators Contd...

☐ **Classification**

- ☐ Pre Increment Operator
- ☐ Post Increment Operator
- ☐ Pre Decrement Operator
- ☐ Post Decrement Operator



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 15 Operators in C Contd...

a) Increment and Decrement Operators Contd...

☐ *Syntax*

(pre)++variable_name;

(pre)--variable_name;

(Or)

variable_name++ (post);

variable_name - (Post);

☐ *Examples*

☐ ++count, ++a, ++i, ++count

☐ Count++, a++, i++, count++



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 15 Operators in C Contd...

a) Increment and Decrement Operators Contd...

S. No	Operator type	Operator	Description
1	Pre Increment	<code>++i</code>	Value of i is incremented before assigning it to variable i.
2	Post Increment	<code>i++</code>	Value of i is incremented after assigning it to variable i.
3	Pre Decrement	<code>-- i</code>	Value of i is decremented before assigning it to variable i.
4	Post Decrement	<code>i --</code>	Value of i is decremented after assigning it to variable i.

/ Program for Post Increment*/*

```
#include<stdio.h>
#include<conio.h>
void main( )
{
    int i = 1;
    while (i++<5)
    {
        printf("%d", i);
    }
    getch ( );
}
```

Output

1 2 3 4 5



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 15 Operators in C Contd...

a) Increment and Decrement Operators Contd...

- ❑ **Step 1 :** In this program, value of i “0” is compared with 5 in while expression.
- ❑ **Step 2 :** Then, value of “i” is incremented from 0 to 1 using post-increment operator.
- ❑ **Step 3 :** Then, this incremented value “1” is assigned to the variable “i”.
- ❑ Above 3 steps are continued until while expression becomes false and output is displayed as “1 2 3 4 5”.

/ Program for Pre Increment*/*

```
#include<stdio.h>
#include<conio.h>
void main( )
{
    int i = 1;
    while (++i<5)
    {
        printf("%d", i );
    }
    getch ( );
}
```

Output

1 2 3 4



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 15 Operators in C Contd...

a) Increment and Decrement Operators Contd...

- ❑ **Step 1 :** In above program, value of “i” is incremented from 0 to 1 using pre-increment operator.
- ❑ **Step 2 :** This incremented value “1” is compared with 5 in while expression.
- ❑ **Step 3 :** Then, this incremented value “1” is assigned to the variable “i”.
- ❑ Above 3 steps are continued until while expression becomes false and output is displayed as “1 2 3 4”.

/ Program for Post Decrement*/*

```
#include<stdio.h>
#include<conio.h>
void main( )
{
    int i = 1;
    while (i--<5)
    {
        printf("%d", i );
    }
    getch ( );
}
```

Output

9 8 7 6 5



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 15 Operators in C Contd...

a) Increment and Decrement Operators Contd...

- ❑ **Step 1 :** In this program, value of i “10” is compared with 5 in while expression.
- ❑ **Step 2 :** Then, value of “i” is decremented from 10 to 9 using post-decrement operator.
- ❑ **Step 3 :** Then, this decremented value “9” is assigned to the variable “i”.
- ❑ Above 3 steps are continued until while expression becomes false and output is displayed as “9 8 7 6 5”.

/ Program for Pre Decrement*/*

```
#include<stdio.h>
#include<conio.h>
void main( )
{
    int i = 1;
    while (--i<5)
    {
        printf("%d", i);
    }
    getch ( );
}
```

Output

9 8 7 6



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 15 Operators in C Contd...

a) Increment and Decrement Operators Contd...

- ❑ **Step 1 :** In above program, value of “i” is decremented from 10 to 9 using pre-decrement operator.
- ❑ **Step 2 :** This decremented value “9” is compared with 5 in while expression.
- ❑ **Step 3 :** Then, this decremented value “9” is assigned to the variable “i”.
- ❑ Above 3 steps are continued until while expression becomes false and output is displayed as “9 8 7 6”.



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 15 Operators in C Contd...

b) Comma Operator

- ☐ Special operator which separates the declaration of multiple variables
- ☐ Has Lowest Precedence i.e it is having lowest priority so it is evaluated at last
- ☐ Returns the value of the rightmost operand when multiple comma operators are used inside an expression
- ☐ Acts as Operator in an Expression and as a Separator while Declaring Variables



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 15 Operators in C Contd...

b) Comma Operator Contd...

```
#include<stdio.h>

int main( )
{
    int i, j;
    i=(j=10, j+20);
    printf("i = %d\n j = %d\n" , i,j );
    return 0;
}
```



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 15 Operators in C Contd...

c) Arrow Operator (->)

- ☐ Arrow operator is used to access the structure members when we use pointer variable to access it
- ☐ When pointer to a structure is used then arrow operator is used



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 15 Operators in C Contd...

d) Assignment Operators

- ❑ Assigns result of expression to a variable
- ❑ Performs Arithmetic and Assignment operations
- ❑ Commonly used Assignment operator: =

❑ *Syntax*

variable = expression;

❑ *Examples*

- ❑ `num = 25; age = 18; pi = 31.4; area = 3.14 * r * r;`



SRM

INSTITUTE OF SCIENCE AND TECHNOLOGY, CHENNAI.

1. 15 Operators in C Contd...

❑ Shorthand Assignment Operators

Simple Assignment Operator	Shorthand Operator
$a = a + 1$	$a += 1$
$a = a - 1$	$a -= 1$
$a = a * 2$	$a *= 2$
$a = a / b$	$a /= b$
$a = a \% b$	$a \% = b$
$c = c * (a + b)$	$c *= (a + b)$
$b = b / (a + b)$	$b /= (a + b)$

/ Program for Assignment Operations*/*

```
#include<stdio.h>
#include<conio.h>
void main( )
{
    int a;
    a = 11;
    a+ = 4;
    printf("Value of A is %d\n",a);
    a = 11;
    a- = 4;
    printf("Value of A is %d\n",a);
    a = 11;
    a* = 4;
    printf("Value of A is %d\n",a);
    a = 11; a/ = 4;
```

```
        printf("Value of A is %d\n",a);  
    a = 11;  
    a% = 4;  
        printf("Value of A is %d\n",a);  
    getch ( );  
}
```

Output

Value of A is 15

Value of A is 7

Value of A is 44

Value of A is 2

Value of A is 3

THANK YOU