Oracle® Fusion Cloud EPM

REST APIs for Oracle Fusion Cloud EPM



G42939-10



Oracle Fusion Cloud EPM REST APIs for Oracle Fusion Cloud EPM,

G42939-10

Copyright © 2017, 2026, Oracle and/or its affiliates.

Primary Author: EPM Information Development Team

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc.

Oracle customer access to and use of Oracle support services will be pursuant to the terms and conditions specified in their Oracle order for the applicable services.

Contents

Documentation Accessibility

Documentation Feedback

1 Getting Started with Cloud EPM REST APIs

About REST APIs for Cloud EPM, EDM, and Narrative Reporting 1
Cloud EPM REST APIs at a Glance 2
Prerequisites 13
Authentication for Cloud EPM REST APIs 15
- Basic Authentication 15
- Authentication with OAuth 2 16

REST API Fundamentals 26
- About REST Resources 27
- URL Structure 28
- REST API Methods 28
- Versioning 29
- Error Handling and Status Codes 30

Cloud EPM REST APIs Best Practices 31

2 Infrastructure REST APIs

Users, Groups, Roles, and Access Reports 1
- URL Structure for Users, Groups, and Roles 2
- Add Users to an Identity Domain 2
  - Add Users to an Identity Domain (v1) 3
  - Add Users to an Identity Domain (v2) 6
- Remove Users from Identity Domains 9
  - Remove Users from an Identity Domain (v1) 9
  - Remove Users from an Identity Domain (v2) 11
- Application Roles and Granular Roles 14
  - Assign Users to an Application Role or Granular Role (v1) 15
  - Assign Users to an Application Role or Granular Role (v2) 18

Copyright © 2017, 2026, Oracle and/or its affiliates.

Remove Users from Application Roles or Granular Roles 21
Remove Users Role Assignment (v1) 22
Remove Users Role Assignment (v2) 27
Add Users to Groups 32
Add Users to a Group (v1) 33
Add Users to a Group (v2) 36
Remove Users from Groups 38
Remove Users from a Group (v1) 39
Remove Users from a Group (v2) 41
List Users (v1) 44
Update Users 49
Update Users (v1) 50
Update Users (v2) 52
Add a User to a Batch of Groups (v1) 55
Remove a User from a Batch of Groups (v1) 59
Import User Group Assignments as CSV (v1) 62
Update Granular Roles For Groups (v1) 66
Update Granular Roles for Users (v1) 70
Add Groups 74
Add Groups (v1) 75
Add Groups (v2) 78
List Groups (v1) 82
Update Groups (v1) 87
Remove Groups 92
Remove Groups (v1) 92
Remove Groups (v2) 95
User Group Reports 97
User Group Report (v1) 98
User Group Report (v2) 100
User Access Reports 106
User Access Report (v1) 107
User Access Report (v2) 109
User Audit Report (v1) (Deprecated) 111
User Audit Report (v2) (Deprecated) 113
User Login Report (v1) 115
Role Assignment Report (v1) 120
Role Assignment Report for Users (v2) 123
Role Assignment Report for Groups (v2) 130
Get Available Roles (v2) 136
Role Assignment Audit Report (v1) 139
Invalid Login Report (v1) 143
Group Assignment Audit Report (v2) 147

Copyright © 2017, 2026, Oracle and/or its affiliates.

Add Users to a Team for Account Reconciliation 149
Add Users to a Team for Financial Consolidation and Close and Tax Reporting 151
Remove Users from a Team for Account Reconciliation 154
Remove Users from a Team for Financial Consolidation and Close and Tax Reporting 156
Environment Lifecycle and Migration 159
Migration 159
URL Structure for Migration 159
Migration Status Codes 160
Get API Versions for Migration APIs 160
Import and Export Files 164
Upload and Download Files 172
View and Delete Files 177
Copy to and from the Object Store 181
Copy to and from SFTP 199
Copy a File Between Instances 206
Clone an Environment (v1) 209
Provide Feedback (v2) 215
Send Email 217
Set Email Domain Allowlist (v2) 221
Get Email Domain Allowlist (v2) 223
Skip Updates 224
List or Restore Backups 229
Restore Environment (v1) 233
Application Snapshots 236
Get Information About a Specific Application Snapshot 236
Get Information About All Application Snapshots 239
Upload Application Snapshot 240
Download Application Snapshot 247
Copy Application Snapshot 256
Rename Application Snapshot 260
Artifacts, Snapshots, and Migration Status 263
Export Categories Artifacts (v2) 263
Get Categories (v2) 265
Get Migration Status (v2) 266
Get Snapshot Modification History (v2) 269
Import Snapshot Artifacts (v2) 270
List the Artifacts in a Category (v2) 274
List Updated Artifacts (v2) 276
List Snapshot Details (v2) 279
List the Artifacts in a Snapshot (v2) 281
List Import Options (v2) 283
Repeat Export Snapshot (v2) 284

Copyright © 2017, 2026, Oracle and/or its affiliates.

Set Import Options (v2) 288
Services 290
Get Information About All Services 290
Get Idle Session Timeout (v2) 292
Set Idle Session Timeout (v2) 293
Restart the Service Instance 294
Run Recreate on a Service (v2) 298
First Generation REST APIs 304
LCM Import 304
LCM Export 308
List Files 311
Delete Files 313
Run Recreate on a Service 315
Provide Feedback 318
Security and Access Control 319
URL Structure for Security 320
Get Restricted Data Access (v2) 320
Set Restricted Data Access (v2) 321
Get Virus Scan on File Upload (v2) 323
Set Virus Scan on File Upload (v2) 324
Manage Permission for Manual Access to Database (v1) 325
Manage Permission for Manual Access to Database (v2) 327
Set Encryption Key (v1) 328
Set Encryption Key (v2) 330
IAM REST APIs 332
Maintenance Operations 332
URL Structure for Daily Maintenance 332
Get the Build Version and Daily Maintenance Time (v1) 333
Get the Build Version and Daily Maintenance Window Time (v2) 334
Set the Daily Maintenance Time (v1) 336
Set the Daily Maintenance Time (v2) 337
Run Daily Maintenance While Skipping the Scheduled Daily Maintenance (v1) 339
Run Daily Maintenance While Skipping the Scheduled Daily Maintenance (v2) 340
Usage Simulation 341
URL Structure for Usage Simulation 341
Simulate Concurrent Usage (v1) 342

3 Cloud EPM Platform REST APIs

Applications and Related Settings 4
Get Applications 5
Get Application Summary 7

Copyright © 2017, 2026, Oracle and/or its affiliates.

Get Dimension Details 8
Get User Preferences 17
List Library Documents 19
Data Slices 23
Clear Data Slices 23
Import Data Slices 27
Export Data Slices 33
Export Data 44
Export Form Data 46
Jobs 48
Execute a Job 50
Administration Mode 52
Auto Predict 53
Compact Cube 55
Configure the Oracle Guided Learning (OGL) Server 55
Clear Cube 57
Cube Refresh 60
Delete Library Documents 61
Execute Job Code Samples 64
Export Audit 66
Export Cell-Level Security 70
Export Data 73
Export Job Console 77
Export Security 81
Execute a Report Bursting Definition 83
Export Library Documents 85
Export Metadata 88
Export User Variable Values 89
Export Valid Intersections 91
Import Cell-Level Security 94
Import Data 96
Import Exchange Rates 100
Import Library Documents 102
Import Metadata 104
Import Security 106
Import User Variable Values 109
Import Valid Intersections 112
Merge Data Slices 114
Optimize Aggregation 116
Plan Type Map 118
Restructure Cube 120
Rules 121

Copyright © 2017, 2026, Oracle and/or its affiliates.

Ruleset 122
Sort Members 128
Get Job Definitions 130
Retrieve Job Status 133
Retrieve Job Status Details 134
Retrieve Child Job Status Details 137
Members 139
Add Member 139
Get Member 141
Plan Types 143
Get Dimensions for a Plan Type 143
Get Plan Types 145
Planning Units 147
Change Planning Unit Status 148
Get Planning Unit History and Annotations 149
Get Planning Unit Owner Photo 152
Get Planning Unit Promotional Path 153
Get Available Planning Unit Actions 155
Get Filters with All Possible Values 157
List All Planning Units 159
User Variables and Substitution Variables 162
Get and Set User Variable Values 162
Get User Variable Values Defined for the Application 162
Get User Variable Values Defined in the Application by the User Variable Name 164
Get User Variable Values Defined in the Application by Value 166
Get User Variable Values Defined for the Application by the User Name 168
Get User Variable Values Defined in the Application by the User Name and Value 170
Set the User Variable Values for the Application 172
Manage User Variables 173
Create User Variables 173
Delete a User Variable 175
Delete User Variable Definitions 176
Get All User Variables 177
Get a User Variable Using Its ID 179
Update User Variables 180
Delete Substitution Variables 181
Delete a Substitution Variable at the Plan Type Level 182
Delete a Substitution Variable for the Application 183
Delete Substitution Variables at the Plan Type Level 184
Delete Substitution Variables for the Application 185
Get and Set Substitution Variables 186
Get All Substitution Variables Defined for the Application 187

Copyright © 2017, 2026, Oracle and/or its affiliates.

Get a Substitution Variable Defined for the Application 188
Create or Update All Substitution Variables Defined for the Application 189
Get Substitution Variables Defined at the Plan Type Level 191
Get Derived Substitution Variables at the Plan Type Level 192
Get a Substitution Variable Defined at the Plan Type Level 193
Get a Derived Substitution Variable Defined at the Plan Type Level 194
Create and Update Substitution Variables at the Plan Type Level 196
Essbase and Application Settings 197
Export Essbase Data (v2) 197
Essbase Block Analysis Report (v1) 199
Get Essbase Query Governor Execution Time (v2) 201
Set Essbase Query Governor Execution Time (v2) 202
Connections 204
View a Connection 204
View All Connections 206
Update a Connection 208
Data Integration and Data Management 210
URL Structure for Data Integration and Data Management 211
Get API Versions for Data Integration and Data Management APIs 211
Get Information about a Specific API Version for Data Integration and Data Management APIs 212
Get Pipeline Details 213
Import Data Mapping 216
Import Data Integration 218
Export Data Mapping 220
Export Data Integration 222
Lock and Unlock POV 224
Run Integrations 230
Run a Pipeline 241
Run Data Rules in Data Management 244
Run Batch Rules in Data Management 247
Retrieve Job Status 249
Update Connection in Data Integration 250
Reporting 252
Generate Report for Financial Consolidation and Close, Tax Reporting, Enterprise Profitability and Cost Management and Planning 252
Generate User Details Report for Financial Consolidation and Close and Tax Reporting 256
Retrieve Job Status for a Report 258
Execute Reports for Data Management 260
Platform Extensions 262
Enterprise Journal REST APIs 262
URL Structure for Enterprise Journal REST APIs 263

Copyright © 2017, 2026, Oracle and/or its affiliates.

Get API Versions for Enterprise Journal APIs 263
Monitor Enterprise Journals for Financial Consolidation and Close 264
Execute an Enterprise Journals Job 266
Retrieve Enterprise Journals for Financial Consolidation and Close 274
Retrieve Enterprise Journal Content for Financial Consolidation and Close 276
Retrieve Enterprise Journal Content by Year and Period for Financial Consolidation and Close 278
Update Enterprise Journal Posting Status for Financial Consolidation and Close 280
Update Validation Status of Enterprise Journals for Financial Consolidation and Close 282
Supplemental Data Manager REST APIs 284
URL Structure for Supplemental Data Manager 285
Get API Versions for Supplemental Data Manager APIs 285
Import Supplemental Collection Data for Financial Consolidation and Close 285
Deploy Form Templates 288
Execute Supplemental Data Manager Job 293
Task Manager REST APIs 296
URL Structure for Task Manager 296
Get API Versions for Task Manager APIs 296
Deploy Task Manager Templates 297
Update Task Status for Event Monitoring 300
Manage Connections in Task Manager 303

4 Account Reconciliation REST APIs

URL Structure for Account Reconciliation 2
Get API Versions 2
Get API Versions for Account Reconciliation REST APIs 3
Get Information about a Specific API Version for Account Reconciliation REST APIs 4
Archive Matched Transactions (Transaction Matching) 6
Change Period Status (Reconciliation Compliance) 8
Create Reconciliation (Reconciliation Compliance) 9
Delete Profile 11
Execute an Account Reconciliation Job 12
Export Application Properties 14
Export Background Image 17
Export Logo Image 18
Generate Balance Summary Report for Account Reconciliation 20
Generate Balance Report Transactions for Account Reconciliation 22
Generate Cosmetic Changes Report for Account Reconciliation 23
Generate Report for Account Reconciliation 25
Generate User Details Report for Account Reconciliation 29
Import Application Properties 31

Copyright © 2017, 2026, Oracle and/or its affiliates.

Import Attribute Values 33
Import Background Image 35
Import Balances (Reconciliation Compliance) 37
Import Logo Image 38
Import Pre-Mapped Balances (Reconciliation Compliance) 40
Import Pre-Mapped Transactions (Reconciliation Compliance) 41
Import Profiles (Reconciliation Compliance) 43
Import Rates (Reconciliation Compliance) 45
Import Pre-Mapped Transactions (Transaction Matching) 46
Import Reconciliation Attributes (Reconciliation Compliance) 48
Monitor Reconciliations (Reconciliation Compliance) 51
Predict Predicted Attribute (Reconciliation Compliance) 53
Purge Transactions (Transaction Matching) 54
Purge Archived Transactions (Transaction Matching) 58
Retrieve Periods with a Specific Status 59
Run Auto Match (Transaction Matching) 61
Retrieve Job Status (Reconciliation Compliance) 63
Retrieve Job Status (Transaction Matching) 64
Retrieve Application Access Level 68
Run Auto Alert (Transaction Matching) 69
Run Train Match Prediction (Transaction Matching) 70
Run Profile Rule 72
Run Reconciliation Rule 74
Set Application Access Level 76
Train Predicted Attribute (Reconciliation Compliance) 77
Unmatch Matched Transactions (Transaction Matching) 79
Unmatch Transactions Matched by Auto Match (Transaction Matching) 81
Update Unmatched Transactions (Transaction Matching) 82
View Reconciliation Comments 84
Manage Connections in Account Reconciliation 86
Create a Connection 86
Delete a Connection 87
View All Connections 88
Update a Connection 90

5 Enterprise Data Management REST APIs

6 Enterprise Profitability and Cost Management REST APIs

URL Structure for Enterprise Profitability and Cost Management 1
Get API Versions for Enterprise Profitability and Cost Management 2

Copyright © 2017, 2026, Oracle and/or its affiliates.

Get Information About a Specific REST API Version for Enterprise Profitability and Cost Management 2
Generate Model Documentation Report 3
Calculate Model (v3) 6
Clear Data By Point of View (v3) 10
Copy Data by Point of View 13
Delete Point of View 17
Use Substitution Variables in Enterprise Profitability and Cost Management REST APIs 20
Validate Model 21

7 Financial Consolidation and Close REST APIs

URL Structure for Financial Consolidation and Close 1
Get API Versions for Financial Consolidation and Close APIs 2
Get Information about a Specific API Version for Financial Consolidation and Close APIs 2
Copy Data 3
Clear Data 5
Export Consolidation Journals 7
Export Configurable Consolidation Rulesets 9
Generate an Intercompany Matching Report 10
Import Configurable Consolidation Rulesets 12
Import Consolidation Journals 13
Perform Journal Actions for Financial Consolidation and Close 15
Perform Journal Period Updates for Financial Consolidation and Close 17
Retrieve Journals for Financial Consolidation and Close 19
Retrieve Journal Details for Financial Consolidation and Close 22
Validate Metadata 25

8 Narrative Reporting REST APIs

9 Planning REST APIs

URL Structure for Planning 2
Resources and Available Actions 3
Getting API Versions for Planning 3
Get REST API Versions for Planning 3
Get Information about a Specific REST API Version for Planning 5

10 Profitability and Cost Management REST APIs

URL Structure for Profitability and Cost Management 1
Get API Versions for Profitability and Cost Management REST APIs 2

Copyright © 2017, 2026, Oracle and/or its affiliates.

Get Information about a Specific API Version for Profitability and Cost Management 3
Apply Data Grants 4
Copy ML POV Data 6
Create File-Based Application 8
Deploy ML Cube 9
Enable File-Based Application 11
Essbase Data Load for Profitability and Cost Management 12
Export Query Results 13
Export Template for Profitability and Cost Management 16
Generate Program Documentation Report 17
Generate Program Documentation Report - Run as a Job 19
Import Template for Profitability and Cost Management 21
Merge Slices for Profitability and Cost Management 23
Optimize ASO Cube 24
Retrieve Task Status for Profitability and Cost Management 26
Run ML Calculations 27
Run ML Clear POV 29
Run ML Rule Balancing 31
Update Dimensions As a Job 33

11 Tax Reporting REST APIs

URL Structure for Tax Reporting 1
Get API Versions for Tax Reporting APIs 1
Get Information about a Specific API Version for Tax Reporting 1
Copy Data 3
Clear Data 4

Copyright © 2017, 2026, Oracle and/or its affiliates.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info or visit http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs if you are hearing impaired.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Documentation Feedback

To provide feedback on this documentation, click the feedback button at the bottom of the page in any Oracle Help Center topic. You can also send email to epmdoc_ww@oracle.com.

Copyright © 2017, 2026, Oracle and/or its affiliates.

1

Getting Started with Cloud EPM REST APIs

Related Topics

- About REST APIs for Cloud EPM, EDM, and Narrative Reporting
  Oracle Fusion Cloud Enterprise Performance Management (EPM), Oracle Fusion Cloud Enterprise Data Management (EDM), and Narrative Reporting provide REST APIs that enable you to automate administrative tasks and integrate with Oracle Cloud services.
- Cloud EPM REST APIs at a Glance
- Prerequisites
- Authentication for Cloud EPM REST APIs
  All HTTP requests to the REST APIs require authentication. Review these topics to understand OAuth 2 and basic authentication for Cloud EPM REST APIs.
- REST API Fundamentals
- Cloud EPM REST APIs Best Practices
  Use the implementation best practices listed in this topic when working with the REST APIs.

About REST APIs for Cloud EPM, EDM, and Narrative Reporting

Oracle Fusion Cloud Enterprise Performance Management (EPM), Oracle Fusion Cloud Enterprise Data Management (EDM), and Narrative Reporting provide REST APIs that enable you to automate administrative tasks and integrate with Oracle Cloud services.

This guide describes REST APIs for Cloud EPM. These REST APIs allow Service Administrators to perform administration tasks in Cloud EPM. This guide assumes that you have the technical and functional knowledge required to work with REST APIs. For more information about the requirements and recommendations, see Prerequisites.

Cloud EPM includes these cloud services:

- Planning
- FreeForm
- Planning Modules
- Account Reconciliation
- Financial Consolidation and Close
- Enterprise Profitability and Cost Management
- Profitability and Cost Management
- Tax Reporting
- Narrative Reporting
- Cloud EDM

Use these guides to discover API endpoints, understand authentication requirements, and use REST requests to automate tasks such as data integration, job execution, and environment management.

Copyright © 2017, 2026, Oracle and/or its affiliates.

REST APIs are also available for Cloud EDM and Narrative Reporting. For more information, see:

- REST API for Oracle Fusion Cloud Enterprise Data Management
- REST API for Narrative Reporting

You can integrate Cloud EPM environments using:

- REST APIs.
- EPM Automate, a command line utility that is implemented on top of the REST APIs.
- Groovy business rules, as described in Cloud EPM Groovy Rules Java API Reference.

Cloud EPM REST APIs at a Glance

The following list summarizes all the REST APIs covered in this guide. Select an API category to navigate directly to its corresponding section within the table.

- Infrastructure REST APIs - The Infrastructure REST APIs are grouped under the categories listed below:
  - Users, Groups, Roles, and Access Reports
  - Migration
  - Services
  - Application Snapshots
  - Artifacts, Snapshots, and Migration Status
  - First Generation REST APIs
  - Security and Access Control
  - Maintenance Operations
- Account Reconciliation REST APIs
- Data Integration and Data Management REST APIs
- Enterprise Profitability and Cost Management REST APIs
- Financial Consolidation and Close REST APIs
- Planning REST APIs
- Tax Reporting REST APIs

Users, Groups, Roles, and Access Reports

Table 1-1 Infrastructure: Users, Groups, Roles, and Access Reports

REST API	Planning	Freeform	Consolidation	Account Reconciliation	Enterprise Profitability	Tax Reporting
Add Users to an Identity Domain (v1)	✔	✔	✔	✔	✔	✔
Add Users to an Identity Domain (v2)	✔	✔	✔	✔	✔	✔
Remove Users from an Identity Domain (v1)	✔	✔	✔	✔	✔	✔

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 1-1 (Cont.) Infrastructure: Users, Groups, Roles, and Access Reports

REST API	Planning	Freeform	Consolidation	Account Reconciliation	Enterprise Profitability	Tax Reporting
Remove Users from an Identity Domain (v2)	✓	✓	✓	✓	✓	✓
Assign Users to an Application Role or Granular Role (v1)	✓	✓	✓	✓	✓	✓
Assign Users to an Application Role or Granular Role (v2)	✓	✓	✓	✓	✓	✓
Remove Users Role Assignment (v1)	✓	✓	✓	✓	✓	✓
Remove Users Role Assignment (v2)	✓	✓	✓	✓	✓	✓
Add Users to a Group (v1)	✓	✓	✓	✓	✓	✓
Add Users to a Group (v2)	✓	✓	✓	✓	✓	✓
Remove Users from a Group (v1)	✓	✓	✓	✓	✓	✓
Remove Users from a Group (v2)	✓	✓	✓	✓	✓	✓
List Users (v1)	✓	✓	✓	✓	✓	✓
Update Users (v1)	✓	✓	✓	✓	✓	✓
Update Users (v2)	✓	✓	✓	✓	✓	✓
Add a User to a Batch of Groups (v1)	✓	✓	✓	✓	✓	✓
Remove a User from a Batch of Groups (v1)	✓	✓	✓	✓	✓	✓
Import User Group Assignments as CSV (v1)	✓	✓	✓	✓	✓	✓
Update Granular Roles For Groups (v1)	✓	✓	✓	✓	✓	✓
Update Granular Roles for Users (v1)	✓	✓	✓	✓	✓	✓
Add Groups (v1)	✓	✓	✓	✓	✓	✓
Add Groups (v2)	✓	✓	✓	✓	✓	✓
List Groups (v1)	✓	✓	✓	✓	✓	✓
Update Groups (v1)	✓	✓	✓	✓	✓	✓
Remove Groups (v1)	✓	✓	✓	✓	✓	✓
Remove Groups (v2)	✓	✓	✓	✓	✓	✓
User Group Report (v1)	✓	✓	✓	✓	✓	✓
User Group Report (v2)	✓	✓	✓	✓	✓	✓
User Access Report (v1)	✓	✓	✓	✓	✓	✓
User Access Report (v2)	✓	✓	✓	✓	✓	✓
User Audit Report (v1) (Deprecated)	✓	✓	✓	✓	✓	✓
User Audit Report (v2) (Deprecated)	✓	✓	✓	✓	✓	✓
User Login Report (v1)	✓	✓	✓	✓	✓	✓
Role Assignment Report (v1)	✓	✓	✓	✓	✓	✓
Role Assignment Report for Users (v2)	✓	✓	✓	✓	✓	✓
Role Assignment Report for Groups (v2)	✓	✓	✓	✓	✓	✓
Get Available Roles (v2)	✓	✓	✓	✓	✓	✓
Role Assignment Audit Report (v1)	✓	✓	✓	✓	✓	✓

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 1-1 (Cont.) Infrastructure: Users, Groups, Roles, and Access Reports

REST API	Planning	Freeform	Consolidation	Account Reconciliation	Enterprise Profitability	Tax Reporting
Invalid Login Report (v1)	✔	✔	✔	✔	✔	✔
Group Assignment Audit Report (v2)	✔	✔	✔	✔	✔	✔
Add Users to a Team for Account Reconciliation (only ARCS)				✔		
Add Users to a Team for Financial Consolidation and Close and Tax Reporting			✔	✔		
Remove Users from a Team for Account Reconciliation (only ARCS)				✔		
Remove Users from a Team for Financial Consolidation and Close and Tax Reporting			✔	✔		

Migration

Table 1-2 Infrastructure: Migration

REST API	Planning	Freeform	Consolidation	Account Reconciliation	Enterprise Profitability	Tax Reporting
Migration Status Codes	✔	✔	✔	✔	✔	✔
Get REST API Versions for Migration	✔	✔	✔	✔	✔	✔
LCM Import (v2)	✔	✔	✔	✔	✔	✔
LCM Export (v2)	✔	✔	✔	✔	✔	✔
Upload	✔	✔	✔	✔	✔	✔
Download	✔	✔	✔	✔	✔	✔
List Files (v2)	✔	✔	✔	✔	✔	✔
Delete Files (v2)	✔	✔	✔	✔	✔	✔
Delete Files (v3)	✔	✔	✔	✔	✔	✔
Copy from Object Store (v1)	✔	✔	✔	✔	✔	✔
Copy from Object Store (v2)	✔	✔	✔	✔	✔	✔
Copy from Object Store (v3)	✔	✔	✔	✔	✔	✔
Copy to Object Store (v1)	✔	✔	✔	✔	✔	✔
Copy to Object Store (v2)	✔	✔	✔	✔	✔	✔
Copy To Object Store (v3)	✔	✔	✔	✔	✔	✔
Copy to SFTP (v2)	✔	✔	✔	✔	✔	✔
Copy from SFTP (v2)	✔	✔	✔	✔	✔	✔
Copy a File Between Instances (v1)	✔	✔	✔	✔	✔	✔
Copy a File Between Instances (v2)	✔	✔	✔	✔	✔	✔
Clone an Environment (v1)	✔	✔	✔	✔	✔	✔

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 1-2 (Cont.) Infrastructure: Migration

REST API	Planning	Freeform	Consolidation	Account Reconciliation	Enterprise Profitability	Tax Reporting
Provide Feedback (v2)	✓	✓	✓	✓	✓	✓
Send Email (v1)	✓	✓	✓	✓	✓	✓
Send Email (v2)	✓	✓	✓	✓	✓	✓
Set Email Domain Allowlist (v2)	✓	✓	✓	✓	✓	✓
Get Email Domain Allowlist (v2)	✓	✓	✓	✓	✓	✓
Skip Updates (v1)	✓	✓	✓	✓	✓	✓
Skip Updates (v2)	✓	✓	✓	✓	✓	✓
List Backups (v2)	✓	✓	✓	✓	✓	✓
Restore Backups (v2)	✓	✓	✓	✓	✓	✓
Restore Environment (v1)	✓	✓	✓	✓	✓	✓

Services

Table 1-3 Infrastructure: Services

REST API	Planning	Freeform	Consolidation	Account Reconciliation	Enterprise Profitability	Tax Reporting
Get Information About All Services	✓	✓	✓	✓	✓	✓
Get Idle Session Timeout (v2)	✓	✓	✓	✓	✓	✓
Set Idle Session Timeout (v2)	✓	✓	✓	✓	✓	✓
Restart the Service Instance (v1)	✓	✓	✓	✓	✓	✓
Restart the Service Instance (v2)	✓	✓	✓	✓	✓	✓
Run Recreate on a Service (v2)	✓	✓	✓	✓	✓	✓

Application Snapshots

Table 1-4 Infrastructure: Application Snapshots

REST API	Planning	Freeform	Consolidation	Account Reconciliation	Enterprise Profitability	Tax Reporting
Get Information About a Specific Application Snapshot	✓	✓	✓	✓	✓	✓
Get Information About All Application Snapshots	✓	✓	✓	✓	✓	✓
Upload Application Snapshot (v1)	✓	✓	✓	✓	✓	✓
Upload Application Snapshot (v2)	✓	✓	✓	✓	✓	✓
Download Application Snapshot (v1)	✓	✓	✓	✓	✓	✓
Download Application Snapshot (v2)	✓	✓	✓	✓	✓	✓

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 1-4 (Cont.) Infrastructure: Application Snapshots

REST API	Planning	Freeform	Consolidation	Account Reconciliation	Enterprise Profitability	Tax Reporting
Copy Application Snapshot (v1)	✓	✓	✓	✓	✓	✓
Copy Application Snapshot (v2)	✓	✓	✓	✓	✓	✓
Rename Application Snapshot (v1)	✓	✓	✓	✓	✓	✓
Rename Application Snapshot (v2)	✓	✓	✓	✓	✓	✓

Artifacts, Snapshots, and Migration Status

Table 1-5 Infrastructure: Artifacts, Snapshots, and Migration Status

REST API	Planning	Freeform	Consolidation	Account Reconciliation	Enterprise Profitability	Tax Reporting
Export Categories Artifacts (v2)	✓	✓	✓	✓	✓	✓
Get Categories (v2)	✓	✓	✓	✓	✓	✓
Get Migration Status (v2)	✓	✓	✓	✓	✓	✓
Get Snapshot Modification History (v2)	✓	✓	✓	✓	✓	✓
Import Snapshot Artifacts (v2)	✓	✓	✓	✓	✓	✓
List the Artifacts in a Category (v2)	✓	✓	✓	✓	✓	✓
List Updated Artifacts (v2)	✓	✓	✓	✓	✓	✓
List Snapshot Details (v2)	✓	✓	✓	✓	✓	✓
List the Artifacts in a Snapshot (v2)	✓	✓	✓	✓	✓	✓
List Import Options (v2)	✓	✓	✓	✓	✓	✓
Repeat Export Snapshot (v2)	✓	✓	✓	✓	✓	✓
Set Import Options (v2)	✓	✓	✓	✓	✓	✓

First Generation REST APIs

Table 1-6 Infrastructure: First Generation REST APIs

REST API	Planning	Freeform	Consolidation	Account Reconciliation	Enterprise Profitability	Tax Reporting
LCM Import	✓	✓	✓	✓	✓	✓
LCM Export	✓	✓	✓	✓	✓	✓
List Files	✓	✓	✓	✓	✓	✓
Delete Files	✓	✓	✓	✓	✓	✓
Run Recreate on a Service	✓	✓	✓	✓	✓	✓
Provide Feedback	✓	✓	✓	✓	✓	✓

Copyright © 2017, 2026, Oracle and/or its affiliates.

Security and Access Control

Table 1-7 Infrastructure: Security and Access Control

REST API	Planning	Freeform	Consolidation	Account Reconciliation	Enterprise Profitability	Tax Reporting
Get Restricted Data Access (v2)	✓	✓	✓	✓	✓	✓
Set Restricted Data Access (v2)	✓	✓	✓	✓	✓	✓
Get Virus Scan on File Upload (v2)	✓	✓	✓	✓	✓	✓
Set Virus Scan on File Upload (v2)	✓	✓	✓	✓	✓	✓
Manage Permission for Manual Access to Database (v1)	✓	✓	✓	✓	✓	✓
Manage Permission for Manual Access to Database (v2)	✓	✓	✓	✓	✓	✓
Set Encryption Key (v1)	✓	✓	✓	✓	✓	✓
Set Encryption Key (v2)	✓	✓	✓	✓	✓	✓
IAM REST APIs	✓	✓	✓	✓	✓	✓

Maintenance Operations

Table 1-8 Infrastructure: Maintenance Operations

REST API	Planning	Freeform	Consolidation	Account Reconciliation	Enterprise Profitability	Tax Reporting
Get the Build Version and Daily Maintenance Time (v1)	✓	✓	✓	✓	✓	✓
Get the Build Version and Daily Maintenance Window Time (v2)	✓	✓	✓	✓	✓	✓
Set the Daily Maintenance Time (v1)	✓	✓	✓	✓	✓	✓
Set the Daily Maintenance Time (v2)	✓	✓	✓	✓	✓	✓
Run Daily Maintenance While Skipping the Scheduled Daily Maintenance (v1)	✓	✓	✓	✓	✓	✓
Run Daily Maintenance While Skipping the Scheduled Daily Maintenance (v2)	✓	✓	✓	✓	✓	✓
Simulate Concurrent Usage (v1)	✓	✓	✓	✓	✓	✓

Copyright © 2017, 2026, Oracle and/or its affiliates.

Account Reconciliation REST APIs

Table 1-9 Account Reconciliation REST APIs

REST API	Planning	Freeform	Consolidation	Account Reconciliation	Enterprise Profitability	Tax Reporting
Archive Matched Transactions (Transaction Matching)				✓		
Change Period Status (Reconciliation Compliance)				✓		
Create Reconciliation (Reconciliation Compliance)				✓		
Create a Connection				✓		
Delete Profile				✓		
Delete a Connection				✓		
Execute an Account Reconciliation Job				✓		
Export Application Properties				✓		
Export Background Image				✓		
Export Logo Image				✓		
Generate Balance Summary Report for Account Reconciliation				✓		
Generate Balance Report Transactions for Account Reconciliation				✓		
Generate Cosmetic Changes Report for Account Reconciliation				✓		
Generate Report for Account Reconciliation				✓		
Generate User Details Report for Account Reconciliation				✓		
Import Application Properties				✓		
Import Attribute Values				✓		
Import Background Image				✓		
Import Balances (Reconciliation Compliance)				✓		
Import Logo Image				✓		
Import Pre-Mapped Balances (Reconciliation Compliance)				✓		
Import Pre-Mapped Transactions (Reconciliation Compliance)				✓		
Import Profiles (Reconciliation Compliance)				✓		
Import Rates (Reconciliation Compliance)				✓		
Import Pre-Mapped Transactions (Transaction Matching)				✓		
Import Reconciliation Attributes (Reconciliation Compliance)				✓		

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 1-9 (Cont.) Account Reconciliation REST APIs

REST API	Planning	Freeform	Consolidation	Account Reconciliation	Enterprise Profitability	Tax Reporting
Monitor Reconciliations (Reconciliation Compliance)				✓		
Predict Predicted Attribute (Reconciliation Compliance)				✓		
Purge Transactions (Transaction Matching)				✓		
Purge Archived Transactions (Transaction Matching)				✓		
Retrieve Periods with a Specific Status				✓		
Run Auto Match (Transaction Matching)				✓		
Retrieve Job Status (Reconciliation Compliance)				✓		
Retrieve Job Status (Transaction Matching)				✓		
Retrieve Application Access Level				✓		
Run Auto Alert (Transaction Matching)				✓		
Run Train Match Prediction (Transaction Matching)				✓		
Run Profile Rule				✓		
Run Reconciliation Rule				✓		
Set Application Access Level				✓		
Train Predicted Attribute (Reconciliation Compliance)				✓		
Unmatch Matched Transactions (Transaction Matching)				✓		
Unmatch Transactions Matched by Auto Match (Transaction Matching)				✓		
Update Unmatched Transactions (Transaction Matching)				✓		
Update a Connection				✓		
View Reconciliation Comments				✓		
View All Connections				✓		

Data Integration and Data Management REST APIs

Table 1-10 Data Integration and Data Management REST APIs

REST API	Planning	Freeform	Consolidation	Account Reconciliation	Enterprise Profitability	Tax Reporting
Get Pipeline Details	✓	✓	✓	✓	✓	✓
Import Data Mapping	✓	✓	✓	✓	✓	✓

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 1-10 (Cont.) Data Integration and Data Management REST APIs

REST API	Planning	Freeform	Consolidation	Account Reconciliation	Enterprise Profitability	Tax Reporting
Import Data Integration	✓	✓	✓	✓	✓	✓
Export Data Mapping	✓	✓	✓	✓	✓	✓
Export Data Integration	✓	✓	✓	✓	✓	✓
Lock and Unlock POV	✓	✓	✓	✓	✓	✓
Run Integrations	✓	✓	✓	✓	✓	✓
Run a Pipeline	✓	✓	✓	✓	✓	✓
Run Data Rules in Data Management	✓	✓	✓	✓	✓	✓
Run Batch Rules in Data Management	✓	✓	✓	✓	✓	✓
Retrieve Job Status	✓	✓	✓	✓	✓	✓
Update Connection in Data Integration	✓	✓	✓	✓	✓	✓

Enterprise Profitability and Cost Management REST APIs

Table 1-11 Enterprise Profitability and Cost Management REST APIs

REST API	Planning	Freeform	Consolidation	Account Reconciliation	Enterprise Profitability	Tax Reporting
Calculate Model (v3)					✓	
Clear Data By Point of View (v3)					✓	
Copy Data by Point of View					✓	
Delete Point of View					✓	
Generate Model Documentation Report					✓	
Validate Model					✓	

Financial Consolidation and Close REST APIs

Table 1-12 Financial Consolidation and Close REST APIs

REST API	Planning	Freeform	Consolidation	Account Reconciliation	Enterprise Profitability	Tax Reporting
Clear Data			✓			
Copy Data			✓			
Export Configurable Consolidation Rulesets			✓			
Export Consolidation Journals			✓			
Generate an Intercompany Matching Report			✓			

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 1-12 (Cont.) Financial Consolidation and Close REST APIs

REST API	Planning	Freeform	Consolidation	Account Reconciliation	Enterprise Profitability	Tax Reporting
Generate Report for Financial Consolidation and Close, Tax Reporting, Enterprise Profitability and Cost Management and Planning			✓			
Generate User Details Report for Financial Consolidation and Close and Tax Reporting			✓			
Get API Versions for Financial Consolidation and Close APIs			✓			
Get Information about a Specific API Version for Financial Consolidation and Close APIs			✓			
Import Configurable Consolidation Rulesets			✓			
Import Consolidation Journals			✓			
Perform Journal Actions for Financial Consolidation and Close			✓			
Perform Journal Period Updates for Financial Consolidation and Close			✓			
Retrieve Job Status for a Report			✓			
Retrieve Journals for Financial Consolidation and Close			✓			
Retrieve Journal Details for Financial Consolidation and Close			✓			
Validate Metadata			✓			

Planning REST APIs

Table 1-13 Planning REST APIs

REST API	Planning	Freeform	Consolidation	Account Reconciliation	Enterprise Profitability	Tax Reporting
Add Member	✓	✓	✓	✓	✓	✓
Change Planning Unit Status	✓	✓	✓	✓		
Clear Data Slice	✓	✓	✓	✓	✓	✓
Create or Update All Substitution Variables Defined for the Application	✓	✓	✓	✓	✓	✓
Create User Variables	✓	✓	✓	✓		✓
Delete a Substitution Variable at the Plan Type Level	✓	✓	✓	✓	✓	✓
Delete a Substitution Variable for the Application	✓	✓	✓	✓	✓	✓

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 1-13 (Cont.) Planning REST APIs

REST API	Planning	Freeform	Consolidation	Account Reconciliation	Enterprise Profitability	Tax Reporting
Delete a User Variable	✓	✓	✓	✓	✓	✓
Delete Substitution Variables at the Plan Type Level	✓	✓	✓	✓		
Delete Substitution Variables for the Application	✓	✓	✓	✓		
Delete User Variable Definitions	✓	✓	✓	✓	✓	✓
Execute a Job	✓	✓	✓	✓	✓	✓
Export Data Slice	✓	✓	✓	✓	✓	✓
Get a Derived Substitution Variable Defined at the Plan Type Level	✓	✓	✓	✓	✓	✓
Get Planning Unit Owner Photo	✓	✓	✓	✓	✓	✓
Get a Substitution Variable Defined for the Application	✓	✓	✓	✓	✓	
Get All Substitution Variables Defined for the Application	✓	✓	✓	✓	✓	✓
Get All User Variables	✓	✓	✓	✓		✓
Get Applications	✓	✓	✓	✓	✓	✓
Get Application Summary	✓	✓	✓	✓	✓	✓
Get Available Planning Unit Actions	✓	✓	✓	✓		
Get Derived Substitution Variables at the Plan Type Level	✓	✓	✓	✓	✓	
Get Dimensions for a Plan Type	✓	✓	✓	✓		
Get Dimension Details	✓	✓	✓	✓		
Get Filters with All Possible Values	✓	✓	✓	✓	✓	
Get Information about a Specific REST API Version for Planning	✓	✓	✓	✓	✓	✓
Get Job Definitions	✓	✓	✓	✓	✓	✓
Get Member	✓	✓	✓	✓	✓	✓
Get Planning Unit History and Annotations	✓	✓	✓	✓		
Get Planning Unit Promotional Path	✓	✓	✓	✓		
Get Plan Types	✓	✓	✓	✓		
Get Substitution Variables Defined at the Plan Type Level	✓	✓	✓	✓	✓	✓
Get User Preferences	✓	✓	✓	✓	✓	✓
Get User Variable Values Defined for the Application	✓	✓	✓	✓	✓	✓
Get User Variable Values Defined for the Application by the User Name	✓	✓	✓	✓	✓	✓
Get User Variable Values Defined in the Application by the User Name and Value	✓	✓	✓	✓	✓	✓

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 1-13 (Cont.) Planning REST APIs

REST API	Planning	Freeform	Consolidation	Account Reconciliation	Enterprise Profitability	Tax Reporting
Get User Variable Values Defined in the Application by the User Variable Name	✔	✔	✔	✔	✔	✔
Get User Variable Values Defined in the Application by Value	✔	✔	✔	✔	✔	✔
Get a User Variable Using Its ID	✔	✔	✔	✔		✔
Getting API Versions for Planning	✔	✔	✔	✔	✔	✔
Import Data Slice	✔	✔	✔	✔	✔	✔
List Library Documents	✔	✔	✔	✔	✔	✔
List All Planning Units	✔	✔	✔	✔		
Retrieve Child Job Status Details	✔	✔	✔	✔	✔	✔
Retrieve Job Status	✔	✔	✔	✔	✔	✔
Retrieve Job Status Details	✔	✔	✔	✔	✔	✔
Set the User Variable Values for the Application	✔	✔	✔	✔	✔	✔
Update User Variables	✔	✔	✔			✔

Tax Reporting REST APIs

Table 1-14 Tax Reporting REST APIs

REST API	Planning	Freeform	Consolidation	Account Reconciliation	Enterprise Profitability	Tax Reporting
Copy Data						✔
Clear Data						✔
Generate Report for Financial Consolidation and Close, Tax Reporting, Enterprise Profitability and Cost Management and Planning						✔
Generate User Details Report for Financial Consolidation and Close and Tax Reporting			✔			✔
Get API Versions for Tax Reporting APIs						✔
Get Information about a Specific API Version for Tax Reporting			✔			✔
Retrieve Job Status for a Report			✔			✔

Prerequisites

Before using the Oracle Fusion Cloud EPM REST APIs, review the following requirements and recommendations:

Copyright © 2017, 2026, Oracle and/or its affiliates.

- Intended Audience
- Requirements
- Using the Samples
- Copying Code Samples

Intended Audience

This guide is intended primarily for infrastructure consultants and service administrators of Cloud EPM.

Infrastructure consultants can use this guide to build custom integrations and services for Cloud EPM business processes, including Planning, Planning Modules, Account Reconciliation, Financial Consolidation and Close, Enterprise Profitability and Cost Management, Profitability and Cost Management, Tax Reporting.

Service administrators can use this documentation to perform selected administrative tasks using REST APIs. Completing administrative tasks using EPM REST APIs as an alternative to using the user interface requires considerable technical and functional expertise. Only technically competent administrators should use this guide to perform these administrative tasks.

Requirements

Before using the REST APIs, ensure that you have:

- An understanding of REST resources and Cloud EPM REST API concepts. For implementation recommendations, see Cloud EPM REST APIs Best Practices.
- Access to the Cloud EPM with the required user roles and service configuration. For more information, see Getting Started for Administrators and Getting Started for Users.
- Technical and functional knowledge to understand and execute the EPM REST APIs, and to administer the product.
- Working knowledge of cURL and REST programming.

Depending on the operation you perform, the following product-specific prerequisites may also apply:

- **Jobs**: Many REST APIs execute jobs such as importing and exporting data. Ensure that you familiarize yourself with managing jobs before using these APIs. For more information, see Managing Jobs.
- **Data Load Rules**: Data load rules define how Data Management loads data from a file. You must have predefined data load rules to load data using REST APIs. You can also load data using batches defined in Data Management. Using a batch, Service Administrators can combine many load rules in a batch and execute them in serial or parallel mode.
- **Business Rules**: Some REST APIs require business rules. For example, in Planning, business rules are created by using Calculation Manager and deployed to Planning applications. For more information, see *Designing with Calculation Manager*.

Using the Samples

This guide includes sample requests and responses for selected integration scenarios and REST API reference topics.

Copyright © 2017, 2026, Oracle and/or its affiliates.

The examples assume that you have a working knowledge of REST programming concepts and cURL. This guide explains how to use Cloud EPM REST APIs; it does not provide an introduction to REST programming.

Copying Code Samples

Do not copy code samples from the PDF version of this guide. Line wrapping and footer text in the PDF can render code unusable. Oracle recommends copying code samples from the HTML version of this guide.

Authentication for Cloud EPM REST APIs

All HTTP requests to the REST APIs require authentication. Review these topics to understand OAuth 2 and basic authentication for Cloud EPM REST APIs.

The REST APIs for Cloud EPM support authentication with OAuth 2 and basic authentication:

- Authentication with OAuth 2
- Basic Authentication

> **Note**
>
> Oracle recommends using OAuth 2.0 instead of Basic Authentication because OAuth 2.0 is more secure.

Oracle Fusion Cloud EPM REST APIs can connect to Cloud EPM through API Gateways, such as Google APIGEE, IBM DataPower, and other reverse proxy servers.

For this to work, configure the gateway or reverse proxy by setting the target as the URL of your Cloud EPM environment without any context such as `/epmcloud`. Example: `https://epm-idDomain.epm.dataCenterRegion.oraclecloud.com`. Then, use the reverse proxy URL instead of the Cloud EPM URL in the REST API. For configuration information, see the documentation of your gateway or proxy server.
While configuring the proxy settings, be sure to pass the response code from Cloud EPM to Cloud EPM REST API without modifying it in any manner to allow REST API processing code to correctly process response codes such as 200, 206, 400, 404, 500, 501, and so on. For example, for IBM Datapower, set `proxy HTTP Response` to `ON`. Additionally, the API gateway should allow HTTP methods (GET, POST, PUT, PATCH, and DELETE).

Note that REST APIs cannot be run by users who are set up for basic authentication with multi-factor authentication (MFA).

Basic Authentication

You can use basic authentication by supplying a username in the format of `identitydomain.username` or only `username` (without identity domain).

HTTP requests to Oracle Fusion Cloud EPM should supply HTTP Basic Authentication credentials through the **`Authorization`** header.

Finding Your Identity Domain

Use one of these methods to identify your identity domain:

Copyright © 2017, 2026, Oracle and/or its affiliates.

- Look in the Activity Report for your environment. The name of the identity domain is displayed at the top left corner of the Activity Report. See Activity Report Contents.
- Derive the identity domain name from the URL that you use to access the environment. For example, in this fictitious URL, `https://epm-`**`exampleDomain`**`.epm.dataCenter.oraclecloud.com/`, the identity domain name is **exampleDomain**.
  The test and production environments of a subscription usually share the same identity domain. For example, for test environments like as this fictitious URL, `https://epm-test-exampleDomain.epm.dataCenter.oraclecloud.com/`, the identity domain can be derived as the string enclosed between "test-" and the next ".", in this case, **exampleDomain**.

  For production environments like this fictitious URL, `https://epm-exampleDomain.epm.dataCenter.oraclecloud.com/`, the identity domain can be derived as the string enclosed between the first "-" and next ".", in this case, **exampleDomain**.

  Note: In this guide, URLs are shown in the following format: `https://<BASE-URL>`

When using PowerShell to call EPMCloud REST API, ensure that the Authorization header is always specified. For example:

```
$headers = @{
"Authorization" = "Basic " +
[System.Convert]::ToBase64String([System.Text.Encoding]::UTF8.GetBytes($userNa
me+":"+$userPassword))
}
Invoke-RestMethod -Method 'Get' -Uri $url -Headers $headers
```

Authentication with OAuth 2

You can use an OAuth 2 access token to issue REST APIs on Oracle Fusion Cloud EPM to satisfy the requirement of avoiding the use of passwords in your environment.

> **Note**
>
> If you are configuring OAuth 2.0 for the first time, follow the procedures in Setting Up Authentication with OAuth 2. If you already have an existing OAuth 2.0 configuration, see Updates to Existing Configuration for the steps required to update your configuration.

Updates to Existing Configuration

If you have an existing OAuth 2.0 configuration, your current grant type can continue to be used. However, the following updates are required:

- **Update the Integrated Application** - Add the appropriate **EPM Cloud Service** resource to the Integrated Application. A single Integrated Application can include multiple **EPM Cloud Service** resources.
  For detailed instructions, see *step 11(a-g)* in Detailed Information for Using Oracle Cloud Console to Register an OAuth 2 Client.
- **Update Oracle Cloud Services** - Update the **Secondary Audience** for each **EPM Cloud Service** under the **Oracle Cloud Services** tab. If the **Refresh Token** grant type is enabled for the Integrated Application, enable the **Allow token refresh** option.
  For detailed instructions, see Step 2: Configure the Secondary Audience and Enable Token Refresh for EPM Cloud Services.

Copyright © 2017, 2026, Oracle and/or its affiliates.

- **Access Token Scope**
  - Update the scope used when requesting an access token. Use the EPM Cloud Service-specific scope when requesting an access token. The scope is in the following format:

    ```
    urn:opc:serviceInstanceID=<SERVICE_INSTANCE_ID>urn:opc:resource:consumer
    ::all
    ```

  - For **Device Code with Refresh Token** integrations, delete the existing refresh token and generate a new first refresh token using the EPM Cloud Service-specific scope. See Step 3: Obtain and securely store the first refresh token for more details.

> **Note**
>
> A token can be used only with the EPM Cloud Service resource for which it was created. If you access multiple EPM Cloud Service resources, you must obtain a separate token for each resource.

Setting Up Authentication with OAuth 2

This section describes how to configure a new OAuth 2 client for Cloud EPM REST API access. If you are updating an existing OAuth 2 client, see Updates to Existing Configuration instead.

In order to access Cloud EPM REST APIs with OAuth 2, a Cloud EPM Service Administrator has to request the Domain Administrator to set up an OAuth 2 client and provide the Identity Domain Cloud Service (IDCS) URL and Client ID.

Overview of the steps:

- Step 1: Register an OAuth Client. This is a one-time setup step that requires user interaction with IDCS Administrator privileges.
- Step 2: Configure the Secondary Audience and Enable Token Refresh for EPM Cloud Services. This is a one-time setup task performed by the System Administrator.
- Step 3: Obtain and securely store the first refresh token. This step requires user interaction. It is a one-time step for each user that needs to invoke REST APIs with OAuth 2.
- Step 4: Obtain an Access Token from the Refresh Token. This step is easily automated. Once automation has been implemented, it can run without user interaction.

About Copying Code Samples

Do not copy code samples from the PDF version of this document. To avoid line breaks and footer information that will render code unusable, Oracle recommends that you copy code samples from the HTML version of the examples in this guide.

The following sections provide detailed information about each step.

Step 1: Register an OAuth Client

Registering an OAuth client is a one-time process. The first step is to update the service provider configuration to authorize requests from the REST client application. As a security measure, any client application that accesses Oracle Cloud resources must be authorized to do so. An IDCS Administrator enables this authorization by registering a client and providing the appropriate registration information to the client's users.

Copyright © 2017, 2026, Oracle and/or its affiliates.

A client application in IDCS is used to obtain an access token. A valid access token (also called a Bearer token) is sufficient authorization to invoke a REST API.

Oracle Fusion Cloud Enterprise Performance Management uses a role-based access control mechanism to permit only authorized users access to the service. For details, see About User and Role Management. This requires that any OAuth 2 access token used to access Cloud EPM REST APIs contains a user context.

A grant type is a standard method to obtain an access token. There are a few different Grant Types as listed here that could be used to obtain an access token. An access token obtained by any of the supported grant types is acceptable as long as the access token is in the context of the user that would be invoking the REST APIs.

In this document, we describe the use of the Device Code Grant Type. EPM Automate has built-in support for the Device Code Grant type.

While the Device Code grant type would work in a majority of environments, it might not be right for every implementation. Any of the grant types that allow creating an access token with a user context would be suitable for Cloud EPM REST APIs. In addition to the Device Code grant type, the following grant types support access tokens in the context of an end user:

- Authorization Code Grant Type
- Resource Owner Password Credentials Grant Type
- Assertion Grant Type when access token is in the context of the end user

The next section highlights the steps to create a sample OAuth 2 client using the Device Code grant type to request an access token. It also demonstrates how to use the access token to invoke the Get Daily Maintenance Window REST API.

Refer to the Oracle Identity Cloud Service documentation for more details on the Supported Access Grant Types.

The Identity Cloud Service Administrator follows the steps in this topic to create a public client using the Identity Cloud Service Administrator console. The IDCS Administrator then shares the Identity Cloud Service tenant URLand client ID with the Cloud EPM Service Administrator.

Follow the instructions in Detailed Information for Using Oracle Cloud Console to Register an OAuth 2 Client.

Detailed Information for Using Oracle Cloud Console to Register an OAuth 2 Client

1. Log in to your account at https://cloud.oracle.com/
2. Click the Navigation menu, select **Identity & Security**, and then select **Domains**.
3. From the **Domains** page, select the identity domain where your Cloud EPM services are deployed. This opens the domain details page.
4. On the domain details page, note the Domain URL. This URL is used as the tenant base URL for OAuth 2.0 token requests.
5. From the domain page, select the **Integrated applications** tab.
6. Click **Add application**.
7. On the **Add application** page, select **Mobile Application**, then click **Launch workflow**.
8. On the **Add Mobile Application** page, enter the **Name** and **Description** for the application. Leave the remaining fields at their default values, and click **Submit**.
9. After clicking **Submit**, the application is created and opens on the **Details** tab. Click the **OAuth configuration** tab.

Copyright © 2017, 2026, Oracle and/or its affiliates.

10. On the **OAuth configuration** tab, click **Edit OAuth configuration**. Under **Client configuration** > **Authorization** > **Allowed grant types**, select **Refresh token** and **Device code**, and ensure **Implicit** is not selected.
11. In the Token Issuance policy section:
    a. Enable **Add Resources**.
    b. Click **Add Scope**.
    c. In the **Add Scope** slide in, select the EPM applications for which this Integrated Application will act as the client. You can select multiple EPM applications by selecting the checkbox next to each application.
    d. Click **Add** to confirm your selection.
    e. Verify that the selected EPM Cloud resources appear in the Resources table.
    f. Note the scope associated with each selected resource. This value will be required when requesting access tokens later.
    g. Scope is of the form:

    ```
    urn:opc:serviceInstanceID=<SERVICE_INSTANCE_ID>urn:opc:resource:consumer
    ::all
    ```

    h. Enable **Add app roles**.
    i. Click the **Add roles** button.
    j. Choose **Identity Domain Administrator** on the slide-in dialog box.
    k. Click the **Add** button to close the slide-in dialog box.
12. Click **Submit** to save the **OAuth configuration**. After the changes are saved, click **Actions** > **Activate**, and then click **Activate application** to activate the application.
13. Note the Client ID value in the General Information section of the OAuth Configuration.

The IDCS Administrator provides the IDCS URL and client ID to the Cloud EPM Service Administrator.

Step 2: Configure the Secondary Audience and Enable Token Refresh for EPM Cloud Services

The EPM Cloud Service Administrator for the EPM Cloud resource added to the Integrated Application in *step 11(c)* logs in to the **Oracle Cloud Console** using an account from the identity domain where the EPM application is provisioned, and then navigates to the **Oracle Cloud Services** tab for that identity domain.

> **Note**
>
> The following steps must be completed for each EPM Cloud Service

1. Click the EPM Cloud service selected during *step 11(c)*.
2. Click the **OAuth configuration** tab.
3. Click **Edit OAuth configuration**.
4. Enable **Add secondary audience**.
5. Add the base URL for the EPM Cloud Service.

Copyright © 2017, 2026, Oracle and/or its affiliates.

a. Derive the base URL of the service from the URL by removing the trailing context path.

b. For example, if an EPM Cloud Service is accessed using the following URL:

```
https://<instance-name>-test-<cloud-account-
name>.epm.<region>.ocs.oraclecloud.com/epmcloud
```

the secondary audience is

```
https://<instance-name>-test-<cloud-account-
name>.epm.<region>.ocs.oraclecloud.com
```

6. Enable the **Allow token refresh** option only if the Integrated Application has the **Refresh Token** grant type enabled.

   Use the slider to enable or disable **Allow token refresh** for the EPM Cloud Service.

7. Save the changes.

Step 3: Obtain and securely store the first refresh token

> **Note**
>
> When requesting the first refresh token, use the EPM Cloud Service-specific scope in the following format:
>
> ```
> urn:opc:serviceInstanceID=<SERVICE_INSTANCE_ID>urn:opc:resource:consumer::
> all offline_access
> ```
>
> A refresh token created using this scope is valid only for the associated EPM Cloud Service resource.

After the Domain Administrator has registered the REST client and provided the IDCS URL and client ID, a Cloud EPM user executes the following steps to get a valid refresh token.

1. Issue the following unauthenticated request to the Identity Cloud Service URL:

   Linux

```
curl --location --request POST 'https://tenant-base-url/oauth2/v1/device' \
--header 'Content-Type: application/x-www-form-urlencoded;charset=utf-8' \
--data-urlencode 'response_type=device_code' \
--data-urlencode
'scope=urn:opc:serviceInstanceID=<SERVICE_INSTANCE_ID>urn:opc:resource:cons
umer::all offline_access' \
--data-urlencode 'client_id=<CLIENT ID OF OAUTH2 APPLICATION>'
```

   Windows Powershell

```
curl --location --request POST 'https://tenant-base-url/oauth2/v1/device' `
--header 'Content-Type: application/x-www-form-urlencoded;charset=utf-8' `
--data-urlencode 'response_type=device_code' `
--data-urlencode
'scope=urn:opc:serviceInstanceID=<SERVICE_INSTANCE_ID>urn:opc:resource:cons
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
umer::all offline_access' `
--data-urlencode 'client_id=<CLIENT ID OF OAUTH2 APPLICATION>'
```

Windows Command Prompt

```
curl --location --request POST "https://tenant-base-url/oauth2/v1/device" ^
--header "Content-Type: application/x-www-form-urlencoded;charset=utf-8" ^
--data-urlencode "response_type=device_code" ^
--data-urlencode
"scope=urn:opc:serviceInstanceID=<SERVICE_INSTANCE_ID>urn:opc:resource:cons
umer::all offline_access" ^
--data-urlencode "client_id=<CLIENT ID OF OAUTH2 APPLICATION>"
```

Here, the value of `tenant-base-url` is the IDCS URL provided by the Domain Administrator or the Domain URL from the IAM console. It is of the form `idcs-<alphanumericvalue>.identity.oraclecloud.com`. Similarly, the value for the `CLIENT ID OF THE OAUTH2 APPLICATION` is also provided by the Domain Administrator or retrieved from the Application's General Information section in IAM. It is an alphanumeric value. The variable `<SERVICE_INSTANCE_ID>` in the scope is the unique identifier for that resource. Refer to *step 11(f)* and *step 11(g)*, where you were asked to note this scope.

A valid response contains a device code, user code, and verification URI:

```
{
  "expires_in": 300,
  "device_code": "4d03f7bc-f7a5-4795-819a-5748c4801d35",
  "user_code": "SDFGHJKL",
  "verification_uri": "https://tenant-base-url/ui/v1/device"
}
```

The `user_code` from the response is needed in the second step below, while `device_code` from the response is needed in the third step below.

Note: Steps 2 and 3 are time-sensitive because the user code and device code expire 300 seconds (5 minutes) after creation. If the codes expire before these steps can be completed, redo the first step of this section to issue an unauthenticated request to the IDCS URL to receive a new pair of user and device codes.

2. Open the `verification_uri` in a supported web browser.

   At this stage, it is important to know that if a user already has an active browser session, the user will not be prompted for re-authentication. If the token is to be generated in context of the currently signed-in user, then proceed with 2b. However, if the token is to be generated in the context of a different user, please sign-out of the current session and navigate to the verification_uri and continue with 2a.

   a. When prompted for credentials, authenticate the user who will be invoking the REST API. These credentials could be credentials for a SAML 2.0 compliant Identity Provider or a native IDCS credential.

   b. When prompted for a code in the browser session, enter the `user_code` from the response payload.

   c. When the Successful message is displayed, it is recommended to log out of the browser session and close the browser window.

3. Within 5 minutes of executing the first step of this section and after executing the second step, issue the following request to the Identity Cloud Service URL:

Copyright © 2017, 2026, Oracle and/or its affiliates.

Linux

```
curl --location --request POST 'https://tenant-base-url/oauth2/v1/token' \
--header 'Content-Type: application/x-www-form-urlencoded;charset=utf-8' \
--data-urlencode 'grant_type=urn:ietf:params:oauth:grant-type:device_code'
\
--data-urlencode 'device_code=<DEVICE CODE FROM THE PAYLOAD OF RESPONSE IN
FIRST STEP>' \
--data-urlencode 'client_id=<CLIENT ID OF THE OAUTH2 APPLICATION>'
```

Windows Powershell

```
curl --location --request POST 'https://tenant-base-url/oauth2/v1/token' `
--header 'Content-Type: application/x-www-form-urlencoded;charset=utf-8' `
--data-urlencode 'grant_type=urn:ietf:params:oauth:grant-type:device_code'
`
--data-urlencode 'device_code=<DEVICE CODE FROM THE PAYLOAD OF RESPONSE IN
FIRST STEP>' `
--data-urlencode 'client_id=<CLIENT ID OF THE OAUTH2 APPLICATION>'
```

Windows Command Prompt

```
curl --location --request POST "https://tenant-base-url/oauth2/v1/token" ^
--header "Content-Type: application/x-www-form-urlencoded;charset=utf-8" ^
--data-urlencode "grant_type=urn:ietf:params:oauth:grant-type:device_code"
^
--data-urlencode "device_code=<DEVICE CODE FROM THE PAYLOAD OF RESPONSE IN
FIRST STEP>" ^
--data-urlencode "client_id=<CLIENT ID OF THE OAUTH2 APPLICATION>"
```

Here the value of `tenant-base-url` is the IDCS URL provided by the Domain Administrator, the `device_code` value is obtained from the response in Step 1, and `client_id` is the same client_id used in the first step of this section.

The response contains the first refresh token:

```
{
    "access_token": "eyJ4NXQjUzI.........evRJChXTRfzn6WlCw",
    "token_type": "Bearer",
    "expires_in": 3600,
    "refresh_token": "AQIDBAWF1.....RVkxNCB7djF9NCA="
}
```

Secure and Protect the Tokens and Client ID

With OAuth 2, tokens are used instead of user credentials to access resources on Cloud EPM. A refresh token and client ID are used to get a new access token and a new refresh token. Thus, to ensure security of Cloud EPM, it is important to securely encrypt and store the `client_id` and any tokens. The REST client must securely store the refresh token and `client_id`.

For EPM Automate, use the encrypt command to create an epw file for OAuth 2.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Step 4: Obtain an Access Token from the Refresh Token

This step is required every time a new access token is required. The REST client uses the latest refresh token and client id to get an access token. It uses the access token as authorization to invoke REST APIs. It also ensures that the latest refresh token and client ID are stored securely.

The REST client uses the Refresh Token grant type to get a new access token and a new refresh token. As mentioned above, this step can be automated. Once automated, it does not require user interaction.

To obtain a valid access token with this grant type, the REST client issues the following request to the IDCS URL:

Linux

```
curl --location --request POST 'https://tenant-base-url/oauth2/v1/token' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'grant_type=refresh_token' \
--data-urlencode 'client_id=<DECRYPTED CLIENT ID OF OAUTH2 APPLICATION FROM
SECURE STORE>' \
--data-urlencode 'refresh_token=<DECRYPTED REFRESH TOKEN FROM SECURE STORE>'
```

Windows Powershell

```
curl --location --request POST 'https://tenant-base-url/oauth2/v1/token' `
--header 'Content-Type: application/x-www-form-urlencoded' `
--data-urlencode 'grant_type=refresh_token' `
--data-urlencode 'client_id=<DECRYPTED CLIENT ID OF OAUTH2 APPLICATION FROM
SECURE STORE>' `
--data-urlencode 'refresh_token=<DECRYPTED REFRESH TOKEN FROM SECURE STORE>'
```

Windows Command Prompt

```
curl --location --request POST "https://tenant-base-url/oauth2/v1/token" ^
--header "Content-Type: application/x-www-form-urlencoded" ^
--data-urlencode "grant_type=refresh_token" ^
--data-urlencode "client_id=<DECRYPTED CLIENT ID OF OAUTH2 APPLICATION FROM
SECURE STORE>" ^
--data-urlencode "refresh_token=<DECRYPTED REFRESH TOKEN FROM SECURE STORE>"
```

Here, the value of `tenant-base-url` is the IDCS URL provided by the Domain Administrator, and the `refresh_token` and `client_id` are obtained from the secure store where there were previously stored.

Note: While the client_id and refresh_token are stored securely, it is important that both refresh_token and client_id are decrypted to use in any request. All requests to Oracle IDCS and Cloud EPM are securely transmitted using the https protocol.

Example response:

```
{
"access_token": "eyJj5M4QjUkI.........abSjZaa86PlseS4lrt7R2",
  "token_type": "Bearer",
  "expires_in": 3600,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
  "refresh_token": "AAyyilYBAWD4....FVkxefd8kjoJr6HJPA="
}
```

The REST client saves the new refresh token for future use (see Secure and Protect the Token and Client ID) and uses the access token as authorization while invoking the REST API (see Use the Access Token).

Use the Access Token

In order to invoke a Cloud EPM REST API, the REST client must provide the access token (obtained in the previous step) in the authorization header as follows:

```
Authorization: Bearer <access token>
```

For example, to get the Automated Maintenance Window start time, the client application submits a GET request to this Cloud EPM endpoint `/interop/rest/v1/services/dailymaintenance` using the access token in the authorization header.

Linux

```
curl --location --request GET 'https://epm-host/interop/rest/v1/services/
dailymaintenance' \
--header 'Authorization: Bearer eyJ5M4QjUkI...abSjZaa86PlseS4lrt7R2'
```

Windows Powershell

```
curl --location --request GET 'https://epm-host/interop/rest/v1/services/
dailymaintenance' `
--header 'Authorization: Bearer eyJ5M4QjUkI...abSjZaa86PlseS4lrt7R2'
```

Windows Command Prompt

```
curl --location --request GET "https://epm-host/interop/rest/v1/services/
dailymaintenance" ^
--header "Authorization: Bearer eyJ5M4QjUkI...abSjZaa86PlseS4lrt7R2"
```

Frequently Asked Questions

What are the default token expiration times?

See Token Expiry Table for the default expiration times for each token type.

A Service Administrator may change these expiration times for an **Oracle Cloud Service**. To do so, sign in to the identity domain where the service is deployed and update the values on the service's **OAuth configuration** page. Exercise caution while extending the token expiration times.

What error is returned when the refresh token has expired?

Executing a refresh token grant flow with an expired refresh token results in a *400 Bad Request* response and the following payload:

```
{  "error": "invalid_grant",
    "error_description": "Token is expired for client : <CLIENT_ID>",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "ecid": "UsbMB0KCV00000000"
}
```

Since refresh tokens expire after 7 days, how can scripts that require a valid refresh token operate unattended on intervals longer than 7 days?

Create a job that refreshes the refresh token every 6 days. This is how to do it:

Using EPM Automate:

1. Use the login command to sign into the environment. Be sure to use the same OAuth2 epw file that you use to run the monthly process.
2. Use the logout command to exit EPM Automate.

Using REST APIs:

1. Update the new refresh token for the next job by obtaining an Access Token from the Refresh Token. See Step 4: Obtain an Access Token from the Refresh Token .
2. Discard the access token.

What error is returned when the refresh token is invalid?

Executing a refresh token grant flow with an invalid refresh token results in a *400 Bad Request* response and the following payload:

```
{  "error": "invalid_grant",
    "error_description": "The given token in the request is invalid",
    "ecid": "UsbMB0KCV00000000"
}
```

What errors are returned for other issues?

A *400 Bad Request* response with the following payloads are returned when there is an error:

Invalid request (for example, not all request parameters are supplied):

```
{
    "error": "invalid_request",
    "error_description": "The request contains invalid parameters or values"
}
```

Invalid grant (for example, using a token that has already been used) :

```
{
    "error": "invalid_grant",
    "error_description": "The token has already been consumed"
}
```

Invalid scope (for example, providing invalid scope):

```
{
    "error": "invalid_scope",
    "error_description": "Invalid scope"
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

What error is returned when an invalid or expired access token is provided?

When an invalid or expired access token is provided in a request, the server responds with a *401 Unauthorized* response with the following HTML in the payload:

```
<html>
<head><title>401 Authorization Required</title></head>
<body>
<center><h1>401 Authorization Required</h1></center>
<hr>
</body>
</html>
```

Can a token be requested with multiple scopes?

Multiple scopes across different resources (Cloud EPM environments) are not supported by Identity Cloud Service. Each token request can support only one resource. Requests for multiple scopes within the same resource are supported with space delimited scopes. Requesting multiple scopes across different resources results in a *400 Bad Request* response with the following payload:

```
{
"error": "invalid_scope",
"error_description": "Invalid scope"
}
```

Can a valid token received for one Cloud EPM environment be used to access all Cloud EPM environments in the same IDCS domain?

A token can only be used to authorize requests to the environment for which it was issued.

What information is logged in the access log with OAuth?

The access log shows the user name, just as it does with basic authorization. The client ID and access token are not logged.

When using multiple scripts to run EPM REST APIs, the refresh token grant type seems to fail randomly with a message that the token is already consumed. What is the resolution?

Each refresh token is a single use token. After first use, the same token cannot be reused. Trying to use a particular token after it has already been used results in the message, *The token is already consumed*.

The right way is to set up each script with its own refresh token. To do that, execute the procedure to obtain and save the first refresh token once for each script requiring a refresh token, and then set up each script to use its own refresh token. All scripts can still use the same clientID.

REST API Fundamentals

This section describes the REST resources and methods available for Oracle Fusion Cloud Enterprise Performance Management (EPM).

REST APIs provide an alternative to performing administrative tasks through the Oracle Fusion Cloud Enterprise Performance Management web interface. Because these tasks require technical and functional expertise, this guide is intended for Oracle Fusion Cloud Enterprise

Copyright © 2017, 2026, Oracle and/or its affiliates.

Performance Management Service Administrators. Before using the REST APIs, review the information in Prerequisites.

The REST APIs that a user can access are determined by the application roles and granular roles assigned to that user.

Encoding Spaces in Path and Query Parameter

If the value of a path or query parameter specified in the request URL contains a space, encode the space as `%20`.

Examples:

```
GET /interop/rest/security/v2/report/roleassignmentreport/user?
userlogin=admin1&rolename=Service%20Administrator
GET /interop/rest/security/v2/report/roleassignmentreport/group?
groupname=Planning%20Analysts&rolename=Service%20Administrator
```

> **Note**
>
> Values specified in the request payload do not require URL encoding.

About REST Resources

Oracle Cloud Enterprise Performance Management (EPM) REST APIs enable you to create, retrieve, update, and manage resources that support various Cloud EPM administrative tasks. REST APIs provide an alternative to performing these tasks through the web-based user interface.

You can access the REST APIs by using web browsers, cURL, or REST client applications developed in programming languages such as:

- Java
- JavaScript
- Groovy
- Ruby
- Perl

REST describes any simple interface that transmits data over a standardized interface (such as HTTP) without an additional messaging layer, such as SOAP. REST provides a set of design rules for creating stateless services that are viewed as resources, or sources of specific information, and can be identified by their unique URIs.

RESTful web services are services that are built according to REST principles and, as such, are designed to work well on the web. Typically, RESTful web services are built on the HTTP protocol and implement operations that map to the common HTTP methods, such as **GET**, **POST**, **PUT**, and **DELETE** to retrieve, create, update, and delete resources, respectively. For more information about these methods, see REST API Methods.

Copyright © 2017, 2026, Oracle and/or its affiliates.

URL Structure

This topic summarizes the URL structures to use for the REST APIs.

For the URL structure to use, see the topic for the REST API:

- Planning and Budgeting REST API URL
- Migration REST API URL
- URL Structure for Security
- URL Structure for Daily Maintenance
- URL Structure for Users, Groups, and Roles
- Data Management REST API URL
- Account Reconciliation REST API URL
- Enterprise Profitability and Cost Management REST API URL
- URL Structure for Financial Consolidation and Close
- Profitability and Cost Management REST API URL
- URL Structure for Tax Reporting

In the description and examples of all REST APIs, this guide uses *<BASE-URL>*. The *<BASE-URL>* is the first part of your service URL, before the context. For example, if your service URL is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com`. Similarly, if your service URL is `https://epm2-acme.epm.us6.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm2-acme.epm.us6.oraclecloud.com`.

> **Note**
>
> Oracle Fusion Cloud Enterprise Performance Management does not authorize or support the use of any REST API endpoint not specified in this document. For example, *<BASE-URL>* such as `https://epmacme.epm.us-phoenix-1.ocs.oraclecloud.com` by itself will fail. Similarly, Cloud EPM does not support the use of REST APIs with the path token `"/internal/"` in the URL.

For details on the URL structure, see Getting Started for Administrators.

REST API Methods

You can create, view, update, or delete Oracle Fusion Cloud Enterprise Performance Management resources using standard HTTP method requests, as summarized in the following table.

Table 1-15 REST API Methods

Method	Description
GET	Retrieve information about the REST API resource
POST	Create a REST API resource

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 1-15 (Cont.) REST API Methods

Method	Description
PUT	Update a REST API resource
DELETE	Delete a REST API resource or related component

Versioning

Cloud EPM REST APIs are versioned at the API level. Every REST API request must include the supported API version as part of the request URL. If the API version is omitted or the specified version is not supported, the request fails.

For each service's API, you can get version and details for a specific REST API version. For details, see the service's API topics or Getting the Current REST API Version.

The API version is specified in the URL, as shown in the following examples:

```
https://<BASE-URL>/HyperionPlanning/rest/{api_version}/applications/
{applicationName}/jobs
```

```
https://<BASE-URL>/interop/rest/{api_version}/applicationsnapshots
```

where `{api_version}` is the current REST API version for the product, for example, `v3` for Planning.

> **Note**
>
> API version identifiers are case-sensitive. For example, if the API version is **v1**, specifying **V1** results in an error. Always use the correct case when specifying the API version.

Getting the Current REST API Version

Each Oracle Fusion Cloud Enterprise Performance Management business process provides a REST API for retrieving the supported API versions and version details. Use the appropriate topic for your business process:

- Planning: See Getting API Versions for Planning
- Migration: See Get API Versions for Migration APIs
- Data Management: See Get API Versions for Data Integration and Data Management APIs
- Account Reconciliation: See Get API Versions
- Financial Consolidation and Close: See Get API Versions for Financial Consolidation and Close APIs
- Profitability and Cost Management: See Get API Versions for Profitability and Cost Management REST APIs
- Profitability and Cost Management: See Get API Versions for Enterprise Profitability and Cost Management

Copyright © 2017, 2026, Oracle and/or its affiliates.

Error Handling and Status Codes

When you call any of the REST APIs, one of the following standard HTTP status codes is returned in the response header.

Error Handling

All REST APIs return JSON output appropriate for the API invoked. HTTP Status codes other than 200 are used as appropriate to indicate various failures, along with JSON for detailed error messages.

Table 1-16 Status Codes

HTTP Status Codes	Description
200 OK	The request was successfully completed. A 200 status is returned for a successful GET or POST method.
201 Created	The request has been fulfilled and resulted in a new resource being created. The response includes a Location header containing the canonical URI for the newly created resource. A 201 status is returned from a synchronous resource creation or an asynchronous resource creation that completed before the response was returned.
202 Accepted	The request has been accepted for processing, but the processing has not been completed. The request may or may not eventually be acted upon, as it may be disallowed at the time processing actually takes place. When specifying an asynchronous (_detached=true_resource creation, for example, when deploying an application, or update, for example, when redeploying an application, a 202 is returned if the underlying operation does not complete in a reasonable amount of time. The response contains a Location header of a job resource that the client should poll to determine when the job has finished. It also returns an entity that contains the current state of the job.
400 Bad Request	The request could not be processed because it contains missing or invalid information, such as a validation error on an input field, a missing required value, and so on.
401 Unauthorized	The request is not authorized. The authentication credentials included with this request are missing or invalid.
403 Forbidden	The user cannot be authenticated. The user does not have authorization to perform this request.
404 Not Found	The request includes a resource URI that does not exist
405 Method Not Allowed	The HTTP verb specified in the request (DELETE, GET, POST, PUT) is not supported for this request URI.
406 Not Acceptable	The resource identified by this request is not capable of generating a representation corresponding to one of the media types in the Accept header of the request.
415 Unsupported Media Type	The client's ContentType header is not correct.
500 Internal Server Error	The server encountered an unexpected condition that prevented it from fulfilling the request.
503 Service Unavailable	The server is unable to handle the request due to temporary overloading or maintenance of the server.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Cloud EPM REST APIs Best Practices

Use the implementation best practices listed in this topic when working with the REST APIs.

- Before using the REST APIs, complete the required Prerequisites.
- Use the appropriate authentication method for your implementation.
  For more information, see Authentication for Cloud EPM REST APIs.
- Understand the URL structure and ensure that requests use the correct endpoint format.
- Review Versioning to understand API version requirements and how to determine the current supported API version for each Cloud EPM business process.
- Use the Cloud EPM REST APIs at a Glance to quickly locate all the REST APIs and navigate to their corresponding reference topics.
- Use the Cloud EPM Platform REST APIs to quickly locate all the Platform REST APIs and navigate to their corresponding reference topics.

Troubleshooting

For help with troubleshooting REST API issues, see Diagnosing REST API Issues.

Copyright © 2017, 2026, Oracle and/or its affiliates.

2

Infrastructure REST APIs

These are APIs that work with Oracle Fusion Cloud Enterprise Performance Management infrastructure components such as Migration, Access Control, and user, group, and role management.

Table 2-1 Infrastructure REST APIs

Infrastructure REST APIs	
Users, Groups, Roles, and Access Reports	Security and Access Control
Environment Lifecycle and Migration	Maintenance Operations

Users, Groups, Roles, and Access Reports

Table 2-2 Users, Groups, Roles, and Access Reports REST APIs

REST APIs for Managing Users, Groups, Roles, and Access Reports		
Add Users to an Identity Domain (v1)	Add Users to an Identity Domain (v2)	Remove Users from an Identity Domain (v1)
Remove Users from an Identity Domain (v2)	Assign Users to an Application Role or Granular Role (v1)	Assign Users to an Application Role or Granular Role (v2)
Remove Users Role Assignment (v1)	Remove Users Role Assignment (v2)	Add Users to a Group (v1)
Add Users to a Group (v2)	Remove Users from a Group (v1)	Remove Users from a Group (v2)
List Users (v1)	Update Users (v1)	Update Users (v2)
Add a User to a Batch of Groups (v1)	Remove a User from a Batch of Groups	Import User Group Assignments as CSV (v1)
Update Granular Roles For Groups (v1)	Update Granular Roles for Users (v1)	Add Groups (v1)
Add Groups (v2)	List Groups (v1)	Update Groups (v1)
Remove Groups (v1)	Remove Groups (v2)	User Group Report (v1)
User Group Report (v2)	User Access Report (v1)	User Access Report (v2)
User Audit Report (v1) (Deprecated)	User Audit Report (v2) (Deprecated)	User Login Report (v1)
Role Assignment Report (v1)	Role Assignment Report for Users (v2)	Role Assignment Report for Groups (v2)
Get Available Roles (v2)	Role Assignment Audit Report (v1)	Invalid Login Report (v1)
Group Assignment Audit Report (v2)	Add Users to a Team for Account Reconciliation	Add Users to a Team for Financial Consolidation and Close and Tax Reporting
Remove Users from a Team for Account Reconciliation	Remove Users from a Team for Financial Consolidation and Close and Tax Reporting	

Copyright © 2017, 2026, Oracle and/or its affiliates.

URL Structure for Users, Groups, and Roles

This topic shows the general URL structure for the Users, Groups, and Roles REST APIs.

Use the following URL structure to access the Users, Groups, and Roles REST resources:

`https://<BASE-URL>/interop/rest/{api_version}/{path}`

Where:

- `<BASE-URL>`: The first part of your service URL, before the context.

  For example, if your service URL is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com/epmcloud`, your `<BASE-URL>` is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com`. Similarly, if your service URL is `https://epm2-acme.epm.us6.oraclecloud.com/epmcloud`, your `<BASE-URL>` is `https://epm2-acme.epm.us6.oraclecloud.com`.
- `{api_version}`: API version you are developing with.
- `{path}`: Identifies the resource.

> **Note**
>
> Oracle does not authorize or support the use of REST APIs with the path token `"/internal/"` in the URL.

Add Users to an Identity Domain

Adds users to identity domains by creating new user accounts from either a CSV file upload (v1) or request payload (v2). These APIs create accounts only for users who do not already exist in the identity domain. Existing users are not modified. Newly created users are available across all service environments that share the identity domain. You can use the Upload REST API to upload the file.

The APIs can optionally send account credential emails to newly created users when `resetpassword` is set to `true`. If `resetpassword` is set to `false`, emails are not sent, and you should specify `userpassword`; otherwise, users may not know their temporary passwords and will be unable to log in.

Both APIs provide details about successful and failed user creation records, including failure reasons. These APIs should be run only by an Identity Domain Administrator. Additionally, the user running the API must have the required administrative or application role privileges in the target environment.

The v1 API creates users using an ANSI or UTF-8 encoded CSV file that must be uploaded before execution. It is asynchronous and returns a Job ID that can be used to track processing status. The CSV file should be deleted after the API executes. See Importing a Batch of User Accounts in *Getting Started with Oracle Cloud* for a detailed description of the CSV file format

The v2 API creates users directly from parameters provided in the request payload. It is synchronous, returns the operation outcome directly in the response, and simplifies API usage by eliminating the need for URL encoding.

Copyright © 2017, 2026, Oracle and/or its affiliates.

> **Note**
>
> The v1 API assigns one password (`userpassword`) to all users specified in the CSV file. This may be useful for testing purposes. For production scenarios requiring unique passwords, Oracle recommends creating one user at a time with a dedicated password for each request.
>
> When adding users through these APIs, credential emails are not automatically sent in the same way as when users are added through Oracle Cloud Console. You should manually communicate credentials to users when required and consider forcing password changes at first login by setting `resetpassword` to `true`.

Required Roles

Identity Domain Administrator and any application role (Service Administrator, Power User, User, or Viewer)

Add Users to an Identity Domain (v1)

REST Resource

POST `/interop/rest/security/v1/users`

Table 2-3 Tasks for Add Users to an Identity Domain

Task	Request	REST Resource
Add users	POST	`/interop/rest/security/<api_version>/users`
Add users status	GET	`/interop/rest/security/<api_version>/jobs/<jobid>`

Request

Supported Media Types: `application/x-www-form-urlencoded`

Table 2-4 Parameters

Name	Description	Type	Required	Default
`filename`	The name of the uploaded ANSI or UTF-8 encoded CSV file containing the users to add, such as `addUsers.csv`.	Form	Yes	None
`userpassword`	Optionally, indicates the default password that you want to assign to all the new users who are created in the identity domain. If specified, this password must meet the minimum identity domain password requirements. If specified, the value of the user password parameter is used as the password for all users specified in the CSV file. Assigning the same password to all users may be desirable if you are creating users purely for testing purposes. If you are creating real Oracle Fusion Cloud Enterprise Performance Management users and want to assign a specific password to each user, use this command without specifying a valid for the `userpassword` optional parameter.	Form	No	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-4 (Cont.) Parameters

Name	Description	Type	Required	Default
`resetpassword`	Optionally, indicates whether new users must change password at the first login. Unless this parameter is set to `false`, new users will be forced to change the password at the first login. This parameter sends each new user an email with details about their accounts (user name and password) if `resetPassword` is set to `true`. If `resetPassword` is set to `false`, the email is not sent. **Note**: If you set `resetPassword` to `false`, you should specify `userPassword`. Otherwise, a unique temporary password will be assigned to each user, but, because no email is sent, the passwords will not be known to the users, so they will not be able to log in.	Form	No	`true`

Response

Supported Media Types: `application/json`

Table 2-5 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`data`	Parameters as key value pairs passed in the request
`items`	Details about the resource
`links`	Details of the first URL to be requested to get the job details; rel is "Job Details"

Examples of Response Body

Example 1: Job is in Progress

```
{
  "links": [
    {
      "rel": "self",
      "href": "https://<BASE-URL>/interop/rest/security/v1/users",
      "data": {
        "jobType": "ADD_USERS",
        "filename": "<filename>",
        "resetpassword": "<true|false>"      },
      "action": "POST"
    },
    {
      "rel": "Job Status",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
      "href": "https://<BASE-URL>/interop/rest/security/v1/users",
      "data": null,
      "action": "GET"
    }
  ],
  "details": null,
  "status": -1,
  "items": null
}
```

Example 2: Job Completes with Errors

```
{
  "links": [
    {
      "rel": "self",
      "href": "https://<BASE-URL>/interop/rest/security/v1/jobs/",
      "data": null,
      "action": "GET"
    }
  ],
  "details": "Failed to add users. Input file <fileName> is not found.
Specify a valid file name.",
  "status": 1,
  "items": null
}
```

Example 3: Job Completes without Errors

```
{
  "links": [
    {
      "rel": "self",
      "href": "https://<BASE-URL>/interop/rest/security/v1/jobs/",
      "data": null,
      "action": "GET"
    }
  ],
  "details": "Processed - 3, Succeeded - 2, Failed - 1.",
  "status": 0,
  "items": [
    {
    "UserName":"<USERNAME>","Error_Details": "User <USERNAME> already exists.
Please provide a different user name."
    }
   ]
 }
```

Sample cURL Command Basic Auth

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/x-
www-form-urlencoded' -d
'filename=addUsers.csv&resetpassword=true&userpassword=Passw0rd1234'
'https://<BASE-URL>/interop/rest/security/v1/users'
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Sample cURL Command OAuth 2.0

```
curl -X POST --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H
'Content-Type: application/x-www-form-urlencoded' -d
'filename=addUsers.csv&resetpassword=true&userpassword=Passw0rd1234'
'https://<BASE-URL>/interop/rest/security/v1/users'
```

Add Users to an Identity Domain (v2)

REST Resource

POST `/interop/rest/security/v2/users/add`

Table 2-6 Tasks for Add Users to an Identity Domain

Task	Request	REST Resource
Add users	POST	`/interop/rest/security/v2/users/add`

Request

Supported Media Types: `application/json`

Table 2-7 Parameters

Name	Description	Type	Required	Default
`users`	List of users to add	Payload	Yes	None

Example URL and Payload

`https://<BASE-URL>/interop/rest/security/v2/users/add`

```
{
    "users":
    [
        {
            "firstname": "Jane",
            "lastname": "Doe",
            "email": "jane.doe@example.com",
            "userlogin": "jdoe",
            "resetpassword": true
        },
        {
            "firstname": "chris",
            "lastname": "west",
            "email": "chris.west@example.com",
            "userlogin": "chris",
            "password": "userPassword",
            "resetpassword": false
            }
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    ]
}
```

Response

Supported Media Types: `application/json`

Table 2-8 Parameters

Name	Description
`links`	Detailed information about the link and HTTP call type
`status`	Identifies the status of the operation • 0: Operation succeeded • 1: Operation failed
`error`	Detailed information about the error
`details`	Detailed status of the operation performed. Total number of records processed, succeeded, and failed and reason why they failed.

Examples of Response Body

Example 1: Job Completes without Errors

```
{
    "links": {
            "href": "https://<BASE-URL>/interop/rest/security/v2/users/add",
            "action": "POST"
    },
    "status": 0,
    "error": null,
    "details": {
        "processed": 3,
        "succeeded": 3,
        "failed": 0,
        "faileditems": null
    }
}
```

Example 2: Job Completes with Errors

```
{
    "links": {
            "href": "https://<BASE-URL>/interop/rest/security/v2/users/add",
            "action": "POST"
    },
    "status": 1,
    "error": {
        "errorcode": "EPMCSS-21146",
        "errormessage": "Failed to add users. Invalid or insufficient
parameters specified. Provide all required parameters for the REST API."
    },
    "details": null
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example 3: Job Completes with Partial Errors

```
{
    "links": {
            "href": "https://<BASE-URL>/interop/rest/security/v2/users/add",
            "action": "POST"
    },
    "status": 0,
    "error": null,
    "details": {
        "processed": 5,
        "succeeded": 3,
        "failed": 2,
        "faileditems":
        [
        {
                        "userlogin": "jdoe",
                        "errorcode": "EPMCSS-21150",
                        "errormessage": "Failed to add user. Invalid email
jdoe.com. Please provide a valid email."
                },
                 {
                        "userlogin": "chris",
                        "errorcode": "EPMCSS-21151",
                        "errormessage": "Failed to add user. Missing
[firstname]. Please provide value: [firstname]."
                 }
        ]
    }
}
```

Sample cURL Command Basic Auth

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/
json' -d '{"users":
[{"firstname":"Jane","lastname":"Doe","email":"jane.doe@example.com","userlogi
n":"jdoe","resetpassword":true},
{"firstname":"chris","lastname":"west","email":"chris.west@example.com","userl
ogin":"chris","password":"userPassword","resetpassword":false}]}'' 'https://
<BASE-URL>/interop/rest/security/v2/users/add'
```

Sample cURL Command OAuth 2.0

```
curl -X POST --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H
'Content-Type: application/json' -d '{"users":
[{"firstname":"Jane","lastname":"Doe","email":"jane.doe@example.com","userlogi
n":"jdoe","resetpassword":true},
{"firstname":"chris","lastname":"west","email":"chris.west@example.com","userl
ogin":"chris","password":"userPassword","resetpassword":false}]}'' 'https://
<BASE-URL>/interop/rest/security/v2/users/add'
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Remove Users from Identity Domains

Removes user accounts from identity domains by deleting users listed in either a CSV file upload (v1) or a request payload (v2). These APIs delete only the accounts identified in the input and do not remove the account of the user executing the command. Because user accounts are shared across all service environments that use the same identity domain, deleting an account from one environment deletes it from all environments that share that identity domain.

Both APIs can report which records failed and why, along with counts of passed and failed records. These APIs should be run only by an Identity Domain Administrator. In v1, the user must also be a Service Administrator. In v2, the user must also have an application role in the target environment.

The v1 API requires an ANSI or UTF-8 encoded CSV file that must first be uploaded to the environment. It is asynchronous and returns a Job ID, which can be checked to determine whether the removal is still in progress or complete.

The v2 API accepts the list of users directly in the request payload. This topic describes the simplified v2 version of the REST API. This version contains all parameters in the payload and does not require URL encoding while calling the REST APIs, which makes the v2 API easier to use. It is synchronous and returns the outcome of the operation in the response.

Any non-zero status indicates failure of removing users, and a status of `-1` in v1 indicates that removal is still in progress.

Required Roles

Identity Domain Administrator and any application role (Service Administrator, Power User, User, or Viewer)

Remove Users from an Identity Domain (v1)

REST Resource

DELETE `/interop/rest/security/<api_version>/users?filename=<filename>`

Table 2-9 Tasks for Remove Users from an Identity Domain

Task	Request	REST Resource
Remove users	DELETE	`/interop/rest/security/<api_version>/users?filename=<filename>`
Remove users status	GET	`/interop/rest/security/<api_version>/jobs/`

Request

Supported Media Types: `application/x-www-form-urlencoded`

Table 2-10 Parameters

Name	Description	Type	Required	Default
`filename`	The name of the uploaded ANSI or UTF-8 encoded CSV file name of a CSV file containing the login names of the users to be removed, for example, `removeUsers.csv`.	Query	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Response

Supported Media Types: `application/json`

Table 2-11 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`data`	Parameters as key value pairs passed in the request
`items`	Details about the resource
`links`	Details of the first URL to be requested to get the job details; rel is "Job Details"

Examples of Response Body

Example 1: Job is in Progress

```
{
  "links": [
    {
      "rel": "self",
      "href": "https://<BASE-URL>/interop/rest/security/<api_version>/users?
filename=<filename>",
      "data": {
        "jobType": "REMOVE_USERS",
        "filename": "<filename>"
      },
      "action": "DELETE"
    },
    {
      "rel": "Job Status",
      "href": "https://<BASE-URL>/interop/rest/security/<api_version>/jobs/",
      "data": null,
      "action": "GET"
    }
  ],
  "details": null,
  "status": -1,
  "items": null
}
```

Example 2: Job Completes with Errors

```
{
  "links": [
    {
      "rel": "self",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
      "href": "https://<BASE-URL>/interop/rest/security/<api_version>/jobs/",
      "data": null,
      "action": "GET"
    }
  ],
  "details": "Failed to remove users. Input file <filename> is not found.
Specify a valid file name.",
  "status": 1,
  "items": null
}
```

Example 3: Job Completes without Errors

```
{
  "links": [
    {
      "rel": "self",
      "href": "https://<BASE-URL>/interop/rest/security/<api_version>/jobs/",
      "data": null,
      "action": "GET"
    }
  ],
  "details": "Processed - 3, Succeeded - 1, Failed - 2.",
  "status": 0,
  "items": [
     {
          "UserName":"<USERNAME>","Error_Details": "User <USERNAME> is not
found. Verify that the user exists."
    },
}
```

Sample cURL Command Basic Auth

```
curl -X DELETE -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/x-
www-form-urlencoded' 'https://<BASE-URL>/interop/rest/security/v1/users?
filename=removeUsers.csv'
```

Sample cURL Command OAuth 2.0

```
curl -X DELETE --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H
'Content-Type: application/x-www-form-urlencoded' 'https://<BASE-URL>/interop/
rest/security/v1/users?filename=removeUsers.csv'
```

Remove Users from an Identity Domain (v2)

Required Roles

Identity Domain Administrator and any application role (Service Administrator, Power User, User, or Viewer)

REST Resource

POST `/interop/rest/security/v2/users/remove`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-12 Tasks for Remove Users from an Identity Domain

Task	Request	REST Resource
Remove users	POST	`/interop/rest/security/v2/users/remove`

Request

Supported Media Types: `application/json`

Table 2-13 Parameters

Name	Description	Type	Required	Default
`users`	List of user login IDs of the users to remove	Payload	Yes	None

Example URL and Payload

`https://<BASE-URL>/interop/rest/security/v2/users/remove`

```
{
    "users":
    [
        {
            "userlogin": "jdoe"
        },
        {
            "userlogin": "chris"
                }
        ]
}
```

Response

Supported Media Types: `application/json`

Table 2-14 Parameters

Name	Description
`links`	Detailed information about the link and HTTP call type
`status`	Identifies the status of the operation • 0: Operation succeeded • 1: Operation failed
`error`	Detailed information about the error
`details`	Detailed status of the operation performed. Total number of records processed, succeeded, and failed and reason for why it failed.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Examples of Response Body

Example 1: Job Completes without Errors

```
{
    "links": {
            "href": "https://<BASE-URL>/interop/rest/security/v2/users/
remove",
            "action": "POST"
    },
    "status": 0,
    "error": null,
    "details": {
        "processed": 2,
        "succeeded": 2,
        "failed": 0,
        "faileditems": null
    }
```

Example 2: Job Completes with Errors

```
{
    "links": {
            "href": "https://<BASE-URL>/interop/rest/security/v2/users/
remove",
            "action": "POST"
    },
    "status": 1,
    "error": {
               "errorcode": "EPMCSS-21147",
               "errormessage": "Failed to remove users. Invalid or
insufficient parameters specified. Provide all required parameters for the
REST API."
        },
    "details": null
}
```

Example 3: Job Completes with Partial Errors

```
{
    "links": {
            "href": "https://<BASE-URL>/interop/rest/security/v2/users/
remove",
            "action": "POST"
    },
    "status": 0,
    "error": null,
    "details": {
        "processed": 5,
        "succeeded": 3,
        "failed": 2,
        "faileditems":
        [
        {
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
                        "userlogin": "jdoe",
                        "errorcode": "EPMCSS-21174",
                        "errormessage": "Failed to remove user. User jdoe
does not exist. Provide a valid userlogin."
                },
                {
                       "userlogin": "chris",
                        "errorcode": "EPMCSS-21174",
                        "errormessage": " Failed to remove user. User chris
does not exist. Provide a valid userlogin."
                }
        ]
    }
}
```

Sample cURL Command Basic Auth

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/
json' -d '{"users":[{"userlogin":"jdoe"},{"userlogin":"chris"}]}' 'https://
<BASE-URL>/interop/rest/security/v2/users/remove'
```

Sample cURL Command OAuth 2.0

```
curl -X POST --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H
'Content-Type: application/json'  -d '{"users":[{"userlogin":"jdoe"},
{"userlogin":"chris"}]}' 'https://<BASE-URL>/interop/rest/security/v2/users/
remove'
```

Application Roles and Granular Roles

Assigns users to application roles or granular roles using either a CSV file upload (v1) or request payload (v2). These APIs can be used to assign users, including the user executing the API, to application roles or to assign granular roles to users.

To assign a user to a granular role, the user must already be assigned to the required application role.

Both APIs provide details about successful and failed assignments, including failure reasons and counts of passed and failed records.

The v1 API requires an ANSI or UTF-8 encoded CSV file containing user information. Role names that contain spaces must be enclosed in double quotation marks in the CSV file. Before running the API, the file must be uploaded to the environment using the Upload REST API, and the file should be deleted after the API executes. The v1 API is asynchronous and returns a Job ID that can be used to monitor the status of the role assignment operation.

Use double quotation marks to enclose role names that contain space characters in the CSV file. Before using this API, use the Upload REST API to upload files to the environment. The file should be deleted after the API executes.

The v2 API accepts all parameters directly in the request payload. This topic describes the simplified v2 version of the REST API. This version does not require URL encoding while calling the REST APIs, which makes the v2 API easier to use. The v2 API is synchronous and returns the outcome of the operation directly in the response.

Copyright © 2017, 2026, Oracle and/or its affiliates.

In v1, a response status of `-1` indicates that the assignment process is still in progress. Any non-zero status value indicates failure of assigning users to roles.

Required Roles

For application roles:

Service Administrator, or Identity Domain Administrator and any application role (Power User, User, or Viewer)

For granular roles:

Service Administrator or any application role and the Access Control - Manage granular role

Assign Users to an Application Role or Granular Role (v1)

REST Resource

PUT `/interop/rest/security/<api_version>/users`

Table 2-15 Tasks for Assign Users to Roles

Task	Request	REST Resource
Assign role	PUT	`/interop/rest/security/<api_version>/users`
Assign role status	GET	`/interop/rest/security/<api_version>/jobs/<jobid>`

Request

Supported Media Types: `application/x-www-form-urlencoded`

Table 2-16 Parameters

Name	Description	Type	Required	Default
`api_version`	Specific API version	Path	Yes	None
`jobtype`	ASSIGN_ROLE	Form	Yes	None
`filename`	The name of the ANSI or UTF-8 encoded CSV file containing the login IDs of the users whose role assignment is to be modified, such as `assignRoles.csv`.	Form	Yes	None
`rolename`	The name of a application or granular role applicable to the service. An incorrect role name will result in an error. • To assign users to a application role, roleName should identify a application role applicable to the service. For a list of application roles for each business process, see Understanding Application Roles in *Getting Started Guide for Administrators*. • To assign users to a granular role, roleName should identify a granular role listed in the Assign Roles tab of Access Control. For a description of these roles, see Granular Role Assignment Overview in *Administering Access Control*.	Form	Yes	None

Response

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-17 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`data`	Parameters as key value pairs passed in the request
`items`	Details about the resource
`links`	Details of the first URL to be requested to get the job details; rel is "Job Details"

Examples of Response Body

Example 1: Job is in Progress

```
{
  "links": [
    {
      "rel": "self",
      "href": "https://<BASE-URL>/interop/rest/security/<api_version>/users",
      "data": {
        "jobType": "ASSIGN_ROLE",
        "filename": "<filename>",
        "rolename": "<rolename>"
      },
      "action": "PUT"
    },
    {
      "rel": "Job Status",
      "href": "https://<BASE-URL>/interop/rest/security/<api_version>/jobs/
<jobid>",
      "data": null,
      "action": "GET"
    }
  ],
  "details": null,
  "status": -1,
  "items": null
}
```

Example 2: Job Completes with Errors

```
{
  "links": [
    {
      "rel": "self",
      "href": "https://<BASE-URL>/interop/rest/security/<api_version>/jobs/
<jobid>",
      "data": null,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
      "action": "GET"
    }
  ],
  "details": " Failed to assign role for users. Input file <filename> is not
found. Specify a valid file name.",
  "status": 1,
  "items": null
}
```

Example 3: Job Completes without Errors

```
{
  "links": [
    {
      "rel": "self",
      "href": "https://<BASE-URL>/interop/rest/security/<api_version>/jobs/
<jobid>",
      "data": null,
      "action": "GET"
    }
  ],
  "details": "Processed - 3, Succeeded - 2, Failed - 1.",
  "status": 0,
  "items": [
    {
        "UserName":"<USERNAME>","Error_Details": "User <USERNAME> is not
found. Verify that the user exists."
    }
  ]
}
```

Sample cURL Command Basic Auth Application Role

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/x-www-
form-urlencoded' -d
'jobtype=ASSIGN_ROLE&filename=assignRoleUsers.csv&rolename=Power User'
'https://<BASE-URL>/interop/rest/security/v1/users'
```

Sample cURL Command Basic Auth Granular Role

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/x-www-
form-urlencoded' -d
'jobtype=ASSIGN_ROLE&filename=assignRoleUsers.csv&rolename=Access Control -
Manage' 'https://<BASE-URL>/interop/rest/security/v1/users'
```

Sample cURL Command OAuth 2.0 Application Role

```
curl -X PUT --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/x-www-form-urlencoded' -d
'jobtype=ASSIGN_ROLE&filename=assignRoleUsers.csv&rolename=Power User'
'https://<BASE-URL>/interop/rest/security/v1/users'
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Sample cURL Command OAuth 2.0 Granular Role

```
curl -X PUT --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/x-www-form-urlencoded' -d
'jobtype=ASSIGN_ROLE&filename=assignRoleUsers.csv&rolename=Access Control -
Manage' 'https://<BASE-URL>/interop/rest/security/v1/users'
```

Assign Users to an Application Role or Granular Role (v2)

REST Resource

PUT `/interop/rest/security/v2/role/assign/user`

Table 2-18 Tasks for Assign Users to Roles

Task	Request	REST Resource
Assign role	PUT	`/interop/rest/security/v2/role/assign/user`

Request

Supported Media Types: `application/json`

Table 2-19 Parameters

Name	Description	Type	Required	Default
`rolename`	The name of an application or granular role applicable to the service. An incorrect role name will result in an error. • To assign users to a application role, roleName should identify a application role applicable to the service. For a list of application roles for each business process, see Understanding Application Roles in *Getting Started Guide for Administrators*. • To assign users to a granular role, roleName should identify a granular role listed in the Assign Roles tab of Access Control. For a description of these roles, see Granular Role Assignment Overview in *Administering Access Control*.	Payload	Yes	None
`users`	List of user login IDs of the users whose role assignment is to be modified.	Payload	Yes	None

Example URL and Payload

`https://<BASE-URL>/interop/rest/security/v2/role/assign/user`

```
{
      "rolename": "Service Administrator",
    "users": [
        {
            "userlogin": "jdoe"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
                },
                {
      "userlogin": "chris"
                }
        ]
}
```

Response

Supported Media Types: `application/json`

Table 2-20 Parameters

Name	Description
`links`	Detailed information about the link and HTTP call type
`status`	Identifies the status of the operation • 0: Operation Success • 1: Operation Failed
`error`	Detailed information about the error
`details`	Detailed status of the operation performed. Total number of records processed, succeeded, and failed and reason for why it failed.

Examples of Response Body

Example 1: Job Completes without Errors

```
{
    "links": {
            "href": "https://<BASE-URL>/interop/rest/security/v2/role/assign/
user",
            "action": "PUT"
    },
    "status": 0,
    "error": null,
    "details": {
        "processed": 3,
        "succeeded": 3,
        "failed": 0,
        "faileditems": null
    }
}
```

Example 2: Job Completes with Errors

```
{
    "links": {
            "href": "https://<BASE-URL>/interop/rest/security/v2/role/assign/
user",
            "action": "PUT"
    },
    "status": 1,
    "error": {
        "errorcode": "EPMCSS-21000",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        "errormessage": "Failed to assign role. Invalid role name <rolename>.
Please provide a valid role name."
    },
    "details": null
}
```

Example 3: Job Completes with Partial Errors

```
{
    "links": {
            "href": "https://<BASE-URL>/interop/rest/security/v2/role/assign/
user",
            "action": "PUT"
    },
    "status": 0,
    "error": null,
    "details": {
        "processed": 5,
        "succeeded": 3,
        "failed": 2,
        "faileditems":
        [
            {
                "userlogin": "jdoe",
                "errorcode": "EPMCSS-21002",
                "errormessage": "Failed to assign role. User jdoe does not
exist. Provide a valid userlogin."
            },
            {
                "userlogin": "chris",
                "errorcode": "EPMCSS-21002",
                "errormessage": "Failed to assign role. User chris does not
exist. Provide a valid userlogin."
            }
        ]
    }
}
```

Sample cURL Command Basic Auth Application Role

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/json'
-d  '{"rolename":"Viewer","users":[{"userlogin":"jdoe1"},
{"userlogin":"chris1"}]}' 'https://<BASE-URL>/interop/rest/security/v2/role/
assign/user'
```

Sample cURL Command Basic Auth Granular Role

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/json'
-d  '{"rolename":"Ad Hoc - Create","users":[{"userlogin":"jdoe1"},
{"userlogin":"chris1"}]}' 'https://<BASE-URL>/interop/rest/security/v2/role/
assign/user'
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Sample cURL Command OAuth 2.0 Application Role

```
curl -X PUT --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/json' -d  '{"rolename":"Viewer","users":
[{"userlogin":"jdoe1"},{"userlogin":"chris1"}]}' 'https://<BASE-URL>/interop/
rest/security/v2/role/assign/user'
```

Sample cURL Command OAuth 2.0 Granular Role

```
curl -X PUT --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/json' -d  '{"rolename":"Ad Hoc - Create","users":
[{"userlogin":"jdoe1"},{"userlogin":"chris1"}]}' 'https://<BASE-URL>/interop/
rest/security/v2/role/assign/user'
```

Remove Users from Application Roles or Granular Roles

Removes application roles or granular roles currently assigned to users using either a CSV file upload (v1) or request payload (v2). These APIs can remove role assignments from users, including the user executing the API.

Before running this API, upload the file to the environment using the Upload REST API

To remove a granular role assignment in v2, the user must exist in Oracle Fusion Cloud Enterprise Performance Management.

Both APIs provide details about successful and failed role removals, including failure reasons and counts of passed and failed records.

The v1 API requires an ANSI or UTF-8 encoded CSV file containing user login IDs. Role names that contain spaces must be enclosed in double quotation marks. Before running the API, the file must be uploaded to the environment using the Upload REST API, and the file should be deleted after the API executes. The v1 API is asynchronous and returns a Job ID that can be used to monitor the status of the role removal process.

The v2 API accepts all parameters directly in the request payload. This topic describes the simplified v2 version of the REST API. This version contains all parameters in the payload and does not require URL encoding while calling the REST APIs, which makes the v2 API easier to use. The v2 API is synchronous and returns the outcome of the operation directly in the response.

In v1, a response status of `-1` indicates that the removal of role assignments is still in progress. Any non-zero status value indicates failure of removing users from roles.

Required Roles

For application roles:

Service Administrator, or Identity Domain Administrator and any application role (Power User, User, or Viewer)

For granular roles:

Service Administrator or any application role and the Access Control - Manage granular role

Copyright © 2017, 2026, Oracle and/or its affiliates.

Remove Users Role Assignment (v1)

REST Resource

PUT `/interop/rest/security/<api_version>/users`

Table 2-21 Tasks for Unassign Users to Roles

Task	Request	REST Resource
Unassign role	PUT	`/interop/rest/security/<api_version>/users`
Unassign role status	GET	`/interop/rest/security/<api_version>/jobs/<jobid>`

Request

Supported Media Types: `application/x-www-form-urlencoded`

Table 2-22 Parameters

Name	Description	Type	Required	Default
`jobtype`	UNASSIGN_ROLE	Form	Yes	None

`filename`	The name of the ANSI or UTF-8 encoded CSV file containing the users whose role assignment is to be revoked, such as `unssignRole.csv`.
	The CSV file must have been uploaded already using the Upload REST API. The CSV file should not include the account of the user who executes this command.
	File format example:
	
	`User Login`
	`<email>`
	`<FirstName2.LastName2>`
		Form	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-22 (Cont.) Parameters

Name	Description	Type	Required	Default
`rolename`	The name of a application or granular role applicable to the service. An incorrect role name will result in an error. It identifies one of the following: • If you are removing users from a application role, roleName should identify a application role applicable to the service. See Understanding Application Roles in *Getting Started Guide for Administrators*. • Acceptable values for services other than Oracle Enterprise Data Management Cloud: – Service Administrator – Power User – User (do not use Planner, which was used in earlier versions of the service) – Viewer • Acceptable values for Oracle Enterprise Data Management Cloud: – Service Administrator – User • If you are removing users from a granular role, roleName should identify a granular role listed in the assign roles tab of Access Control. Acceptable values for Planning, Financial Consolidation and Close, Sales Planning, Strategic Workforce Planning, and Tax Reporting applications: – Approvals Administrator – Approvals Ownership Assigner – Approvals Process Desiger – Approvals Supervisor – Ad Hoc Grid Creator – Ad Hoc User – Ad Hoc Read Only User – Calculation Manager Administrator – Create Integration – Drill Through – Run Integration – Mass Allocation – Task List Access Manager • Acceptable values for Account Reconciliation applications: – Access Control - Manage – Access Control - View – Alert Types - Manage – Announcements - Manage – Audit - View – Currencies - Manage – Dashboards - Manage – Data Integration - Administrator – Data Integration - Create – Data Integration - Run – Data Loads - Manage – Jobs - View – Match Types - Manage	Form	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-22 (Cont.) Parameters

Name	Description	Type	Required	Default
	– Match Types - View – Organizations - Manage – Periods - Manage – Periods - View – Profiles - View – Profiles and Reconciliations - Manage – Public Filters and Views - Manage – Reconciliation - Commentator – Reconciliation - Preparer – Reconciliation - Reviewer – Reports - Manage – Teams - Manage – Users - Manage • Acceptable values for Oracle Enterprise Data Management Cloud applications: – Application Creator – Auditor – View Creator • Acceptable values for Oracle Enterprise Profitability and Cost Management applications: – Ad Hoc Grid Creator – Ad Hoc Read Only User – Ad Hoc User – Clear POV Data – Copy POV Data – Create/Edit Rule – Create Integration – Create Model – Create POV – Create Profit Curve – Delete Calculation History – Delete Model – Delete POV – Delete Rule – Drill Through – Edit POV Status – Edit Profit Curve – Mass Edit of Rules – Run Calculation – Run Integration – Run Profit Curve – Run Rule Balancing – Run Trace Allocation – Run Validation – View Calculation History – View Model For a description of these roles, see Managing Role Assignments at the Application Level in *Administering Access Control*.			

Copyright © 2017, 2026, Oracle and/or its affiliates.

Response

Supported Media Types: `application/json`

Table 2-23 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`data`	Parameters as key value pairs passed in the request
`items`	Details about the resource
`links`	Details of the first URL to be requested to get the job details; rel is Job Details

Examples of Response Body

Example 1: Job is in Progress

```
{
  "links": [
    {
      "rel": "self",
      "href": "https://<BASE-URL>/interop/rest/security/<api_version>/users",
      "data": {
        "jobtype": "UNASSIGN_ROLE",
        "filename": "<fileName>",
        "rolename": "<roleName>"
      },
      "action": "PUT"
    },
    {
      "rel": "Job Status",
      "href": "https://<BASE-URL>/interop/rest/security/<api_version>/jobs/
<jobid>",
      "data": null,
      "action": "GET"
    }
  ],
  "details": null,
  "status": -1,
  "items": null
}
```

Example 2: Job Completes with Errors

```
{
  "links": [
    {
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
      "rel": "self",
      "href": "https://<BASE-URL>/interop/rest/security/<api_version>/jobs/
<jobid>",
      "data": null,
      "action": "GET"
    }
  ],
  "details": "Failed to unassign role for users. Input file <filename> is not
found. Specify a valid file name.",
  "status": 1,
  "items": null
}
```

Example 3: Job Completes without Errors

```
{
  "links": [
    {
      "rel": "self",
      "href": "https://<BASE-URL>/interop/rest/security/<api_version>/jobs/
<jobid>",
      "data": null,
      "action": "GET"
    }
  ],
  "details": "Processed - 3, Succeeded - 2, Failed - 1.",
  "status": 0,
  "items": [
    {
        "UserName":"<USERNAME>","Error_Details": "User <USERNAME> is not
found. Verify that the user exists."
    }
  ]
}
```

Sample cURL Command Basic Auth Application Role

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -H'Content-Type: application/x-www-
form-urlencoded' -d
'jobtype=UNASSIGN_ROLE&filename=unassignRoleUsers.csv&rolename=Viewer'
'https://<BASE-URL>/interop/rest/security/v1/users'
```

Sample cURL Command Basic Auth Granular Role

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -H'Content-Type: application/x-www-
form-urlencoded' -d
'jobtype=UNASSIGN_ROLE&filename=unassignRoleUsers.csv&rolename=Ad Hoc -
Create' 'https://<BASE-URL>/interop/rest/security/v1/users'
```

Sample cURL Command OAuth 2.0 Application Role

```
curl -X PUT --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/x-www-form-urlencoded' -d
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
'jobtype=UNASSIGN_ROLE&filename=unassignRoleUsers.csv&rolename=Viewer'
'https://<BASE-URL>/interop/rest/security/v1/users'
```

Sample cURL Command OAuth 2.0 Granular Role

```
curl -X PUT --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/x-www-form-urlencoded' -d
'jobtype=UNASSIGN_ROLE&filename=unassignRoleUsers.csv&rolename=Ad Hoc -
Create' 'https://<BASE-URL>/interop/rest/security/v1/users'
```

Remove Users Role Assignment (v2)

REST Resource

PUT `/interop/rest/security/v2/role/unassign/user`

Table 2-24 Tasks for Unassign Users to Roles

Task	Request	REST Resource
Unassign role	PUT	`/interop/rest/security/v2/role/unassign/user`

Request

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-25 Parameters

Name	Description	Type	Required	Default
`rolename`	The name of a application or granular role applicable to the service. An incorrect role name will result in an error. It identifies one of the following: • If you are removing users from a application role, roleName should identify a application role applicable to the service. See "*Understanding Application Roles*" in *Getting Started Guide for Administrators.* • Acceptable values for services other than Oracle Fusion Cloud Enterprise Data Management: – Service Administrator – Power User – User (do not use Planner, which was used in earlier versions of the service) – Viewer • Acceptable values for Cloud EDM: – Service Administrator – User • If you are removing users from a granular role, roleName should identify a granular role listed in the Manage Granular Roles tab of Access Control. Acceptable values for FreeForm, Planning, Planning Modules, Sales Planning, Strategic Workforce Planning, Financial Consolidation and Close, and Tax Reporting applications: – Approvals Administrator – Approvals Ownership Assigner – Approvals Supervisor – Approvals Process Designer – Ad Hoc Grid Creator – Ad Hoc User – Ad Hoc Read Only User – Calculation Manager Administrator – Create Integration – Drill Through – Run Integration – Mass Allocation – Task List Access Manager Acceptable values for Account Reconciliation: • – Access Control - Manage – Access Control - View – Alert Types - Manage – Announcements - Manage – Audit - View – Currencies - Manage – Dashboards - Manage – Data Integration - Administrator – Data Integration - Create – Data Integration - Run – Data Loads - Manage – Jobs - View	Payload	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-25 (Cont.) Parameters

Name	Description	Type	Required	Default
	– Match Types - Manage – Match Types - View – Organizations - Manage – Periods - Manage – Periods - View – Profiles - View – Profiles and Reconciliations - Manage – Public Filters and Views - Manage – Reconciliation - Commentator – Reconciliation - Preparer – Reconciliation - Reviewer – Reports - Manage – Teams - Manage – Users - Manage Acceptable values for Cloud EDMapplications: – Application Creator – Auditor – View Creator • Acceptable values for Enterprise Profitability and Cost Management applications: – Ad Hoc Grid Creator – Ad Hoc Read Only User – Ad Hoc User – Clear POV Data – Copy POV Data – Create/Edit Rule – Create Integration – Create Model – Create POV – Create Profit Curve – Delete Calculation History – Delete Model – Delete POV – Delete Rule – Drill Through – Edit POV Status – Edit Profit Curve – Mass Edit of Rules – Run Calculation – Run Integration – Run Profit Curve – Run Rule Balancing – Run Trace Allocation – Run Validation – View Calculation History – View Model For a description of these roles, see "*Managing Role Assignments at the Application Level*" in *Administering Access Control.*			

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-25 (Cont.) Parameters

Name	Description	Type	Required	Default
users	List of user login IDs of the users whose role assignment is to be removed.	Payload	Yes	None

Example URL and Payload

```
https://<BASE-URL>/interop/rest/security/v2/role/unassign/user
```

```
{
      "rolename": "Service Administrator",
    "users": [
        {
            "userlogin": "jdoe"
                },
                {
                  "userlogin": "chris"
                }
        ]
}
```

Response

Supported Media Types: `application/json`

Table 2-26 Parameters

Name	Description
links	Detailed information about the link and HTTP call type
status	Identifies the status of the operation • 0 - Operation Success • 1 - Operation Failed
error	Detailed information about the error
details	Detailed status of the operation performed. Total number of records processed, succeeded, and failed and reason for why it failed.

Examples of Response Body

Example 1: Job Completes without Errors

```
{
    "links": {
            "href": "https://<BASE-URL>/interop/rest/security/v2/role/
unassign/user",
            "action": "PUT"
    },
    "status": 0,
    "error": null,
    "details": {
        "processed": 3,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        "succeeded": 3,
        "failed": 0,
        "faileditems": null
    }
}
```

Example 2: Job Completes with Errors

```
{
    "links": {
            "href": "https://<BASE-URL>/interop/rest/security/v2/role/
unassign/user",
            "action": "PUT"
    },
    "status": 1,
    "error": {
        "errorcode": "EPMCSS-21008",
        "errormessage": "Failed to unassign role. Invalid role name
<rolename>. Please provide a valid role name."
    },
    "details": null
}
```

Example 3: Job Completes with Partial Errors

```
{
    "links": {
            "href": "https://<BASE-URL>/interop/rest/security/v2/role/
unassign/user",
            "action": "PUT"
    },
    "status": 0,
    "error": null,
    "details": {
        "processed": 5,
        "succeeded": 3,
        "failed": 2,
        "faileditems":
        [
            {
                "userlogin": "jdoe",
                "errorcode": "EPMCSS-21010",
                "errormessage": "Failed to unassign role. User jdoe does not
exist. Provide a valid userlogin."
            },
            {
                "userlogin": "chris",
                "errorcode": "EPMCSS-21010",
                "errormessage": "Failed to unassign role. User chris does not
exist. Provide a valid userlogin."
            }
        ]
    }
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Sample cURL Command Basic Auth Application Role

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/json'
-d  '{"rolename":"Power User","users":[{"userlogin":"jdoe1"},
{"userlogin":"chris1"}]}' 'https://<BASE-URL>/interop/rest/security/v2/role/
unassign/user'
```

Sample cURL Command Basic Auth Granular Role

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/json'
-d  '{"rolename":"Access Control - Manage","users":[{"userlogin":"jdoe1"},
{"userlogin":"chris1"}]}' 'https://<BASE-URL>/interop/rest/security/v2/role/
unassign/user'
```

Sample cURL Command OAuth 2.0 Application Role

```
curl -X PUT --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/json' -d  '{"rolename":"Power User","users":
[{"userlogin":"jdoe1"},{"userlogin":"chris1"}]}' 'https://<BASE-URL>/interop/
rest/security/v2/role/unassign/user'
```

Sample cURL Command OAuth 2.0 Granular Role

```
curl -X PUT --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/json' -d  '{"rolename":"Access Control - Manage","users":
[{"userlogin":"jdoe1"},{"userlogin":"chris1"}]}' 'https://<BASE-URL>/interop/
rest/security/v2/role/unassign/user'
```

Add Users to Groups

Adds batches of users to existing groups in Access Control using either a CSV file upload (v1) or request payload (v2).. Use the Upload REST API to upload the file. The file should be deleted after the API executes.

> **Note**
>
> A user is added to the group only if both these conditions are met:
>
> - User login IDs included in the file exist in the identity domain that services the environment
> - The user is assigned to a application role in the identity domain

Both APIs provide details about successful and failed user additions, including failure reasons and counts of passed and failed records.

The v1 API requires an ANSI or UTF-8 encoded CSV file containing user login IDs or email addresses. Before running the API, the file must be uploaded to the environment using the Upload REST API, and the file should be deleted after the API executes. This API should be run only by a Service Administrator in the identity domain where users are to be added to the

Copyright © 2017, 2026, Oracle and/or its affiliates.

group. The v1 API is asynchronous and returns a Job ID that can be used to monitor the status of the operation.

The v2 API accepts all parameters directly in the request payload. This topic describes the simplified v2 version of the REST API. This version contains all parameters in the payload and does not require URL encoding while calling the REST APIs, which makes the v2 API easier to use. The v2 API is synchronous and returns the outcome of the operation directly in the response.

In v1, a response status of `-1` indicates that adding users to the group is still in progress. Any non-zero status value indicates failure of adding users to groups.

Required Roles

Service Administrator or any application role and the Access Control - Manage granular role

Add Users to a Group (v1)

REST Resource

PUT `/interop/rest/security/v1/groups`

Table 2-27 Tasks for Add Users to Group

Task	Request	REST Resource
Add users to group	PUT	`/interop/rest/security/v1/groups`
Add users to group status	GET	`/interop/rest/security/v1/jobs/<jobId>`

Request

Supported Media Types: `application/x-www-form-urlencoded`

Table 2-28 Parameters

Name	Description	Type	Required	Default
`jobtype`	The string should have the value `ADD_USERS_TO_GROUP`. This value denotes that the users are being added to the group.	Form	Yes	None
`filename`	The name of the uploaded ANSI or UTF-8 encoded CSV file containing the users to add, such as `addUsersToGroup.csv`. The file must have been uploaded already using the Upload REST API.	Form	Yes	None
`groupname`	The name of group to which the users must be added. This group must be a pre-existing group.	Form	Yes	None

Response

Supported Media Types: `application/json`

Table 2-29 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-29 (Cont.) Parameters

Name	Description
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`data`	Parameters as key value pairs passed in the request
`items`	Details about the resource
`links`	Details of the first URL to be requested to get the job details; rel is "Job Details"

Examples of Response Body

Example 1: Job is in Progress

```
{
  "links": [
    {
      "rel": "self",
      "href": "https://<BASE-URL>/interop/rest/security/<api_version>/groups",
      "data": {
        "jobType": "ADD_USERS_TO_GROUP",
        "filename": "<fileName>",
        "groupName": "<groupName>",
      },
      "action": "GET"
    },
    {
      "rel": "Job Status",
      "href": "https://<BASE-URL>/interop/rest/security/<api_version>/jobs/
<jobId>",
      "data": null,
      "action": "GET"
    }
  ],
  "details": null,
  "status": -1,
  "items": null
}
```

Example 2: Job Completes with Errors

```
{
  "links": [
    {
      "rel": "self",
      "href": "https://<BASE-URL>/interop/rest/security/<api_version>/jobs/
<jobID>",
      "data": null,
      "action": "GET"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    }
  ],
  "details": "Failed to add users to group. Input file <fileName> is not
found. Specify a valid file name.",
  "status": 1,
  "items": null
}
```

Example 3: Job Completes without Errors

```
{
  "links": [
    {
      "rel": "self",
      "href": "https://<BASE-URL>/interop/rest/security/<api_version>/jobs/
<jobId>",
      "data": null,
      "action": "GET"
    }
  ],
  "details": "Processed - 3, Succeeded - 2, Failed - 1.",
  "status": 0,
  "items": [
    {
        "UserName":"<USERNAME>","Error_Details": "User <USERNAME> is not
found. Verify that the user exists."
    }
   ]
}
```

Sample cURL Command Basic Auth

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -H'Content-Type: application/x-www-
form-urlencoded' -d
'jobtype=ADD_USERS_TO_GROUP&filename=addUsersToGroup.csv&groupname=GroupA'
'https://<BASE-URL>/interop/rest/security/v1/groups'


curl -X PUT -s -u 'alla.baksh@oracle.com:EPM_Welc0me!1' -H'Content-Type:
application/x-www-form-urlencoded' -d
'jobtype=ADD_USERS_TO_GROUP&filename=addUsersToGroup.csv&groupname=GroupA'
'https://epm-test-ociplanning.epm.us-ashburn-1.ocs.oc-test.com/interop/rest/
security/v1/groups'
```

Sample cURL Command OAuth 2.0

```
curl -X PUT --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/x-www-form-urlencoded' -d
'jobtype=ADD_USERS_TO_GROUP&filename=<CSV-FILE-NAME>&groupname=<GROUPNAME>'
'https://<BASE-URL>/interop/rest/security/v1/groups'
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Add Users to a Group (v2)

REST Resource

PUT `/interop/rest/security/v2/groups/adduserstogroup`

Table 2-30 Tasks for Add Users to Group

Task	Request	REST Resource
Add users to group	PUT	`/interop/rest/security/v2/groups/adduserstogroup`

Request

Supported Media Types: `application/json`

Table 2-31 Parameters

Name	Description	Type	Required	Default
`groupname`	The name of the group to which the users must be added. This group must be a pre-existing group.	Payload	Yes	None
`users`	List of user login IDs of the users to add to the group.	Payload	Yes	None

Example URL and Payload

`https://<BASE-URL>/interop/rest/security/v2/groups/adduserstogroup`

```
{
      "groupname": "G1",
    "users":     [
                {
              "userlogin": "jdoe"
                },
                {
                    "userlogin": "chris"
                }
        ]
}
```

Response

Supported Media Types: `application/json`

Table 2-32 Parameters

Name	Description
`links`	Detailed information about the link and HTTP call type
`status`	Identifies the status of the operation • 0 - Operation Success • 1 - Operation Failed

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-32 (Cont.) Parameters

Name	Description
error	Detailed information about the error
details	Detailed status of the operation performed. Total number of records processed, succeeded, and failed and reason for why it failed.

Examples of Response Body

Example 1: Job Completes without Errors

```
{
    "links": {
            "href": "https://<BASE-URL>/interop/rest/security/v2/groups/
adduserstogroup",
            "action": "PUT"
    },
    "status": 0,
    "error": null,
    "details": {
        "processed": 3,
        "succeeded": 3,
        "failed": 0,
        "faileditems": null
    }
}
```

Example 2: Job Completes with Errors

```
{
    "links": {
            "href": "https://<BASE-URL>/interop/rest/security/v2/groups/
adduserstogroup",
            "action": "PUT"
    },
    "status": 1,
    "error": {
        "errorcode": "EPMCSS-21021",
        "errormessage": "Failed to add users to group. Group <groupname> does
not exist. Provide a valid groupname."
    },
    "details": null
}
```

Example 3: Job Completes with Partial Errors

```
"links": {
            "href": "https://<BASE-URL>/interop/rest/security/v2/groups/
adduserstogroup",
            "action": "PUT"
    },
    "status": 0,
    "error": null,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "details": {
        "processed": 5,
        "succeeded": 3,
        "failed": 2,
        "faileditems":
        [
            {
                "userlogin": "jdoe",
                "errorcode": "EPMCSS-21031",
                "errormessage": "Failed to add user to group. User jdoe does
not exist. Provide a valid userlogin."
            },
            {
                "userlogin": "chris",
                "errorcode": "EPMCSS-21031",
                "errormessage": "Failed to add user to group. User chris does
not exist. Provide a valid userlogin."
            }
        ]
    }
}
```

Sample cURL Command Basic Auth

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/json'
-d '{"groupname":"G1","users":[{"userlogin":"jdoe"},{"userlogin":"chris"}]}'
'https://<BASE-URL>/interop/rest/security/v2/groups/adduserstogroup'
```

Sample cURL Command OAuth 2.0

```
curl -X PUT --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/json' -d '{"groupname":"G1","users":[{"userlogin":"jdoe"},
{"userlogin":"chris"}]}' 'https://<BASE-URL>/interop/rest/security/v2/groups/
adduserstogroup'
```

Remove Users from Groups

Removes batches of users from existing groups maintained in Access Control using either a CSV file upload (v1) or request payload (v2). You can use the Upload REST API to upload the file to the environment.

> **Note**
>
> A user is removed from a group only if both of these conditions are met:
>
> - User logins included in the file exist in the identity domain that services the environment
> - The user is assigned to an application role in the identity domain

Both APIs provide details about successful and failed user removals, including failure reasons and counts of passed and failed records.

Copyright © 2017, 2026, Oracle and/or its affiliates.

The v1 API requires an ANSI or UTF-8 encoded CSV file containing user login IDs or email addresses. Before running the API, the file must be uploaded to the environment using the Upload REST API. This API can be run only by a Service Administrator in the identity domain from which users are to be removed. The v1 API is asynchronous and returns a Job ID that can be used to monitor the status of the operation.

The v2 API accepts all parameters directly in the request payload. This topic describes the simplified v2 version of the REST API. This version contains all parameters in the payload and does not require URL encoding while calling the REST APIs, which makes the v2 API easier to use. The v2 API is synchronous and returns the outcome of the operation directly in the response.

In v1, a response status of `-1` indicates that removing users from the group is still in progress. Any non-zero status value indicates failure of removing users from groups.

Required Roles

Service Administrator or any application role and the Access Control - Manage granular role

Remove Users from a Group (v1)

REST Resource

PUT `/interop/rest/security/<api_version>/groups`

Table 2-33 Tasks for Remove Users from Group

Task	Request	REST Resource
Remove users from group	PUT	`/interop/rest/security/<api_version>/groups`
Remove users from group status	GET	`/interop/rest/security/<api_version>/jobs/<jobId>`

Request

Supported Media Types: `application/x-www-form-urlencoded`

Table 2-34 Parameters

Name	Description	Type	Required	Default
`jobtype`	The string should have the value `REMOVE_USERS_FROM_GROUP`. This value denotes that the users are being removed from the group.	Form	Yes	None
`filename`	The name of the uploaded ANSI or UTF-8 encoded CSV file containing information on the users to be removed, for example, `removeUsersFromGroup.csv`. The file must have been uploaded already using the Upload REST API.	Form	Yes	None
`groupname`	The name of group from which the users must be removed. This group must be a pre-existing group.	Form	Yes	None

Response

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-35 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`data`	Parameters as key value pairs passed in the request
`items`	Details about the resource
`links`	Details of the first URL to be requested to get the job details; rel is "Job Details"

Examples of Response Body

Example 1: Job is in Progress

```
{
  "links": [
    {
      "rel": "self",
      "href": "https://<BASE-URL>/interop/rest/security/<api_version>/groups",
      "data": {
        "jobType": "REST_REMOVE_USERS_FROM_GROUP",
        "filename": "<filename>"
        "groupName": "<groupName>"
      },
      "action": "PUT"
    },
    {
      "rel": "Job Status",
      "href": "https://<BASE-URL>/interop/rest/security/<api_version>/jobs/
<jobID>",
      "data": null,
      "action": "GET"
    }
  ],
  "details": null,
  "status": -1,
  "items": null
}
```

Example 2: Job Completes with Errors

```
{
  "links": [
    {
      "rel": "self",
      "href": "https://<BASE-URL>/interop/rest/security/<api_version>/jobs/
<jobId>",
      "data": null,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
      "action": "GET"
    }
  ],
  "details": "Failed to remove users. Input file <filename> is not found.
Specify a valid file name.",
  "status": 1,
  "items": null
}
```

Example 3: Job Completes without Errors

```
{
  "links": [
    {
      "rel": "self",
      "href": "https://<BASE-URL>/interop/rest/security/<api_version>/jobs/
<jobId>",
      "data": null,
      "action": "GET"
    }
  ],
  "details": "Processed - 3, Succeeded - 2, Failed - 1.",
  "status": 0,
  "items": [
    {
         "UserName":"<USERNAME>","Error_Details": "User <USERNAME> is not
found. Verify that the user exists."
    }
  ]
 }
```

Sample cURL Command Basic Auth

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -H'Content-Type: application/x-www-
form-urlencoded' -d
'jobtype=REMOVE_USERS_FROM_GROUP&filename=removeUsersFromGroup.csv&groupname=G
roupA' 'https://<BASE-URL>/interop/rest/security/v1/groups'
```

Sample cURL Command OAuth 2.0

```
curl -X PUT --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/x-www-form-urlencoded' -d
'jobtype=REMOVE_USERS_FROM_GROUP&filename=removeUsersFromGroup.csv&groupname=G
roupA' 'https://<BASE-URL>/interop/rest/security/v1/groups'
```

Remove Users from a Group (v2)

REST Resource

PUT `/interop/rest/security/v2/groups/removeusersfromgroup`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-36 Tasks for Remove Users from Group

Task	Request	REST Resource
Remove users from group	PUT	`/interop/rest/security/v2/groups/removeusersfromgroup`

Request

Supported Media Types: `application/json`

The following table summarizes the request parameters.

Table 2-37 Parameters

Name	Description	Type	Required	Default
`groupname`	The name of group from which the users must be removed. This group must be a pre-existing group.	Payload	Yes	None
`users`	List of userlogin IDs of the users to be removed from group.	Payload	Yes	None

Example URL and Payload

`https://<BASE-URL>/interop/rest/security/v2/groups/removeusersfromgroup`

```
{
      "groupname": "G1",
    "users":     [
                {
            "userlogin": "jdoe"
                },
                {
                    "userlogin": "chris"
                }
        ]
}
```

Response

Supported Media Types: `application/json`

Table 2-38 Parameters

Name	Description
`links`	Detailed information about the link and HTTP call type
`status`	Identifies the status of the operation • 0: Operation Success • 1: Operation Failed
`error`	Detailed information about the error
`details`	Detailed status of the operation performed. Total number of records processed, succeeded, and failed and reason for why it failed.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Examples of Response Body

Example 1: Job Completes without Errors

```
{
    "links": {
            "href": "https://<BASE-URL>/interop/rest/security/v2/groups/
removeusersfromgroup",
            "action": "PUT"
    },
    "status": 0,
    "error": null,
    "details": {
        "processed": 3,
        "succeeded": 3,
        "failed": 0,
        "faileditems": null
    }
}
```

Example 2: Job Completes with Errors

```
{
    "links": {
            "href": "https://<BASE-URL>/interop/rest/security/v2/groups/
removeusersfromgroup",
            "action": "PUT"
    },
    "status": 1,
    "error": {
        "errorcode": "EPMCSS-21022",
        "errormessage": "Failed to remove users from group. Group <groupname>
does not exist. Provide a valid groupname."
    },
    "details": null
}
```

Example 3: Job Completes with Partial Errors

```
{
    "links": {
            "href": "https://<BASE-URL>/interop/rest/security/v2/groups/
removeusersfromgroup",
            "action": "PUT"
    },
    "status": 0,
    "error": null,
    "details": {
        "processed": 5,
        "succeeded": 3,
        "failed": 2,
        "faileditems":
        [
            {
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
                "userlogin": "jdoe",
                "errorcode": "EPMCSS-21032",
                "errormessage": "Failed to remove user from group. User jdoe
does not exist. Provide a valid userlogin."
            },
            {
                "userlogin": "chris",
                "errorcode": "EPMCSS-21032",
                "errormessage": "Failed to remove user from group. User chris
does not exist. Provide a valid userlogin."
            }
        ]
    }
}
```

Sample cURL Command Basic Auth

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/json'
-d '{"groupname":"G1","users":[{"userlogin":"jdoe"},{"userlogin":"chris"}]}'
'https://<BASE-URL>/interop/rest/security/v2/groups/removeusersfromgroup'
```

Sample cURL Command OAuth 2.0

```
curl -X PUT --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/json' -d '{"groupname":"G1","users":[{"userlogin":"jdoe"},
{"userlogin":"chris"}]}' 'https://<BASE-URL>/interop/rest/security/v2/groups/
removeusersfromgroup'
```

List Users (v1)

The List Users REST API generates a list of available users in the environment.

The API identifies the userlogin, firstname, lastname, and email. Additionally, it can provide information about the EPM groups, IDCS groups, application roles, and granular roles assigned to the users. Users can be retrieved based on specific user login or any matching user attribute (first name, last name, user login, email).

The API is synchronous and returns the outcome of the operation in the response. Any non-zero status indicates failure in listing users.

The optional `indirect` parameter controls whether the API returns only direct associations or both direct and indirect associations.

Required Roles

- Service Administrator
- Any application role and the Access Control - Manage granular role
- Any application role and the Access Control - View granular role

REST Resource

POST `/interop/rest/security/v1/users/list`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-39 Tasks for List Users

Task	Request	REST Resource
List Users	POST	`/interop/rest/security/v1/users/list`

Request

Supported Media Types: `application/json`

Table 2-40 Request Parameters

Name	Description	Type	Required	Default
`userlogin`	Get the users matching the specified `userlogin`.	Payload	No	Return all users
`epmgroups`	• **true**: Returns the list of EPM groups that users belong to, if any. • **false**: Does not return the list of EPM groups that users belong to, if any.	Payload	No	False
`granularroles`	• **true**: Returns the list of granular roles assigned to users, if any. • **false**: Does not return the list of granular roles assigned to users, if any.	Payload	No	False
`idcsgroups`	• **true**: Returns the list of IDCS groups that users belong to, if any. • **false**: Does not return the list of IDCS groups that users belong to, if any.	Payload	No	False
`applicationroles`	• **true**: Returns the list of application roles assigned to users, if any. • **false**: Does not return the list of application roles assigned to users, if any.	Payload	No	False
`indirect`	• **true**: Returns both direct and indirect groups and roles that users belong to, if any. • **false**: Returns only direct groups and roles that users belong to, if any.	Payload	No	False
`userattribute`	Get the users matching the specified user attribute (case-insensitive) with any one of these user attributes: • `userlogin` • `firstname` • `lastname` • `email`	Payload	No	Returns all users

Example URL and Payload

```
https://<BASE-URL>/interop/rest/security/v1/users/list
```

```
{
  "userlogin": "john",
  "epmgroups": true,
  "granularroles": true,
  "idcsgroups": true
  "applicationroles": true,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
  "indirect": true,
  "userattribute": "jack"
}
```

Response

Supported Media Types: `application/json`

Table 2-41 Response Parameters

Name	Description
`links`	Detailed information about the link and HTTP call type
`status`	Status of the operation • 0: Operation succeeded • 1: Operation failed
`error`	Detailed information about the error
`details`	User details

Examples of Response Body

Example 1: REST API issued without any Payload Completes without Errors

```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v1/users/list",
    "action": "POST"
  },
  "status": 0,
  "error": null,
  "details": [
    {
      "userlogin": "Jade",
      "firstname": "Jade",
      "lastname": "Clark",
      "email": "jade.clark@example.com"
    },
    {
      "userlogin": "Jeff",
      "firstname": "Jeff",
      "lastname": "Clark",
      "email": "jeff.clark@example.com"
    },
    {
      "userlogin": "john",
      "firstname": "john",
      "lastname": "kennedy",
      "email": "john.kennedy@example.com"
    }
  ]
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example 2: REST API issued with "userlogin", "epmgroups ", "granularroles ", "idcsgroups ", and "applicationroles " in Payload Completes without Errors


```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v1/users/list",
    "action": "POST"
  },
  "status": 0,
  "error": null,
  "details": [
    {
      "userlogin": "john",
      "firstname": "john",
      "lastname": "kennedy",
      "email": "john.kennedy@example.com",
      "epmgroups": [
        {
          "groupname": "Analyst",
          "description": "analyst",
          "type": "EPM"
        },
        {
          "groupname": "InteractiveUser",
          "description": "UsedforaccessassignmentsforPowerUsers",
          "type": "EPM"
        }
      ],
      "idcsgroups": [
        {
          "groupname": "Sales-EU",
          "description": "sales euratop",
          "type": "IDCS"
        },
        {
          "groupname": "Sales-US",
          "description": "Sales United States",
          "type": "IDCS"
        }
      ],
      "granularroles": [
        {
          "rolename": "AdHoc-ReadOnlyUser",
          "id": "HP: 0017"
        },
        {
          "rolename": "AdHoc-User",
          "id": "HP: 0015"
        }
      ],
      "applicationroles": [
        {
          "rolename": "Service Administrator",
          "id": "HUB: 001"
        },
        {
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
          "rolename": "Power User",
          "id": "HUB: 002"
        }
      ]
    }
  ]
}
```

Example 3: REST API Completes with Errors

```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v1/users/list",
    "action": "POST"
  },
  "status": 1,
  "error": {
    "errorcode": "EPMCSS-21193",
    "errormessage": "Failed to get Users. Authorization failed. Please
provide valid authorized User."
  },
  "details": null
}
```

Sample cURL Command Basic Auth

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/
json' 'https://<BASE-URL>/interop/rest/security/v1/users/list'
```

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/
json' -d '{"userlogin":"john"}' 'https://<BASE-URL>/interop/rest/security/v1/
users/list'
```

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/
json' -d
'{"userlogin":"john","epmgroups":true,"granularroles":true,"idcsgroups":true,"
applicationroles":true,"indirect":true }' 'https://<BASE-URL>/interop/rest/
security/v1/users/list'
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Sample cURL Command OAuth 2.0

```
curl -X POST --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H'Content-
Type: application/json' 'https://<BASE-URL>/interop/rest/security/v1/users/
list'


curl -X POST --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H'Content-
Type: application/json' -d '{"userlogin":"john"}' 'https://<BASE-URL>/interop/
rest/security/v1/users/list'


curl -X POST --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H'Content-
Type: application/json' -d
'{"userlogin":"john","epmgroups":true,"granularroles":true,"idcsgroups":true,"
applicationroles":true,"indirect":true}' 'https://<BASE-URL>/interop/rest/
security/v1/users/list'
```

Update Users

Updates user attributes in an identity domain using either a CSV file upload (v1) or request payload (v2). These APIs can modify user properties such as first name, last name, and email for users identified by their user login.

Because user accounts are common to all service environments that share the identity domain, updates made to a user account are reflected across all environments associated with that identity domain.

Both APIs provide details about successful and failed user updates, including failure reasons and counts of passed and failed records.

The v1 API requires an ANSI or UTF-8 encoded CSV file containing user information and updated attribute values. Fields containing space characters must be enclosed in double quotation marks. Before running the API, the file must be uploaded to the environment using the Upload REST API, and the file should be deleted after the API executes. The CSV file should not include the account of the user executing the command. This API updates all properties of the user identified by the User Login field. The v1 API should be run only by Service Administrators who are also assigned to the Identity Domain Administrator role in the identity domain where users are to be updated. The v1 API is asynchronous and returns a Job ID that can be used to monitor the status of the operation.

In v1, a response status of `-1` indicates that updating users is still in progress. Any non-zero status value indicates failure of updating users.

The v2 API accepts updated user attributes directly in the request payload. If a user definition in the payload matches an existing user account in the identity domain, no changes are made and the API returns an error response. This API should be run only by an Identity Domain Administrator in the identity domain where users are to be updated. In addition, the user running the API must also be assigned an application role in the target environment. This topic describes the simplified v2 version of the REST API. This version contains all parameters in the payload and does not require URL encoding while calling the REST APIs, which makes the v2 API easier to use. The v2 API is synchronous and returns the outcome of the operation directly in the response.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Required Roles

Identity Domain Administrator and any application role (Service Administrator, Power User, User, or Viewer)

Update Users (v1)

Required Roles

Identity Domain Administrator and any application role (Service Administrator, Power User, User, or Viewer)

REST Resource

PUT `/interop/rest/security/v1/users`

Table 2-42 Tasks for Updating Users

Task	Request	REST Resource
Update users	PUT	`/interop/rest/security/v1/users`
Update users status	GET	`/interop/rest/security/v1/jobs/<jobId>`

Request

Supported Media Types: `application/x-www-form-urlencoded`

Table 2-43 Parameters

Name	Description	Type	Required	Default
`jobtype`	UPDATE_USERS	Form	Yes	None
`filename`	The name of the uploaded ANSI or UTF-8 encoded CSV file containing the users to update, such as `updateUsers.csv`.	Form	Yes	None

Response

Supported Media Types: `application/json`

Table 2-44 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`data`	Parameters as key value pairs passed in the request
`items`	Details about the resource
`links`	Details of the first URL to be requested to get the job details; rel is "Job Details"

Copyright © 2017, 2026, Oracle and/or its affiliates.

Examples of Response Body

Example 1: Job is in Progress

```
{
    "links": [
        {
            "rel": "self",
            "href": "https://<BASE-URL>/interop/rest/security/<api_version>/
users",
            "data": {
                "jobType": "UPDATE_USERS",
                "filename": "<filename>"
            },
            "action": "UPDATE"
        },
        {
            "rel": "Job Status",
            "href": "https://<BASE-URL>/interop/rest/security/<api_version>/
jobs/<jobID>",
            "data": null,
            "action": "GET"
        }
    ],
    "details": null,
    "status": -1,
    "items": null
}
```

Example 2: Job Completes with Errors

```
{
"links": [
{
"rel": "self",
"href": "https://<BASE-URL>/interop/rest/security/
<api_version>/jobs/",
"data": null,
"action": "GET"
}
],
"details": "Failed to update users. Input file <filename> not found. Specify
a valid file name.",
"status": 1,
"items": null
}
```

Example 3: Job Completes without Errors

```
{
"links": [
{
"rel": "self",
"href": "https://<BASE-URL>/interop/rest/security/
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
<api_version>/jobs/",
"data": null,
"action": "GET"
}
],
"details": "Processed - 3, Succeeded - 2, Failed - 1.",
"status": 0,
"items": [
        {
            "UserName": "<username>",
            "Error_Details": " User <USER_NAME> not found. Verify that the
user exists. "
        }
    ]}
```

Sample cURL Command Basic Auth

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/x-www-
form-urlencoded' -d 'jobtype=UPDATE_USERS&filename=updateUsers.csv' 'https://
<BASE-URL>/interop/rest/security/v1/users'
```

Sample cURL Command OAuth 2.0

```
curl -X PUT --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/x-www-form-urlencoded' -d
'jobtype=UPDATE_USERS&filename=updateUsers.csv' 'https://<BASE-URL>/interop/
rest/security/v1/users'
```

Update Users (v2)

Updates user attributes as provided in the request payload. It modifies user attributes such as first name, last name, and email for a user in an identity domain identified by user login. If a user definition in the payload matches a user account that exists in the identity domain, no changes are made to the existing user account, and the REST API responds back with an error. Because user accounts are common to all service environments that an identity domain supports, updated users are available to all the environments that share the identity domain.

This API should be run only by an Identity Domain Administrator in the identity domain where users will be updated. In addition, the user running the API must also be assigned an application role in the environment where the API is targeted. With this API, you can see which records failed and the reason why they failed in addition to how many records passed and failed.

This topic describes the simplified v2 version of this REST API. This version contains all parameters in the payload and does not require URL encoding while calling the REST APIs. This makes the v2 API easier to use.

The API is synchronous and returns the outcome of the operation in the response. Any non-zero status indicates failure of updating users.

Required Roles

Identity Domain Administrator and any application role (Service Administrator, Power User, User, or Viewer)

Copyright © 2017, 2026, Oracle and/or its affiliates.

REST Resource

PUT `/interop/rest/security/v2/users/update`

Request

Supported Media Types: `application/json`

Request Payload

Table 2-45 Payload Parameters

Name	Description	Type	Required	Default
`userlogin`	User login IDs of the user, whose attributes are to be modified	Payload	Yes	None
`firstname`	User's first name to modify	Payload	No	None
`lastname`	User's last name to modify	Payload	No	None
`email`	User's email to modify	Payload	No	None

Example URL and Payload

`https://<BASE-URL>/interop/rest/security/v2/users/update`

```
{
  "users": [
    {
      "userlogin": "jdoe",
      "firstname": "Jane",
      "lastname": "Doe",
      "email": jane.doe@example.com,
    },
    {
      "userlogin": "chris",
      "firstname": "chris",
      "email": chris.newton@example.com
    },
    {
      "userlogin": "alex",
      "firstname": "alex",
      "lastname": "peter",
    },
    {
      "userlogin": "jeff",
      "email": jeff.chris@example.com
    },

  ]
}
```

Response

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-46 Response Parameters

Name	Description
`links`	Detailed information about the link and HTTP call type
`status`	Identifies the status of the operation • 0 - Operation succeeded • 1 - Operation failed
`error`	Detailed information about the error
`details`	Detailed status of the operation performed. Total number of records processed, succeeded, and failed, and the reason for why they failed.

Examples of Response Body

Example 1: REST API Completes without Errors

```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v2/users/update",
    "action": "PUT"
  },
  "status": 0,
  "error": null,
  "details": {
    "processed": 2,
    "succeeded": 2,
    "failed": 0,
    "faileditems": null
  }
}
```

Example 2: REST API Completes with Errors

```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v2/users/update",
    "action": "PUT"
  },
  "status": 1,
  "error": {
    "errorcode": "EPMCSS-21192",
    "errormessage": "Failed to update user. Authorization failed. Please
provide valid authorized user."
  },
  "details": null
}
```

Example 3: REST API Completes with Partial Errors

```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v2/users/update",
    "action": "PUT"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
  },
  "status": 0,
  "error": null,
  "details": {
    "processed": 5,
    "succeeded": 3,
    "failed": 2,
    "faileditems": [
      {
        "userlogin": "jdoe",
        "errorcode": "EPMCSS-21142",
        "errormessage": "Failed to update user. User already exists in
System. Provide different user login."
      },
      {
        "userlogin": "alex",
        "errorcode": "EPMCSS-21143",
        "errormessage": "Failed to update user. Invalid email. Provide valid
email."
      }
          ]
  }
}
```


Sample cURL Command Basic Auth

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/json'
-d '{"users":
[{"userlogin":"jdoe","firstname":"Jane","lastname":"Doe","email":jane.doe@exam
ple.com},
{"userlogin":"chris","firstname":"chris","lastname":"west","email":chris.west@
example.com},{"userlogin":"jeff","email":jeff.chris@example.com}]}' 'https://
<BASE-URL>/interop/rest/security/v2/users/update'
```

Sample cURL Command OAuth 2.0

```
curl -X PUT --header "Authorization: Bearer <OAUTH_TOKEN>" 'Content-Type:
application/json' -d '{"users":
[{"userlogin":"jdoe","firstname":"Jane","lastname":"Doe","email":jane.doe@exam
ple.com},
{"userlogin":"chris","firstname":"chris","lastname":"west","email":chris.west@
example.com},{"userlogin":"jeff","email":jeff.chris@example.com}]}' 'https://
<BASE-URL>/interop/rest/security/v2/users/update'
```

Add a User to a Batch of Groups (v1)

Adds an existing user to a batch of groups in Access Control using an ANSI or UTF-8 encoded CSV file that was uploaded to the environment. Use the Upload REST API to upload the file. The file should be deleted after the API executes. With this API, you can see which records

Copyright © 2017, 2026, Oracle and/or its affiliates.

failed and the reason why they failed in addition to how many records passed and failed. The file format is as follows:

```
Group Name
GroupA
GroupB
```

The user is added to the groups only if these conditions are met:

- The user must exist in the identity domain that services the environment
- The user must be assigned to an application role in the identity domain
- The groups provided must exist in Access Control and must not be pre-defined groups

Additionally, the user running this API must be authorized to perform this action. This API should be run only by a service administrator in the environment where the user is to be added to the groups.

The API is asynchronous and returns the Job ID. Use the job status URI to determine whether the assignment of a user to the groups is complete. The presence of status -1 in the response indicates that the addition of a user to groups is in progress. Any non-zero status except -1 indicates failure of adding a user.

Required Roles

Service Administrator or any application role and the Access Control - Manage granular role

REST Resource

PUT `/interop/rest/security/v1/groups`

Table 2-47 Tasks for Adding a User to a Batch of Groups

Task	Request	REST Resource
Add a user to groups	PUT	`/interop/rest/security/v1/groups`
Add a user to groups status	GET	`/interop/rest/security/v1/jobs/<jobId>`

Request

Supported Media Types: `application/x-www-form-urlencoded`

Table 2-48 Parameters

Name	Description	Type	Required	Default
jobtype	The string should have the value ADD_USER_TO_GROUPS. This value denotes that the user is being added to the groups.	Form	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-48 (Cont.) Parameters

Name	Description	Type	Required	Default

`filename`	The name of the uploaded ANSI or UTF-8 encoded CSV file containing the groups to add the user to, such as `addUserToGroups.csv`.
	The file must have been uploaded already using the Upload REST API.
	File format example:
	
	`Group Name`
	`GroupA`
	`GroupB`
		Form	Yes	None

username	The name of the user to add to the provided list of groups. This user must already exist.	Form	Yes	None

Response

Supported Media Types: `application/json`

Table 2-49 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`data`	Parameters as key value pairs passed in the request
`items`	Details about the resource
`links`	Details of the first URL to be requested to get the job details; rel is "Job Details"

Examples of Response Body

Example 1: Job is in Progress

```
{
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/security/<api_version>/
groups",
            "rel": "self",
            "data": {
                "jobType": "ADD_USER_TO_GROUPS",
                "filename": "<filename>",
                "username": "<username>"
            },
            "action": "PUT"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        },
        {
            "href": "https://<BASE-URL>/interop/rest/security/<api_version>/
jobs/<jobId>",
            "rel": "Job Status",
            "data": null,
            "action": "GET"
        }
    ],
    "details": null,
    "status": -1,
    "items": null
}
```

Example 2: Job Completes with Errors

```
{
  "links": [
    {
      "rel": "self",
      "href": "https://<BASE-URL>/interop/rest/security/v1/jobs/<jobID>",
      "data": null,
      "action": "GET"
    }
  ],
  "details": "Failed to add user to groups. Input file <fileName> is not
found. Specify a valid file name.",
  "status": 1,
  "items": null
}
```

Example 3: Job Completes without Errors

```
{
  "links": [
    {
      "rel": "self",
      "href": "https://<BASE-URL>/interop/rest/security/<api_version>/jobs/
<jobId>",
      "data": null,
      "action": "GET"
    }
  ],
  "details": "Processed - 3, Succeeded - 2, Failed - 1.",
  "status": 0,
  "items": [
    {
            "GroupName":"<GROUPNAME>","Error_Details": "Group <GROUPNAME> is
not found. Verify that the group exists."
    }
  ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Sample cURL Commands Basic Auth

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -H'Content-Type: application/x-www-
form-urlencoded' -d
'jobtype=ADD_USER_TO_GROUPS&filename=addUserToGroups.csv&username=Alex.Smith@e
xample.com' 'https://<BASE-URL>/interop/rest/security/v1/groups'


curl -X PUT --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/x-www-form-urlencoded' -d
'jobtype=ADD_USER_TO_GROUPS&filename=addUserToGroups.csv&username=Alex.Smith@e
xample.com' 'https://<I>/interop/rest/security/v1/groups'
```

Sample cURL Commands OAuth 2.0

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -H'Content-Type: application/x-www-
form-urlencoded' -d
'jobtype=REMOVE_USER_FROM_GROUPS&filename=removeUserFromGroups.csv&username=Al
ex.Smith@example.com' 'https://<BASE-URL>/interop/rest/security/v1/groups'


curl -X PUT --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/x-www-form-urlencoded' -d
'jobtype=REMOVE_USER_FROM_GROUPS&filename=removeUserFromGroups.csv&username=Al
ex.Smith@example.com' 'https://<BASE-URL>/interop/rest/security/v1/groups'
```

Remove a User from a Batch of Groups (v1)

Removes a user from a batch of groups listed in an ANSI or UTF-8 encoded CSV file maintained in Access Control. You can use the Upload REST API to upload the file to the environment. The file format is as follows:

```
Group Name
GroupA
GroupB
```

A user is removed from groups only if these conditions are met:

- The user must exist in the identity domain that services the environment
- The user must be assigned to an application role in the identity domain
- The groups provided must exist in Access Control and must not be pre-defined groups

Additionally, the user running this API must be authorized to perform this action. This API should be run only by a service administrator in the environment where a user is to be removed from the groups. With this API, you can see which records failed and the reason why they failed in addition to how many records passed and failed.

The presence of status -1 in the response indicates that the removal in progress. Use the job status URI to determine whether the removal is complete. Any non-zero status except -1 indicates failure.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Required Roles

Service Administrator or any application role and the Access Control - Manage granular role

REST Resource

PUT `/interop/rest/security/<api_version>/groups`

Table 2-50 Tasks for Remove a User from a Batch of Groups

Task	Request	REST Resource
Remove a user from groups	PUT	`/interop/rest/security/v1/groups`
Remove a user from groups status	GET	`/interop/rest/security/v1/jobs/<jobId>`

Request

Supported Media Types: `application/x-www-form-urlencoded`

The following table summarizes the request parameters.

Table 2-51 Parameters

Name	Description	Type	Required	Default
`jobtype`	The string should have the value `REMOVE_USER_FROM_GROUPS`. This value denotes that the user is being removed from the groups.	Form	Yes	None

`filename`	The name of the uploaded ANSI or UTF-8 encoded CSV file containing information on the groups from which the user is to be removed, for example, `removeUserFromGroups.csv`.
	The file must have been uploaded already using the Upload REST API.
	File format:
	`Group Name`
	`GroupA`
	`GroupB`
		Form	Yes	None

`username`	The name of the user to remove from the provided list of groups. This user must already exist.	Form	Yes	None

Response

Supported Media Types: `application/json`

Table 2-52 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-52 (Cont.) Parameters

Name	Description
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`data`	Parameters as key value pairs passed in the request
`items`	Details about the resource
`links`	Details of the first URL to be requested to get the job details; rel is "Job Details"

Examples of Response Body

Example 1: Job is in Progress

```
{
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/security/<api_version>/
groups",
            "rel": "self",
            "data": {
                "jobType": "REMOVE_USER_FROM_GROUPS",
                "filename": "<filename>",
                "username": "<username>"
            },
            "action": "PUT"
        },
        {
            "href": "https://<BASE-URL>/interop/rest/security/<api_version>/
jobs/<jobId>",
            "rel": "Job Status",
            "data": null,
            "action": "GET"
        }
    ],
    "details": null,
    "status": -1,
    "items": null
}
```

Example 2: Job Completes with Errors

```
{
  "links": [
    {
      "rel": "self",
      "href": "https://<BASE-URL>/interop/rest/security/<api_version>/jobs/
<jobId>",
      "data": null,
      "action": "GET"
    }
  ],
  "details": "Failed to remove user from groups. File <filename> is not
found. Specify a valid file name.",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
  "status": 1,
  "items": null
}
```

Example 3: Job Completes without Errors

```
{
  "links": [
    {
      "rel": "self",
      "href": "https://<BASE-URL>/interop/rest/security/<api_version>/jobs/
<jobId>",
      "data": null,
      "action": "GET"
    }
  ],
  "details": "Processed - 3, Succeeded - 1, Failed - 2.",
  "status": 0,
  "items": [
    {
        "GroupName":"<GROUPNAME>","Error_Details": "Group <GROUPNAME> is not
found. Verify that the group exists."
    },

{        "GroupName":"<GROUPNAME>","Error_Details": "Group <GROUPNAME> is not
found. Verify that the group exists."
    }
  ]
}
```

Sample cURL Command Basic Auth

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -H'Content-Type: application/x-www-
form-urlencoded' -d
'jobtype=REMOVE_USER_FROM_GROUPS&filename=removeUserFromGroups.csv&username=Al
ex.Smith@example.com'
'https://<BASE-URL>/interop/rest/security/v1/groups'
```

Sample cURL Command OAuth 2.0

```
curl -X PUT --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/x-www-form-urlencoded' -d
'jobtype=REMOVE_USER_FROM_GROUPS&filename=removeUserFromGroups.csv&username=Al
ex.Smith@example.com'
'https://<BASE-URL>/interop/rest/security/v1/groups'
```

Import User Group Assignments as CSV (v1)

Imports EPM group assignments of users from a comma separated value (CSV) file to create new assignments in an existing EPM group. Oracle Fusion Cloud EPM enforces application-level and artifact-level security assignments based on the new group assignments.

Copyright © 2017, 2026, Oracle and/or its affiliates.

> **Note**
>
> - All user logins and group names included in the import file must exist in Access Control.
> - You cannot create a group using this import process.
> - You can only create new group assignments; you cannot remove user's current group assignments.

The CSV file format can be as shown in the following examples:

Example 1

```
"User Login","Group"
"jdoe","Example_grp1"
"jane.doe@example.com","Example_grp2"
```

Example 2

```
"User Login","First Name","Last Name","Email","Direct","Group"
"jdoe","John","Doe","jdoe@example.com","Yes","Example_grp1"
"jane.doe@example.com","Jane","Doe","janedoe@example.com","No","Example_grp2"
```

This format is identical to the export CSV version of User Group Report (v1). If you use this format, the import process ignores all columns other than User Login and Group. An easy way to create an import file is to export the current User Group report and then modify it as needed.

The API is synchronous and returns the outcome of the operation in the response. Any non-zero status indicates that Updating Groups failed. With this API, you can see which records failed and the reason why they failed, in addition to how many records passed and failed.

Required Roles

Service Administrator

Any application role and the Access Control - Manage granular role

REST Resource

POST `/interop/rest/security/v1/import/usergroupassignments`

Request

Supported Media Types: `application/octet-stream`

Response

Supported Media Types: `application/json`

Table 2-53 Response Parameters

Name	Description
`links`	Detailed information about the link and HTTP call type

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-53 (Cont.) Response Parameters

Name	Description
`status`	Identifies the status of the operation • 0 - Operation succeeded • 1 - Operation failed
`error`	Detailed information about the error
`details`	Detailed status of the operation performed. Total number of records processed, succeeded, and failed, and the reason for why they failed.

Examples of Response Body

Example 1: REST API Completes without Errors

```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v1/import/
usergroupassignments",
    "action": "POST"
  },
  "status": 0,
  "error": null,
  "details": {
    "processed": 2,
    "succeeded": 2,
    "failed": 0,
    "faileditems": null
  }
}
```

Example 2: REST API Completes with Errors

```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v1/import/
usergroupassignments",
    "action": "POST"
  },
  "status": 1,
  "error": {
    "errorcode": "EPMCSS-21387",
    "errormessage": "Failed to import user group report. Authorization
failed. User 'bishalghosh' is not authorized to perform this operation.
"
  },
  "details": null
}
```

Example 3: REST API Completes with Partial Errors

```
{
  "links": {
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "href": "https://<BASE-URL>/interop/rest/security/v1/import/
usergroupassignments",
    "action": "POST"
  },
  "status": 0,
  "error": null,
  "details": {
    "processed": 3,
    "succeeded": 1,
    "failed": 2,
    "faileditems": [
      {
        "groupname": "GroupA",
        "errorcode": "EPMCSS-21382",
        "errormessage": "Failed to import user group report.
Invalid group. Provide valid group."
      },
      {
        "groupname": "GroupB",
        "errorcode": "EPMCSS-21385",
"errormessage": "Failed to import user group report. Unable to import user
members. Provide valid members."
        "erroritems": {
          "users": [
            {
              "userlogin": "UserA",
              "errorcode": "EPMCSS-21389",
                       "errormessage": "Invalid user. Provide valid user."
            }
          ]
        }
      }
    ],
    "items": null
  }
```

Sample cURL Command Basic Auth

```
curl -X POST 'https://<BASE-URL>/interop/rest/security/v1/import/
usergroupassignments' -u '<USERNAME>:<PASSWORD>' -H 'Content-Type:
application/octet-stream' --data-binary '@<FILE_LOCATION>'


curl -X POST 'https://<BASE-URL>/interop/rest/security/v1/import/
usergroupassignments' -u '<USERNAME>:<PASSWORD>' -H 'Content-Type:
application/octet-stream' -H 'LOCALE: <LOCALE>' --data-binary
'@<FILE_LOCATION>'
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Sample cURL Command OAuth 2.0

```
curl -X POST 'https://<BASE-URL>/interop/rest/security/v1/import/
usergroupassignments' -H 'Content-Type: application/octet-stream' -H
"Authorization: Bearer <OAUTH_TOKEN>" --data-binary '@<FILE_LOCATION>'


curl -X POST 'https://<BASE-URL>/interop/rest/security/v1/import/
usergroupassignments' -H 'Content-Type: application/octet-stream' -H
"Authorization: Bearer <OAUTH_TOKEN>" -H 'LOCALE: <LOCALE>' --data-binary
'@<FILE_LOCATION>'
```

Update Granular Roles For Groups (v1)

Updates granular roles assigned to EPM or IDCS groups provided in the REST API payload. To update the granular role assigned an IDCS group, that group should already have an application role assigned to it.

This version contains all parameters in the payload and does not require URL encoding while calling the REST APIs.

The API is synchronous and returns the outcome of the operation in the response. Any non-zero status indicates that updating groups granular roles failed. With this API, you can see which records failed and the reason why they failed, in addition to how many records passed and failed.

Required Roles

Service Administrator or any application role and the Access Control - Manage granular role

REST Resource

PUT `/interop/rest/security/v1/roles/application/groups/update`

Request

Supported Media Types: `application/json`

Table 2-54 Request Parameters

Name	Description	Type	Required	Default
`groupname`	Name of group whose granular role assignment is to be modified.	Payload	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-54 (Cont.) Request Parameters

Name	Description	Type	Required	Default
`rolename`	The name of an granular role to assign to the group exactly as listed in Access Control. For a list of granular roles, see these links in *Administering Access Control*: • Account Reconciliation • Enterprise Profitability and Cost Management • Financial Consolidation and Close • FreeForm • Narrative Reporting • Enterprise Data Management • Planning • Profitability and Cost Management • Tax Reporting	Payload	Yes	None

Example URL and Payload

`https://<BASE-URL>/interop/rest/security/v1/roles/application/groups/update`

```
{
  "groups": [
    {
      "groupname": "EPMGroup1",
      "roles": [
        {
          "rolename": "Access Control - Manage"
        },
        {
          "rolename": "Ad Hoc - Read Only User"
        }
      ]
    },
    {
      "groupname": "IDCSGroup1",
      "roles": [
        {
          "rolename": "Access Control - View"
        },
        {
          "rolename": "Ad Hoc - User"
        }
      ]
    }
  ]
}
```

Response

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-55 Response Parameters

Name	Description
`links`	Detailed information about the link and HTTP call type
`status`	Identifies the status of the operation • 0 - Operation succeeded • 1 - Operation failed
`error`	Detailed information about the error
`details`	Detailed status of the operation performed. Total number of records processed, succeeded, and failed, and the reason for why they failed.

Examples of Response Body

Example 1: REST API Issued without any Payload Completes without Errors

```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v1/roles/application/
groups/update",
    "action": "PUT"
  },
  "status": 0,
  "error": null,
  "details": {
    "processed": 2,
    "succeeded": 2,
    "failed": 0,
    "faileditems": null
  }
}
```

Example 2: REST API Completes with Errors

```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v1/roles/application/
groups/update",
    "action": "PUT"
  },
  "status": 1,
  "error": {
    "errorcode": "EPMCSS-21192",
    "errormessage": "Failed to update granular roles for group. Authorization
failed. Please provide valid authorized user."
  },
  "details": null
}
```

Example 3: REST API Completes with Partial Errors

```
{
  "links": {
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "href": "https://<BASE-URL>/interop/rest/security/v1/roles/application/
groups/update",
    "action": "PUT"
  },
  "status": 0,
  "error": null,
  "details": {
    "processed": 5,
    "succeeded": 3,
    "failed": 2,
    "faileditems": [
      {
        "groupname": "EPMGroup1",
        "errorcode": "EPMCSS-21140",
        "errormessage": " Failed to update granular roles for group. Found
invalid role(s). Provide valid granular role(s).",
        "erroritems": {
          "roles": [
            {
              "rolename": "AccessControl-Manage",
              "errorcode": "EPMCSS-21140",
              "errormessage": "Failed to update granular role for group. Role
doesn’t exist in System. Provide valid rolename."
            }
          ]
        }
      },
      {
        "groupname": "IDCSGroup1",
        "errorcode": "EPMCSS-21140",
        "errormessage": "Failed to update granular roles for group. Found
invalid role(s). Provide valid granular role(s).",
        "erroritems": {
          "roles": [
            {
              "rolename": "Dashboards-Manage",
              "errorcode": "EPMCSS-21140",
              "errormessage": "Failed to update granular role for group. Role
doesn’t exist in System. Provide valid rolename."
            }
          ]
        }
      },
      {
        "groupname": "IDCSGroup2",
        "errorcode": "EPMCSS-21141",
        "errormessage": "Failed to update granular role for group. Group
doesn't exist in System. Provide valid Group.",
        "roles": null
      }
    ]
  }
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Sample cURL Command Basic Auth

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type:application/json' -
d '{"groups":[{"groupname":"IDCSGroup1","roles":[{"rolename":"Access Control
- Manage"},{"rolename":"Dashboards - Manage"}]},
{"groupname":"epmgroup1","roles":[{"rolename":"Access Control - View"},
{"rolename":"Dashboards - View"}]}]}' 'https://<BASE-URL>/interop/rest/
security/v1/roles/application/groups/update'
```

Sample cURL Command OAuth 2.0

```
curl -X PUT --header "Authorization: Bearer <OAUTH_TOKEN>" -H 'Content-
Type:application/json' -d ' {"groups":[{"groupname":"IDCSGroup1","roles":
[{"rolename":"Access Control - Manage"},{"rolename":"Dashboards - Manage"}]},
{"groupname":"epmgroup1","roles":[{"rolename":"Access Control - View"},
{"rolename":"Dashboards - View"}]}]}' 'https://<BASE-URL>/interop/rest/
security/v1/roles/application/groups/update'
```

Update Granular Roles for Users (v1)

Updates granular roles assigned to users provided in the REST API payload. To update a granular role assigned to a user, that user should already have an application role assigned to it.

This version contains all parameters in the payload and does not require URL encoding while calling the REST APIs.

The API is synchronous and returns the outcome of the operation in the response. Any non-zero status indicates that updating users granular roles failed. With this API, you can see which records failed and the reason why they failed, in addition to how many records passed and failed.

Required Roles

Service Administrator or any application role and the Access Control - Manage granular role

REST Resource

PUT `/interop/rest/security/v1/roles/application/users/update`

Request

Supported Media Types: `application/json`

Table 2-56 Request Parameters

Name	Description	Type	Required	Default
`userlogin`	User login IDs of the user, whose role assignment is to be modified.	Payload	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-56 (Cont.) Request Parameters

Name	Description	Type	Required	Default
	The name of a granular role to assign to the user exactly as listed in Access Control. For a list of granular roles, see these links in *Administering Access Control*: • Account Reconciliation • Enterprise Profitability and Cost Management • Financial Consolidation and Close • FreeForm • Narrative Reporting • Enterprise Data Management • Planning • Profitability and Cost Management • Tax Reporting	Payload	Yes	None

Example URL and Payload

```
https://<BASE-URL>/interop/rest/security/v1/roles/application/users/update
```

```
{
  "users": [
    {
      "userlogin": "jdoe",
      "roles": [
        {
          "rolename": "Access Control - Manage"
        },
        {
          "rolename": "Ad Hoc - Read Only User"
        }
      ]
    },
    {
      "userlogin": "jeff",
      "roles": [
        {
          "rolename": "Access Control - View"
        },
        {
          "rolename": "Ad Hoc - User"
        }
      ]
    }
  ]
}
```

Response

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-57 Response Parameters

Name	Description
`links`	Detailed information about the link and HTTP call type
`status`	Identifies the status of the operation • 0 - Operation succeeded • 1 - Operation failed
`error`	Detailed information about the error
`details`	Detailed status of the operation performed. Total number of records processed, succeeded, and failed, and the reason for why they failed.

Examples of Response Body

Example 1: REST API Issued without any Payload Completes without Errors

```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v1/roles/application/
users/update",
    "action": "PUT"
  },
  "status": 0,
  "error": null,
  "details": {
    "processed": 2,
    "succeeded": 2,
    "failed": 0,
    "faileditems": null
  }
}
```

Example 2: REST API Completes with Errors

```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v1/roles/application/
users/update",
    "action": "PUT"
  },
  "status": 0,
  "error": null,
  "details": {
    "processed": 5,
    "succeeded": 3,
    "failed": 2,
    "faileditems": {
      "users": [
        {
          "userlogin": "jdoe",
          "erroritems": {
            "roles": [
              {
                "rolename": "AccessControl-Manage",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
                "errorcode": "EPMCSS-21140",
                "errormessage": "Failed to update role.Role doesn’t exist in
System. Provide valid rolename."
              }
            ]
          }
        },
        {
          "userlogin": "jeff",
          "erroritems": {
            "roles": [
              {
                "rolename": "Dashboards-Manage",
                "errorcode": "EPMCSS-21140",
                "errormessage": "Failed to assignrole. Role doesn’t exist in
System. Provide valid rolename."
              }
            ]
          }
        },
        {
          "userlogin": "Jack",
          "errorcode": "EPMCSS-21141",
          "errormessage": "Failed to update role for user. User doesn't exist
in System. Provide valid user."
        }
      ]
    }
  }
}
```


Example 3: REST API Completes with Partial Errors


```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v1/roles/application/
users/update",
    "action": "PUT"
  },
  "status": 0,
  "error": null,
  "details": {
    "processed": 5,
    "succeeded": 3,
    "failed": 2,
    "faileditems": {
      "users": [
        {
          "userlogin": "jdoe",
          "erroritems": {
            "roles": [
              {
                "rolename": "AccessControl-Manage",
                "errorcode": "EPMCSS-21140",
                "errormessage": "Failed to update role.Role doesn’t exist in
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
System. Provide valid rolename."
              }
            ]
          }
        },
        {
          "userlogin": "jeff",
          "erroritems": {
            "roles": [
              {
                "rolename": "Dashboards-Manage",
                "errorcode": "EPMCSS-21140",
                "errormessage": "Failed to assignrole. Role doesn’t exist in
System. Provide valid rolename."
              }
            ]
          }
        },
        {
          "userlogin": "Jack",
          "errorcode": "EPMCSS-21141",
          "errormessage": "Failed to update role for user. User doesn't exist
in System. Provide valid user."
        }
      ]
    }
  }
}
```


Sample cURL Command Basic Auth

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/json'
-d ' {"users":[{"userlogin":"jdoe","roles":[{"rolename":"Access Control -
Manage"},{"rolename":"Dashboards - Manage"}]},{"userlogin":"jeff","roles":
[{"rolename":"Access Control - View"},{"rolename":"Dashboards - View"}]}]}
' 'https://<BASE-URL>/interop/rest/security/v1/roles/application/users/update
'
```

Sample cURL Command OAuth 2.0

```
curl -X PUT --header "Authorization: Bearer <OAUTH_TOKEN>"  -H 'Content-Type:
application/json' -d ' {"users":
[{"userlogin":"jdoe","option":"overwrite","roles":[{"rolename":"Access
Control - Manage"},{"rolename":"Dashboards - Manage"}]},
{"userlogin":"jeff","option":"append","roles":[{"rolename":"Access Control -
View"},{"rolename":"Dashboards - View"}]}]} ' 'https://<BASE-URL>/interop/
rest/security/v1/roles/application/users/update'
```

Add Groups

Adds groups in Access Control using either a CSV file upload (v1) or request payload (v2). Groups created through these APIs can be viewed and managed in Access Control.. Use the Upload REST API to upload the file. The file should be deleted after the API executes.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Both APIs provide details about successful and failed group creation requests, including failure reasons and counts of passed and failed records.

The v1 API requires an ANSI or UTF-8 encoded CSV file containing group names and descriptions. Before running the API, the file must be uploaded to the environment using the Upload REST API, and the file should be deleted after the API executes. The user running this API must be authorized to perform this action and should be a Service Administrator in the environment where groups are to be added. The v1 API is asynchronous and returns a Job ID that can be used to monitor the status of the operation.

In v1, a response status of `-1` indicates that group creation is still in progress. Any non-zero status value indicates failure of adding groups.

The v2 API accepts group details directly in the request payload. In addition to creating groups, this version also supports assigning users or group members as part of the request. This topic describes the simplified v2 version of the REST API. This version contains all parameters in the payload and does not require URL encoding while calling the REST APIs, which makes the v2 API easier to use. The user running this API must be authorized to perform this action and should be a Service Administrator in the environment where groups are to be added. The v2 API is synchronous and returns the outcome of the operation directly in the response.

Required Roles

Service Administrator or any application role and the Access Control - Manage granular role

Add Groups (v1)

REST Resource

POST `/interop/rest/security/<api_version>/groups`

Table 2-58 Tasks for Adding a Batch of Groups

Task	Request	REST Resource
Create groups	POST	`/interop/rest/security/<api_version>/groups`
Create groups status	GET	`/interop/rest/security/<api_version>/jobs/<jobId>`

Request

Supported Media Types: `application/x-www-form-urlencoded`

Table 2-59 Parameters

Name	Description	Type	Required	Default

`filename`	The name of the uploaded ANSI or UTF-8 encoded CSV file containing the groups to add, such as `addGroups.csv`.
	The file must have been uploaded already using the Upload REST API.
	File format example:
	
	`Group Name,Description`
	`GroupA,GroupADescription`
	`GroupB,GroupBDescription`
		Form	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Response

Supported Media Types: `application/json`

Table 2-60 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`data`	Parameters as key value pairs passed in the request
`items`	Details about the resource
`links`	Details of the first URL to be requested to get the job details; rel is "Job Details"

Examples of Response Body

Example 1: Job is in Progress

```
{
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/security/<api_version>/
groups",
            "rel": "self",
            "data": {
                "jobType": "ADD_GROUPS",
                "filename": "<filename>"
            },
            "action": "POST"
        },
        {
            "href": "https://<BASE-URL>/interop/rest/security/<api_version>/
jobs/<jobId",
            "rel": "Job Status",
            "data": null,
            "action": "GET"
        }
    ],
    "status": -1,
    "details": null,
    "items": null
}
```

Example 2: Job Completes with Errors

```
{
    "links": [
        {
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "href": "https://<BASE-URL>/interop/rest/security/<api_version>/
groups",
            "rel": "self",
            "data": {
                "jobType": "ADD_GROUPS",
                "filename": ""
            },
            "action": "POST"
        }
    ],
    "status": 1,
    "details": "EPMCSS-20671: Failed to create groups. Invalid or
insufficient parameters specified. Provide all required parameters for the
REST API. ",
    "items": null
}
```

Example 3: Job Completes without Errors

```
{
    "links": [
        {
            "data": null,
            "action": "GET",
            "href": " https://<BASE-URL>/interop/rest/security/<api_version>/
jobs/<jobId>",
            "rel": "self"
        }
    ],
    "status": 0,
    "details": "Processed - 4, Succeeded - 3, Failed - 1.   ",
    "items": [
    {
        "GroupName":"<GROUPNAME>","Error_Details": "Failed to create a group
with the name <GROUPNAME>. This group already exists in the system. Provide a
different group name."
     }
   ]
}
```

Sample cURL Command Basic Auth

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -H'Content-Type: application/x-www-
form-urlencoded' -d 'filename=<CSV-FILE-NAME>' 'https://<BASE-URL>/interop/
rest/security/v1/groups'
```

Sample cURL Command OAuth 2.0

```
curl -X POST --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H
'Content-Type: application/x-www-form-urlencoded' -d 'filename=<CSV-FILE-
NAME>' 'https://<BASE-URL>/interop/rest/security/v1/groups'
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Add Groups (v2)

REST Resource

POST `/interop/rest/security/v2/groups/add`

Table 2-61 Tasks for Add Users to Group

Task	Request	REST Resource
Add groups	POST	`/interop/rest/security/v2/groups/add`

Request

Supported Media Types: `application/json`

Table 2-62 Parameters

Name	Description	Type	Required	Default
`groupname`	Name of group to add	Payload	Yes	None
`description`	Description of group	Payload	No	None
`userlogin`	The user login of the user to add to the group	Payload	No	None
`groupname`	Name of the group to add as a member of this group	Payload	No	None

Example URL and Payload

`https://<BASE-URL>/interop/rest/security/v2/groups/add`

Payload with Only Groups

```
{
         "groups":
            [
            {
                 "groupname": "GroupA",
                 "description": "GroupADescription"

         },
         {
                  "groupname": "GroupB",
                  "description": "GroupBDescription"
         }
         ]
}
```

Payload with Groups and Members

```
{
  "groups": [
    {
      "groupname": "GroupA",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
      "description": "GroupADescription",
      "members": {
        "users": [
          {
            "userlogin": "jdoe"
          },
          {
            "userlogin": "chris"
          }
        ],
        "groups": [
          {
            "groupname": "User"
          },
          {
            "groupname": "Interactive User"
          }
        ]
      }
    },
    {
      "groupname": "GroupB",
      "description": "GroupBDescription",
      "members": {
        "users": [
          {
            "userlogin": "jane"
          },
          {
            "userlogin": "alex"
          }
        ],
        "groups": [
          {
            "groupname": "Analyst"
          },
          {
            "groupname": "Super User"
          }
        ]
      }
    }
  ]
}
```


Response

Supported Media Types: `application/json`

Table 2-63 Parameters

Name	Description
`links`	Detailed information about the link and HTTP call type

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-63 (Cont.) Parameters

Name	Description
`status`	Identifies the status of the operation • 0 - Operation succeeded • 1 - Operation failed
`error`	Detailed information about the error
`details`	Detailed status of the operation performed. Total number of records processed, succeeded, and failed, and the reason for why they failed.

Examples of Response Body

The following examples show the contents of the response body in JSON format:

Example 1: REST API Completes without Errors

```
{
    "links": {
            "href": "https://<BASE-URL>/interop/rest/security/v2/groups/add",
            "action": "POST"
    },
    "status": 0,
    "error": null,
    "details": {
        "processed": 2,
        "succeeded": 2,
        "failed": 0,
        "faileditems": null
    }
}
```

Example 2: REST API Completes with Errors

```
{
    "links": {
            "href": "https://<BASE-URL>/interop/rest/security/v2/groups/add",
            "action": "POST"
    },
    "status": 1,
    "error": {
        "errorcode": "EPMCSS-21119",
        "errormessage": "Failed to add groups. Invalid or insufficient
parameters specified. Provide all required parameters for the REST API."
    },
    "details": null
}
```

Example 3: REST API Completes with Partial Errors

```
{
    "links": {
        "href": "https://<BASE-URL>/interop/rest/security/v2/groups/add",
        "action": "POST"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    },
    "status": 0,
    "error": null,
    "details": {
        "processed": 3,
        "succeeded": 1,
        "failed": 2,
        "faileditems": [
            {
                "groupname": "GroupA",
                "errorcode": "EPMCSS-21140",
                "errormessage": "Failed to add group. Group already exists in
System. Provide different group name."
            },
            {
                "groupname": "GroupB",
                "errorcode": "EPMCSS-21231",
                "errormessage": "Failed to add group. Unable to add
member(s). Provide valid member(s).",
                "erroritems": {
                    "groups": [
                        {
                            "groupname": "GroupC",
                            "errorcode": "EPMCSS-21228",
                            "errormessage": "Group GroupC does not exist.
Provide a valid groupname."
                        }
                    ],
                    "users": [
                        {
                            "userlogin": "UserA",
                            "errorcode": "EPMCSS-21230",
                            "errormessage": "User UserA does not exist.
Provide a valid userlogin."
                        }
                    ]
                }
            }
        ],
        "items": null
    }
}
```


Sample cURL Command Basic Auth

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/
json' -d '{"groups":[{"groupname":"GroupA","description":"GroupADescription"},
{"groupname":"GroupB","description":"GroupBDescription"}]}' 'https://<BASE-
URL>/interop/rest/security/v2/groups/add'


curl -X POST -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/
json' -d '{"groups":
[{"groupname":"GroupA","description":"GroupADescription","members":{"users":
[{"userlogin":"jdoe"},{"userlogin":"chris"}],"groups":[{"groupname":"User"},
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
{"groupname":"Interactive User"}]}}]}'  'https://<BASE-URL>/interop/rest/
security/v2/groups/add'
```

Sample cURL Command OAuth 2.0

```
curl -X POST --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H
'Content-Type: application/json' -d '{"groups":
[{"groupname":"GroupA","description":"GroupADescription"},
{"groupname":"GroupB","description":"GroupBDescription"}]}' 'https://<BASE-
URL>/interop/rest/security/v2/groups/add'
```

```
curl -X POST --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H
'Content-Type: application/json' -d '{"groups":
[{"groupname":"GroupA","description":"GroupADescription","members":{"users":
[{"userlogin":"jdoe"},{"userlogin":"chris"}],"groups":[{"groupname":"User"},
{"groupname":"Interactive User"}]}}]}' 'https://<BASE-URL>/interop/rest/
security/v2/groups/add'
```

List Groups (v1)

The List Groups REST API generates a list of available groups in the environment.

The API identifies the group name, description, type, and identity. Additionally, it can provide information about the groups/user members belonging to the groups and the granular roles assigned to the groups.

The API is synchronous and returns the outcome of the operation in the response. Any non-zero status indicates failure in listing groups.

Required Roles

- Service Administrator
- Any application role and the Access Control - Manage granular role
- Any application role and the Access Control - View granular role

REST Resource

POST `/interop/rest/security/v1/groups/list`

Table 2-64 Tasks for List Groups

Task	Request	REST Resource
List Groups	POST	`/interop/rest/security/v1/groups/list`

Request

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-65 Request Parameters

Name	Description	Type	Required	Default
`groupname`	Get the groups matching the specified `groupname`.	Payload	No	Return all groups
`type`	Get the groups matching the specified `type`. This is a comma-separated list containing "EPM", "IDCS", or "PREDEFINED"	Payload	No	Return all groups
`members`	• **true**: Returns the list of user and group members belonging to the groups, if any. • **false**: Does not return the list of user and group members belonging to the groups, if any.	Payload	No	False
`roles`	• **true**: Returns the list of granular roles assigned to the groups, if any. • **false**: Does not return the list of granular roles assigned to the groups, if any.	Payload	No	False

Example URL and Payload

```
https://<BASE-URL>/interop/rest/security/v1/groups/list
```

```
{
  "groupname": "Analyst",
  "type": ["EPM","IDCS","PREDEFINED"],
  "members": true,
  "roles": true
}
```

Response

Supported Media Types: `application/json`

Table 2-66 Response Parameters

Name	Description
`links`	Detailed information about the link and HTTP call type
`status`	Status of the operation • 0: Operation succeeded • 1: Operation failed
`error`	Detailed information about the error
`details`	Group details

Examples of Response Body

Example 1: REST API Issued without any Payload Completes without Errors

```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v1/groups/list",
    "action": "POST"
  },
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
  "status": 0,
  "error": null,
  "details": [
    {
      "groupname": "Analyst",
      "description": "Used for access assignments for Users",
      "type": "EPM",
      "identity": "native://nvid=7afc645a6c46bb19:39236dfe:17f68cb24d0:-7fbe?
GROUP"
    },
    {
      "groupname": "Interactive User",
      "description": "Used for access assignments for Power Users",
      "type": "EPM",
      "identity": "native://nvid=7afc645a6c46bb19:39236dfe:17f68cb24d0:-7fc0?
GROUP"
    },
    {
      "groupname": "IDCS_Group",
      "description": "Sample IDCS Group",
      "type": "IDCS",
      "identity": "rest://groupName=IDCS_Group?GROUP"
    },
    {
      "groupname": "Finance",
      "description": "Finance Group",
      "type": "IDCS",
      "identity": "rest://groupName=Finance?GROUP"
    }
  ]
}
```


Example 2: REST API Issued with Group Name and Type "EPM" in Payload Completes without Errors


```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v1/groups/list",
    "action": "POST"
  },
  "status": 0,
  "error": null,
  "details": [
    {
      "groupname": "Analyst",
      "description": "Used for access assignments for Users",
      "type": "EPM",
      "identity": "native://nvid=7afc645a6c46bb19:39236dfe:17f68cb24d0:-7fbe?
GROUP"
    }
  ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example 3: REST API Issued with Group Name, Members, and Roles in Payload Completes with Errors


```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v1/groups/list",
    "action": "POST"
  },
  "status": 0,
  "error": null,
  "details": [
    {
      "groupname": "Analyst",
      "description": "Used for access assignments for Users",
      "type": "EPM",
      "identity": "native://nvid=7afc645a6c46bb19:39236dfe:17f68cb24d0:-7fbe?
GROUP",
      "members": {
        "users": [
          {
            "userlogin": "jdoe",
            "firstname": "Jane",
            "lastname": "Doe",
            "email": "jane.doe@example.com"
          },
          {
            "userlogin": "chris",
            "firstname": "Chris",
            "lastname": "West",
            "email": "chris.west@example.com"
          }
        ],
        "groups": [
          {
            "groupname": "User",
            "description": "UserRole",
            "type": "PREDEFINED"
          },
          {
            "groupname": "InteractiveUser",
            "description": "Used for access assignments for Power Users",
            "type": "EPM"
          }
        ]
      },
      "roles": [
        {
          "rolename": "Ad Hoc - Read Only User",
          "id": "HP: 0017"
        },
        {
          "rolename": "Ad Hoc - User",
          "id": "HP: 0015"
        }
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
      ]
    }
```

Example 4: REST API Issued Only with Type "EPM, IDCS, PREDEFINED" in Payload Completes without Errors

```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v1/groups/list",
    "action": "POST"
  },
  "status": 0,
  "error": null,
  "details": [
    {
      "groupname": "Analyst",
      "description": "Used for access assignments for Users",
      "type": "EPM",
      "identity": "native://nvid=7afc645a6c46bb19:39236dfe:17f68cb24d0:-7fbe?
GROUP"
    },
    {
      "groupname": "Interactive User",
      "description": "Used for access assignments for Power Users",
      "type": "EPM",
      "identity": "native://nvid=7afc645a6c46bb19:39236dfe:17f68cb24d0:-7fc0?
GROUP"
    },
    {
      "groupname": "IDCS_Group",
      "description": "Sample IDCS Group",
      "type": "IDCS",
      "identity": "rest://groupName=IDCS_Group?GROUP"
    },
    {
      "groupname": "Finance",
      "description": "Finance Group",
      "type": "IDCS",
      "identity": "rest://groupName=Finance?GROUP"
    },
    {
      "groupname": "Service Administrator",
      "description": "Service Administrator Role",
      "type": "PREDEFINED",
      "identity": "rest://displayName=Service_Administrator?GROUP"
    },
    {
      "groupname": "User",
      "description": "User Role",
      "type": "PREDEFINED",
      "identity": "rest://displayName=User?GROUP"
    }
  ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example 5: REST API Completes with Errors

```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v1/groups/list",
    "action": "POST"
  },
  "status": 1,
  "error": {
    "errorcode": "EPMCSS-21263",
    "errormessage": "Failed to get Groups. Authorization failed. Please
provide valid authorized  ser."
  },
  "details": null
}
```

Sample cURL Command Basic Auth

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/
json' 'https://<BASE-URL>/interop/rest/security/v1/groups/list


curl -X POST -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/
json' -d '{"groupname":"Analyst","members":true,"roles":true}' 'https://<BASE-
URL>/interop/rest/security/v1/groups/list'
```

Sample cURL Command OAuth 2.0

```
curl -X POST -H 'Content-Type: application/json' 'https://<BASE-URL>/interop/
rest/security/v1/groups/list' --header "Authorization: Bearer
<OAUTH_ACCESS_TOKEN>"


curl -X POST --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H
'Content-Type: application/json' -d
'{"groupname":"Analyst","members":true,"roles":true}' 'https://<BASE-URL>/
interop/rest/security/v1/groups/list'
```

Update Groups (v1)

Updates the groups (only EPM) provided in the REST API payload. Additionally, with this API, groups can also be updated with users or group members.

This version contains all parameters in the payload and does not require URL encoding while calling the REST APIs.

The API is synchronous and returns the outcome of the operation in the response. Any non-zero status indicates that Updating Groups failed. With this API, you can see which records failed and the reason why they failed, in addition to how many records passed and failed.

Required Roles

Service Administrator

Any application role and the Access Control - Manage granular role

Copyright © 2017, 2026, Oracle and/or its affiliates.

REST Resource

PUT `/interop/rest/security/v1/groups/update`

Request

Supported Media Types: `application/json`

Table 2-67 Request Parameters

Name	Description	Type	Required	Default
`groups`	List of groups to update	Payload	Yes	None
`groupname`	Name of groups to update	Payload	No	None
`description`	Description of the group	Payload	No	None
`type`	Type of group to update **Note:** For now, only "EPM" is supported.	Payload	Yes	None
`identity`	Identity of the group to update	Payload	Yes	None
`members`	List of users or groups to assign as member of this group • **users**: User logins to assign as members of the group • **groups**: Group names to assign as member sof the group	Payload	No	None

Example URL and Payload

`https://<BASE-URL>/interop/rest/security/v1/groups/update`

```
 {
  "groups": [
    {
      "groupname": "GroupA",
      "description": "GroupADescription_updated",
   "type": "EPM",
   "identity": "native://nvid=7afc645a6c46bb19:39236dfe:17f68cb24d0:-7fbe?
GROUP",
      "members": {
        "users": [
          {
            "userlogin": "jdoe"
          },
          {
            "userlogin": "chris"
          }
        ],
        "groups": [
          {
            "groupname": "User"
          },
          {
            "groupname": "Interactive User"
          }
        ]
      }
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    },
    {
      "groupname": "GroupB",
      "description": "GroupBDescription_updated",
     "type": "EPM",
      "identity": "native://nvid=7afc645a6c46bb19:39236dfe:17f68cb24d0:-7fbf?
GROUP",
      "members": {
        "users": [
          {
            "userlogin": "jane"
          },
          {
            "userlogin": "alex"
          }
        ],
        "groups": [
          {
            "groupname": "Analyst"
          },
          {
            "groupname": "Super User"
          }
        ]
      }
    }
  ]
}
```

Response

Supported Media Types: `application/json`

Table 2-68 Response Parameters

Name	Description
`links`	Detailed information about the link and HTTP call type
`status`	Identifies the status of the operation • 0 - Operation succeeded • 1 - Operation failed
`error`	Detailed information about the error
`details`	Detailed status of the operation performed. Total number of records processed, succeeded, and failed, and the reason for why they failed.

Examples of Response Body

Example 1: REST API Completes without Errors

```
{
"links": {
"href": "https://<BASE-URL>/interop/rest/security/v1/groups/update",
"action": "PUT"
   },
"status": 0,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
"error": null,
"details": {
"processed": 2,
"succeeded": 2,
"failed": 0,
"faileditems": null
}
}
```


Example 2: REST API Completes with Errors


```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v1/groups/update",
    "action": "PUT"
  },
  "status": 1,
  "error": {
    "errorcode": "EPMCSS-21192",
    "errormessage": "Failed to update Groups. Authorization failed. Please
provide valid authorized user."
  },
  "details": null
}
```


Example 3: REST API Completes with Partial Errors


```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v1/groups/update",
    "action": "PUT"
  },
  "status": 0,
  "error": null,
  "details": {
    "processed": 3,
    "succeeded": 1,
    "failed": 2,
    "faileditems": [
      {
        "groupname": "GroupA",
        "errorcode": "EPMCSS-21140",
        "errormessage": "Failed to update group. Group already exists in
System. Provide different group name."
      },
      {
        "groupname": "GroupB",
        "errorcode": "EPMCSS-21231",
        "errormessage": "Failed to update group. Unable to assign member(s).
Provide valid member(s).",
        "erroritems": {
          "groups": [
            {
              "groupname": "GroupC",
              "errorcode": "EPMCSS-21228",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
              "errormessage": "Group GroupC does not exist.  Provide a valid
groupname."
            }
          ],
          "users": [
            {
              "userlogin": "UserA",
              "errorcode": "EPMCSS-21230",
              "errormessage": "User UserA does not exist.  Provide a valid
userlogin."
            }
          ]
        }
      }
    ],
    "items": null
  }
```

Sample cURL Command Basic Auth

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/json'
-d '{"groups":
[{"groupname":"GroupA","description":"GroupADescription_updated","type":"EPM",
"identity":"native://nvid=7afc645a6c46bb19:39236dfe:17f68cb24d0:-7fbe?
GROUP",}]}' 'https://<BASE-URL>/interop/rest/security/v1/groups/update'
```

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/json'
-d '{"groups":
[{"groupname":"GroupA","description":"GroupADescription_updated","type":"EPM",
"identity":"native://nvid=7afc645a6c46bb19:39236dfe:17f68cb24d0:-7fbe?
GROUP","members":{"users":[{"userlogin":"jdoe"},
{"userlogin":"chris"}],"groups":[{"groupname":"User"},
{"groupname":"Interactive User"}]}}]}' 'https://<BASE-URL>/interop/rest/
security/v1/groups/update'
```

Sample cURL Command OAuth 2.0

```
curl -X PUT --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H'Content-
Type: application/json' -d '{"groups":
[{"groupname":"GroupA","description":"GroupADescription_updated","type":"EPM",
"identity":"native://nvid=7afc645a6c46bb19:39236dfe:17f68cb24d0:-7fbe?
GROUP"}]}' 'https://<BASE-URL>/interop/rest/security/v1/groups/update'
```

```
curl -X PUT --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H'Content-
Type: application/json' -d '{"groups":
[{"groupname":"GroupA","description":"GroupADescription_updated","type":"EPM",
"identity":"native://nvid=7afc645a6c46bb19:39236dfe:17f68cb24d0:-7fbe?
GROUP","members":{"users":[{"userlogin":"jdoe"},
{"userlogin":"chris"}],"groups":[{"groupname":"User"},
{"groupname":"Interactive User"}]}}]}' 'https://<BASE-URL>/interop/rest/
security/v1/groups/update'
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Remove Groups

Removes groups maintained in Access Control using either a CSV file upload (v1) or request payload (v2). You can use the Upload REST API to upload the file to the environment.

Both APIs provide details about successful and failed group removal requests, including failure reasons and counts of passed and failed records.

The v1 API requires an ANSI or UTF-8 encoded CSV file containing group names. Before running the API, the file must be uploaded to the environment using the Upload REST API. The user running this API must be authorized to perform this action and should be a Service Administrator in the environment where groups are to be removed. The v1 API is asynchronous and returns a Job ID that can be used to monitor the status of the operation.

In v1, a response status of `-1` indicates that group removal is still in progress. Any non-zero status value indicates failure of removing groups.

The v2 API accepts group details directly in the request payload. This topic describes the simplified v2 version of the REST API. This version contains all parameters in the payload and does not require URL encoding while calling the REST APIs, which makes the v2 API easier to use. The user running this API must be authorized to perform this action and should be a Service Administrator in the environment where groups are to be removed. The v2 API is synchronous and returns the outcome of the operation directly in the response.

Required Roles

Service Administrator or any application role and the Access Control - Manage granular role

Remove Groups (v1)

REST Resource

DELETE `/interop/rest/security/<api_version>/groups`

Table 2-69 Tasks for Remove Groups

Task	Request	REST Resource
Remove groups	DELETE	`/interop/rest/security/v1/groups`
Remove groups status	GET	`/interop/rest/security/v1/jobs/<jobId>`

Request

Supported Media Types: `application/x-www-form-urlencoded`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-70 Parameters

Name	Description	Type	Required	Default

`filename`	The name of the uploaded ANSI or UTF-8 encoded CSV file containing information on the groups to be removed, for example, `removeGroups.csv`.
	The file must have been uploaded already using the Upload REST API.
	
	`Group Name`
	`GroupA`
	`GroupB`
		Query	Yes	None

Response

Supported Media Types: `application/json`

Table 2-71 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`data`	Parameters as key value pairs passed in the request
`items`	Details about the resource
`links`	Details of the first URL to be requested to get the job details; rel is "Job Details"

Examples of Resonse Body

Example 1: Job is in Progress

```
{
    "status": -1,
    "items": null,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/security/<api_version>/
groups?filename=<filename>",
            "rel": "self",
            "data": {
                "jobType": "REMOVE_GROUPS",
                "filename": "<filename>"
            },
            "action": "DELETE"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        },
        {
            "href": "https://<BASE-URL>/interop/rest/security/<api_version>/
jobs/<jobId>",
            "rel": "Job Status",
            "data": null,
            "action": "GET"
        }
    ],
    "details": null
}
```

Example 2: Job Completes with Errors

```
{
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/security/<api_version>/
groups",
            "rel": "self",
            "data": {
                "jobType": "REMOVE_GROUPS",
                "filename": ""
            },
            "action": "DELETE"
        }
    ],
    "status": 1,
    "details": "EPMCSS-20673: Failed to delete groups. Invalid or
insufficient parameters specified. Provide all required parameters for the
REST API. ",
    "items": null
}
```

Example 3: Job Completes without Errors

```
{
    "links": [
        {
            "data": null,
            "action": "GET",
            "href": "https://<BASE-URL>/interop/rest/security/<api_version>/
jobs/<jobId>",
            "rel": "self"
        }
    ],
    "status": 0,
    "details": "Processed - 3, Succeeded – 2, Failed - 1.   ",
    "items":  [
    {
        "GroupName":"<GROUPNAME>","Error_Details": "Group <GROUPNAME> is not
found. Verify that the group exists."
     }
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
   ]
}
```

Sample cURL Command Basic Auth

```
curl -X DELETE -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/x-
www-form-urlencoded' 'https://<BASE-URL>/interop/rest/security/v1/groups?
filename=RemoveGroups.csv'
```

Sample cURL Command OAuth 2.0

```
curl -X DELETE --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H
'Content-Type: application/x-www-form-urlencoded' 'https://<BASE-URL>/interop/
rest/security/v1/groups?filename=RemoveGroups.csv'
```

Remove Groups (v2)

REST Resource

POST `/interop/rest/security/v2/groups/remove`

Table 2-72 Tasks for Remove Groups

Task	Request	REST Resource
Remove groups	POST	`/interop/rest/security/v2/groups/remove`

Request

Supported Media Types: `application/json`

Table 2-73 Parameters

Name	Description	Type	Required	Default
`groups`	List of groups to remove.	Payload	Yes	None

Example URL and Payload

```
https://<BASE-URL>/interop/rest/security/v2/groups/remove
```

```
{
            "groups":
               [
               {
                  "groupname": "GroupA"
                },
                {
                    "groupname": "GroupB"
                }
                ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Response

Supported Media Types: `application/json`

Table 2-74 Parameters

Name	Description
`links`	Detailed information about the link and HTTP call type
`status`	Identifies the status of the operation • 0 - Operation succeeded • 1 - Operation failed
`error`	Detailed information about the error
`details`	Detailed status of the operation performed. Total number of records processed, succeeded, and failed, and the reason for why they failed.

Examples of Response Body

Example 1: Job Completes without Errors

```
{
    "links": {
            "href": "https://<BASE-URL>/interop/rest/security/v2/groups/
remove",
            "action": "POST"
    },
    "status": 0,
    "error": null,
    "details": {
        "processed": 2,
        "succeeded": 2,
        "failed": 0,
        "faileditems": null
    }
}
```

Example 2: Job Completes with Errors

```
{
    "links": {
            "href": "https://<BASE-URL>/interop/rest/security/v2/groups/
remove",
            "action": "POST"
    },
    "status": 1,
    "error": {
                "errorcode": "EPMCSS-21120",
                "errormessage": "Failed to remove groups. Invalid or
insufficient parameters specified. Provide all required parameters for the
REST API."
        },
    "details": null
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example 3: Job Completes with Partial Errors

```
{
    "links": {
            "href": "https://<BASE-URL>/interop/rest/security/v2/groups/
remove",
            "action": "POST"
    },
    "status": 0,
    "error": null,
    "details": {
        "processed": 5,
        "succeeded": 3,
        "failed": 2,
        "faileditems":
        [
        {
                        "groupname": "GroupA",
                        "errorcode": "EPMCSS-21125",
                        "errormessage": "Failed to remove group. Group GroupA
does not exist. Provide a valid groupname."
                },
                {
                       "groupname": "GroupB",
                        "errorcode": "EPMCSS-21125",
                        "errormessage": "Failed to remove group. Group GroupB
does not exist. Provide a valid groupname."
                }
        ]
    }
}
```

Sample cURL Command Basic Auth

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/
json' -d '{"groups":[{"groupname":"GroupA"},{"groupname":"GroupB"}]}'
'https://<BASE-URL>/interop/rest/security/v2/groups/remove'
```

Sample cURL Command OAuth 2.0

```
curl -X POST --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H
'Content-Type: application/json' -d '{"groups":[{"groupname":"GroupA"},
{"groupname":"GroupB"}]}' 'https://<BASE-URL>/interop/rest/security/v2/groups/
remove'
```

User Group Reports

Generates User Group Reports for users in the system and identifies direct and indirect group memberships within Access Control and groups.

These reports identify whether a user's assignment to a group is direct (as a direct member of a group) or indirect (through membership in a child group within a nested group hierarchy). The reports include details such as user login name, first name, last name, email address, assigned group, and assignment type.

Copyright © 2017, 2026, Oracle and/or its affiliates.

The v1 API generates the report and writes it to the specified output file, which can be downloaded using the Download API. The report format is identical to the CSV version generated from the User Group Report tab in Access Control. The v1 API is asynchronous and returns a Job ID that can be used to monitor report generation status.

The v2 API generates the report directly through the request and supports querying by specific user login, group name, or user attributes such as first name, last name, user login, and email in any combination. This topic describes the simplified v2 version of the REST API. This version contains all parameters in the payload and does not require URL encoding while calling the REST APIs, which makes the v2 API easier to use. The v2 API is synchronous and returns the outcome of the operation directly in the response.

Any non-zero status value indicates failure in generating the User Group Report.

Required Roles

- Service Administrator
- Any application role and the Access Control - Manage granular role
- Any application role and the Access Control - View granular role

User Group Report (v1)

REST Resource

POST `/interop/rest/security/<api_version>/usergroupreport`

Table 2-75 Tasks for User Group Report

Task	Request	REST Resource
User Group Report	POST	`/interop/rest/security/v1/usergroupreport`
User Group Report Status	GET	`/interop/rest/security/v1/jobs/<jobId>`

Request

Supported Media Types: `application/x-www-form-urlencoded`

Table 2-76 Parameters

Name	Description	Type	Required	Default
`filename`	The name of the file where the report is to be populated, such as `userGroupReport.csv`.	Form	Yes	None

Response

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-77 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Can be `self` and/or `Job Status`. If set to `Job Status`, you can use the `href` to get the status of the import operation
`data`	Parameters as key value pairs passed in the request

Examples of Response Body

Example 1: Job is in Progress

```
{
    "details": null,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/security/<api_version>/
usergroupreport",
            "rel": "self",
            "data": {
                "jobType": "GENERATE_USER_GROUP_REPORT",
                "filename": "<filename>"
            },
            "action": "POST"
        },
        {
            "href": "https://<BASE-URL>/interop/rest/security/<api_version>/
jobs/<jobId>",
            "rel": "Job Status",
            "data": null,
            "action": "GET"
        }
    ],
    "status": -1,
    "items": null
}
```

Example 2: Job Completes with Errors

```
{
    "details": "Failed to generate User Group Report. File <filename> already
exists. Please provide different file name. ",
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/security/<api_version>/
jobs/<jobId>",
            "rel": "self",
            "data": null,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "action": "GET"
        }
    ],
    "status": 1,
    "items": null
}
```

Example 3: Job Completes without Errors

```
{
    "details": null,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/security/<api_version>/
jobs/<jobid>",
            "rel": "self",
            "data": null,
            "action": "GET"
        }
    ],
    "status": 0,
    "items": null
}
```

Sample cURL Command Basic Auth

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -H'Content-Type: application/x-www-
form-urlencoded' -d 'filename=usergroupreportnew.csv' 'https://<BASE-URL>/
interop/rest/security/v1/usergroupreport'
```

Sample cURL Command OAuth 2.0

```
curl -X POST --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H
'Content-Type: application/x-www-form-urlencoded' -d
'filename=usergroupreportnew.csv' 'https://<BASE-URL>/interop/rest/
security/v1/usergroupreport'
```

User Group Report (v2)

- Service Administrator
- Any application role and the Access Control - Manage granular role
- Any application role and the Access Control - View granular role

REST Resource

GET `/interop/rest/security/v2/report/usergroupreport?userlogin=<userlogin>&groupname=<groupname>&userattribute=<search user attributes>`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-78 Tasks for User Group Report

Task	Request	REST Resource
User Group Report	GET	`/interop/rest/security/v2/report/usergroupreport?userlogin=<userlogin>&groupname=<groupname>&userattribute=<search user attributes>`

Request

Supported Media Types: `application/json`

Table 2-79 Request Parameters

Name	Description	Type	Required	Default
`userlogin`	Generate `usergroupreport` for the specified user.	Query	No	All Users
`groupname`	Generate `usergroupreport` for the users belonging to the specified group name.	Query	No	All Users
`userattribute`	Generates `usergroupreport` for the users matching the specified user attribute (case-insensitive) with any one of these user attributes: • userlogin • firstname • lastname • email	Query	No	All Users

Response

Supported Media Types: `application/json`

Table 2-80 Response Parameters

Parameters	Description
`links`	Detailed information about the link
`status`	Status of the operation • 0: Operation succeeded • 1: Operation failed
`error`	Detailed information about the error
`details`	Records matching the request

Examples of Response Body

Example 1: REST API Issued without Any Query Parameters Completes without Errors

```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v2/report/
usergroupreport",
    "action": "GET"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
  },
  "status": 0,
  "error": null,
  "details": [
    {
      "userlogin": "Jade",
      "firstname": "Jade",
      "lastname": "Clark",
      "email": "jade.clark@example.oracle.com",
      "groups": [
        {
          "direct": "Yes",
          "groupname": "Interactive User"
        },
        {
          "direct": "No",
          "groupname": "Strategic Planner"
        }
      ]
    },
    {
      "userlogin": "Jeff",
      "firstname": "Jeff",
      "lastname": "Clark",
      "email": "jeff.clark@discard.oracle.com",
      "groups": [
        {
          "direct": "Yes",
          "groupname": "Analyst"
        },
        {
          "direct": "No",
          "groupname": "Strategic Planner"
        }
      ]
    }
  ]
}
```


Example 2: REST API Issued with `userlogin` and `groupname` Query Parameters Completes without Errors


```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v2/report/
usergroupreport? userlogin=’Jade’&groupname='Interactive User'",
    "action": "GET"
  },
  "status": 0,
  "error": null,
  "details": [
    {
      "userlogin": "Jade",
      "firstname": "Jade",
      "lastname": "Clark",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
      "email": "jade.clark@example.oracle.com",
      "groups": [
        {
          "direct": "Yes",
          "groupname": "Interactive User"
        }
      ]
    }
  ]
}
```

Example 3: REST API Issued with `userattribute` and `groupname` Query Parameters Completes without Errors

```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v2/report/
usergroupreport?userattribute='Doe'&groupname='Super User'",
    "action": "GET"
  },
  "status": 0,
  "error": null,
  "details": [
 {
      "userlogin": "Jeffrey",
      "firstname": "Jeffrey",
      "lastname": "Doe",
      "email": "jeffrey.doe@example.oracle.com",
      "groups": [
        {
          "direct": "Yes",
          "groupname": "Super User""
        }
      ]
    }
  ]
}
```

Example 4: REST API Issued Only with a `userlogin` Query Parameter Completes without Errors

```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v2/report/
usergroupreport?userlogin='Jade'",
    "action": "GET"
  },
  "status": 0,
  "error": null,
  "details": [
    {
      "userlogin": "Jade",
      "firstname": "Jade",
      "lastname": "Clark",
      "email": "jade.clark@example.oracle.com",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
      "groups": [
        {
          "direct": "Yes",
          "groupname": "Interactive User"
        },
        {
          "direct": "No",
          "groupname": "Strategic Planner"
        }
      ]
    }
  ]
}
```


Example 5: REST API Issued Only with a `groupname` Query Parameter Completes without Errors


```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v2/report/
usergroupreport?groupname='Strategic Planner'",
    "action": "GET"
  },
  "status": 0,
  "error": null,
  "details": [
    {
      "userlogin": "Jade",
      "firstname": "Jade",
      "lastname": "Clark",
      "email": "jade.clark@example.oracle.com",
      "groups": [
         {
          "direct": "No",
          "groupname": "Strategic Planner"
        }
      ]
    },
    {
      "userlogin": "Jeff",
      "firstname": "Jeff",
      "lastname": "Clark",
      "email": "jeff.clark@example.oracle.com",
      "groups": [
        {
          "direct": "No",
          "groupname": "Strategic Planner"
        }
      ]
    }
  ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example 6: REST API Issued Only with `userattribute` Query Parameter Completes without Errors


```
{
  "links": {
    "href": " https://<BASE-URL>/interop/rest/security/v2/report/
usergroupreport?userattribute='Doe'",
    "action": "GET"
  },
  "status": 0,
  "error": null,
  "details": [
    {
      "userlogin": "Jeff",
      "firstname": "Jeff",
      "lastname": "Doe",
      "email": "jeff.doe@example.oracle.com",
      "groups": [
        {
          "direct": "Yes",
          "groupname": "Analyst"
        }
      ]
    },
 {
      "userlogin": "Jeffrey",
      "firstname": "Jeffrey",
      "lastname": "Doe",
      "email": "jeffrey.doe@example.oracle.com",
      "groups": [
        {
          "direct": "Yes",
          "groupname": "Super User"
        }
      ]
    },
 {
      "userlogin": "johndoe",
      "firstname": "John",
      "lastname": "Doe",
      "email": "john.doe@example.oracle.com",
      "groups": [
        {
          "direct": "Yes",
          "groupname": "Super User"
        }
      ]
    }
  ]
}
```


Example 7: REST API Completes with Errors


```
{
  "links": {
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "href": "https://<BASE-URL>/interop/rest/security/v2/report/
usergroupreport",
    "action": "GET"
  },
  "status": 1,
  "error": {
    "errorcode": "EPMCSS-21192",
    "errormessage": "Failed to generate User Group Report. Authorization
failed. Please provide valid authorized user."
  },
  "details": null
}
```

Sample cURL Commands Basic Auth

```
curl -X GET -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/json'
'https://<BASE-URL>/interop/rest/security/v2/report/usergroupreport'


curl -X GET -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/json'
'https://<BASE-URL>/interop/rest/security/v2/report/usergroupreport?
userlogin=john@example.com&groupname=Strategic%20Planner'


curl -X GET -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/json'
'https://<BASE-URL>/interop/rest/security/v2/report/usergroupreport?
userattribute=John&groupname=Strategic%20Planner
```

Sample cURL Commands OAuth 2.0

```
curl -X GET --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/json' 'https://<BASE-URL>/interop/rest/security/v2/report/
usergroupreport'


curl -X GET --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/json' 'https://<BASE-URL>/interop/rest/security/v2/report/
usergroupreport?userlogin=john@example.com&groupname=Strategic%20Planner'


curl -X GET --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/json' 'https://<BASE-URL>/interop/rest/security/v2/report/
usergroupreport?userattribute=John&groupname=Strategic%20Planner'
```

User Access Reports

Generates User Access Reports for users provisioned in the environment and writes the report to the specified output file. The generated report can be downloaded using the download command or Download API.

These reports provide user access information for the environment.

Both v1 and v2 APIs are asynchronous and use the job status URI to determine whether report generation is complete.

Copyright © 2017, 2026, Oracle and/or its affiliates.

The v1 API generates the report using the specified file name and returns a Job ID that can be used to monitor the status of the operation.

The v2 API provides the same functionality using version v2 of the REST API and generates the report for users provisioned in the environment. This topic describes the simplified v2 version of the REST API.

Use the job status URI to determine whether report generation is complete. Any non-zero status value indicates failure in generating the User Access Report.

Required Roles

- Service Administrator
- Any application role and the Access Control - Manage granular role
- Any application role and the Access Control - View granular role

User Access Report (v1)

REST Resource

POST `/interop/rest/v1/reports?q=%7Btype%3Aprovisionreport%2CfileName%3Aprovreport_17_Apr.csv%2Cformat%3Asimplified%2Cusertype%3Aserviceusers%7D`

Table 2-81 Tasks for User Access Report

Task	Request	REST Resource
User Access Report	POST	`/interop/rest/v1/reports?q=%7Btype%3Aprovisionreport%2CfileName%3Aprovreport_17_Apr.csv%2Cformat%3Asimplified%2Cusertype%3Aserviceusers%7D`

Request

Supported Media Types: `application/json`

The following table summarizes the request parameters.

Table 2-82 Parameters

Name	Description	Type	Required	Default
`fileName`	File where report is to be populated	Query	Yes	None
`type`	Type of report being generated: `provisionreport`	Query	Yes	None
`format`	The format of the `csv` file, `classic` or `simplified`	Query	No	`classic`
`usertype`	Wheter to generate the report only for Identity Domain Administrators, `IDAdmins` or `ServiceUsers`	Query	No	`ServiceUsers`

Response

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-83 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Can be `self` and/or `Job Status`. If set to `Job Status`, you can use the `href` to get the status of the import operation
`data`	Parameters as key value pairs passed in the request

Example of Response Body

Example 1: Job is in Progress

```
{
   "links": [
      {
         "rel": "self",
         "href": "https://<BASE-URL>/interop/rest/{api_version}/reports?
q={type=provisionreport,fileName=provreport.csv,format=simplified,usertype=ser
viceusers}",
         "data": null,
         "action": "POST"
      },
      {
         "rel": "Job Status",
         "href": "https://<BASE-URL>/interop/rest/v1/reports/
3180399797144693",
         "data": null,
         "action": "GET"
      }
   ],
   "status": -1,
   "details": null
}
```

Sample cURL Command Basic Auth

```
curl -X POST -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/x-www-
form-urlencoded' 'https:///<BASE-URL>/interop/rest/v1/reports?
q=%7Btype%3Aprovisionreport%2CfileName%3Aprovreport.csv%2Cformat%3Asimplified%
2Cusertype%3Aserviceusers%7D'
```

Sample cURL Command OAuth 2.0

```
curl -X POST --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H
'Content-Type: application/x-www-form-urlencoded' 'https://<BASE-URL>/interop/
rest/security/v1/reports?
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
q=%7Btype%3Aprovisionreport%2CfileName%3Aprovreport.csv%2Cformat%3Asimplified%
2Cusertype%3Aserviceusers%7D'
```

User Access Report (v2)

REST Resource

POST `/interop/rest/v2/reports/useraccess`

Table 2-84 Tasks for User Access Report

Task	Request	REST Resource
User Access Report	POST	`/interop/rest/v2/reports/useraccess`

Request

Supported Media Types: `application/json`

Table 2-85 Parameters

Name	Description	Type	Required	Default
`fileName`	File where report is to be populated	Payload	Yes	None
`format`	The format of the `csv` file, `classic` or `simplified`	Payload	No	`classic`
`usertype`	Wheter to generate the report only for Identity Domain Administrators, `IDAdmins` or `ServiceUsers`	Payload	No	`ServiceUsers`

Example URL and Payload

`https://<BASE-URL>/interop/rest/v2/reports/useraccess`

```
{
    "fileName": "provisionreport.csv",
    "parameters": {
        "format": "simplified",
        "usertype": "IDAdmins"
    }
}
```

Response

Supported Media Types: `application/json`

Table 2-86 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-86 (Cont.) Parameters

Parameters	Description
`href`	Links to API call
`action`	The HTTP call type
`rel`	Can be `self` and/or `Job Status`. If set to `Job Status`, you can use the `href` to get the status of the import operation
`data`	null

Example of Response Body

```
{
    "details": null,
    "status": -1,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/reports/useraccess",
            "action": "POST",
            "rel": "self",
            "data": null
        },
        {
            "href": "https://<BASE-URL>/interop/rest/v2/status/jobs/
2274706699774736 3",
            "action": "GET",
            "rel": "Job Status",
            "data": null
        }
    ]
}
```

Sample cURL Commands Basic Auth

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/
json' -d '{"fileName":"provisionreport.csv","parameters":
{"format":"simplified","usertype":"ServiceUsers"}}' 'https://<BASE-URL>/
interop/rest/v2/reports/useraccess'


curl -X POST -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/
json' -d '{"fileName":"provisionreportID.csv","parameters":
{"format":"simplified","usertype":"IDAdmins"}}' 'https://<BASE-URL>/interop/
rest/v2/reports/useraccess'
```

Sample cURL Commands OAuth 2.0

```
curl -X POST --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H
'Content-Type: application/json' -d
'{"fileName":"provisionreport.csv","parameters":
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
{"format":"simplified","usertype":"ServiceUsers"}}' 'https://<BASE-URL>/
interop/rest/v2/reports/useraccess'


curl -X POST --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H
'Content-Type: application/json' -d
'{"fileName":"provisionreportID.csv","parameters":
{"format":"simplified","usertype":"IDAdmins"}}' 'https://<BASE-URL>/interop/
rest/v2/reports/useraccess'
```

User Audit Report (v1) (Deprecated)

Generates a user audit report in the system and writes the report to the filename provided. The output CSV file contains the first character as a Byte Order Mark(BOM) character `\ufeff`. The API writes an encrypted application identifier following the BOM character. This application identifier is written between double quotes. Headers for the CSV file follow the application identifier. The report contains the details regarding the users logged into the system in a given time range.

The generated CSV file is compressed and the output is a ZIP file. The file can be downloaded using the Download REST API.

This is an asynchronous command, so use the job status URI to determine whether the operation is complete.

> **Note**
>
> Oracle Fusion Cloud EPM ensures that only valid date range is used during report generation. These validations are performed for the start and end dates:
>
> - The start date cannot be earlier than the allowed maximum retention period (120 days) from the current date.
> - The end date cannot be later than the maximum retention period from the start date.
> - The end date cannot be earlier than the start date.

Required Roles

- Service Administrator
- Any application role and the Access Control - Manage granular role
- Any application role and the Access Control - View granular role

REST Resource

POST`/interop/rest/{api_version}/reports?q=%7Btype%3Auserauditreport%2CfileName%3Auseraudit%20report.csv%2Csince%3A2025-04-01%2Cuntil%3A2025-04-31%7D`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-87 Tasks for User Audit Report

Task	Request	REST Resource
User Audit Report	POST	`/interop/rest/{api_version}/reports?q=%7Btype%3Auserauditreport%2CfileName%3Auseraudit%20report.csv%2Csince%3A2025-04-01%2Cuntil%3A2025-04-31%7D`

Request

Supported Media Types: `application/x-www-form-urlencoded`

The following table summarizes the request parameters.

Table 2-88 Parameters

Name	Description	Type	Required	Default
`fileName`	File where report is to be populated	Query	Yes	None
`since`	Report generation start date	Query	Yes	None
`until`	Report generation end date	Query	Yes	None
`type`	Type of report being generated, `provisionreport` or `userauditreport`	Query	Yes	None

Response

Supported Media Types: `application/json`

Table 2-89 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Can be `self` and/or `Job Status`. If set to `Job Status`, you can use the `href` to get the status of the import operation
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
   "links": [
      {
         "rel": "self",
         "href": "https://<BASE-URL>/interop/rest/{api_version}/reports?
q={type:userauditreport,fileName:useraudit
report.csv,since:2017-12-10,until:2018-06-10}",
         "data": null,
         "action": "POST"
      },
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
      {
         "rel": "Job Status",
         "href": "https://<BASE-URL>/interop/rest/v1/reports/
3180621025673301",
         "data": null,
         "action": "GET"
      }
   ],
   "status": -1,
   "details": null
}
```

Sample cURL Command Basic Auth

```
curl -X POST -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/x-www-
form-urlencoded' 'https:///<BASE-URL>/interop/rest/v1/reports?
q=%7Btype%3Auserauditreport%2CfileName%3Auseraudit%20report.csv%2Csince%3A2025
-04-01%2Cuntil%3A2025-04-31%7D'
```

Sample cURL Command OAuth 2.0

```
curl -X POST --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H
'Content-Type: application/x-www-form-urlencoded' 'https://<BASE-URL>/interop/
rest/security/v1/reports?
q=%7Btype%3Auserauditreport%2CfileName%3Auseraudit%20report.csv%2Csince%3A2025
-04-01%2Cuntil%3A2025-04-11%7D'
```

User Audit Report (v2) (Deprecated)

The User Audit Report (v2) REST API generates a user audit report in the environment and writes the report to the filename provided. The output CSV file contains the first character as a Byte Order Mark(BOM) character `\ufeff`. The API writes an encrypted application identifier following the BOM character. This application identifier is written between double quotes. Headers for the CSV file follow the application identifier. The report contains the details regarding the users logged into the environment in a given time range.

The generated CSV file is compressed and the output is a ZIP file. The file can be downloaded using the Download REST API.

This is an asynchronous command, so use the job status URI to determine whether the operation is complete.

> **Note**
>
> Oracle Fusion Cloud EPM ensures that only valid date range is used during report generation. These validations are performed for the start and end dates:
>
> - The start date cannot be earlier than the allowed maximum retention period (120 days) from the current date.
> - The end date cannot be later than the maximum retention period from the start date.
> - The end date cannot be earlier than the start date.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Required Roles

- Service Administrator
- Any application role and the Access Control - Manage granular role
- Any application role and the Access Control - View granular role

REST Resource

POST `/interop/rest/v2/reports/useraudit`

Table 2-90 Task for User Audit Report

Task	Request	REST Resource
User Audit Report	POST	`/interop/rest/v2/reports/useraudit`

Request

Supported Media Types: `application/json`

The following table summarizes the request parameters.

Table 2-91 Parameters

Name	Description	Type	Required	Default
`fileName`	File where report is to be populated	Payload	Yes	None
`since`	Report generation start date	Payload	Yes	None
`until`	Report generation end date	Payload	Yes	None

Example URL and Payload

`https://<BASE-URL>/interop/rest/v2/reports/useraudit`

```
{
    "fileName": "userauditreport.csv",
    "since": "2022-10-01",
     "until":"2022-11-01"
}
```

Response

Supported Media Types: `application/json`

Table 2-92 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-92 (Cont.) Parameters

Parameters	Description
`action`	The HTTP call type
`rel`	Can be `self` and/or `Job Status`. If set to `Job Status`, you can use the `href` to get the status of the import operation
`data`	Parameters as key value pairs passed in the request

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
    "details": null,
    "status": -1,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/reports/useraudit",
            "action": "POST",
            "rel": "self",
            "data": null
        },
        {
            "href": "https://<BASE-URL>/interop/rest/v2/status/jobs/
2274715257765784 2",
            "action": "GET",
            "rel": "Job Status",
            "data": null
        }
    ]
}
```

Sample cURL Command Basic Auth

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/
json' -d '{"fileName":"userauditreport.csv","until":"2025-03-31",
"since":"2025-03-01"}' 'https://<BASE-URL>/interop/rest/v2/reports/useraudit'
```

Sample cURL Command OAuth 2.0

```
curl -X POST --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H
'Content-Type: application/json' -d
'{"fileName":"userauditreport.csv","until":"2025-03-31",
"since":"2025-03-01"}' 'https://<BASE-URL>/interop/rest/v2/reports/useraudit'
```

User Login Report (v1)

This REST API generates the User Login Report containing information on the users who accessed the environment within a specified date range The report lists the user name, IP address of the device used to access the environment, and the date and time (UTC) at which the user accessed the environment.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Additionally, you can use the `report_name` parameter to pass a report name with .CSV extension to generate the report with a specific name. This report can then be downloaded using the *download* API. In the resulting report file, the first character is the Byte Order Mark (BOM) character *\ufeff*. It is followed by an encrypted application identifier enclosed in double quotes. Headers for the CSV file follow the application identifier.

This API, by default, generates the report in JSON format if a value for the `report_name` parameter is not specified.

The API is synchronous and returns the outcome of the operation in the response. A non-zero status indicates a failure in generating the User Login Report.

Required Roles

- Service Administrator
- Any application role and the Access Control - Manage granular role
- Any application role and the Access Control - View granular role

REST Resource

GET `/interop/rest/security/v1/report/userloginreport?userlogin=<USERLOGIN>&from_date=<FROM_DATE>&to_date=<TO_DATE>&report_name=<REPORT_NAME>`

Request

Supported Media Types: `application/json`

Table 2-93 Request Parameters

Name	Description	Type	Required	Default
`userlogin`	The login name of the user, if you are creating this report for a specific user.	Query	No	All Users
`from_date`	The start date of the period for which the report is to be generated in YYYY-MM-DD format.	Query	No	Today's Date
`to_date`	The end date of the period for which the report is to be generated in YYYY-MM-DD format.	Query	No	Today's Date
`report_name`	A unique file name for the report. The generated report is stored in the inbox. The .CSV extension must be a part of the file name	Query	No	None

Response

Supported Media Types: `application/json`

Table 2-94 Response Parameters

Name	Description
`links`	Detailed information about the link and HTTP call type
`status`	Status of the operation • 0: Operation succeeded • 1: Operation failed
`error`	Detailed information about the error

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-94 (Cont.) Response Parameters

Name	Description
`details`	Records matching the request If a report name is specified using the `report_name` parameter, either a success message or an error message summarizing the encountered error.

Examples of Response Body

Example 1: Execution with No Parameters -- Completes without Errors

```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v1/report/
userloginreport",
    "action": "GET"
  },
  "status": 0,
  "error": null,
  "details": [
    {
      "userlogin": "John",
      "ipaddress": "10.69.112.149",
      "accessdateandtime": "July 3, 2025 11:34:33 UTC"
    },
    {
      "userlogin": "Alex",
      "ipaddress": "10.14.110.178",
      "accessdateandtime": "July 3, 2025 13:45:21 UTC"
    },
    {
      "userlogin": "Clark",
      "ipaddress": "10.54.123.118",
      "accessdateandtime": "July 3, 2025 17:23:47 UTC"
    }
  ]
}
```

Example 2: Execution with `from_date` and `to_date` Query Parameters -- Completes without Errors

```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v1/report/
userloginreport?from_date=2025-06-24&to_date=2025-07-03",
    "action": "GET"
  },
  "status": 0,
  "error": null,
  "details": [
   {
      "userlogin": "Clark",
      "ipaddress": "10.54.123.118",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
      "accessdateandtime": "June 27, 2025 17:23:47 UTC"
    },
    {
      "userlogin": "Alex",
      "ipaddress": "10.14.110.178",
      "accessdateandtime": "July 2, 2025 13:45:21 UTC"
    },
    {
      "userlogin": "John",
      "ipaddress": "10.69.112.149",
      "accessdateandtime": "July 3, 2025 11:34:33 UTC"
    }
  ]
}
```


Example 3: Execution with `userlogin`, `from_date`, and `to_date` Query Parameter -- Completes without Errors


```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v1/report/
userloginreport?userlogin=john&from_date=2024-06-24&to_date=2024-07-03",
    "action": "GET"
  },
  "status": 0,
  "error": null,
  "details": [
    {
      "userlogin": "John",
      "ipaddress": "10.69.112.149",
      "accessdateandtime": "July 3, 2024 11:34:33 UTC"
    },
    {
      "userlogin": "John",
      "ipaddress": "10.14.110.178",
      "accessdateandtime": "July 2, 2024 13:45:21 UTC"
    }
  ]
}
```


Example 4: Execution with `report_name` Parameter -- Completes without Errors


```
{
    "links": {
        "href": "https://<BASE-URL>/interop/rest/security/v1/report/
userloginreport?report_name=UserLoginReport.csv",
        "action": "GET"
    },
    "status": 0,
    "error": null,
    "details": "User Login Report generated successfully.",
    "message": null
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example 5: Execution with `report_name` Parameter -- Completes with Errors

```
{
    "links": {
        "href": "https://<BASE-URL>/interop/rest/security/v1/report/
userloginreport?report_name=UserLoginReport.csv",
        "action": "GET"
    },
    "status": 1,
    "error": {
        "errorcode": "EPMCSS-20685",
        "errormessage": "Failed to generate User Login Report. File
UserLoginReport.csv already exists.Please provide different file name. "
    },
    "details": null,
    "message": "Failed to generate User Login Report. File
UserLoginReport.csv already exists.Please provide different file name. "
}
```

Example 6: Execution Completes with Errors

```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v1/report/
userloginreport?userlogin=clark&from_date=2024-06-24&to_date=2024-07-03",
    "action": "GET"
  },
  "status": 1,
  "error": {
    "errorcode": "EPMCSS-21192",
    "errormessage": "Failed to generate User Login Report. Authorization
failed. Please provide valid authorized user."
  },
  "details": null
}
```

Sample cURL Command Basic Auth

```
curl -X GET -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/json'
'https://<BASE-URL>/interop/rest/security/v1/report/userloginreport'


curl -X GET -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/json'
'https://<BASE-URL>/interop/rest/security/v1/report/userloginreport?
from_date=2024-06-24&to_date=2024-07-03'


curl -X GET -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/json'
'https://<BASE-URL>/interop/rest/security/v1/report/userloginreport?
userlogin=John&from_date=2024-06-24&to_date=2024-07-03'


curl -X GET -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/json'
'https://<BASE-URL>/interop/rest/security/v1/report/userloginreport?
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
userlogin=John&from_date=2024-06-24&to_date=2024-07-03&report_name=UserLoginRe
port.csv'
```

Sample cURL Command OAuth 2.0

```
curl -X GET --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/json' 'https://<BASE-URL>/interop/rest/security/v1/report/
userloginreport'
```

```
curl -X GET --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/json' 'https://<BASE-URL>/interop/rest/security/v1/report/
userloginreport?from_date=2024-06-24&to_date=2024-07-03'
```

```
curl -X GET --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/json' 'https://<BASE-URL>/interop/rest/security/v1/report/
userloginreport?userlogin=John&from_date=2024-06-24&to_date=2024-07-03'
```

```
curl -X GET --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/json' 'https://<BASE-URL>/interop/rest/security/v1/report/
userloginreport?
userlogin=John&from_date=2024-06-24&to_date=2024-07-03&report_name=UserLoginRe
port.csv '
```

Role Assignment Report (v1)

Generates a Role Assignment Report (.CSV). This report lists the application roles (for example, Service Administrator) and granular roles (for example, Approvals Ownership Assigner, Approvals Supervisor, Approvals Administrator, and Approvals Process Designer, which are Planning granular roles) assigned to users. This report matches the CSV version of the Role Assignment Report generated from Access Control. Additionally, it can generate reports containing Identity Domain Administrator on the system by specifying the user type. The API writes the report to the filename provided, and the report can then be downloaded using the Download REST API.

This is an asynchronous job and uses the job status URI to determine if the operation is complete.

The presence of status -1 in the response indicates that the generation of Role Assignment Report is in progress. Use the job status URI to determine whether the generation of Role Assignment Report is complete. Any non-zero status except -1 indicates failure of generating Role Assignment Report.

Required Roles

- Service Administrator
- Any application role and the Access Control - Manage granular role
- Any application role and the Access Control - View granular role

REST Resource

POST `/interop/rest/security/v1/roleassignmentreport`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-95 Tasks for User Assignment Report

Task	Request	REST Resource
Role Assignment Report	POST	`/interop/rest/security/v1/roleassignmentreport/`
Role Assignment Report Status	GET	`/interop/rest/security/v1/jobs/{jobId}`

Request

Supported Media Types: `application/x-www-form-urlencoded`

Table 2-96 Parameters

Name	Description	Type	Required	Default
`filename`	File name for the file where the report is to be populated, such as `roleAssignmentReport.csv`	Form	Yes	None
`usertype`	User type for which to generate the report. This paramenter is optional. If provided values can be either `ServiceUsers` or `IDAdmins`.	Form	No	ServiceUsers

Response

Supported Media Types: `application/json`

Table 2-97 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Can be `self` and/or `Job Status`. If set to `Job Status`, you can use the `href` to get the status of the import operation
`data`	Parameters as key value pairs passed in the request

Examples of Response Body

Example 1: Job is in Progress

```
{
    "links": [
        {
            "data": {
                "jobType": "GENERATE_ROLE_ASSIGNMENT_REPORT",
                "filename": "<filename>"
                "usertype": "<USER_TYPE>"
            },
            "action": "POST",
            "href": "https://<BASE-URL>/interop/rest/security/<api_version>/
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
jobs/<jobId>",
            "rel": "Job Status"
        }
    ],
    "status": -1,
    "details": null,
    "items": null
}
```

Example 2: Job Completes with Errors

```
{
    "links": [
        {
            "data": {
                "jobType": "GENERATE_ROLE_ASSIGNMENT_REPORT",
                "filename": "<filename>"
                "usertype": "<USER_TYPE>"
            },
            "action": "POST",
            "href": "https://<BASE-URL>/interop/rest/security/{api_version}/
roleassignmentreport",
            "rel": "self"
        }
    ],
    "status": 1,
    "details": "EPMCSS-20665: Failed to generate Role Assignment Report.
Invalid or insufficient parameters are specified. Provide all required
parameters for the REST API. ",
    "items": null
}
```

Example 3: Job Completes without Errors

```
{
    "links": [
        {
            "data": null,
            "action": "GET",
            "href": "https://<BASE-URL>/interop/rest/security/<api_version>/
jobs/<jobID>",
            "rel": "self"
        }
    ],
    "status": 0,
    "details": null,
    "items": null
}
```

Sample cURL Command Basic Auth

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -H'Content-Type: application/x-www-
form-urlencoded' -d
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
'filename=roleAssignmentReportUsers.csv&usertype=ServiceUsers' 'https://<BASE-URL>/interop/rest/security/v1/roleassignmentreport'
```

Sample cURL Command OAuth 2.0

```
curl -X POST --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-Type: application/x-www-form-urlencoded' -d 'filename=roleAssignmentReportUsers.csv&usertype=ServiceUsers' 'https://<BASE-URL>/interop/rest/security/v1/roleassignmentreport'
```

Role Assignment Report for Users (v2)

Generates a Role Assignment Report of users in the environment.

The report lists the roles assigned to users. It identifies the user's login name, first name, last name, email address and assigned roles. The report can be created for a specific user login or a role or any user attribute (first name, last name, user login, email).

The report includes:

- Application roles (such as Service Administrator)
- Granular roles (such as Approvals - Assign Ownerships, Approvals - Supervise, Approvals - Administer, and Approvals - Design Process).

The API is synchronous and returns the outcome of the operation in the response. Any non-zero status indicates failure of getting Role Assignment Report for users.

> **Note**
>
> When the report is generated for a single user (using the `userlogin` query parameter), the API returns the currently available data and does not reflect the latest updates.

Required Roles

- Service Administrator
- Any application role and the Access Control - Manage granular role
- Any application role and the Access Control - View granular role

REST Resource

GET `/interop/rest/security/v2/report/roleassignmentreport/user?userlogin=<userlogin>&rolename=<rolename>&userattribute=<search user attribute>`

Table 2-98 Tasks for Role Assignment Report for Users

Task	Request	REST Resource
Role Assignment Report for Users	GET	`/interop/rest/security/v2/report/roleassignmentreport/user?userlogin=<userlogin>&rolename=<rolename>&userattribute=<search user attribute>`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Request

Supported Media Types: `application/json`

Table 2-99 Request Parameters

Name	Description	Type	Required	Default
`userlogin`	Generates `roleassignmentreport` for the specified user only. When the report is generated for a single user (using the `userlogin` query parameter), the API returns the currently available data and does not reflect the latest updates. If a user login is not specified, the report is generated for all the users with the updated data.	Query	No	All Users
`rolename`	Generates `roleassignmentreport` for the specified role only. If a role name is not specified, the report is generated for all the roles. The Role name can be either Application or Granular role (for example, Power User or Access Control - Manage).	Query	No	All Roles
`userattribute`	Generates `roleassignmentreport` for the users matching the specified user attribute (case-insensitive) with any one of these user attributes: • userlogin • firstname • lastname • email	Query	No	All Users

Response

Supported Media Types: `application/json`

Table 2-100 Response Parameters

Parameters	Description
`links`	Detailed information about the link and HTTP call type
`status`	status of the operation • 0: Operation succeeded • 1: Operation failed
`error`	Detailed information about the error
`details`	Lists records matching the request

Example of Respose Body

Example 1: REST API Issued without Any Query Parameters Completes without Errors

```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v2/report/
roleassignmentreport/user",
    "action": "GET"
  },
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
  "status": 0,
  "error": null,
  "details": [
    {
      "userlogin": "Jade",
      "firstname": "Jade",
      "lastname": "Clark",
      "email": "jade.clark@example.com",
      "roles": [
        {
          "rolename": "Service Administrator",
          "roletype": "Application",
          "grantedthroughgroup": ""
        },
        {
          "rolename": "Ad Hoc - Creater",
          "roletype": "Granular",
          "grantedthroughgroup": ""
        }
      ]
    },
    {
      "userlogin": "Jeff",
      "firstname": "Jeff",
      "lastname": "Clark",
      "email": "jeff.clark@example.com",
      "roles": [
        {
          "rolename": "Service Administrator",
          "roletype": "Application",
          "grantedthroughgroup": "idcsgroup"
        },
        {
          "rolename": "Ad Hoc - Read Only User",
          "roletype": "Granular",
          "grantedthroughgroup": ""
        },
        {
          "rolename": "Application - Mass Allocate",
          "roletype": "Granular",
          "grantedthroughgroup": "Analyst->idcsgroup"
        }
      ]
    }
  ]
}
```


Example 2: REST API Issued with `userlogin` and `rolename` Query Parameters Completes without Errors


```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v2/report/
roleassignmentreport/user?userlogin='Jade'&rolename='Service Administrator'",
    "action": "GET"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
  },
  "status": 0,
  "error": null,
  "details": [
    {
      "userlogin": "Jade",
      "firstname": "Jade",
      "lastname": "Clark",
      "email": "jade.clark@example.com",
      "roles": [
        {
          "rolename": "Service Administrator",
          "roletype": "Application",
          "grantedthroughgroup": ""
        }
      ]
    }
  ]
}
```


Example 3: REST API Issued with `userattribute` and `rolename` Query Parameters and Completes without Errors


```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v2/report/
roleassignmentreport/user? userattribute='Clark'&rolename='Service
Administrator'",
    "action": "GET"
  },
  "status": 0,
  "error": null,
  "details": [
    {
      "userlogin": "Jade",
      "firstname": "Jade",
      "lastname": "Clark",
      "email": "jade.clark@example.com",
      "roles": [
        {
          "rolename": "Service Administrator",
          "roletype": "Application",
          "grantedthroughgroup": ""
        }
      ]
    },
    {
      "userlogin": "Jeff",
      "firstname": "Jeff",
      "lastname": "Clark",
      "email": "jeff.clark@example.com",
      "roles": [
        {
          "rolename": "Service Administrator",
          "roletype": "Application",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
          "grantedthroughgroup": "idcsgroup"
        }
      ]
    }
  ]
}
```

Example 4: REST API Issued with Only `rolename` Query Parameter Completes without Errors

```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v2/report/
roleassignmentreport/user?rolename='Ad Hoc - Read Only User'",
    "action": "GET"
  },
  "status": 0,
  "error": null,
  "details": [
    {
      "userlogin": "Jade",
      "firstname": "Jade",
      "lastname": "Clark",
      "email": "jade.clark@example.com",
      "roles": [
        {
          "rolename": "Ad Hoc - Read Only User",
          "roletype": "Granular",
          "grantedthroughgroup": ""
        }
      ]
    },
    {
      "userlogin": "Jeff",
      "firstname": "Jeff",
      "lastname": "Clark",
      "email": "jeff.clark@example.com",
      "roles": [
        {
          "rolename": "Ad Hoc - Read Only User",
          "roletype": "Granular",
          "grantedthroughgroup": ""
        }
      ]
    }
  ]
}
```

Example 5: REST API Issued with Only `userlogin` Query Parameter Completes without Errors

```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v2/report/
roleassignmentreport/user?userlogin='Jade'",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "action": "GET"
  },
  "status": 0,
  "error": null,
  "details": [
    {
      "userlogin": "Jade",
      "firstname": "Jade",
      "lastname": "Clark",
      "email": "jade.clark@example.com",
      "roles": [
        {
          "rolename": "Service Administrator",
          "roletype": "Application",
          "grantedthroughgroup": ""
        },
        {
          "rolename": "Ad Hoc - Creater",
          "roletype": "Granular",
          "grantedthroughgroup": ""
        }
      ]
    }
  ]
}
```


Example 6: REST API Issued with Only `userattribute` Query Parameter and Completes without Errors


```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v2/report/
roleassignmentreport/user?userattribute='Clark'",
    "action": "GET"
  },
  "status": 0,
  "error": null,
  "details": [
    {
      "userlogin": "Jade",
      "firstname": "Jade",
      "lastname": "Clark",
      "email": "jade.clark@example.com",
      "roles": [
        {
          "rolename": "Service Administrator",
          "roletype": "Application",
          "grantedthroughgroup": ""
        },
        {
          "rolename": "Ad Hoc - Creater",
          "roletype": "Granular",
          "grantedthroughgroup": ""
        }
      ]
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    },
    {
      "userlogin": "Jeff",
      "firstname": "Jeff",
      "lastname": "Clark",
      "email": "jeff.clark@example.com",
      "roles": [
        {
          "rolename": "Service Administrator",
          "roletype": "Application",
          "grantedthroughgroup": "idcsgroup"
        },
        {
          "rolename": "Ad Hoc - Read Only User",
          "roletype": "Granular",
          "grantedthroughgroup": ""
        },
        {
          "rolename": "Application - Mass Allocate",
          "roletype": "Granular",
          "grantedthroughgroup": "Analyst->idcsgroup"
        }
      ]
    }
  ]
}
```


Example 7: Job Completes with Errors


```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v2/report/
roleassignmentreport/user",
    "action": "GET"
  },
  "status": 1,
  "error": {
    "errorcode": "EPMCSS-21206",
    "errormessage": "Failed to generate Role Assignment Report for Users.
Authorization failed. Please provide valid authorized user."
  },
  "details": null
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Sample cURL Commands Basic Auth

```
curl -X GET -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/json'
'https://<BASE-URL>/interop/rest/security/v2/report/roleassignmentreport/user'
```

```
curl -X GET -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/json'
'https://<BASE-URL>/interop/rest/security/v2/report/roleassignmentreport/user?
userlogin=yogini@example.com&rolename=Power%20User'
```

```
curl -X GET -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/json'
'https://<BASE-URL>/interop/rest/security/v2/report/roleassignmentreport/user?
userattribute=yogini&rolename=Power%20User'
```

Sample cURL Commands OAuth 2.0

```
curl -X GET --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/json' 'https://<BASE-URL>/interop/rest/security/v2/report/
roleassignmentreport/user'
```

```
curl -X GET --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/json' 'https://<BASE-URL>/interop/rest/security/v2/report/
roleassignmentreport/user?userlogin=yogini@example.com&rolename=Power%20User'
```

```
curl -X GET --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/json' 'https://<BASE-URL>/interop/rest/security/v2/report/
roleassignmentreport/user?userattribute=yogini&rolename=Power%20User'
```

Role Assignment Report for Groups (v2)

Generates a Role Assignment report of groups in the environment. The report lists the roles assigned to groups. It identifies the group's name, description, type and assigned roles. The report can be created for a specific group or a role or a combination of groups and roles.

The report includes:

- Application roles (such as Service Administrator)
- Granular roles (such as Approvals - Assign Ownerships, Approvals - Supervise, Approvals - Administer, and Approvals - Design Process)

The API is synchronous and returns the outcome of the operation in the response. Any non-zero status indicates failure of getting Role Assignment Report for groups.

> **Note**
>
> When the report is generated for a single group (using the `groupname` query parameter), the API returns the currently available data and does not reflect the latest updates.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Required Roles

- Service Administrator
- Any application role and the Access Control - Manage granular role
- Any application role and the Access Control - View granular role

REST Resource

GET `/interop/rest/security/v2/report/roleassignmentreport/group?groupname=<groupname>&rolename=<rolename>`

Request

Supported Media Types: `application/json`

The following table summarizes the request parameters.

Table 2-101 Parameters

Name	Description	Type	Required	Default
`groupname`	Generates `roleassignmentreport` for the specified group only. When the report is generated for a single group (using the `groupname` query parameter), the API returns the currently available data and does not reflect the latest updates. If a group name is not specified, the report is generated for all the groups. The group name can be either EPM or IDCS groups with the updated data.	Query	No	All Groups
`rolename`	Generates `roleassignmentreport` for the specified role only. If a role name is not specified, the report is generated for all the roles. The Role name can be either Application or Granular Role (for example, Power User or Access Control - Manage).	Query	No	All Roles

Response

Supported Media Types: `application/json`

Table 2-102 Parameters

Parameters	Description
`links`	Detailed information about the link and HTTP call type
`status`	See Migration Status Codes
`error`	Detailed information about the error
`details`	Lists records matching the request

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example of Response Body

Response 1: REST API Issued without `groupname` or `rolename` Query Parameters Completes without Errors

```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v2/report/
roleassignmentreport/group",
    "action": "GET"
  },
  "status": 0,
  "error": null,
  "details": [
    {
      "groupname": "idcsgroup",
      "description": "Sample IDCS Group",
      "type": "IDCS",
      "roles": [
        {
          "rolename": "Service Administrator",
          "roletype": "Application",
          "grantedthroughgroup": ""
        },
        {
          "rolename": "Application - Mass Allocate",
          "roletype": "Granular",
          "grantedthroughgroup": ""
        },
        {
          "rolename": "Ad Hoc - Read Only User",
          "roletype": "Granular",
          "grantedthroughgroup": "Analyst"
        }
      ]
    },
    {
      "groupname": "FinancialAnalyst",
      "description": "Sample EPM Group",
      "type": "EPM",
      "roles": [
        {
          "rolename": "Application - Mass Allocate",
          "roletype": "Granular",
          "grantedthroughgroup": ""
        },
        {
          "rolename": "DataIntegration-Create",
          "roletype": "Granular",
          "grantedthroughgroup": ""
        },
        {
          "rolename": "DataIntegration-Run",
          "roletype": "Granular",
          "grantedthroughgroup": ""
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        }
      ]
    },
    {
      "groupname": "GroupPU",
      "description": "Sample IDCS GroupPU",
      "type": "IDCS",
      "roles": [
        {
          "rolename": "PowerUser",
          "roletype": "Application",
          "grantedthroughgroup": ""
        },
        {
          "rolename": "Approval-Supervise",
          "roletype": "Granular",
          "grantedthroughgroup": ""
        },
        {
          "rolename": "DataIntegration-Run",
          "roletype": "Granular",
          "grantedthroughgroup": "Analyst->FinancialAnalyst"
        }
      ]
    }
  ]
}
```


Response 2: REST API Issued with `groupname` and `rolename` Query Parameters Completes without Errors


```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v2/report/
roleassignmentreport/group?groupname='idcsgroup'&rolename='Service
Administrator'",
    "action": "GET"
  },
  "status": 0,
  "error": null,
  "details": [
    {
      "groupname": "idcsgroup",
      "description": "Sample IDCS Group",
      "type": "IDCS",
      "roles": [
        {
          "rolename": "Service Administrator",
          "roletype": "Application",
          "grantedthroughgroup": ""
        }
      ]
    }
  ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Response 3: REST API Issued with Only `rolename` Query Parameter Completes without Errors


```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v2/report/
roleassignmentreport/group?rolename='Application - Mass Allocate'",
    "action": "GET"
  },
  "status": 0,
  "error": null,
  "details": [
    {
      "groupname": "idcsgroup",
      "description": "Sample IDCS Group",
      "type": "IDCS",
      "roles": [
        {
          "rolename": "Application - Mass Allocate",
          "roletype": "Granular",
          "grantedthroughgroup": ""
        }
      ]
    },
    {
      "groupname": "FinancialAnalyst",
      "description": "Sample EPM Group",
      "type": "EPM",
      "roles": [
        {
          "rolename": "Application - Mass Allocate",
          "roletype": "Granular",
          "grantedthroughgroup": ""
        }
      ]
    }
  ]
}
```


Response 4: REST API Issued with Only `groupname` Query Parameter Completes without Errors


```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v2/report/
roleassignmentreport/group?groupname='idcsgroup'",
    "action": "GET"
  },
  "status": 0,
  "error": null,
  "details": [
    {
      "groupname": "idcsgroup",
      "description": "Sample IDCS Group",
      "type": "IDCS",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
      "roles": [
        {
          "rolename": "Service Administrator",
          "roletype": "Application",
          "grantedthroughgroup": ""
        },
        {
          "rolename": "Application - Mass Allocate",
          "roletype": "Granular",
          "grantedthroughgroup": ""
        },
        {
          "rolename": "Ad Hoc - Read Only User",
          "roletype": "Granular",
          "grantedthroughgroup": "Analyst"
        }
      ]
    }
  ]
}
```


Response 5: Job Completes with Errors


```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v2/report/
roleassignmentreport/group",
    "action": "GET"
  },
  "status": 1,
  "error": {
    "errorcode": "EPMCSS-21203",
    "errormessage": "Failed to generate Role Assignment Report for Groups.
Authorization failed. Please provide valid authorized user."
  },
  "details": null
}
```


Sample cURL Commands Basic Auth

```
curl -X GET -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/json'
'https://<BASE-URL>/interop/rest/security/v2/report/roleassignmentreport/
group'
```

```
curl -X GET -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/json'
'https://<BASE-URL>/interop/rest/security/v2/report/roleassignmentreport/
group?groupname=auditingepm&rolename=Power%20User'
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Sample cURL Commands OAuth 2.0

```
curl -X GET --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/json' 'https://<BASE-URL>/interop/rest/security/v2/report/
roleassignmentreport/group'
```

```
curl -X GET --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/json' 'https://<BASE-URL>/interop/rest/security/v2/report/
roleassignmentreport/group?groupname=auditingepm&rolename=Power%20User'
```

Get Available Roles (v2)

Returns all the granular and application roles that are available for an Oracle Fusion Cloud Enterprise Performance Management service. Additionally, roles can be retrieved based on the specified type (application or granular).

This API is synchronous and returns the outcome of the operation in the response. Any non-zero status indicates failure of getting available roles.

Required Roles

Service Administrator or any application role and the Access Control – Manage granular role

REST Resource

GET `/interop/rest/security/v2/role/getavailableroles?type=<type>`

Table 2-103 Tasks for Getting Available Roles

Task	Request	REST Resource
Get Available Roles	GET	`/interop/rest/security/v2/role/getavailableroles?type=<type>`

Request

Supported Media Types: `application/json`

Table 2-104 Request Parameter

Name	Description	Type	Required	Default
`type`	When `type=granular` is specified, all the granular roles are returned. When `type=application` is specified, all the application roles are returned. When `type` is not specified all the granular roles and application roles are returned.	Query	No	All granular and application roles

Response

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-105 Response Parameters

Parameters	Description
`links`	Detailed information about the link
`status`	Status of the operation • 0: Operation succeeded • 1: Operation failed
`error`	Detailed information about the error
`details`	Records matching the request

Examples of Response Body

Example 1: REST API Completes without Errors when no Query Parameter is Specified

```
{
  "links": {
    "href": "https://<BASE URL>/interop/rest/security/v2/role/
getavailableroles",
    "action": "GET"
  },
  "status": 0,
  "error": null,
  "details": [
    {
      "name": "Ad Hoc - Create",
      "id": "HP:0016"
    },
    {
      "name": "Ad Hoc - Read Only User",
      "id": "HP:0017"
    },
    {
      "name": "Ad Hoc - User",
      "id": "HP:0015"
    },
    {
      "name": "Announcements - Manage",
      "id": "HP:0021"
    },
    {
      "name": "User",
      "id": "HUB:003"
    },
    {
      "name": "Viewer",
      "id": "HUB:004"
    },
    ...
  ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example 2: REST API Completes without Errors, when Query Parameter `type=application` is Specified


```
{
  "links": {
    "href": " https://<BASE URL>/interop/rest/security/v2/role/
getavailableroles?type=application",
    "action": "GET"
  },
  "status": 0,
  "error": null,
  "details": [
    {
      "name": "Ad Hoc - Create",
      "id": "HP:0016"
    },
    {
      "name": "Ad Hoc - Read Only User",
      "id": "HP:0017"
    },
    {
      "name": "Ad Hoc - User",
      "id": "HP:0015"
    },
    {
      "name": "Announcements - Manage",
      "id": "HP:0021"
    }
  ]
}
```


Example 3: REST API Completes without Errors, when Query Parameter `type=Application` is Specified


```
{
  "links": {
    "href": " https://<BASE URL>/interop/rest/security/v2/role/
getavailableroles?type=application",
    "action": "GET"
  },
  "status": 0,
  "error": null,
  "details": [
    {
      "name": "User",
      "id": "HUB:003"
    },
    {
      "name": "Viewer",
      "id": "HUB:004"
    }
    . . .
  ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example 4: REST API Completes with Errors

```
{
  "links": {
    "href": "https://<BASE-URL>/interop/rest/security/v2/role/
getavailableroles",
    "action": "GET"
  },
  "status": 1,
  "error": {
    "errorcode": "EPMCSS-21192",
    "errormessage": "Failed to get available roles. Authorization failed.
Please provide valid authorized user."
  },
  "details": null
}
```

Sample cURL Command Basic Auth

```
curl -X GET -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/json'
'https://<BASE-URL>/interop/rest/security/v2/role/getavailableroles'


curl -X GET -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/
json''https://<BASE-URL>/interop/rest/security/v2/role/getavailableroles?
type=application'
```

Sample cURL Command OAuth 2.0

```
curl -X GET --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/json' 'https://<BASE-URL>/interop/rest/security/v2/role/
getavailableroles'


curl -X GET --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H 'Content-
Type: application/json' 'https://<BASE-URL>/interop/rest/security/v2/role/
getavailableroles?type=application'
```

Role Assignment Audit Report (v1)

Users with a Service Administrator role can use this API to generate a Role Assignment Audit Report. The report shows all the changes made to the application role and granular role assignments within the provided time frame. This report can be generated for up to the previous 90 days from the current date. You can download the report using the Download REST API. The report shows the timestamp (UTC) in the Date and Time column in 24-hour format.

This is an asynchronous job and uses the job status URI to determine if the operation is complete.

The presence of status -1 in the response indicates that the generation of the report is in progress. Use the job status URI to determine whether the generation of the report is complete. Any non-zero status except -1 indicates failure of generating the report.

Copyright © 2017, 2026, Oracle and/or its affiliates.

The default retention period for audit data is 30 days; however, you can extend the retention period up to a maximum of 90 days from the Identity Console. If you want a longer duration of audit data, download a Role Assignment Audit Report and archive it.

> **Note**
>
> Oracle Fusion Cloud EPM ensures that only valid date range is used during report generation. Thesevalidations are performed for the start and end dates:
>
> - The start date cannot be earlier than the allowed maximum retention period (90 days) from the current date.
> - The end date cannot be later than the maximum retention period from the start date.
> - The end datecannot be earlier than the start date.

Required Roles

- Service Administrator
- Any application role and the Identity Domain Administrator role
- Any application role and the Access Control - Manage granular role
- Any application role and the Access Control - View granular role

REST Resource

POST `/interop/rest/security/v1/roleassignmentauditreport`

Table 2-106 Tasks for Role Assignment Audit Report

Task	Request	REST Resource
Role Assignment Audit Report	POST	`/interop/rest/security/v1/roleassignmentauditreport/`
Role Assignment Audit Report Status	GET	`/interop/rest/security/v1/jobs/{jobId}`

Request

Supported Media Types: `application/x-www-form-urlencoded`

Table 2-107 Parameters

Name	Description	Type	Required	Default
`from_date`	The start date for the report (in YYYY-MM-DD format)	Form	Yes	None
`to_date`	The end date for the report (in YYYY-MM-DD format)	Form	Yes	None
`filename`	CSV file where the report is to be populated, such as roleAssignmentAuditReport.csv	Form	Yes	None

Response

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-108 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Can be `self` and/or `Job Status`. If set to `Job Status`, you can use the `href` to get the status
`data`	Parameters as key value pairs passed in the request

Sample Role Assignment Audit Report

The Role Assignment Audit Report lists the User Login Name, IDCs Group Name, or EPM Group Name for which a role change (in Action column) was made. It also includes the application or granular role that was assigned or unassigned, the user who performed the role change (Performed By column), and the timestamp (UTC) in 24-hour format when the action was completed. The Type column indicates what Name column represents. It can have one of these three values: User (if the Name column identifies a login name of a user), IDCS Group (if the Name column displays an IDCS group name), or EPM Group (if the Name column lists an EPM group name).

	A	B	C	D	E	F
1	**Name**	**Type**	**Role**	**Action**	**Performed By**	**Date and Time**
2	IDCS-Group1	IDCS Group	Power User	Assign	serviceadmin@example.com	December 11, 2024 00:47:10 UTC
3	jane.doe@example.com	User	Power User	Assign	serviceadmin@example.com	December 11, 2024 00:47:27 UTC
4	epmIDCSGroup	User	Service Administrator	Assign	serviceadmin@example.com	December 11, 2024 00:48:47 UTC
5	john.doe@example.com	User	Power User	Assign	serviceadmin@example.com	December 11, 2024 00:59:06 UTC
6	john.doe@example.com	User	Ad Hoc - Create	Assign	serviceadmin@example.com	December 11, 2024 01:08:37 UTC
7	john.doe@example.com	User	Access Control - Manage	Unassign	serviceadmin@example.com	December 11, 2024 01:10:30 UTC
8	john.doe@example.com	User	Ad Hoc - Create	Unassign	serviceadmin@example.com	January 07, 2025 03:28:56 UTC

Information on deleted users who were previously assigned to application roles in the environment is listed with the display name (first and last name) of the user in the User Name column. In such cases, the Role column indicates the application role that the user had before the user's account was deleted. This change does not apply to granular roles, if any, that were assigned to the deleted user; such assignments are shown with the User Login Name of the user. For an example, see the information in the red box in the following illustration.

	A	B	C	D	E	F
1	**Name**	**Type**	**Role**	**Action**	**Performed By**	**Date and Time**
2	Jane Doe	User	User	Assign	admin@example.com	January 08, 2025 05:42:47 UTC
3	jane.doe@example.com	User	Run Integrations	Assign	admin@example.com	January 08, 2025 05:44:18 UTC
4	john.smith@example.com	User	Power User	Assign	admin@example.com	January 08, 2025 05:44:18 UTC
5	john.smith@example.com	User	User	Unassign	admin@example.com	January 08, 2025 05:44:18 UTC
6	john.smith@example.com	User	Access Control - View	Assign	admin@example.com	January 08, 2025 05:44:18 UTC
7	epmIDCSGroup	IDCS Group	Viewer	Assign	admin@example.com	January 08, 2025 05:44:22 UTC
8	epmGroup	EPM Group	Ad Hoc - Create	Assign	admin@example.com	January 08, 2025 05:44:22 UTC

Examples of Response Body

The following show examples of the response body in JSON format.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Response 1: Job is in Progress

```
{
    "links": [
        {
            "rel": "self",
            "href": "https://<BASE-URL>/interop/rest/security/<api_version>/
roleassignmentauditreport",
            "data": {
                "jobType": "GENERATE_ROLE_ASSIGNMENT_AUDIT_REPORT",
                "to_date": "<toDate>",
                "filename": "<filename>",
                "from_date": "<fromDate>"
            },
            "action": "POST"
        },
        {
            "rel": "Job Status",
            "href": "https://<BASE-URL>/interop/rest/security/<api_version>/
jobs/3023387588778806",
            "data": null,
            "action": "GET"
        }
    ],
    "details": null,
    "status": -1,
    "items": null
}
```

Response 2: Job Completes with Errors

```
{
    "links": [
        {
            "data": {
                "jobType": "GENERATE_ROLE_ASSIGNMENT_AUDIT_REPORT",
            "from_date": " ",
            "to_date": " ",
                "filename": " "
            },
            "action": "POST",
            "href": "https://<BASE-URL>/interop/rest/security/{api_version}/
roleassignmentauditreport",
            "rel": "self"
        }
    ],
    "status": 1,
    "details": "EPMCSS-20678: Failed to generate Role Assignment Audit
Report. Invalid or insufficient parameters specified. Provide all required
parameters for the REST API. ",
    "items": null
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Response 3: Job Completes without Errors

```
{
    "links": [
        {
            "data": null,
            "action": "GET",
            "href": "https://<BASE-URL>/interop/rest/security/<api_version>/
jobs/<jobID>",
            "rel": "self"
        }
    ],
    "status": 0,
    "details": null,
    "items": null
}
```

Sample cURL Command Basic Auth

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/x-
www-form-urlencoded' -d
'from_date=2025-03-10&to_date=2025-03-31&filename=roleAssignmentAuditReport.cs
v' 'https://<BASE-URL>/interop/rest/security/v1/roleassignmentauditreport'
```

Sample cURL Command OAuth 2.0

```
curl -X POST --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H
'Content-Type: application/x-www-form-urlencoded' -d
'from_date=2025-03-10&to_date=2025-03-31&filename=roleAssignmentAuditReport.cs
v' 'https://<BASE-URL>/interop/rest/security/v1/roleassignmentauditreport'
```

Invalid Login Report (v1)

Users who have both a Service Administrator role and an Identity Domain Administrator role can use this API to generate an Invalid Login Report. This allows you to automate reporting on unsuccessful login attempts. This report shows unsuccessful login attempts for users within the provided time frame. This report can be generated for the previous 90 days from the current date. You can download the report using the Download REST API. This report shows all the unsuccessful login attempts to the corresponding Identity Cloud Service. These may not all be to this particular Oracle Fusion Cloud EPM instance.

This is an asynchronous job and uses the job status URI to determine if the operation is complete.

The presence of status -1 in the response indicates that the generation of the report is in progress. Use the job status URI to determine whether the generation of the report is complete. Any non-zero status except -1 indicates failure of generating the report.

The default retention period for audit data is 30 days; however, you can extend the retention period up to a maximum of 90 days from the Identity Console. If you want a longer duration of audit data, download an Invalid Login Report and archive it.

Copyright © 2017, 2026, Oracle and/or its affiliates.

> **Note**
>
> Cloud EPM ensures that only valid date range is used during report generation. These validations are performed for the start and end dates:
>
> - The start date cannot be earlier than the allowed maximum retention period (90 days) from the current date.
> - The end date cannot be later than the maximum retention period from the start date.
> - The end date cannot be earlier than the start date.

Required Roles

Identity Domain Administrator and any application role (Service Administrator, Power User, User, or Viewer)

REST Resource

POST `/interop/rest/security/{api_version}/invalidloginreport`

Table 2-109 Tasks for Invalid Login Report

Task	Request	REST Resource
Invalid Login Report	POST	`/interop/rest/security/{api_version}/invalidloginreport/`
Invalid Login Report Status	GET	`/interop/rest/security/{api_version}/jobs/{jobId}`

Request

Supported Media Types: `application/x-www-form-urlencoded`

The following table summarizes the request parameters.

Table 2-110 Parameters

Name	Description	Type	Required	Default
`from_date`	The start date for the report (in YYYY-MM-DD format)	Form	Yes	None
`to_date`	The end date for the report (in YYYY-MM-DD format)	Form	Yes	None
`filename`	CSV file where the report is to be populated, such as InvalidLoginReport.csv	Form	Yes	None

Response

Supported Media Types: `application/json`

Table 2-111 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-111 (Cont.) Parameters

Parameters	Description
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Can be `self` and/or `Job Status`. If set to `Job Status`, you can use the `href` to get the status
`data`	Parameters as key value pairs passed in the request

Sample Invalid Login Report

	A	B	C
1	User Name	IP Address	Access Date and Time
2	john.doe@example.com	xxx.xx.xx.xx5	July 15, 2021 11:14:58 UTC
3	jane.doe@example.com	xxx.xx.xx.xx9	July 15, 2021 11:14:58 UTC
4	john.smith@example.com	xxx.xx.xx.xx3	July 15, 2021 11:14:57 UTC

Examples of Response Body

The following show examples of the response body in JSON format.

Response 1: Job is in Progress

```
{
    "links": [
        {
            "rel": "self",
            "href": "https://<BASE-URL>/interop/rest/security/<api_version>/
invalidloginreport",
            "data": {
                "jobType": "GENERATE_INVALID_LOGIN_REPORT",
                "to_date": "<toDate>",
                "filename": "<filename>",
                "from_date": "<fromDate>"
            },
            "action": "POST"
        },
        {
            "rel": "Job Status",
            "href": "https://<BASE-URL>/interop/rest/security/<api_version>/
jobs/<job_id>",
            "data": null,
            "action": "GET"
        }
    ],
    "details": null,
    "status": -1,
    "items": null
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Response 2: Job Completes with Errors

```
{
    "links": [
        {
            "data": {
                "jobType": "GENERATE_INVALID_LOGIN_REPORT",
            "from_date": " ",
            "to_date": " ",
                "filename": " "
            },
            "action": "POST",
            "href": "https://<BASE-URL>/interop/rest/security/{api_version}/
invalidloginreport",
            "rel": "self"
        }
    ],
    "status": 1,
    "details": "EPMCSS-20679: Failed to generate Invalid Login Report.
Invalid or insufficient parameters specified. Provide all required parameters
for the REST API. ",
    "items": null
}
```

Response 3: Job Completes without Errors

```
{
    "links": [
        {
            "data": null,
            "action": "GET",
            "href": "https://<BASE-URL>/interop/rest/security/<api_version>/
jobs/<jobID>",
            "rel": "self"
        }
    ],
    "status": 0,
    "details": null,
    "items": null
}
```

Sample cURL Command Basic Auth

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/x-
www-form-urlencoded' -d
'from_date=2025-03-10&to_date=2025-03-31&filename=invalidLoginReport.csv'
'https://<BASE-URL>/interop/rest/security/v1/invalidloginreport'
```

Sample cURL Command OAuth 2.0

```
curl -X POST --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H'Content-
Type: application/x-www-form-urlencoded' -d
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
'from_date=2025-03-10&to_date=2025-03-31&filename=invalidLoginReport.csv'
'https://<BASE-URL>/interop/rest/security/v1/invalidloginreport'
```

Group Assignment Audit Report (v2)

Generates a report that lists users and groups that have been assigned to or unassigned (removed) from EPM groups for a specified date range. Additionally, the report includes users who have been assigned or unassigned (removed) from IDCS groups, based on the IDCS Audit record retention period.

The Group Assignment Audit Report lists the User Login Name, IDCS Group Name, and either the Predefined Group Name or EPM Group Name associated with a group membership change (as indicated in the Action column). The report also includes the EPM or IDCS group that was assigned or unassigned, the user who executed the membership change (Performed By column), and the completion timestamp (UTC) in 24-hour format. The API writes the report to the filename provided, and the report can then be downloaded using the Download REST API

This is an asynchronous job and uses the job status URI to determine if the operation is complete.

The presence of status -1 in the response indicates that the generation of Group Assignment Audit Report is in progress. Use the job status URI to determine whether the generation of the report is complete. Any non-zero status except -1 indicates failure of generating the report.

> **Note**
>
> Oracle Fusion Cloud EPM ensures that only valid date range is used during report generation. These validations are performed for the start and end dates:
>
> - The start date cannot be earlier than the allowed maximum retention period (120 days) from the current date.
> - The end date cannot be later than the maximum retention period from the start date.
> - The end date cannot be earlier than the start date.

Required Roles

- Service Administrator
- Any application role and the Access Control - Manage granular role
- Any application role and the Access Control - View granular role

REST Resource

POST `/interop/rest/v2/reports/groupaudit`

Table 2-112 Tasks for Group Assignment Audit Report

Task	Request	REST Resource
Group Assignment Audit Report	POST	`/interop/rest/{api_version}/reports/groupaudit`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-112 (Cont.) Tasks for Group Assignment Audit Report

Task	Request	REST Resource
Group Assignment Audit Report Status	GET	`/interop/rest/{api_version}/jobs/{jobId}`

Request

Supported Media Type: `application/json`

Table 2-113 Parameters

Name	Description	Type	Required	Default
`api_version`	Specific API version	Path	Yes	None
`filename`	The CSV file where the report is to be populated, such as `groupAssignmentAuditReport.csv`	Payload	Yes	None
`from_date`	The start date for the report (in YYYY-MM-DD format)	Payload	Yes	None
`to_date`	The end date for the report (in YYYY-MM-DD format)	Payload	Yes	None

Example Payload

```
{
fileName":"groupauditreport_test.csv",
"from_date":"2022-03-26",
"to_date":"2022-05-30"
}
```

Response

Supported Media Types: `application/json`

Table 2-114 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Can be `self` and/or `Job Status`. If set to `Job Status`, you can use the `href` to get the status of the import operation
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
   "links": [
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
      {
         "rel": "self",
         "href": "https://<BASE-URL>/interop/rest/v2/reports/groupaudit",
         "data": null,
         "action": "POST"
      },
      {
         "rel": "Job Status",
         "href": "https://<BASE-URL>/interop/rest/v2/jobs/3180621025673301",
         "data": null,
         "action": "GET"
      }
   ],
   "status": -1,
   "details": null
}
```

Sample cURL Command Basic Auth

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -H'Content-Type: application/json'
-d
'{"fileName":"groupAssignmentAuditReport.csv","from_date":"2025-03-30","to_dat
e":"2025-04-28"}' 'https://<BASE-URL>/interop/rest/v2/reports/groupaudit'
```

Sample cURL Command OAuth 2.0

```
curl -X POST --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H
'Content-Type: application/json' -d
'{"fileName":"groupAssignmentAuditReport.csv","from_date":"2025-03-30","to_dat
e":"2025-04-28"}' 'https://<BASE-URL>/interop/rest/v2/reports/groupaudit'
```

Add Users to a Team for Account Reconciliation

Adds Oracle Fusion Cloud EPM users listed in a UTF8 formatted CSV file to an existing team in Access Control for Account Reconciliation. The file must be uploaded to the environment before using this API, and the file should be deleted after the API executes. Use the Upload REST API to upload the file.

A primary user is, by default, designated to perform the tasks that are assigned to the team. The file format is as follows:

```
User Login, primary_user
jdoe, yes
jane.doe@example.com,no
```

The users are added only if both these conditions are met:

- User login IDs included in the file exist in the identity domain that services the environment
- The user is assigned to a application role in the identity domain

The API is asynchronous and returns the Job ID. Use the job status URI to determine whether the process is complete. The presence of status -1 in the response indicates that the update is in progress. Any non-zero status except -1 indicates failure for the update.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Required Roles

Service Administrator, Power User, User, Viewer

Users with Power User, User, and Viewer application roles may require additional granular roles

REST Resource

`POST /armARCS/rest/{version}/jobs`

Request

Supported Media Types: `application/json`

Table 2-115 Parameters

Name	Data Type	Description
`jobName`	String	The name of the job, `ADD_USERS_TO_TEAM`.

`fileName`	String	The name of the uploaded ANSI or UTF-8 encoded CSV file containing information on the users to be added, for example, `addUsersToTeam.csv`.
		The file must have been uploaded already using the Upload REST API. The CSV file should not include the account of the user who executes this command.
		A primary user is, by default, designated to perform the tasks that are assigned to the team. The file format is as follows:
		`User Login, primary_user`
		`jdoe, yes`
		`jane.doe@example.com,no`

`teamName`	String	The name of an existing team in Access Control, such as `Team1`

Example URL and Payload

`https://<BASE-URL>/armARCS/rest/v1/jobs/`

```
{
   "jobName":"ADD_USERS_TO_TEAM",
      "parameters":{
      "fileName":"users.csv",
      "teamName":"Team1"
   }
}
```

Response

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-116 Parameters

Name	Description
`status`	`-1` - In Progress `0` - Success `1` - Failure
`details`	In case of errors, details are published with the error string
`descriptiveStatus`	The status of the job, such as `Completed` or `Error`.
`items`	Collection of notification categories
`links`	Detailed information about the link
`href`	Links to the API call
`action`	The HTTP call type
`rel`	Possible value: `self`
`data`	Parameters as key value pairs passed in the request

Example of Response Body

The following is an example of the response body in JSON format.

```
{
  "details": "In Process",
  "links": [
    {
      "rel": "self",
      "href": "https://<BASE-URL>/armARCS/rest/v1/jobs/100000000053010",
      "action": "GET"
    }
  ],
  "status": -1,
  "type": "ARCS",
  "link": null,
  "items": null,
  "error": null
}
```

Add Users to a Team for Financial Consolidation and Close and Tax Reporting

Adds Oracle Fusion Cloud EPM users listed in a UTF8 formatted CSV file to an existing team in Access Control. The file must be uploaded to the environment before using this API, and the file should be deleted after the API executes. Use the Upload REST API to upload the file.

A primary user is, by default, designated to perform the tasks that are assigned to the team. The file format is as follows:

```
User Login, primary_user
jdoe, yes
jane.doe@example.com,no
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

The users are added only if both these conditions are met:

- User login IDs included in the file exist in the identity domain that services the environment
- The user is assigned to a application role in the identity domain

The API is asynchronous and returns the Job ID. Use the job status URI to determine whether the process is complete. The presence of status -1 in the response indicates that the update is in progress. Any non-zero status except -1 indicates failure for the update.

> **Note**
>
> This feature uses a Planning REST API to run a job. Details about Planning REST APIs are described here: Planning REST APIs.

Required Roles

Service Administrator, Power User, User, Viewer

Users with Power User, User, and Viewer application roles may require additional granular roles.

REST Resource

```
POST /HyperionPlanning/rest/{api_version}/applications/{application}/fcmjobs
```

Request

Supported Media Types: `application/x-www-form-urlencoded`

Table 2-117 Parameters

Name	Description	Type	Required	Default
`application`	The name of the application, for example, FCCS or TRCS	Path	Yes	None

Example of Request Body

Table 2-118 Parameters

Name	Description
`jobName`	The name of the job, ADD_USERS_TO_TEAM

`fileName`	The name of the uploaded ANSI or UTF-8 encoded CSV file containing information on the users to be added, for example, `addUsersToTeam.csv`.
	The file must have been uploaded already using the Upload REST API. The CSV file should not include the account of the user who executes this command.
	A primary user is, by default, designated to perform the tasks that are assigned to the team. The file format is as follows:
	
	`User Login, primary_user`
	`jdoe, yes`
	`jane.doe@example.com,no`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-118 (Cont.) Parameters

Name	Description
`teamName`	The name of an existing team in Access Control, for example, `Team1`

Example URL and Payload

`https://<BASE-URL>/HyperionPlanning/rest/v3/applications/FCCS/fcmjobs`

```
{
   "jobName":"ADD_USERS_TO_TEAM",
      "parameters":{
      "fileName":"users.csv",
      "teamName":"Team1"
   }
}
```

Response

Supported Media Types: `application/json`

Table 2-119 Parameters

Name	Description
`jobName`	`ADD_USERS_TO_TEAM`
`jobID`	The ID of the job, such as 100000000114040
`status`	`-1` - In Progress
	`0` - Success
	`1` - Failure
`details`	In case of errors, details are published with the error string
`descriptiveStatus`	The status of the job, such as `Completed` or `Error`
`items`	Collection of notification categories
`links`	Detailed information about the link
`href`	Links to the API call
`action`	The HTTP call type
`rel`	Possible value: `self`
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
   "jobName":"ADD_USERS_TO_TEAM",
   "jobId":100000000114040,
   "descriptiveStatus":",
   "detail":"In Progress",
   "status":-1,
   "items":null,
   "links":[
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
      {
         "rel":"self",
         "href":"https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
FCCS/fcmjobs/100000000114040",
         "action":"GET"
      }
   ]
}
```

Remove Users from a Team for Account Reconciliation

Removes Oracle Fusion Cloud EPM users listed in a UTF8 formatted CSV file from an existing team in Access Control for Account Reconciliation. The file must be uploaded to the environment before using this API, and the file should be deleted after the API executes. Use the Upload REST API to upload the file.

A primary user is, by default, designated to perform the tasks that are assigned to the team. The file format is as follows:

```
User Login, primary_user
jdoe, yes
jane.doe@example.com,no
```

The users are removed only if both these conditions are met:

- User login IDs included in the file exist in the identity domain that services the environment
- The user is assigned to a application role in the identity domain

The API is asynchronous and returns the Job ID. Use the job status URI to determine whether the process is complete. The presence of status -1 in the response indicates that the update is in progress. Any non-zero status except -1 indicates failure for the update.

Required Roles

Service Administrator

REST Resource

`POST /armARCS/rest/{version}/jobs`

Request

Supported Media Types: `application/json`

The following table summarizes the parameters of the JSON request.

Table 2-120 Parameters

Name	Data type	Description
`jobName`	String	The name of the job, `REMOVE_USERS_FROM_TEAM`.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-120 (Cont.) Parameters

Name	Data type	Description

`fileName`	String	The name of the uploaded ANSI or UTF-8 encoded CSV file containing information on the users to be remved, for example, `removeUsersFromTeam.csv`.
		The file must have been uploaded already using the Upload REST API. The CSV file should not include the account of the user who executes this command.
		A primary user is, by default, designated to perform the tasks that are assigned to the team. The file format is as follows:
		`User Login, primary_user`
		`jdoe, yes`
		`jane.doe@example.com,no`

`teamName`	String	The name of an existing team in Access Control, such as `Team1`

Example URL and Payload

`https://<<BASE-URL>/armARCS/rest/v1/jobs`

```
{
   "jobName":"REMOVE_USERS_FROM_TEAM",
   "parameters":{
      "fileName":"users.csv",
      "teamName":"Team1"
   }
}
```

Response

Supported Media Types: `application/json`

Table 2-121 Parameters

Name	Description
`type`	Application type
`status`	`-1` - In Progress `0` - Success `1` - Failure
`details`	In case of errors, details are published with the error string
`descriptiveStatus`	The status of the job, such as `Completed` or `Error`.
`items`	Collection of notification categories
`links`	Detailed information about the link
`href`	Links to the API call
`action`	The HTTP call type

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-121 (Cont.) Parameters

Name	Description
`rel`	Possible value: `self`
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
  "details": "In Process",
  "links": [
    {
      "rel": "self",
      "href": "https://<BASE-URL>/armARCS/rest/v1/jobs/100000000053010",
      "action": "GET"
    }
  ],
  "status": -1,
  "type": "ARCS",
  "link": null,
  "items": null,
  "error": null
}
```

Remove Users from a Team for Financial Consolidation and Close and Tax Reporting

Removes Oracle Fusion Cloud EPM users listed in a UTF8 formatted CSV file from an existing team in Access Control. The file must be uploaded to the environment before using this API, and the file should be deleted after the API executes. Use the Upload REST API to upload the file.

A primary user is, by default, designated to perform the tasks that are assigned to the team. The file format is as follows:

```
User Login, primary_user
jdoe, yes
jane.doe@example.com,no
```

The users are removed only if both these conditions are met:

- User login IDs included in the file exist in the identity domain that services the environment
- The user is assigned to a application role in the identity domain

The API is asynchronous and returns the Job ID. Use the job status URI to determine whether the process is complete. The presence of status -1 in the response indicates that the update is in progress. Any non-zero status except -1 indicates failure for the update.

Copyright © 2017, 2026, Oracle and/or its affiliates.

> **Note**
>
> This feature uses a Planning REST API to run a job. Details about Planning REST APIs are described here: Planning REST APIs.

Required Roles

Service Administrators

REST Resource

`POST /HyperionPlanning/rest/{api_version}/applications/{application}/fcmjobs`

Request

Supported Media Types: `application/x-www-form-urlencoded`

Table 2-122 Parameters

Name	Description	Type	Required	Default
`application`	The name of the application, FCCS	Path	Yes	None

Example of Request Body

Table 2-123 Parameters

Name	Description
`jobName`	The name of the job, REMOVE_USERS_FROM_TEAM

`fileName`	The name of the uploaded ANSI or UTF-8 encoded CSV file containing information on the users to be removed, for example, `removeUsersFromTeam.csv`.
	The file must have been uploaded already using the Upload REST API. The CSV file should not include the account of the user who executes this command.
	A primary user is, by default, designated to perform the tasks that are assigned to the team. The file format is as follows:
	`User Login, primary_user`
	`jdoe, yes`
	`jane.doe@example.com,no`

`teamName`	The name of an existing team in Access Control, such as `Team1`.

Example URL and Payload

`https://<BASE-URL>/HyperionPlanning/rest/v3/applications/FCCS/fcmjobs`

```
{
   "jobName":"REMOVE_USERS_FROM_TEAM",
      "parameters":{
      "fileName":"users.csv",
      "teamName":"Team1"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
   }
}
```

Response

Supported Media Types: `application/json`

Table 2-124 Parameters

Name	Description
`jobName`	`REMOVE_USERS_FROM_TEAM`
`jobID`	The ID of the job, such as 100000000114040
`status`	`-1` - In Progress `0` - Success `1` - Failure
`details`	In case of errors, details are published with the error string
`descriptiveStatus`	The status of the job, such as `Completed` or `Error`
`items`	Collection of notification categories
`links`	Detailed information about the link
`href`	Links to the API call
`action`	The HTTP call type
`rel`	Possible value: `self`
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
   "jobName":"REMOVE_USERS_FROM_TEAM",
   "jobId":100000000114040,
   "descriptiveStatus":",
   "detail":"In Progress",
   "status":-1,
   "items":null,
   "links":[
      {
         "rel":"self",
         "href": "https://BASE-URL>/HyperionPlanning/rest/v3/applications/
FCCS/fcmjobs/100000000114040",
         "action":"GET"
      }
   ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Environment Lifecycle and Migration

Table 2-125 Lifecycle and Migration REST APIs

Lifecycle and Migration REST APIs		
Migration	Services	Application Snapshots
Artifacts, Snapshots, and Migration Status	First Generation REST APIs	

Migration

Use these APIs to get work with migration activities such as API versions, import, export, download and upload files, copy files, and work with skip update settings.

Table 2-126 Lifecycle and Migration REST APIs

Lifecycle and Migration REST APIs		
Get API Versions for Migration APIs	Import and Export Files	Upload and Download Files
View and Delete Files	Copy to and from the Object Store	Copy to and from SFTP
Copy a File Between Instances	Clone an Environment (v1)	Provide Feedback (v2)
Send Email	Skip Updates	List or Restore Backups
Restore Environment (v1)		

URL Structure for Migration

This topic shows the general URL structure for the Migration REST APIs.

Use the following URL structure to access the Migration REST resources:

`https://<BASE-URL>/interop/rest/{api_version}/{path}`

Where:

- *<BASE-URL>*: The first part of your service URL, before the context.

  For example, if your service URL is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com`. Similarly, if your service URL is `https://epm2-acme.epm.us6.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm2-acme.epm.us6.oraclecloud.com`.
- *{api_version}*: API version you are developing with.
- *{path}*: Identifies the resource.

Copyright © 2017, 2026, Oracle and/or its affiliates.

> **Note**
>
> Oracle does not authorize or support the use of REST APIs with the path token "`/internal/`" in the URL.

> **Note**
>
> Some Migration REST APIs are version 11.1.2.3.600 and others are version v1 or v2. Be sure to use the correct version for the API. Passing the incorrect version will result in 404 errors when the API is invoked.
>
> You can find an API version using REST APIs as described here: Get API Versions for Migration APIs. For a list of all of the Migration APIs and their version numbers, see Migration.

Migration Status Codes

The status code returned in the response of REST API calls identifies the status of the operation.

Table 2-127 Status Code

Status Code	Description
O	Operation success
-1	Operation in progress
+ve	Operation failed, with the status signifying an error

Get API Versions for Migration APIs

You can manage versions using the set of REST resources summarized in the following table.

Important: The version number is case-sensitive. For example, if the version number is listed as `v1` with a lowercase `v`, you cannot enter the version number with a capital `V` as in this incorrect example, `V1`, which would result in an error. Instead, you must enter the version number with a lowercase `v` as in this correct example: `v1`.

Table 2-128 Manage Versions of Migration APIs

Task	Request	REST Resource
Get REST API Versions for Migration	GET	`/interop/rest/`
Get Information About a Specific REST API Version for Migration	GET	`/interop/rest/{apiVersion}`

Get REST API Versions for Migration

Returns information about which REST APIs are available and supported. Multiple versions may be supported simultaneously.

Required Roles

Copyright © 2017, 2026, Oracle and/or its affiliates.

Service Administrator, Power User, User, Viewer

REST Resource

GET `/interop/rest/`

Request

Supported Media Types: `application/json`

Table 2-129 Parameters

Name	Description
`Details`	In case of errors, details are published with the error string
`Status`	See Migration Status Codes
`Items`	Detailed information about the API
`Version`	The version
`Lifecycle`	Possible values: `active`, `deprecated`
`Latest`	Whether this version is the latest
`Links`	Detailed information about the link
`Href`	Links to API call
`Action`	The HTTP call type
`Rel`	Possible values: self
`Data`	Parameters as key value pairs passed in the request
`lifecycle`	The stage in the lifecycle, such as active
`version`	The version, such as 11.1.2.3.600, v1, and v2, for example, `"version": "11.1.2.3.600", "v1", v2"`
`serviceType`	The service type, such as PCMCS
`serverVersion`	The server version, such as 21.05.70
`skuType`	The subscription type, such as `Enterprise`
`essbaseVersion`	The essbase version, such as 21.7.4.0.0.004
`buildVersion`	The build version, such as 21.05.52

Example of Response Body

```
{
    "details": null,
    "status": 0,
    "items": [
        {
            "version": "<VERSION>",
            "lifecycle": "<LIFECYCLE_STAGE>",
            "buildVersion": "<BUILD_VERSION>",
            "serverVersion": "<SERVER_VERSION>",
            "skuType": "<SUBSCRIPTION_TYPE>",
            "essbaseVersion": "<ESSBASE_VERSION>",
            "serviceType": "<SERVICE_TYPE>",
            "links": [
                {
                    "href": "https://<BASE-URL>/interop/rest/11.1.2.3.600",
                    "action": "GET",
                    "rel": "version",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
                    "data": null
                }
            ],
            "latest": true
        }
    ],
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/",
            "action": "GET",
            "rel": "self",
            "data": null
        }
    ]
}
```

cURL Sample

```
funcGetLCMVersions() {
    url=$SERVER_URL/interop/rest
    funcExecuteRequest "GET" $url

    output=`cat response.txt`
    status=`echo $output | jq '.status'`
    if [ $status == 0 ]; then
        echo "List of versions :"
        count=`echo $output | jq '.items | length'`
        i=0
        while [ $i -lt $count ]; do
            echo "Version : " `echo $output | jq '.items['$i'].version'`
            echo "Lifecycle :" `echo $output | jq '.items['$i'].lifecycle'`
            echo "Latest :" `echo $output | jq '.items['$i'].latest'`
            echo "Link :" `echo $output | jq '.items['$i'].links[0].href'`
            echo ""
            i=`expr $i + 1`
        done
    else
        error=`echo $output | jq '.details'`
        echo "Error occurred. " $error
    fi
    funcRemoveTempFiles "respHeader.txt" "response.txt"
}
```

Get Information About a Specific REST API Version for Migration

Returns information about a specific version.

Some Migration REST APIs are version 11.1.2.3.600, and others are other versions, such as v1 or v3. Passing the incorrect version will result in 404 errors when the API is invoked. Be sure to use the correct version for the API; `api_version` could be `11.1.2.3.600`, `v1`, or `v2`.

Required Roles

Service Administrator, Power User, User, Viewer

Copyright © 2017, 2026, Oracle and/or its affiliates.

REST Resource

GET `/interop/rest/{api_version}`

Request

Parameters:

Response

Supported Media Types: `application/json`

Table 2-130 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Possible values: self, recreate service
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
    "status":0,
    "details":null,
    "links":[{
        "data":null,
        "action":"GET",
        "href":"https://<BASE-URL/interop/rest/11.1.2.3.600",
        "rel":"self"
        },{
        "data":null,
        "action":"GET",
        "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/services",
        "rel":"recreate service"
        },{
        "data":null,
        "action":"GET",
        "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/applications",
        "rel":"application service"
        },{
        "data":null,
        "action":"GET",    "href":"https://<BASE-URL>/interop/rest/
11.1.2.3.600/applicationsnapshots    "rel":"application snapshot service"
    },{
"data":null,
"action":"POST",
"rel":"feedback services",
"href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/feedback"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
}]
}
```

cURL Sample

```
funcGetLCMVersionDetails() {
    url=$SERVER_URL/interop/rest/$API_VERSION
    funcExecuteRequest "GET" $url

    output=`cat response.txt`
    status=`echo $output | jq '.status'`
    if [ $status == 0 ]; then
        echo "Version $API_VERSION details :"
        count=`echo $output | jq '.links | length'`
        i=0
        while [ $i -lt $count ]; do
            echo "Service : " `echo $output | jq '.links['$i'].rel'`
            echo "URL :" `echo $output | jq '.links['$i'].href'`
            echo "Action :" `echo $output | jq '.links['$i'].action'`
            echo ""
            i=`expr $i + 1`
        done
    else
        error=`echo $output | jq '.details'`
        echo "Error occurred. " $error
    fi
    funcRemoveTempFiles "respHeader.txt" "response.txt"
}
```

Import and Export Files

Table 2-131 Import and Export Files

Task	Request	REST Resource
LCM Import	POST	/interop/rest/{api_version}/applicationsnapshots/{applicationSnapshotName}/migration?q={type:"import"}
LCM Import (v2)	POST	/interop/rest/v2/snapshots/import
LCM Export	POST	/interop/rest/{api_version}/applicationsnapshots/{applicationSnapshotName}/migration?q={type:"export"}
LCM Export (v2)	POST	/interop/rest/v2/snapshots/export

LCM Import (v2)

This REST API initiates import of a Migration snapshot so that the contents of the application snapshot are imported into the application. You can complete these tasks for imported users: set a specific password for all users in the snapshot, set a unique temporary password for each user in the snapshot, and force password reset at first login.

The presence of status -1 in the response indicates that the import is in progress. You should use the job status URI to determine whether the import is complete.

If the Job completes with status 1, the task details will be mentioned in the items from which the source, destination, and URL to fetch the first set of errors is available. All issues for a

Copyright © 2017, 2026, Oracle and/or its affiliates.

particular task can be fetched in the manner of pagination. Acceptable values for msgtype are: `error/warn/info`; `limit` represents the number of issues requested per request, and `offset` marks the beginning number to fetch the issues.

For the previous version of this API, see LCM Import.

Required Roles

Service Administrator or any user assigned to the Migrations - Administer granular role

Identity Domain Administrator role is required to import users and application roles.

REST Resource

POST `/interop/rest/v2/snapshots/import`

Table 2-132 Tasks for LCM Import

Task	Request	REST Resource
LCM Import	POST	`/interop/rest/v2/snapshots/import`
Import Status	GET	`/interop/rest/v2/status/migration/22`
Details	GET	`/interop/rest/v2/status/migration/22/0/details?limit=25&offset=0&msgtype=info`

Request

Support Media Types: `application/json`

Table 2-133 Parameters

Name	Description	Type	Required	Default
`snapshotName`	Application snapshot that is to be imported	Payload	Yes	None
`importUsers`	Whether to import users; `true` imports users and their application role assignments. The import fails if the user issuing the request does not have the Identity Domain Administrator role.	Payload	No	`false`
`userPassword`	The default password for the imported users.	Payload	No	A unique temporary password is assigned to each user
`resetPassword`	Whether to force reset password for the imported users on first login, `true` or `false`	Payload	No	`true`

Example URL and Payload

`https://<BASE-URL>/interop/rest/v2/snapshots/import`

```
{
    "snapshotName": "Artifact Snapshot",
    "parameters": {
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        "importUsers": "TRUE/FALSE",
        "userPassword": "PASSWORD",
        "resetPassword": "TRUE/FALSE"
    }
}
```

Response

Table 2-134 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Can be `self` and/or `Job Status`. If set to `Job Status`, you can use the `href` to get the status of the import operation
`data`	Parameters as key value pairs passed in the request
`items`	Details about the resource
`source`	From where the navigation is being performed
`destination`	To where the navigation is being performed
`name`	Name of the task, usually "Task Information"
`links`	Details of the first URL to be requested to get the job details; rel is "Job Details"

Examples of Response Body

Example 1: Import is in Progress

```
{
    "details": null,
    "status": -1,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/snapshots/import",
            "action": "POST",
            "rel": "self",
            "data": null
        },
        {
            "href": "https://<BASE-URL>/interop/rest/v2/status/migration/
<JOB_ID>",
            "action": "POST",
            "rel": "Job Status",
            "data": null
        }
    ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example 2: Import Completes


```
{
    "details": null,
    "status": 0,
    "items": [
        {
            "name": "Task Information",
            "source": "/Artifact Snapshot/HSS-Shared Services",
            "destination": "Shared Services",
            "links": [
                {
                    "href": "https://<BASE-URL>/interop/rest/v2/status/
migration/24/0/details?limit=25&offset=0&msgtype=warning",
                    "action": "GET",
                    "rel": "Job Details",
                    "data": null
                }
            ]
        },
        {
            "name": "Task Information",
            "source": "/Artifact Snapshot/HP-Vision",
            "destination": "Vision",
            "links": [
                {
                    "href": "https://<BASE-URL>/interop/rest/v2/status/
migration/24/1/details?limit=25&offset=0&msgtype=warning",
                    "action": "GET",
                    "rel": "Job Details",
                    "data": null
                }
            ]
        },
        {
            "name": "Task Information",
            "source": "/Artifact Snapshot/DOCREP-Document Repository",
            "destination": "Document Repository",
            "links": [
                {
                    "href": "https://<BASE-URL>/interop/rest/v2/status/
migration/24/2/details?limit=25&offset=0&msgtype=warning",
                    "action": "GET",
                    "rel": "Job Details",
                    "data": null
                }
            ]
        },
        {
            "name": "Task Information",
            "source": "/Artifact Snapshot/CALC-Calculation Manager",
            "destination": "Calculation Manager",
            "links": [
                {
                    "href": "https://<BASE-URL>/interop/rest/v2/status/
migration/24/3/details?limit=25&offset=0&msgtype=warning",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
                    "action": "GET",
                    "rel": "Job Details",
                    "data": null
                }
            ]
        },
        {
            "name": "Task Information",
            "source": "/Artifact Snapshot/FDMEE-FDM Enterprise Edition",
            "destination": "FDM Enterprise Edition",
            "links": [
                {
                    "href": "https://<BASE-URL>/interop/rest/v2/status/
migration/24/4/details?limit=25&offset=0&msgtype=warning",
                    "action": "GET",
                    "rel": "Job Details",
                    "data": null
                }
            ]
        }
    ],
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/status/migration/24",
            "action": "GET",
            "rel": "self",
            "data": null
        }
    ]
}
```


Sample cURL Command Basic Auth

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -H
'Content-Type: application/json' -d '{"snapshotName":"<SNAPSHOT-
NAME>","parameters":
{"importUsers":<TRUE/FALSE>,"userPassword":"<PASSWORD>","resetPassword":<TRUE/
FALSE>}}'
'https://<BASE-URL>/interop/rest/v2/snapshots/import'
```

Sample cURL Command OAuth 2.0

```
curl -X POST --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H
'Content-Type: application/json' -d '{"snapshotName":"<SNAPSHOT-
NAME>","parameters":
{"importUsers":<TRUE/FALSE>,"userPassword":"<PASSWORD>","resetPassword":<TRUE/
FALSE>}}'
'https://<BASE-URL>/interop/rest/v2/snapshots/import'
```

LCM Export (v2)

The LCM Export (v2) REST API initiates a repeat export of a Migration artifact based on the settings that were used to export artifacts using the Migration artifact export screen.

Copyright © 2017, 2026, Oracle and/or its affiliates.

The presence of status -1 in the response indicates that the reexport is in progress. You should use the job status URI to determine whether the reexport is complete.

If the job completes with status 1, the task details will be mentioned in the items from which the source, destination, and URL to fetch the first set of errors is available. All issues for a particular task can be fetched in the manner of pagination. Acceptable values for `msgtype` are: `error/warn/info`; `limit` represents the number of issues requested per request, and `offset` marks the beginning number to fetch the issues.

For the previous version of this API, see LCM Export.

Required Roles

Service Administrator or any user assigned to the Migrations - Administer granular role

REST Resource

POST `/interop/rest/v2/snapshots/export`

Table 2-135 LCM Export Tasks

Task	Request	REST Resource
LCM Export	POST	`/interop/rest/v2/snapshots/export`
Export Status	GET	`/interop/rest/v2/status/migration/28`
Details	GET	`/interop/rest/v2/status/migration/28/1/details?limit=25&offset=0&msgtype=info`

Request

Supported Media Types: `application/json`

Table 2-136 Parameters

Name	Description	Type	Required	Default
`SnapshotName`	Application snapshot that has to be exported	Payload	Yes	None

Response

Supported Media Types: `application/json`

Table 2-137 Parameters

Attribute	Description
`details`	In case of errors, details are published with the error string
`status`	See Error Handling and Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Possible values. Can be `self` and/or `Job Status`. If set to `Job Status`, you can use the `href` to get the status of the re-export operation
`data`	Parameters as key value pairs passed in the request
`items`	Details about the resource

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-137 (Cont.) Parameters

Attribute	Description
source	From where the navigation is being performed
destination	To where the navigation is being performed
name	Name of the task, usually "Task Information"
links	Details of the first URL to be requested to get the job details; rel is "Job Details"

Examples of Response Body

Example 1: Export is in Progress

```
{
    "details": null,
    "status": -1,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/snapshots/export",
            "action": "POST",
            "rel": "self",
            "data": null
        },
        {
            "href": "https://<BASE-URL>/interop/rest/v2/status/migration/28",
            "action": "POST",
            "rel": "Job Status",
            "data": null
        }
    ]
}
```

Example 2: Export Completes

```
{
    "details": null,
    "status": 0,
    "items": [
        {
            "name": "Task Information",
            "source": "Shared Services",
            "destination": "/Artifact Snapshot1/HSS-Shared Services",
            "links": [
                {
                    "href": "https://<BASE-URL>/interop/rest/v2/status/
migration/28/0/details?limit=25&offset=0&msgtype=info",
                    "action": "GET",
                    "rel": "Job Details",
                    "data": null
                }
            ]
        },
        {
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "name": "Task Information",
            "source": "Vision",
            "destination": "/Artifact Snapshot1/HP-Vision",
            "links": [
                {
                    "href": "https://<BASE-URL>/interop/rest/v2/status/
migration/28/1/details?limit=25&offset=0&msgtype=info",
                    "action": "GET",
                    "rel": "Job Details",
                    "data": null
                }
            ]
        },
        {
            "name": "Task Information",
            "source": "Document Repository",
            "destination": "/Artifact Snapshot1/DOCREP-Document Repository",
            "links": [
                {
                    "href": "https://<BASE-URL>/interop/rest/v2/status/
migration/28/2/details?limit=25&offset=0&msgtype=info",
                    "action": "GET",
                    "rel": "Job Details",
                    "data": null
                }
            ]
        },
        {
            "name": "Task Information",
            "source": "Calculation Manager",
            "destination": "/Artifact Snapshot1/CALC-Calculation Manager",
            "links": [
                {
                    "href": "https://<BASE-URL>/interop/rest/v2/status/
migration/28/3/details?limit=25&offset=0&msgtype=info",
                    "action": "GET",
                    "rel": "Job Details",
                    "data": null
                }
            ]
        },
        {
            "name": "Task Information",
            "source": "FDM Enterprise Edition",
            "destination": "/Artifact Snapshot1/FDMEE-FDM Enterprise Edition",
            "links": [
                {
                    "href": "https://<BASE-URL>/interop/rest/v2/status/
migration/28/4/details?limit=25&offset=0&msgtype=info",
                    "action": "GET",
                    "rel": "Job Details",
                    "data": null
                }
            ]
        }
    ],
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/status/migration/28",
            "action": "GET",
            "rel": "self",
            "data": null
        }
    ]
}
```

Sample cURL command

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H'Content-Type: application/json' -d
'{"snapshotName":"Artifact Snapshot"}''https://<BASE-URL>/interop/rest/v2/
snapshots/export'
```

Upload and Download Files

Table 2-138 Upload and Download Files

Task	Request	REST Resource
Upload	POST	/interop/rest/11.1.2.3.600/applicationsnapshots/{applicationSnapshotName}/contents
Download	GET	/interop/rest/11.1.2.3.600/applicationsnapshots/{applicationSnapshotName}/contents

Upload

Uploads a file from the current directory on the local machine to the repository. Files on the repository cannot be accessed directly.

If a file already exists, the API gives an error and does not overwrite it. Use this command to upload data, metadata, and back up snapshots to a service instance. See About EPM Automate in *Working with EPM Automate*.

If a -1 status is returned and it is the last chunk to be uploaded, this means that an LCM artifact snapshot has been uploaded and zip extraction is in progress. The client pings the URL until the status is a positive integer. This job is done asynchronously.

Note: The entire path to the file must be encoded, for example, changing / to %2F and spaces to %20.

For example, change this path to an .HTML file in the apr directory:

```
apr/2020-03-04 23_07_20/2020-03-04 23_07_20.html
```

to this:

```
apr%2F2020-03-04%2023_07_20%2F2020-03-04%2023_07_20.html
```

Required Roles

Service Administrator

Any application role and the Migrations – Administer granular role

Copyright © 2017, 2026, Oracle and/or its affiliates.

REST Resource

POST `/interop/rest/11.1.2.3.600/applicationsnapshots/{applicationSnapshotName}/contents`

> **Note**
>
> For Data Management uploads, use the following JSON format for the query parameter:
>
> `/interop/rest/11.1.2.3.600/applicationsnapshots/{applicationSnapshotName}/contents?extDirPath=inbox`

Request

Supported Media Types: `application/octet-stream`

Table 2-139 Parameters

Name	Description	Type	Required	Default
`applicationSnapshotName`	Name of the application snapshot or file name to be uploaded (for example, "Artifact Snapshot.zip" or s112.csv). A file with this name is created in the repository. If a file or folder with this name exists in the repository, an error indicates that a file or folder exists	Path	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-139 (Cont.) Parameters

Name	Description	Type	Required	Default
`extDirPath`	Used to support upload of Data Management files. Supported values include: • `inbox` - Upload files into the inbox; except for Profitability and Cost Management, Oracle Fusion Cloud Enterprise Performance Management business processes look in this location for files to process • `profitinbox` - Upload files to be processed by Profitability and Cost Management • `to_be_imported` - Upload a Narrative Reporting snapshot that is to be imported during the next daily maintenance of the environment • `outbox` - Upload files to the outbox for all Cloud EPM business processes except for Profitability and Cost Management • *profitoutbox* - Upload files to the outbox for Profitability and Cost Management You can also use a directory under `inbox`, `outbox`, `profitinbox`, and `profitoutbox`, for example, `inbox/directory_name` Example: "`extDirPath= inbox/directory_name`" to upload files to a directory within the inbox for processing by Data Management. Upload: `/interop/rest/11.1.2.3.600/applicationsnapshots/applicationSnapshotName/contents?extDirPath=inbox%2Fdm_folder` Example: "`extDirPath=inbox`" where `inbox` is the folder where the Data Management file is to be uploaded Example of query parameters in JSON format for Data Management Upload: `/interop/rest/11.1.2.3.600/applicationsnapshots/{applicationSnapshotName}/contents?extDirPath=inbox`	Query	No	None

Response

Supported Media Types: `application/json`

Table 2-140 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Possible values: self, recreate service
`data`	Parameters as key value pairs passed in the request

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example of Response Body

```
{
  "status": 0,
  "details": null,
  "links": [
    {
      "data": null,
      "action": "POST",
      "href": "https://<_BASE-URL_>/interop/rest/11.1.2.3.600/
applicationsnapshots/{applicationSnapshotName}/contents"
    }
  ]
}
```

Sample cURL Command

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/
octet-stream'  --data-binary '@<FILE_NAME_PATH>' 'https://<BASE-URL>/interop/
rest/11.1.2.3.600/applicationsnapshots/<FILE_NAME>/contents'
```

Download

Downloads a file from the repository to the current directory in the local environment.

If the content type of the response is `application/JSON`, then an error with details is displayed on the server. Otherwise, the content of the file is streamed through the response.

Note: The entire path to the file must be encoded, for example, changing `/` to `%2F` and spaces to `%20`. This API can be used to download files up to 1GB in a single request.

For example, change this path to an .HTML file in the `apr` directory:

```
apr/2020-03-04 23_07_20/2020-03-04 23_07_20.html
```

to this:

```
apr%2F2020-03-04%2023_07_20%2F2020-03-04%2023_07_20.html
```

Required Roles

Service Administrator

Any application role and the Migrations – Administer granular role

REST Resource

GET `/interop/rest/11.1.2.3.600/applicationsnapshots/{applicationSnapshotName}/contents`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Request

Table 2-141 Parameters

Name	Description	Type	Required	Default

`applicationSnapshotName`	Application snapshot name or file name to download (for example, `"Artifact Snapshot"` or `s112.csv`).
	The entire `applicationSnapshotName` must be encoded before sending the request.
	To download a particular file, provide the path to that file as the value of `applicationSnapshotName`. For example, to download a Data Management file called `s112.csv` in the inbox, refer to the file as `"inbox\s112.csv"` in the path parameter.
	To download the Activity Reports or access log, use the fully qualified file name as shown in the output of List Files.
	For example, to download a specific file from the `apr` directory, use the following format:
	`pr%2F2020-03-04%0A23_07_20%2F2020-03-04%0A23_07_20.html`
	`apr%2F%0A2020-03-04%2023_07_20%2F%0Aaccess_log.zip`
	`apr%2F%0A2020-03-04%2023_07_20%2F%0Aactivityreport.json.`
		Path	Yes	None

Example of Request

```
https://<BASE-URL>/interop/rest/11.1.2.3.600/applicationsnapshots/Vision.zip/contents
```

Table 2-142 Parameters

Name	Description
`Details`	In case of errors, details are published with the error string
`Status`	See Migration Status Codes
`Links`	Detailed information about the link
`Href`	Links to API call
`Action`	The HTTP call type
`Rel`	Possibly value: `self`
`Data`	Parameters as key value pairs passed in the request

Response

Supported Media Types: `application/json` or `application/octet-stream`

Example of Response Body

```
{
    "details": "Invalid file : Vision.zip",
    "status":1,
    "links":[{
        "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
applicationsnapshots/Vision.zip/contents",
        "action":"GET",
        "rel":"self",
        "data":null
    }]
}
```

Sample cURL Command

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/
octet-stream'  --data-binary '@<FILE_NAME_PATH>' 'https://<BASE-URL>/interop/
rest/11.1.2.3.600/applicationsnapshots/<FILE_NAME>/contents
```

View and Delete Files

This table shows the REST APIs to view and delete files.

Table 2-143 View and Delete Files

Task	Request	REST Resource
List Files	GET	`/applicationsnapshots`
List Files (v2)	GET	`/interop/rest/v2/files/list`
Delete Files	DELETE	`/applicationsnapshots/{applicationSnapshotName}`
Delete Files (v2)	DELETE	`/interop/rest/v2/files/delete`
Delete Files (v3)	POST	`/interop/rest/v3/files/delete`

List Files (v2)

This REST API lists the files in the repository and returns information about the available file and application snapshots.

This API provides details such as name, type, size and last modified time. Size and modified time are not available for LCM snapshots. See About EPM Automate in *Working with EPM Automate*.

For the previous version of this API, see List Files.

Required Roles

Service Administrator

Any application role and the Migrations – Administer granular role

REST Resource

GET `/interop/rest/v2/files/list`

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Request

Example URL

```
https://<BASE-URL>/interop/rest/v2/files/list
```

Response

Table 2-144 Parameters

Name	Description
`Details`	Will be published in case of error with the error string
`Status`	See Migration Status Codes
`Items`	
`Name`	Name of the file or application snapshot
`Type`	Can be LCM or EXTERNAL Type signifies if this is an LCM snapshot or not. LCM indicates that the file is an LCM snapshot. EXTERNAL indicates that the file is not an LCM snapshot, such as a Planning file.
`Size`	Size of the file in bytes. Available only for type EXTERNAL
`Lastmodifiedtime`	Last modified time of the file in milliseconds since 1970-01-01.
`Links`	Detailed information about the link
`Href`	Link to API call/ status API
`Action`	The HTTP call type
`Rel`	Will be `self`
`Data`	null

Example of Response Body

```
{
    "status":0,
    "items":[{
        "name":"sample.csv",
        "type":"EXTERNAL",
        "size":"18",
        "lastmodifiedtime":"1422534438000"
        },{
        "name":"Artifact Snapshot",
        "type":"LCM",
        "size":null,
        "lastmodifiedtime":null
    }],
    "details":null,
    "links":[{
        "data":null,
        "action":"GET",
        "href": "https://<BASE-URL>/interop/rest/v2/files/list",
        "rel":"self"
    }]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Sample cURL command

```
curl -X GET -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H
'Content-Type: application/json' 'https://<BASE-URL>/interop/rest/v2/files/
list'
```

Delete Files (v2)

This REST API deletes a file from the repository. This topic describes the simplified v2 version of this REST API. This version contains all parameters in the payload and does not require URL encoding while calling the REST APIs. This makes the v2 API easier to use. This API is backwards compatible.

Filenames that use a backslash \ as path separators must be handled using escape characters, for example, using \\ as the value for \ (the file separator). For a file named `inbox\file1.csv`, pass it as `inbox\\file1.csv`.

For more information on deleting files, see EPM Automate Commands in *Working with EPM Automate*.

For the previous version of this API, see Delete Files.

Required Roles

Service Administrator

Any application role and the Migrations – Administer granular role

REST Resource

DELETE `/interop/rest/v2/files/delete`

Request

Supported Media Types: `application/json`

Table 2-145 Parameters

Name	Description	Type	Required	Default
`fileName`	Application snapshot name that needs to be deleted	Payload	Yes	None

Response

Supported Media Types: `application/json`

Table 2-146 Parameters

Parameters	Description
`Details`	Published if there is an error with the error string
`Status`	See Migration Status Codes
`Links`	Detailed information about the link
`Href`	Links to the API call
`Action`	The HTTP call type

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-146 (Cont.) Parameters

Parameters	Description
`Rel`	Possible value: `self`
`Data`	Parameters as key value pair passed in the request

Example of Response Body

```
{
    "status":0,
    "links":[{
        "data":null,
        "action":"DELETE",
        "rel":"self",
        "href":"https://<BASE-URL>/interop/rest/v2/files/delete"
    }],
    "details":null
}
```

Sample cURL command

```
curl -X DELETE -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D
respHeader.txt -H 'Content-Type: application/json' -d
'{"fileName":"FILE_TO_BE_DELETED"}' 'https://<BASE-URL>/interop/rest/v2/files/
delete'
```

Delete Files (v3)

This REST API deletes a file from the repository. This topic describes the simplified v3 version of this REST API. This version contains all parameters in the payload and does not require URL encoding while calling the REST APIs. This makes the v3 API easier to use. This API is backwards compatible.

Filenames that use a backslash \ as path separators must be handled using escape characters; for example, using \\ as the value for \ (the file separator). For a file named `inbox\file1.csv`, pass it as `inbox\\file1.csv`.
For more information on deleting files, see EPM Automate Commands in *Working with EPM Automate*.

Required Roles

Service Administrator

Any application role and the Migrations – Administer granular role

REST Resource

POST `/interop/rest/v3/files/delete`

Request

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-147 Parameters

Name	Description	Type	Required	Default
`fileName`	File name to delete	Payload	Yes	None

Response

Supported Media Types: `application/json`

Table 2-148 Parameters

Parameters	Description
`Details`	Published if there is an error with the error string
`Status`	See Migration Status Codes
`Links`	Detailed information about the link
`Href`	Links to the API call
`Action`	The HTTP call type
`Rel`	Possible value: `self`
`Data`	Parameters as key value pair passed in the request

Example Response Body

```
{
    "status":0,
    "links":[{
        "data":null,
        "action": "POST",
        "rel":"self",
        "href":"https://<BASE-URL>/interop/rest/v3/files/delete"
    }],
    "details":null
}
```

Sample cURL command

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' -d
'{"fileName":"FILE_TO_BE_DELETED"}' 'https://<BASE-URL>/interop/rest/v3/files/
delete'
```

Copy to and from the Object Store

These APIs enable copying files and backup snapshots between a Oracle Fusion Cloud Enterprise Performance Management environment and Oracle Object Storage.

- Copy from Object Store (v1)
- Copy from Object Store (v2)
- Copy from Object Store (v3)
- Copy to Object Store (v1)

Copyright © 2017, 2026, Oracle and/or its affiliates.

- Copy to Object Store (v2)
- Copy To Object Store (v3)

Copy from Object Store (v1)

Use this REST API to copy a file or a backup snapshot from the Oracle Object Storage Cloud (the source) to the cloud environment (the target). If you are copying a backup snapshot, this API copies it from the Object Storage bucket and extracts its contents in Oracle Fusion Cloud EPM.

This topic describes the v1 version of this REST API. You can also use the simplified v2 version of the REST API. The v2 version contains all parameters in the payload and does not require URL encoding while calling the REST APIs. This makes the v2 API easier to use. The v2 version is backwards compatible.

> **Note**
>
> The Object Storage requires an *Other Web Services Provider* type. Ensure that you have access to the Web service you are connecting. You must also have URLs for the Web service and an login details if required. For information see, Connecting to External Web Services in *Administering Planning*.

Required Roles

Service Administrator

REST Resource

POST `/interop/rest/v1/services/copyfromobjectstore`

Table 2-149 Tasks for Copy from Object Store

Task	Request	REST Resource
Trigger `copyfromobjectstore`	POST	`/interop/rest/v1/services/copyfromobjectstore`
Retrieve `copyfromobjectstore` status	GET	`/interop/rest/v1/services/jobs/777`

Request

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-150 Parameters

Name	Description	Type	Required	Default
`url`	The URL of the Object Store, appended with the bucket name and the name of the object to be copied. The URL format: `https://swiftobjectstorage.region_identifier.oraclecloud.com/v1/namespace/bucket_name/object_name` Components of this URL: • region_identifier is a Oracle Cloud Infrastructure hosting region. • namespace is the top-level container for all buckets and objects. Each Oracle Cloud Infrastructure tenant is assigned a unique system-generated and immutable Object Storage namespace name at account creation time. Your tenancy's namespace name, for example, axaxnpcrorw5, is effective across all regions. • bucket_name is the name of a logical container where you store your data and files. Buckets are organized and maintained under compartments. A system generated bucket name, for example, bucket-20210301-1359 reflects the current year, month, day, and time. • object_name is the name of the snapshot or file that you want to copy from Oracle Object Storage Cloud. For more information, see these topics in Oracle Cloud Infrastructure Documentation: • Regions and Availability Domains • Understanding Object Storage Namespaces • Managing Buckets	Form	Yes	None
`username`	The ID of a user who has the required access rights to write to Oracle Object Storage Cloud. For users created in a federated identity provider, specify the fully-qualified name of the user (for example, `exampleIdP/jdoe` or `exampleIdP/john.doe@example.com`, where `exampleIdP` is the name of the federated identity provider). For other users, provide the User ID.	Form	Yes	None
`password`	The Swift password or auth token associated with the user. This password is not the same as the password that you use to sign into the Object Storage Console. Auth token is an Oracle-generated token that you use to authenticate with third-party APIs, for example to authenticate with a Swift client. For instructions to create this token, see To create an auth token in *Oracle Cloud Infrastructure Documentation* .	Form	Yes	None
`targetfile`	Name of the target filename (with path) of the downloaded artifact. When copying snapshots, do not specify the ZIP extension. Examples: Artifact Snapshot_24_Sept_2020, inbox/File_new.txt	Form	Yes	None

Sample Request Payload

```
{
  "url": "OBJECT-STORAGE-URL",
  "username": "USER_NAME",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
  "password": "PASSWORD",
  "targetfile": "TARGET-FILENAME"
}
```

Response

Supported Media Types: `application/json`

Table 2-151 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
  "details": null,
  "status": -1,
  "items": null,
  "links": [
    {
      "href": "https://<BASE-URL>/interop/rest/v1/services/
copyfromobjectstore",
      "action": "POST",
      "rel": "self",
      "data": null
    },
    {
      "href": "https://<BASE-URL>/interop/rest/v1/services/jobs/<JOB-ID>",
      "action": "GET",
      "rel": "Job' 'Status",
      "data": null
    }
  ]
}
```

Sample cURL Command

```
curl -s -u <USERNAME>:<PASSWORD> -H 'Content-Type: application/x-www-form-
urlencoded' --request POST https://<BASE-URL>/interop/rest/v1/services/
copyfromobjectstore -d 'url=<OBJECT-STORAGE-URL>/<OBJECT-NAME>/<FILE-
NAME>&username=<OBJECT-STORAGE-USERNAME>&password==<OBJECT-STORAGE-
PASSWORD>&targetfile=<TARGET-FILENAME>'
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Copy from Object Store (v2)

Use this REST API to copy a file or a backup snapshot from the Oracle Object Storage Cloud (the source) to the cloud environment (the target). If you are copying a backup snapshot, this API copies it from the Object Storage bucket and extracts its contents in Oracle Fusion Cloud EPM.

This topic describes the simplified v2 version of this REST API. This version contains all parameters in the payload and does not require URL encoding while calling the REST APIs. This makes the v2 API easier to use. This API is backwards compatible.

> **Note**
>
> The Object Storage requires an *Other Web Services Provider* type. Ensure that you have access to the Web service you are connecting. You must also have URLs for the Web service and an login details if required. For information see, Connecting to External Web Services in *Administering Planning*.

Required Roles

Service Administrator

REST Resource

POST `/interop/rest/v2/objectstorage/copyfrom`

Table 2-152 Tasks

Task	Request	REST Resource
Trigger `copyfromobjectstore`	POST	`/interop/rest/v2/objectstorage/copyfrom`
Retrieve `copyfromobjectstore` status	GET	`/interop/rest/v2/status/jobs/777`

Request

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-153 Parameters

Name	Description	Type	Required	Default
`url`	The URL for Oracle Cloud Object Storage, appended with the bucket name and an optional object name. This is the URL format: : `https://swiftobjectstorage.region_identifier.oraclecloud.com/v1/namespace/`*`bucket_name/object_name`* Components of this URL: • **region_identifier** is a Oracle Cloud Infrastructure hosting region. • **namespace** is the top-level container for all buckets and objects. Each Oracle Cloud Infrastructure tenant is assigned a unique system-generated and immutable Object Storage namespace name at account creation time. Your tenancy's namespace name, for example, axaxnpcrorw5, is effective across all regions. • **bucket_name** is the name of a logical container where you store your data and files. Buckets are organized and maintained under compartments. A system-generated bucket name, for example, bucket-20210301-1359 reflects the current year, month, day, and time. • **object_name** is the name of the snapshot or file that you want to copy from Oracle Object Storage Cloud. For more information, see these topics in Oracle Cloud Infrastructure Documentation: • Regions and Availability Domains • Understanding Object Storage Namespaces • Managing Buckets	Payload	Yes	None
`userName`	The ID of a user who has the required access rights to write to Oracle Object Storage Cloud. For users created in a federated identity provider, specify the fully-qualified name of the user (for example, `exampleIdP/jdoe` or `exampleIdP/john.doe@example.com`, where `exampleIdP` is the name of the federated identity provider). For other users, provide the User ID.	Payload	Yes	None
`password`	The Swift password or auth token associated with the user. This password is not the same as the password that you use to sign into the Object Storage Console. Auth token is an Oracle-generated token that you use to authenticate with third-party APIs, for example to authenticate with a Swift client. For instructions to create this token, see To create an auth token in *Oracle Cloud Infrastructure Documentation* .	Payload	Yes	None
`targetFile`	Name of the target filename (with path) of the downloaded artifact. When copying snapshots, do not specify the ZIP extension. Examples: Artifact Snapshot_24_Sept_2020, inbox/File_new.txt	Payload	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example URL and Payload

```
https://<BASE-URL>/interop/rest/v2/objectstorage/copyfrom
```

```
{
    "url":"OBJECT_STORAGE_URL",
    "userName": "USER_NAME",
    "password": "PASSWORD",
    "targetFile": "Artifact snapshot"
}
```

Response

Supported Media Types: `application/json`

Table 2-154 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`data`	Parameters as key value pairs passed in the request

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
    "details": null,
    "status": -1,
    "items": null,
    "links": [
        {
            "href": " https://<BASE-URL>/interop/rest/v2/objectstorage/
copyfrom",
            "action": "POST",
            "rel": "self",
            "data": null
        },
        {
            "href": " https://<BASE-URL>/interop/rest/v2/status/jobs/<JOB_ID",
            "action": "GET",
            "rel": "Job Status",
            "data": null
        }
    ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Sample cURL Command

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H
'Content-Type: application/json' -d
'{"url":"OBJECT_STORAGE_URL","userName":"USER_NAME","password":"PASSWORD",
"targetFile":"FILEPATH/FILENAME"}' 'https://<BASE-URL>/interop/rest/v2/
objectstorage/copyfrom'
```

Copy from Object Store (v3)

Use this asynchronous API to copy a file or backup snapshot as a single non-segmented file from an Oracle Object Storage bucket to the current environment. This API uses API signing authentication to digitally sign the request to ensure security; which is a more secure authentication method compared to basic authentication used by the previous versions.

If you are copying a backup snapshot, this API copies it from the Object Storage bucket and extracts its contents in Oracle Fusion Cloud Enterprise Performance Management. This version contains all parameters in the payload and does not require URL encoding while calling the REST APIs, making it easy to use.

Required Roles

Service Administrator

Method and URI

REST Resource: `POST /interop/rest/v3/objectstorage/copyfrom`

Example: `POST https://<BASE-URL>/interop/rest/v3/objectstorage/copyfrom`

Table 2-155 Tasks

Task	Request	REST Resource
Trigger copyfromobjectstore	POST	/interop/rest/v3/objectstorage/copyfrom
Retrieve copyfromobjectstore status	GET	/interop/rest/v3/status/jobs/777

Request

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-156 Parameters

Name	Description	Required	Type
`url`	The URL for Oracle Cloud Object Storage, appended with the bucket name and an optional object name. This is the URL format: `https://objectstorage.region_identifier.oraclecloud.com/n/namespace/b/bucket_name/o/object_name` Components of this URL: • `region_identifier` is the Oracle Cloud Infrastructure hosting region. • `namespace` is the top-level container for all buckets and objects. Each Oracle Cloud Infrastructure tenant is assigned a unique system-generated and immutable Object Storage namespace name at account creation time. Your tenancy's namespace name, for example, axaxnpcrorw5, is effective across all regions. • `bucket_name` is the name of a logical container where you store your data and files. Buckets are organized and maintained under compartments. A system-generated bucket name, for example, bucket-20210301-1359 reflects the current year, month, day, and time. • `object_name` is the name of the snapshot or file that you want to copy from Oracle Object Storage Cloud. For more information, see these topics in Oracle Cloud Infrastructure Documentation: • Regions and Availability Domains • Understanding Object Storage Namespaces • Managing Buckets	Yes	Payload
`tenancyOcid`	The OCID of the tenancy that stores the file you want to copy. This ID is available on the **Tenancy details** page of the Oracle Cloud Identity Console.	Yes	Payload
`userOcid`	The Oracle Cloud Identity of the user who has the access privileges to copy the file from the Object Storage. This ID is available on the **User details** page of the Oracle Cloud Identity Console.	Yes	Payload
`fingerprint`	The fingerprint (hash) of the RSA public API key. You can retrieve the RSA asymmetric cryptography algorithm fingerprint by running the OpenSSL command `openssl rsa -pubout -outform DER -in ~/.oci/oci_api_key.pem | openssl md5 -cs`	Yes	Payload
`privateKey`	The name, including the path, of the private key file stored on your computer.	Yes	Payload
`targetFile`	The unique name (including the path) of the file on the current environment.	Yes	Payload

Example Payload

```
{
    "url": "OBJECT_STORAGE_URL",
    "tenancyOcid": "TENANCY_OCID",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "userOcid": "USER_OCID",
    "fingerprint": "FINGER_PRINT",
    "privateKey": "Base64-Encoded PRIVATE_KEY",
    "targetFile": "Artifact snapshot"
}
```

Response

Supported Media Types: `application/json`

The response body reports status 0 for successful operation, -1 for operation in progress, and a positive number for failed operation. For failed operations, error strings are reported. Response for successful operation:

```
{
    "details": null,
    "status": 0,
    "items": null,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v3/objectstorage/
copyfrom",
            "action": "POST",
            "rel": "self",
            "data": null
        },
        {
            "href": "https://<BASE-URL>/interop/rest/v3/status/jobs/<JOB_ID>",
            "action": "GET",
            "rel": "Job Status",
            "data": null
        }
    ]
}
```

Sample cURL Command

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' -d
'{"url":"OBJECT_STORAGE_URL","tenancyOcid":"TENANCY_OCID","userOcid":"USER_OCI
D","fingerprint":"FINGER_PRINT","privateKey":"Base64-Encoded
PRIVATE_KEY","targetFile":"FILEPATH/FILENAME"}' 'https://<BASE-URL>/interop/
rest/v3/objectstorage/copyfrom'
```

Copy to Object Store (v1)

Use the Copy to Object Store (v1) REST API to copy a file or a backup snapshot from the current cloud environment (the source) to the Oracle Object Storage Cloud (the target). You can copy any file or snapshot available in the Oracle Fusion Cloud Enterprise Performance Management. For example, if you export data to a file, the exported file is stored in the Outbox. You can then use this API to copy the file directly to Oracle Object Storage, assuming you have an account.

This topic describes the v1 version of this REST API. You can also use the simplified v2 version of the REST API. The v2 version contains all parameters in the payload and does not

Copyright © 2017, 2026, Oracle and/or its affiliates.

require URL encoding while calling the REST APIs. This makes the v2 API easier to use. The v2 version is backwards compatible.

> **Note**
>
> The Object Storage requires an *Other Web Services Provider* type. Ensure that you have access to the Web service you are connecting. You must also have URLs for the Web service and an login details if required. For information see, Connecting to External Web Services in *Administering Planning*.

Required Roles

Service Administrator

REST Resource

POST `/interop/rest/v1/services/copytoobjectstore`

Table 2-157 Tasks for Copy to Object Store

Task	Request	REST Resource
Trigger `copytoobjectstore`	POST	`/interop/rest/v1/services/copytoobjectstore`
Retrieve `copytoobjectstore` status	GET	`/interop/rest/v1/services/jobs/777`

Request

Supported Media Types: `application/x-www-form-urlencoded`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-158 Parameters

Name	Description	Type	Required	Default
`url`	Oracle Object Storage Cloud bucket with an optional object name appended. The URL format without object name: `https://swiftobjectstorage.region_identifier.oraclecloud.com/v1/namespace/bucket_name` The URL format with object name: `https://swiftobjectstorage.region_identifier.oraclecloud.com/v1/namespace/bucket_name/object_name` Components of this URL: • **region_identifier** is an Oracle Cloud Infrastructure hosting region. • **namespace** is the top-level container for all buckets and objects. Each Oracle Cloud Infrastructure tenant is assigned a unique system-generated and immutable Object Storage namespace name at account creation time. Your tenancy's namespace name, for example, axaxnpcrorw5, is effective across all regions. • **bucket_name** is the name of a logical container where you store your data and files. Buckets are organized and maintained under compartments. A system generated bucket name, for example, bucket-20210301-1359 reflects the current year, month, day, and time. • **object_name**, optionally, is name that you want to use for the file on Oracle Object Storage Cloud. If an object name is not specified, the file will be copied with its original name. For more information, see these topics in Oracle Cloud Infrastructure Documentation: • Regions and Availability Domains • Understanding Object Storage Namespaces • Managing Buckets	Form	Yes	None
`username`	The ID of a user who has the required access rights to write to Oracle Object Storage Cloud. For users created in a federated identity provider, specify the fully-qualified name of the user (for example, `exampleIdP/jdoe` or `exampleIdP/john.doe@example.com`, where `exampleIdP` is the name of the federated identity provider). For other users, provide the User ID.	Form	Yes	None
`password`	The Swift password or auth token associated with the user. This password is not the same as the password that you use to sign into the Object Storage Console. Auth token is an Oracle-generated token that you use to authenticate with third-party APIs, for example to authenticate with a Swift client. For instructions to create this token, see To create an auth token in *Oracle Cloud Infrastructure Documentation* .	Form	Yes	None
`filepath`	Name of the file (with path) to be copied to the Store. If you are copying a snapshot, do not specify the ZIP extension. Examples: Artifact Snapshot, inbox/File.txt	Form	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Sample Request Payload

```
{
  "url": "OBJECT_STORAGE_URL",
  "username": "USER_NAME",
  "password": "PASSWORD",
  "filepath": "<FILEPATH>"
}
```

Response

Supported Media Types: `application/json`

Table 2-159 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
  "details": null,
  "status": -1,
  "items": null,
  "links": [
    {
      "href": "https://<BASE-URL>/interop/rest/v1/services/copytoobjectstore",
      "action": "POST",
      "rel": "self",
      "data": null
    },
    {
      "href": "https://<BASE-URL>/interop/rest/v1/services/jobs/<JOB_ID>",
      "action": "GET",
      "rel": "Job' 'Status",
      "data": null
    }
  ]
}
```

Sample cURL Command

```
curl -s -u <USERNAME>:<PASSWORD> -H 'Content-Type: application/x-www-form-
urlencoded' --request POST https://<BASE-URL>/interop/rest/v1/services/
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
copytoobjectstore -d 'url=<OBJECT-STORAGE-URL>/<OBJECT-NAME>&username=<OBJECT-
STORAGE-USERNAME>&password==<OBJECT-STORAGE-PASSWORD>&filepath=<FILEPATH>'
```

Copy to Object Store (v2)

Use this REST API to copy a file or a backup snapshot from the current cloud environment (the source) to the Oracle Object Storage Cloud (the target). You can copy any file or snapshot available in the Oracle Fusion Cloud Enterprise Performance Management. For example, if you export data to a file, the exported file is stored in the Outbox. You can then use this API to copy the directly to Oracle Object Storage, assuming you have an account.

This topic describes the simplified v2 version of this REST API. This version contains all parameters in the payload and does not require URL encoding while calling the REST APIs. This makes the v2 API easier to use. This API is backwards compatible.

> **Note**
>
> The Object Storage requires an *Other Web Services Provider* type. Ensure that you have access to the Web service you are connecting. You must also have URLs for the Web service and an login details if required. For information see, Connecting to External Web Services in *Administering Planning*.

Required Roles

Service Administrator

REST Resource

POST `/interop/rest/v2/objectstorage/copyto`

Table 2-160 Tasks

Task	Request	REST Resource
Trigger `copytoobjectstore`	POST	`/interop/rest/v2/objectstorage/copyto`
Retrieve `copytoobjectstore` status	GET	`/interop/rest/v2/status/jobs/777`

Request

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-161 Parameters

Name	Description	Type	Required	Default

`url`	The URL for Oracle Cloud Object Storage, appended with the bucket name and an optional object name.
	This is the URL format without the object name:
	`https://swiftobjectstorage.region_identifier.oraclecloud.com/v1/namespace/bucket_name`
	This is the URL format with the object name:
	`https://swiftobjectstorage.region_identifier.oraclecloud.com/v1/namespace/bucket_name/object_name`
	Components of this URL:
	• **region_identifier** is a Oracle Cloud Infrastructure hosting region.
	• **namespace** is the top-level container for all buckets and objects. Each Oracle Cloud Infrastructure tenant is assigned a unique system-generated and immutable Object Storage namespace name at account creation time. Your tenancy's namespace name, for example, axaxnpcrorw5, is effective across all regions.
	• **bucket_name** is the name of a logical container where you store your data and files. Buckets are organized and maintained under compartments. A system-generated bucket name, for example, bucket-20210301-1359 reflects the current year, month, day, and time.
	• **object_name**, optionally, is a name that you want to use for the file on Oracle Object Storage Cloud. If an object name is not specified, the file will be copied with its original name.
	For more information, see these topics in Oracle Cloud Infrastructure documentation:
	• Regions and Availability Domains
	• Understanding Object Storage Namespaces
	• Managing Buckets
		Payload	Yes	None

`userName`	The ID of a user who has the required access rights to write to Oracle Object Storage Cloud. For users created in a federated identity provider, specify the fully-qualified name of the user (for example, `exampleIdP/jdoe` or `exampleIdP/john.doe@example.com`, where `exampleIdP` is the name of the federated identity provider). For other users, provide the User ID.	Payload	Yes	None
`password`	The Swift password or auth token associated with the user. This password is not the same as the password that you use to sign into the Object Storage Console. Auth token is an Oracle-generated token that you use to authenticate with third-party APIs, for example to authenticate with a Swift client. For instructions to create this token, see To create an auth token in *Oracle Cloud Infrastructure Documentation* .	Payload	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-161 (Cont.) Parameters

Name	Description	Type	Required	Default
`filePath`	Name of the file (with path) to be copied to the Object Store. If you are copying a snapshot, do not specify the ZIP extension. Examples: Artifact Snapshot, inbox/File.txt	Payload	Yes	None

Example URL and Payload

`https://<BASE URL>/interop/rest/v2/objectstorage/copyto`

```
{
    "url": "OBJECT_STORAGE_URL",
    "userName": "USER_NAME",
    "password": "PASSWORD",
    "filePath": "Artifact Snapshot"
}
```

Response

Supported Media Types: `application/json`

Table 2-162 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`data`	Parameters as key value pairs passed in the request

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
    "status": -1,
    "items": null,
    "links": [{
        "rel": "self",
        "href": "https://<BASE-URL>/interop/rest/v2/objectstorage/copyto",
        "data": null,
        "action": "POST"
    }, {
        "rel": "Job Status",
        "href": "https://<BASE-URL>/interop/rest/v2/status/jobs/<JOB_ID>",
        "data": null,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        "action": "GET"
    }],
    "details": null
}
```

Sample cURL command

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' -d
'{"url":"OBJECT_STORAGE_URL","userName":"USER_NAME","password":"PASSWORD","fil
ePath":"FILEPATH/FILENAME"}' 'https://<BASE URL>/interop/rest/v2/
objectstorage/copyto'
```

Copy To Object Store (v3)

Use this asynchronous API to copy a file or backup snapshot as a single non-segmented file from the current environment to an Oracle Object Storage bucket. This command uses API signing authentication to digitally sign the request to ensure security; which is a more secure authentication method compared to basic authentication used by the previous versions.

This version contains all parameters in the payload and does not require URL encoding while calling the REST APIs, making it easy to use.

Required Roles

Service Administrator

Method and URI

REST Resource: `POST /interop/rest/v3/objectstorage/copyto`

Example: `POST https://<BASE-URL>/interop/rest/v3/objectstorage/copyto`

Task	Request	REST Resource
Trigger `copytoobjectstore`	POST	`/interop/rest/v3/objectstorage/copyto`
Retrieve `copytoobjectstore` status	GET	`/interop/rest/v3/status/jobs/777`

Request

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-163 Parameters

Name	Description	Required	Type
`url`	The Object Storage URL, including the name of the bucket to which you want to copy the file. This value can include an object name. • URL format without the object name: `https://objectstorage.region_identifier.oraclecloud.com/n/namespace/b/bucket_name` • URL format with object name: `https://objectstorage.region_identifier.oraclecloud.com/n/namespace/b/bucket_name/o/object_name` Components of this URL: • `region_identifier` is the Oracle Cloud Infrastructure hosting region. • `namespace` is the top-level container for all buckets and objects. This unique, immutable value assigned to a tenant is effective across all regions. • `bucket_name` is the name of a logical container where you store data and files. Buckets are organized and maintained under compartments. A system-generated bucket name, for example, *bucket-20210301-1359*, reflects the current year, month, day, and time. • `object_name`, optionally, is the name that you want to use for the file on Object Storage. If not specified, the file will be copied with its original name. For more information, see these topics in Oracle Cloud Infrastructure Documentation: • Regions and Availability Domains • Understanding Object Storage Namespaces • Managing Buckets	Yes	Payload
`tenancyOcid`	The OCID of the tenancy to which you want to copy the file from the environment. This ID is available on the **Tenancy details** page of the Oracle Cloud Identity Console.	Yes	Payload
`userOcid`	The Oracle Cloud Identity of the user who has the access privileges to copy the file to the Object Storage. This ID is available on the **User details** page of the Oracle Cloud Identity Console.	Yes	Payload
`fingerprint`	The fingerprint (hash) of the RSA public API key. You can retrieve the RSA asymmetric cryptography algorithm fingerprint by running the OpenSSL command `openssl rsa -pubout -outform DER -in ~/.oci/oci_api_key.pem | openssl md5 -cs`	Yes	Payload
`privateKey`	Contents of the base 64 encoded private key (PEM) file.	Yes	Payload
`filePath`	The unique name for the file, including its path, in the current environment that you want to copy to the Object Storage. For snapshots, do not include the .ZIP extension. Examples: *Artifact Snapshot*, *inbox/File.txt*	Yes	Payload

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example Payload

```
{
    "url": "OBJECT_STORAGE_URL",
    "tenancyOcid": "TENANCY_OCID",
    "userOcid": "USER_OCID",
    "fingerprint": "FINGER_PRINT",
    "privateKey": "Base64-Encoded PRIVATE_KEY",
    "filePath": "Artifact Snapshot"
}
```

Response

Supported Media Types: `application/json`

The response body reports status 0 for successful operation, -1 for operation in progress, and a positive number for failed operation. For failed operations, error strings are reported.

Example of Response Body

```
{
    "status": 0,
    "items": null,
    "links": [{
        "rel": "self",
        "href": "https://<BASE-URL>/interop/rest/v3/objectstorage/copyto",
        "data": null,
        "action": "POST"
    }, {
        "rel": "Job Status",
        "href": "https://<BASE-URL>/interop/rest/v3/status/jobs/<JOB_ID>",
        "data": null,
        "action": "GET"
    }],
    "details": null
}
```

Sample cURL Command

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' -d
'{"url":"OBJECT_STORAGE_URL","tenancyOcid":"TENANCY_OCID","userOcid":"USER_OCI
D","fingerprint":"FINGER_PRINT","privateKey":"Base64-Encoded
PRIVATE_KEY","filePath":"FILEPATH/FILENAME"}' 'https://<BASE-URL>/interop/
rest/v3/objectstorage/copyto'
```

Copy to and from SFTP

This table shows the REST APIs to copy a file or a backup snapshot from the SFTP server (the source) to the cloud environment (the target), and to copy a file or a backup snapshot from the cloud environment (the source) to the SFTP server (the target).

These APIs support only SFTP servers running on port 22.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-164 Copy To and From SFTP

Task	Request	REST Resource
Copy to SFTP (v2)	POST	`/interop/rest/v2/config/services/copytosftp`
Copy from SFTP (v2)	POST	`/interop/rest/v2/config/services/copyfromsftp`

> **Note**
>
> These APIs support the following set of cryptographic algorithms. The SFTP servers must have at least one algorithm listed in the table in each required category (Cipher, MAC, Key Exchange, and Host Key) for the APIs to work successfully.

Table 2-165 Supported Cryptographic Algorithms

Cryptographic Algorithm Type	Supported Algorithms
Ciphers	`chacha20-poly1305@openssh.com, aes128-ctr, aes192-ctr, aes256-ctr, aes128-gcm@openssh.com, aes256-gcm@openssh.com, aes128-cbc, aes192-cbc, aes256-cbc`
MACs	`hmac-sha2-256-etm@openssh.com, hmac-sha2-512-etm@openssh.com, hmac-sha1-etm@openssh.com, hmac-sha2-256, hmac-sha2-512, hmac-sha1`
Key Exchange Algorithms	`sntrup761x25519-sha512, sntrup761x25519-sha512@openssh.com, curve25519-sha256, curve25519-sha256@libssh.org, curve448-sha512, ecdh-sha2-nistp521, ecdh-sha2-nistp384, ecdh-sha2-nistp256, diffie-hellman-group-exchange-sha256, diffie-hellman-group18-sha512, diffie-hellman-group17-sha512, diffie-hellman-group16-sha512, diffie-hellman-group15-sha512, diffie-hellman-group14-sha256`
Host Key Algorithms	`ecdsa-sha2-nistp256-cert-v01@openssh.com, ecdsa-sha2-nistp384-cert-v01@openssh.com, ecdsa-sha2-nistp521-cert-v01@openssh.com, ssh-ed25519-cert-v01@openssh.com, rsa-sha2-512-cert-v01@openssh.com, rsa-sha2-256-cert-v01@openssh.com, ecdsa-sha2-nistp256, ecdsa-sha2-nistp384, ecdsa-sha2-nistp521, ssh-ed25519, sk-ecdsa-sha2-nistp256@openssh.com, sk-ssh-ed25519@openssh.com, rsa-sha2-512,rsa-sha2-256, ssh-rsa`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Copy to SFTP (v2)

Copies a file or a backup snapshot from the current cloud environment (the source) to the SFTP server (the target).

You can copy any file or snapshot available in Oracle Fusion Cloud Enterprise Performance Management. For example, if you export data to a file, the exported file is stored in the Outbox. You can then use this API to copy the file directly to an SFTP server where you have an account.

Required Roles

Service Administrator

REST Resource

POST `/interop/rest/v2/config/services/copytosftp`

Request

Supported Media Types: `application/json`

Table 2-166 Parameters

Name	Description	Type	Required	Default
`userName`	ID of a user who has the required access rights to write to the SFTP server	Payload	Yes	None
`password`	Password associated with the user. Required if `privatekey` is not specified.	Payload	Yes	None
`url`	URL for the source file on the SFTP server in the following format: `sftp://myserver/mydir/File_New.txt`	Payload	Yes	None

`filePath`	Name of the file (with path) to be copied to the SFTP Server. If you are copying a snapshot, do not specify the ZIP extension.
	Examples:
	`Artifact Snapshot_24_Sept_2020`
	`inbox/File_new.txt`
		Payload	Yes	None

`privatekey`	Base 64 encoded private key content. Required if `password` is not specified.	Payload	Optional	None
`passphrase`	Passphrase associated with private key(if any)	Payload	Optional	None

> **Note**
>
> For private key-based authentication (with or without passphrase), the public key corresponding to the provided private key must be added to the authorized_keys file on the SFTP server. This is required for successful authentication. If the SFTP server does not have the correct public key in its authorized_keys file under the appropriate user account, authentication will fail.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Sample Request Payload - Password based authentication

```
{
    "userName" : "username",
    "password" : "password",
    "url"      : "sftp://mysever/mydir/File_New.txt",
    "filePath" : "inbox/File_new.txt"
}
```

Sample Request Payload - Private Key based authentication (without passphrase)

```
{
    "userName"   : "username",
    "privateKey" : "privateKey",
    "url"        : "sftp://mysever/mydir/File_New.txt",
    "filePath"   : "inbox/File_new.txt"
}
```

Sample Request Payload - Private Key based authentication (with passphrase)

```
{
    "userName"   : "username",
    "privateKey" : "privateKey",
    "passphrase" : "passphrase",
    "url"        : "sftp://mysever/mydir/File_New.txt",
    "filePath"   : "inbox/File_new.txt"
}
```

Response

Supported Media Types: `application/json`

Table 2-167 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link and HTTP call type
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: self or Job Status. If the value is set to Job Status, you can use the href to get the status of the job
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
    "details": null,
    "status": -1,
    "items": null,
    "links": [
        {
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "href"  : "https://<BASE-URL>/interop/rest/v2/config/services/
copytosftp",
            "action": "POST",
            "rel"   : "self",
            "data"  : null
        },
        {
            "href"  : "https://<BASE-URL>/interop/rest/v2/config/status/
service/copytosftp/<JOB_ID>",
            "action": "GET",
            "rel"   : "Job Status",
            "data"  : null
        }
    ]
}
```

Sample cURL command - Password based authentication

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' \
-d '{"url":"SFTP_URL
","userName":"USER_NAME","password":"PASSWORD","filePath":"FILEPATH/
FILENAME"}'\
'https://<BASE URL>/interop/rest/v2/config/services/copytosftp'
```

Sample cURL command - Private Key based authentication (without passphrase)

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' \
-d '{"url":"SFTP_URL
","userName":"USER_NAME","privateKey":"PRIVATE_KEY","filePath":"FILEPATH/
FILENAME"}'\
'https://<BASE URL>/interop/rest/v2/config/services/copytosftp'
```

Sample cURL command - Private Key based authentication (with passphrase)

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' \
-d '{"url":"SFTP_URL ","userName":"USER_NAME","privateKey":"PRIVATE_KEY",
"passphrase":"PASSPHRASE","filePath":"FILEPATH/FILENAME"}'\
'https://<BASE URL>/interop/rest/v2/config/services/copytosftp'
```

Copy from SFTP (v2)

Copies a file or a backup snapshot from the SFTP Server (the source) to the cloud environment (the target).

If you are copying a backup snapshot, this API copies it from the SFTP Server and extracts its contents in Oracle Fusion Cloud EPM.

Required Roles

Service Administrator

Copyright © 2017, 2026, Oracle and/or its affiliates.

REST Resource

POST `/interop/rest/v2/config/services/copyfromsftp`

Request

Supported Media Types: `application/json`

Table 2-168 Parameters

Name	Description	Type	Required	Default
`userName`	ID of a user who has the required access rights to read from the SFTP server	Payload	Yes	None
`password`	Password associated with the user. Required if `privatekey` is not specified.	Payload	Yes	None
`url`	URL for the source file in SFTP server in the following format: `sftp://myserver/mydir/File_New.txt`	Payload	Yes	None

`filePath`	Name of the target filename (with path) of the downloaded artifact. When copying snapshots, do not specify the ZIP extension.
	Examples:
	`Artifact Snapshot_24_Sept_2020`
	`inbox/File_new.txt`
		Payload	Yes	None

`privatekey`	Base 64 encoded private key content. Required if `password` is not specified.	Payload	Optional	None
`passphrase`	Passphrase associated with private key(if any)	Payload	Optional	None

> **Note**
>
> For private key-based authentication (with or without passphrase), the public key corresponding to the provided private key must be added to the authorized_keys file on the SFTP server. This is required for successful authentication. If the SFTP server does not have the correct public key in its authorized_keys file under the appropriate user account, authentication will fail.

Sample Request Payload - Password based authentication

```
{
    "userName" : "username",
    "password" : "password",
    "url"      : "sftp://mysever/mydir/File_New.txt",
    "filePath" : "inbox/File_new.txt"
}
```

Sample Request Payload - Private Key based authentication (without passphrase)

```
{
    "userName"   : "username",
    "privateKey" : "privateKey",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "url"        : "sftp://mysever/mydir/File_New.txt",
    "filePath"   : "inbox/File_new.txt"
}
```

Sample Request Payload - Private Key based authentication (with passphrase)

```
{
    "userName"   : "username",
    "privateKey" : "privateKey",
    "passphrase" : "passphrase",
    "url"        : "sftp://mysever/mydir/File_New.txt",
    "filePath"   : "inbox/File_new.txt"
}
```

Response

Supported Media Types: `application/json`

Table 2-169 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link and HTTP call type
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: self or Job Status. If the value is set to Job Status, you can use the href to get the status of the job
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
    "details": null,
    "status": -1,
    "items": null,
    "links": [
        {
          "href"  : "https://<BASE-URL>/interop/rest/v2/config/services/
copyfromsftp",
          "action": "POST",
          "rel"   : "self",
          "data"  : null
        },
        {
          "href"  : "https://<BASE-URL>/interop/rest/v2/config/services/
copyfromsftp/<JOB_ID>",
          "action": "GET",
          "rel"   : "Job Status",
          "data"  : null
        }
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    ]
}
```

Sample cURL command - Password based authentication

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' \
-d '{"url":"SFTP_URL
","userName":"USER_NAME","password":"PASSWORD","filePath":"FILEPATH/
FILENAME"}'\
'https://<BASE URL>/interop/rest/v2/config/services/copyfromsftp'
```

Sample cURL command - Private Key based authentication (without passphrase)

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' \
-d '{"url":"SFTP_URL
","userName":"USER_NAME","privateKey":"PRIVATE_KEY","filePath":"FILEPATH/
FILENAME"}'\
'https://<BASE URL>/interop/rest/v2/config/services/copyfromsftp'
```

Sample cURL command - Private Key based authentication (with passphrase)

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' \
-d '{"url":"SFTP_URL ","userName":"USER_NAME","privateKey":"PRIVATE_KEY",
"passphrase":"PASSPHRASE","filePath":"FILEPATH/FILENAME"}'\
'https://<BASE URL>/interop/rest/v2/config/services/copyfromsftp'
```

Copy a File Between Instances

Use these REST APIs to copy files from one environment (source) to another environment (target).

These APIs are executed on the target environment after providing the source environment details from which the file is to be copied. The v1 version of these APIs describe the original version of this REST API. You can also use the simplified v2 version of the REST API. The v2 version contains all parameters in the payload and does not require URL encoding while calling the REST APIs. This makes the v2 API easier to use. The v2 version is backwards compatible.

Required Roles

Service Administrator

Power User assigned to the Migration Administrator Profitability and Cost Management granular role

Copy a File Between Instances (v1)

REST Resource

POST `/interop/rest/v1/services/copyfile`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Request

Supported Media Types: `application/x-www-form-urlencoded`

Table 2-170 Parameters

Name	Description	Type	Required	Default
`sourceFileName`	Name of the file to be copied	Form	Yes	None
`userName`	User with access to the source instance	Form	Yes	None
`pwd`	Base64-encoded password	Form	Yes	None
`sourceURL`	The URL of the source instance	Form	Yes	None
`targetFileName`	Name of the file to be copied to the target environment	Form	Yes	None

Sample Request Payload

```
{
  "sourceFileName": "<FILE-NAME>",
  "userName": "<USER_NAME>",
  "pwd": "<PASSWORD>",
  "sourceURL": "<SOURCE-URL>",
  "targetFileName": "<TARGET-FILENAME>"
}
```

Response

Supported Media Types: `application/json`

Table 2-171 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
  "details": null,
  "status": -1,
  "items": null,
  "links": [
    {
      "href": "https://<BASE-URL>/interop/rest/v1/services/copyfile",
      "action": "POST",
      "rel": "self",
      "data": null
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    },
    {
      "href": "https://<BASE-URL>/interop/rest/v1/services/jobs/<JOB_ID>",
      "action": "GET",
      "rel": "Job' 'Status",
      "data": null
    }
  ]
}
```

Sample cURL Command

```
curl -s -u <USERNAME>:<PASSWORD> -H 'Content-Type: application/x-www-form-
urlencoded' --request POST https://<BASE-URL>/interop/rest/v1/services/
copyfile -d 'sourceFileName=<FILE-
NAME>&userName=<USERNAME>&pwd=<PASSWORD>&sourceURL=<SOURCE-
URL>&targetFileName=<TARGET-FILENAME>'
```

Copy a File Between Instances (v2)

REST Resource

POST `/interop/rest/v2/files/copyfrominstance`

Request

Supported Media Types: `application/json`

Table 2-172 Parameters

Name	Description	Type	Required	Default
`sourceFileName`	Name of the file to copy	Payload	Yes	None
`userName`	User with the Service Administrator application role in the source instance	Payload	Yes	None
`pwd`	Base64-encoded password	Payload	Yes	None
`sourceURL`	The URL of the source instance	Payload	Yes	None
`targetFileName`	Name of the file to be copied to the target environment	Payload	Yes	None

Example URL and Payload

```
https://<BASE-URL>/interop/rest/v2/files/copyfrominstance
```

```
{
  "sourceFileName": "FILE_TO_BE_COPIED",
  "userName": "USER_NAME",
  "pwd": "BASE64ENCODED_PASSWORD",
  "sourceURL": "SOURCE_URL",
  "targetFileName": "TARGET_FILENAME"
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Response

Supported Media Types: `application/json`

Table 2-173 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`data`	null

Example of Response Body

```
    "status": -1,
    "items": null,
    "links": [{
        "rel": "self",
        "href": "https://<BASE-URL>/interop/rest/v2/files/copyfrominstance",
        "data": null,
        "action": "POST"
    }, {
        "rel": "Job Status",
        "href": "https://<BASE-URL>/interop/rest/v2/status/jobs/<JOB_ID>",
        "data": null,
        "action": "GET"
    }],
    "details": null
}
```

Sample cURL command

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' -d '{"sourceFileName":"FILE_TO_BE_COPIED",
"sourceURL":"SOURCE_URL","userName":"USER_NAME","targetFileName":"TARGET_FILEN
AME","pwd":"BASE64ENCODED_PASSWORD"}' 'https://<BASE-URL>/interop/rest/v2/
files/copyfrominstance'
```

Clone an Environment (v1)

Use this REST API to clone the current environment and, optionally, identify domain artifacts (users and application roles), Data Management records, audit records, Job Console records, contents of the inbox and outbox, and stored snapshots.

This API is executed on the source environment after details are provided for the target environment to be cloned. It is an alternative to using the Clone Environment feature in a browser or the EPM Automate cloneEnvironment command.

Copyright © 2017, 2026, Oracle and/or its affiliates.

After initiating the clone, use the Clone Environment Status endpoint to monitor progress and retrieve clone metadata such as the backup name, backup creation time, and clone start and completion timestamps. The status endpoint returns both non-localized step status and localized step details based on the request header `locale`.

> **Note**
>
> This API now supports the cloning of environments using Environment Backups. With this update, you can now specify an Environment Backup as the source when cloning an environment, providing a more efficient and reliable way to replicate the environments for disaster recovery or production-to-test migration. Previously, cloning was limited to using backup snapshots or the Artifact snapshot as the source.

Required Roles

Service Administrator or any user assigned to the Migrations - Administer granular role

REST Resource

POST `/interop/rest/v1/services/clone`

Request

Supported Media Types: `application/json`

Table 2-174 Parameters

Name	Description	Type	Required	Default
`applicationAudit`	Whether to clone the application audit data in the source to the target environment for FreeForm, Planning, Financial Consolidation and Close, and Tax Reporting environments, `True` or `False`. Including application audit data while cloning an environment makes the target environment keep the application audit history.	Payload	No	`True`
`applicationProperties`	Whether to clone the Account Reconciliation application settings (email notification on/off setting, Redwood Experience, theme, business process name, logo image, and background image) in the source environment to the target environment, `True` or `False`. For the target environment to retain its current application settings, set this value to `False`.	Payload	No	True
`dataManagement`	Whether to clone the Data Management records of the source to the target environment for all environments other than Data Management and Narrative Reporting, `True` or `False`.	Payload	No	`True`
`jobConsole`	Whether to clone the job console data in the source to the target environment for FreeForm, Planning, Financial Consolidation and Close, and Tax Reporting environments, `True` or `False`. Including job console data while cloning an environment makes the target environment keep the job console history.	Payload	No	`True`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-174 (Cont.) Parameters

Name	Description	Type	Required	Default
`maintenanceStartTime`	Whether to reset the maintenance start time of the cloned environment to that of the source environment. To keep the current maintenance start time of the target environment, set this value to `False`.	Payload	No	`True`
`migrateUsers`	Whether to clone users and their application and granular role assignments, `True` or `False`. For this option to work, the user identified by `targetUsername` must have the Identity Domain Administrator role in the target environment.	Payload	No	`False`
`snapshotName`	Optionally, the name of a snapshot that should be used for cloning. This snapshot must be present in the source environment. **Note**: This snapshot must have been created by the daily maintenance. Besides Artifact Snapshot, it can be any snapshot copied to the source environment through the `restoreBackup` EPM Automate command.	Payload	No	Last maintenance snapshot
`environmentBackup`	Whether to clone the environment backup from source to target.	Payload	No	False
`storedSnapshotsAndFiles`	Whether to clone the contents of the inbox, outbox, and stored snapshots in the source to the target environment for all environments, `True` or `False`. Including stored snapshots and files while cloning an environment makes sure that the stored snapshots and files are not lost.	Payload	No	`False`
`targetEncryptPassword`	Base64-encoded password of the user identified by `targetUsername` to be passed as a string.	Payload	Yes	None
`targetURL`	The URL of the environment that will become the cloned environment	Payload	Yes	None
`targetUsername`	The ID of a Service Administrator in the target environment. If you plan to clone user and role assignments in the target environment, this user must also have the Identity Domain Administrator role.	Payload	Yes	None

Example Payload

```
{
  "targetURL": "https://<TARGET-BASE-URL>",
  "targetUserName": "cloneUser@oracle.com",
  "targetEncryptPassword": "<TARGET-BASE64-ENCODED-PASSWORD>",
  "parameters": {
    "snapshotName": "Artifact Snapshot",
    "migrateUsers": true,
    "maintenanceStartTime": true,
    "dataManagement": true,
    "jobConsole": true,
    "applicationAudit": true,
    "storedSnapshotsAndFiles": false
  }
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Response

Supported Media Types: `application/json`

Table 2-175 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string. Error details are always in english and not localized.
`inputParameters`	Returns the clone input parameters associated with the clone job and is available in the clone status response while the clone is in progress. This includes the target URL, target user name, and the parameter set used for the clone request.
`status`	See Migration Status Codes
`links`	Detailed information about the link
`backupName`	Backup name used for the clone.
`backupCreatedTime`	The exact timestamp when the backup (used for the cloning process) was generated.
`cloneStartTime`	The timestamp when the clone job was initiated.
`cloneCompletedTime`	The timestamp indicating successful completion of the clone job; this field remains `null` while the clone is in progress or if the job is terminated.
`statusDetails`	The localized, real-time status for each execution step, which can be polled continuously using the job status URL. Each entry includes a localized message, the step result, and, when applicable, detailed failure information.
`intermittentStatus`	The real-time status of each execution step, which can be continuously polled via the job-status URL.

Example Response Body (Initiate Clone)

```
{
  "links": [
    {
      "rel": "Job Status",
      "href": "https://<BASE-URL>/interop/rest/v1/services/clone/status",
      "data": null,
      "action": "GET"
    }
  ],
  "details": null,
  "status": -1,
  "items": null,
  "intermittentStatus": null
}
```

Example of Response Body (In Progress)

```
{
  "details": null,
  "status": 0,
  "items": null,
  "links": null,
  "backupName": "Artifact Snapshot",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
"backupCreatedTime": "2026-05-05T03:42:43",
"cloneStartTime": "2026-05-08T05:24:48",
"cloneCompletedTime": "2026-05-08T05:27:38",
"intermittentStatus": [
  {
    "Validation before initiating clone": "Success"
  },
  {
    "Login to target environment": "Success"
  },
  {
    "Validating target environment version": "Success"
  },
  {
    "Validating target service environment": "Success"
  },
  {
    "Performing recreate service on target environment": "Success"
  },
  {
    "Uploading snapshot Artifact Snapshot": "Success"
  },
  {
    "Importing snapshot Artifact Snapshot": "Success"
  },
  {
    "Setting daily maintenance start time to that of the source": "Success"
  },
  {
    "Migration status": "Success"
  }
],
"statusDetails": [
  {
    "message": "Validation before initiating clone",
    "result": "success"
  },
  {
    "message": "Login to target environment",
    "result": "success"
  },
  {
    "message": "Validating target environment version",
    "result": "success"
  },
  {
    "message": "Validating target service environment",
    "result": "success"
  },
  {
    "message": "Performing recreate service on target environment",
    "result": "success"
  },
  {
    "message": "Uploading snapshot Artifact Snapshot",
    "result": "success"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    },
    {
      "message": "Importing snapshot Artifact Snapshot",
      "result": "success"
    },
    {
      "message": "Setting daily maintenance start time to that of the source",
      "result": "success"
    },
    {
      "message": "Migration status",
      "result": "success"
    }
  ],
  "inputParameters": {
    "targetURL": "https://<TARGET-BASE-URL>",
    "targetUserName": "<TARGET-USERNAME>",
    "parameters": {
      "migrateUsers": false,
      "maintenanceStartTime": true,
      "dataManagement": true,
      "jobConsole": true,
      "applicationAudit": true,
      "storedSnapshotsAndFiles": false
    }
  }
}
```

Example Response (Completed Successfully)

```
{
  "details": null,
  "status": 0,
  "items": null,
  "links": null,
  "backupName": "EPRCS_Backup.tar.gz",
  "backupCreatedTime": "2026-04-10T04:03:26",
  "cloneStartTime": "2026-04-10T04:56:49",
  "cloneCompletedTime": "2026-04-10T05:03:52",
  "intermittentStatus": [
    { "Validation before initiating clone": "Success" },
    { "Login to target environment": "Success" },
    { "Validating target environment version": "Success" },
    { "Validating target service environment": "Success" },
    { "Performing recreate service on target environment": "Success" },
    { "Migration status": "Success" }
  ],
  "statusDetails": [
    { "message": "Validation before initiating clone", "result": "success" },
    { "message": "Login to target environment", "result": "success" },
    { "message": "Validating target environment version", "result":
"success" },
    { "message": "Validating target service environment", "result":
"success" },
    { "message": "Performing recreate service on target environment",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
"result": "success" },
    { "message": "Migration status", "result": "success" }
  ]
}
```

Sample cURL Command Basic Auth

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/
json' -d '{"targetURL":
" https://<BASE URL>","targetUserName":"<TARGET-
USERNAME>","targetEncryptPassword":"<TARGET-BASE64ENCODED-PASSWORD>",
"parameters":{"snapshotName":"<SNAPSHOT-
NAME>","migrateUsers":"true","maintenanceStartTime":"<TRUE/
FALSE>","dataManagement":
"<TRUE/FALSE>","jobConsole":"<TRUE/FALSE>","applicationAudit":"<TRUE/
FALSE>","storedSnapshotsAndFiles":"<TRUE/FALSE>"}}'
'https://<BASE-URL>/interop/rest/v1/services/clone'
```

Sample cURL Command OAuth 2.0

```
curl -X POST --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H
'Content-Type: application/json' -d '{"targetURL":
" https://<BASE URL>","targetUserName":"<TARGET-
USERNAME>","targetEncryptPassword":"<TARGET-BASE64ENCODED-PASSWORD>",
"parameters":{"snapshotName":"<SNAPSHOT-
NAME>","migrateUsers":"true","maintenanceStartTime":"<TRUE/
FALSE>","dataManagement":
"<TRUE/FALSE>","jobConsole":"<TRUE/FALSE>","applicationAudit":"<TRUE/
FALSE>","storedSnapshotsAndFiles":"<TRUE/FALSE>"}}'
'https://<BASE-URL>/interop/rest/v1/services/clone'
```

Provide Feedback (v2)

The Provide Feedback (v2) feedback service sends feedback or reports an issue to Oracle.

For the previous version of this API, see Provide Feedback.

Required Roles

Service Administrator, Power User, User, Viewer

REST Resource

POST `/interop/rest/v2/services/feedback`

Request

Supported Media Types: `multipart/form-data`

Name	Description	Type	Required	Default
`fileName`	The name of the zip file that you want Oracle support to use to resolve the current issue.	Multipart	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Name	Description	Type	Required	Default
file	Multiple files like EPM Automate scripts or Fiddler traces required to be submitted to Oracle can be zipped altogether and uploaded.	Multipart	Yes	None
configuration	Details of the client, OS, URL, and description of the issue.	Multipart	Yes	None

Example URL and Payload

```
https://<BASE-URL>/interop/rest/v2/services/feedback
```

```
{
  "configuration": {
    "Operating_System": "OPERATING_SYSTEM",
    "EPMAutomate_Version": "EPMAUTOMATE_VERSION",
    "Java_Vendor": "JAVA_VENDOR",
    "Java_Version": "JAVA_VERSION",
    "URL": "URL",
    "description": "abc"
  }
}
```

Response

Supported Media Types: `application/json`

Table 2-176 Parameters

Name	Description
details	Published in case of errors with the error string
status	See Migration Status Codes
items	Details about the resource
issueRef	Feedback reference to contact Oracle support
links	Detailed information about the link
href	Links to API call
action	The HTTP call type
rel	Possible value: self
data	Parameters as key value pairs passed in the request

Example of Response Body

```
"details": null,
    "status": 0,
    "items": [
        {
            "issueRef":
"UDR_default_epm_default_cloud_admin_2022_10_11_01_47_10"
        }
    ],
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/services/feedback",
            "action": "POST",
            "rel": "self",
            "data": null
        }
    ]
}
```

Sample cURL Command

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: multipart/form-data' -F 'fileName=abc.zip' -
F'configuration={"configuration":{"Operating_System": "Windows 10",
"EPMAutomate_Version":"EPMAUTOMATE_VERSION","Java_Vendor":"JAVA_VENDOR","Java_
Version":"JAVA_VERSION","URL":"https://<BASE
URL>","description":"DESCRIPTIONabc"}}' -F 'file=@/
<FILE_PATH>' 'https://<BASE-URL>/interop/rest/v2/services/feedback'
```

Send Email

Use these REST APIs (v1 and v2) to send emails to specified recipients, optionally attaching files from Oracle Fusion Cloud Enterprise Performance Management. You can attach any files up to 10 MB in size, other than snapshots, that are available in Cloud EPM environments. These APIs can be incorporated into REST API programs and scripts to notify users of various conditions or to send reports.

These APIs are asynchronous and return Job IDs. Use the job status URIs to determine whether the processes are complete. The presence of status -1 in the responses indicates that the processes are in progress. Any non-zero statuses except -1 indicate failures.

Required Roles

Service Administrator

Related Documentation

EPM Automate Command - sendMail

Send Email (v1)

This topic describes the original version of this REST API. You can also use the simplified v2 version of the REST API. The v2 version contains all parameters in the payload and does not require URL encoding while calling the REST APIs. This makes the v2 API easier to use. The v2 version is backwards compatible.

REST Resource

POST `/interop/rest/v1/services/sendmail`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-177 Tasks

Task	Request	REST Resource
Trigger `sendmail`	POST	`/interop/rest/v1/services/sendmail`
Retrieve `sendmail` status	GET	`/interop/rest/v1/services/jobs/777`

Request

Supported Media Types: `application/json`

Table 2-178 Parameters

Name	Description	Type	Required	Default
`to`	The recipient email addresses separated by semi-colons	Form	Yes	None
`subject`	The subject for the email	Form	Yes	None
`body`	The body of the email providing details.	Form	Yes	None
`attachments`	One or more file names separated by commas to be added as attachments to the email, for example, `outbox/Errorfile.txt` or `inbox/Errorfile2.txt` You can attach any file up to 10 MB in size, other than a snapshot, that is available in Oracle Fusion Cloud Enterprise Performance Management environments.	Form	No	None

Sample Request Payload

```
{
  "to": "<EMAIL>",
  "subject": "<SUBJECT>",
  "body": "<BODY>",
  "parameters": {
    "attachments": "<ATTACHMENT>"
  }
}
```

Response

Table 2-179 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`data`	Parameters as key value pairs passed in the request
`items`	Details about the resource

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-179 (Cont.) Parameters

Name	Description
`links`	Details of the first URL to be requested to get the job details; rel is "Job Details"

Example of Response Body

```
{
  "details": null,
  "status": -1,
  "items": null,
  "links": [
    {
      "href": "https://<BASE-URL>/interop/rest/v1/services/sendmail",
      "action": "POST",
      "rel": "self",
      "data": null
    },
    {
      "href": "https://<BASE-URL>/interop/rest/v1/services/jobs/<JOB-ID>",
      "action": "GET",
      "rel": "Job Status",
      "data": null
    }
  ]
}
```

Sample cURL Command

```
curl -s -u <USERNAME>:<PASSWORD> -H 'Content-Type: application/x-www-form-
urlencoded' --request POST https://<BASE-URL>/interop/rest/v1/services/
sendmail -d 'to=<EMAIL>&subject=<SUBJECT>&body=<BODY>&attachment=<ATTACHMENT>'
```

Send Email (v2)

This topic describes the simplified v2 version of this REST API. This version contains all parameters in the payload and does not require URL encoding while calling the REST APIs. This makes the v2 API easier to use. This API is backwards compatible.

REST Resource

POST `/interop/rest/v2/mails/send`

Table 2-180 Tasks

Task	Request	REST Resource
Trigger `sendmail`	POST	`/interop/rest/v2/mails/send`
Retrieve `sendmail` status	GET	`/interop/rest/v2/status/jobs/777`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Request

Supported Media Types: `application/json`

Table 2-181 Parameters

Name	Description	Type	Required	Default
`to`	The recipient email addresses separated by semi-colons	Payload	Yes	None
`subject`	The subject for the email	Payload	Yes	None
`body`	The body of the email providing details.	Payload	Yes	None
`parameters`	Parameters for this REST API	Payload	No	None
`attachments`	One or more file names separated by commas to be added as attachments to the email, for example, `outbox/Errorfile.txt` or `inbox/Errorfile2.txt` You can attach any file up to 10 MB in size, other than a snapshot, that is available in Oracle Fusion Cloud Enterprise Performance Management environments.	Payload	No	None

Sample Request Payload

```
{
  "subject": "SUBJECT_OF_THE_MAIL",
  "to": "RECIPIENT_EMAIL_ADDRESS",
  "body": "BODY_OF_THE_MAIL",
  "parameters": {
    "attachments": "NAME_OF_THE_FILE_TO_BE_ATTACHED"
  }
}
```

Response

Table 2-182 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`data`	Parameters as key value pairs passed in the request
`items`	Details about the resource
`links`	Details of the first URL to be requested to get the job details; rel is "Job Details"

Example of Response Body

```
{
    "status": -1,
    "items": null,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "links": [{
        "rel": "self",
        "href": "https://<BASE-URL>/interop/rest/v2/mails/send",
        "data": null,
        "action": "POST"
    }, {
        "rel": "Job Status",
        "href": "https://<BASE-URL>/interop/rest/v2/status/jobs/<JOB_ID>",
        "data": null,
        "action": "GET"
    }],
    "details": null
}
```

Sample cURL Command

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' -d '{"subject":"SUBJECT_OF_THE_MAIL",
"to":"RECIPIENT_EMAIL_ADDRESS","body":"BODY_OF_THE_MAIL","parameters":
{"attachments":"NAME_OF_THE_FILE_TO_BE_ATTACHED"}}' 'https://<BASE URL>/
interop/rest/v2/mails/send'
```

Set Email Domain Allowlist (v2)

Use this REST API to set the allowed email domains to which emails can be sent from the EPM Cloud environment. If an email domain allowlist is set, emails will not be sent to any address whose domain is not one of the specified email domains.

Required Roles

Service Administrator

REST Resource

POST `/interop/rest/v2/mails/allowlist`

Request

Supported Media Types: `application/json`

Table 2-183 Parameters

Name	Description	Type	Required	Default
`alloweddomains`	Comma-separated list of allowed email domains. To clear the allowlist, pass an empty string.	Payload	Yes	None

Sample Request Payload

Copyright © 2017, 2026, Oracle and/or its affiliates.

The following payload specifies that emails should not be sent to any email address whose domain is not oracle.com or gmail.com.

```
{
  "alloweddomains": "oracle.com,gmail.com"
}
```

Sample Request Payload to Clear the Allowed Email Domain List and Allow any Email Domain

```
{
  "alloweddomains": ""
}
```

Response

Table 2-184 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Possible values: `self`
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
    "details": null,
    "status": 0,
    "items": null,
    "links": [{
          "href": "https://<BASE-URL>/interop/rest/v2/mails/allowlist",
          "action": "POST",
          "rel": "self",
          "data": null
     }]
}
```

Sample cURL Command

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' -d
'{"alloweddomains":"example.com,oracle.com"}' 'https://<BASE-URL>/interop/
rest/v2/mails/allowlist'
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Get Email Domain Allowlist (v2)

Use this REST API to retrieve the configured list of allowed email domains to which emails can be sent from the EPM Cloud environment. If this list is not empty, emails will not be sent to any address whose domain is not one of the returned email domains.

Required Roles

Service Administrator

REST Resource

POST `/interop/rest/v2/mails/allowlist`

Request

Supported Media Types: `application/json`

Response

Table 2-185 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`items`	Detailed information about the API
`alloweddomains`	Lists the allowed domains
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Possible values: `self`
`data`	Parameters as key value pairs passed in the request

Example Response with Non-Empty List of Allowed Email Domains

```
{
    "details": null,
    "status": 0,
    "items": [{
        "alloweddomains": "example.com,oracle.com"
    }],
    "links": [{
            "href": "https://<BASE-URL>/interop/rest/v2/mails/allowlist",
            "action": "GET",
            "rel": "self",
            "data": null
    }]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example Response with Empty Allowed Email Domain List

```
{
  "details": null,
  "status": 0,
  "items": [
    {
      "alloweddomains": ""
    }
  ],
  "links": [
    {
      "href": "https://<BASE-URL>/interop/rest/v2/mails/allowlist",
      "action": "GET",
      "rel": "self",
      "data": null
    }
  ]
}
```

Sample cURL Command

```
curl -X GET -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json'  'https://<BASE-URL>/interop/rest/v2/mails/
allowlist'
```

Skip Updates

Use the Skip Updates REST API (v1, v2) to add, list, or remove a skip update request. Using this API, you can ask Oracle to skip applying a monthly update to an environment, or remove all previous skip update requests so that the environment is updated to the main code line. This allows you to skip updates to an Oracle Fusion Cloud Enterprise Performance Management production environment at times when you need to complete time-sensitive tasks, for example, closing a quarter, without creating a service request.

You can also list the skip update requests currently specified for an environment. You can set skip update requests for a maximum of three update cycles. You cannot skip updates for an environment that is on a one-off patch. Additionally, you cannot skip monthly updates that are more than three months apart from the update that the environment is currently on. For example, if the environment is currently on 24.10, you can skip 24.11, 24.12, and 25.01 updates, but not 25.02. This gives you better control over monthly and weekly updates.

Skip Updates (v1)

This topic describes the original version of this REST API. You can also use the simplified v2 version of the REST API. The v2 version contains all parameters in the payload and does not require URL encoding while calling the REST APIs. This makes the v2 API easier to use. The v2 version is backwards compatible.

Required Roles

Service Administrator

Copyright © 2017, 2026, Oracle and/or its affiliates.

REST Resource

POST `/interop/rest/v1/services/skipupdate`

Request

Supported Media Types: `application/x-www-form-urlencoded`

Table 2-186 Parameters

Name	Description	Type	Required	Default
`type`	The desired action to be performed (Add, List, or Remove)	Form	Yes	None
`version`	The version to be skipped from update, for example, 20.12	Form	No (Yes, only when the type is Add)	None
`comment`	The business reason for skipping an update, such as Year End	Form	No (Yes, only when the type is Add)	None

Sample Request Payload (Add)

```
{
  "type": "Add",
  "version": "<VERSION>",
  "comment": "<COMMENT>"
}
```

Sample Request Payload (Remove)

```
{
  "type": "Remove",
  }
```

Sample Request Payload (List)

```
{
  "type": "List",
  }
```

Response

Supported Media Types: `application/json`

Table 2-187 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-187 (Cont.) Parameters

Name	Description
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`data`	Parameters as key value pairs passed in the request

Example of Response Body (Skip Updates - Add, Remove)

```
{
  "details": null,
  "status": 0,
  "items": null,
  "links": [
    {
      "href": "https://<BASE-URL>/interop/rest/v1/services/skipupdate",
      "action": "POST",
      "rel": "self",
      "data": null
    }
  ]
}
```

Example of Response Body (Skip Updates - List)

```
{
  "details": null,
  "status": 0,
  "items": [
    {
      "User": "<USERNAME>",
      "Version": "<VERSION>",
      "Comments": "<COMMENT>",
      "Timestamp": "<TIMESTAMP>"
    }
  ],
  "links": [
    {
      "href": "https://<BASE-URL>/interop/rest/v1/services/skipupdate",
      "action": "POST",
      "rel": "self",
      "data": null
    }
  ]
}
[
  {
    "User": "<USERNAME>",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "Version": "<VERSION>",
    "Comments": "<COMMENT>",
    "Timestamp": "<TIMESTAMP>"
  }
]
```

Sample cURL Command (Add)

```
curl -s -u <USERNAME>:<PASSWORD> -H 'Content-Type: application/x-www-form-
urlencoded' --request POST https://<BASE-URL>/interop/rest/v1/services/
skipupdate -d 'type=Add&version=<VERSION>&comment=<COMMENT>
```

Sample cURL Command (Remove)

```
curl -s -u <USERNAME>:<PASSWORD> -H 'Content-Type: application/x-www-form-
urlencoded' --request POST https://<BASE-URL>/interop/rest/v1/services/
skipupdate -d type=Remove
```

Sample cURL Command (List)

```
curl -s -u <USERNAME>:<PASSWORD> -H 'Content-Type: application/x-www-form-
urlencoded' --request POST https://<BASE-URL>/interop/rest/v1/services/
skipupdate -d type=List
```

Skip Updates (v2)

This REST API version contains all parameters in the payload and does not require URL encoding while calling the REST APIs. This makes the v2 API easier to use. The v2 version is backwards compatible.

Required Roles

Service Administrator

REST Resource

POST `/interop/rest/v2/services/skipupdate`

Request

Supported Media Types: `application/json`

Table 2-188 Parameters

Name	Description	Type	Required	Default
`type`	The desired action to be performed (Add, List, or Remove)	Payload	Yes	None
`version`	The version to be skipped from update, for example, 22.12	Payload	No (Yes, only when the type is Add)	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-188 (Cont.) Parameters

Name	Description	Type	Required	Default
`comment`	The business reason for skipping an update, such as Year End	Payload	No (Yes, only when the type is `Add`)	None

Sample Request Payload

```
{
  "type": "Add",
  "parameters": {
    "version": "<VERSION>",
    "comment": "<COMMENT>"
  }
}
```

Response

Supported Media Types: `application/json`

Table 2-189 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`data`	null

Example of Response Body

```
{
    "status": 0,
    "items": null,
    "links": [{
        "rel": "self",
        "href": "https://<BASE-URL>/interop/rest/v2/services/skipupdate",
        "data": null,
        "action": "POST"
    }
    "details": null
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Sample cURL Command

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' -d '{"type":"Add","parameters":
{"version":"22.10","comment":"Year End"}}' 'https://<BASE URL>/interop/
rest/v2/services/skipupdate'
```

List or Restore Backups

Use this REST API to list available backup snapshots archived by Oracle in the Oracle Object Storage Cloud, or to restore an available backup snapshot archived by Oracle in the Oracle Object Storage Cloud (that is, copy it to the environment).

Table 2-190 List or Restore Backups

Task	Request	REST Resource
List Backups (v2)	GET	`/interop/rest/v2/backups/list`
Restore Backups (v2)	POST	`/interop/rest/v2/backups/restore`

List Backups (v2)

You can list available Artifact Snapshots and Environment Backups created by the daily maintenance process and archived in the Oracle Object storage Cloud.

You can then restore an available backup to your current environment using the following process:

To restore an archived Artifact Snapshot to the current environment, copy it to the environment using Restore Backups (v2). After copying the backup, you can use it to import it into the current environment yourself.

To restore an archived Environment Backup, to the current environment, see Restore Environment (v1).

With the List Backups, Restore Backups, and Restore Environment APIs, you do not need to create a service request to restore an environment from the archived backup.

Required Roles

Service Administrator

Any application role and Migrations – Administer granular role

REST Resource

GET `/interop/rest/v2/backups/list`

Response

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-191 Parameters

Attribute	Description
`details`	Published in case of errors with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Possible value: `self`
`intermittentStatus`	Stats of each step perormed; can be polled regularly from the job status URL

Example of Response Body


```
{
  "details": null,
  "status": 0,
  "items": [
    "2026-03-20T12:46:04/Artifact_Snapshot.zip",
    "2026-03-21T12:46:05/Artifact_Snapshot.zip",
    "2026-04-30T07:29:17/Artifact_Snapshot.zip",
    "2026-05-06T07:29:13/Artifact_Snapshot.zip",
    "2026-05-07T07:29:19/Artifact_Snapshot.zip",
    "2026-05-08T07:29:14/Artifact_Snapshot.zip",
    "2026-05-09T07:29:16/Artifact_Snapshot.zip",
    "2026-05-12T07:29:14/Artifact_Snapshot.zip",
    "2026-05-13T07:29:15/Artifact_Snapshot.zip",
    "2026-05-14T07:29:21/Artifact_Snapshot.zip",
    "2026-05-14T23:05:32/Artifact_Snapshot.zip",
    "2026-05-15T23:05:36/Artifact_Snapshot.zip",
    "2026-05-19T23:05:33/Artifact_Snapshot.zip",
    "2026-04-30T07:25:49/Environment_Backup",
    "2026-05-01T07:25:49/Environment_Backup",
    "2026-05-02T07:25:46/Environment_Backup",
    "2026-05-03T07:25:46/Environment_Backup",
    "2026-05-04T07:25:43/Environment_Backup",
    "2026-05-05T07:25:42/Environment_Backup",
    "2026-05-06T07:25:43/Environment_Backup",
    "2026-05-07T07:25:44/Environment_Backup",
    "2026-05-08T07:25:44/Environment_Backup",
    "2026-05-09T07:25:44/Environment_Backup",
    "2026-05-10T07:25:44/Environment_Backup",
    "2026-05-11T07:25:42/Environment_Backup",
    "2026-05-12T07:25:43/Environment_Backup",
    "2026-05-13T07:25:44/Environment_Backup",
    "2026-05-14T07:25:44/Environment_Backup",
    "2026-05-14T23:01:44/Environment_Backup",
    "2026-05-15T23:01:44/Environment_Backup",
    "2026-05-16T23:01:45/Environment_Backup",
    "2026-05-17T23:01:43/Environment_Backup",
    "2026-05-18T23:01:43/Environment_Backup",
    "2026-05-19T23:01:44/Environment_Backup"
  ],
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
  "links": [
    {
      "href": "https://<BASE-URL>/interop/rest/v2/backups/list",
      "action": "GET",
      "rel": "self",
      "data": null
    }
  ]
}
```

Sample cURL Command

```
curl -s -u <USERNAME>:<PASSWORD> -H 'Content-Type: application/json' --
request GET -G https://<BASE-URL>/interop/rest/v2/backups/list
```

Restore Backups (v2)

You can restore an available backup snapshot archived by Oracle in Oracle Object Storage (that is, copy it to the environment).

To view available backup snapshots, see List Backups. If a backup snapshot is available, you can copy it to the current environment using the Restore Backup API.

After copying the backup, you can archive it or use it to restore the current environment by yourself. With the List Backups and Restore Backup APIs, you do no have to create a service request to request a backup from an environment.

Required Roles

Service Administrator

Any application role and Migrations – Administer granular role

REST Resource

POST `/interop/rest/v2/backups/restore`

Request

Supported Media Types: `application/json`

Table 2-192 Parameters

Name	Description	Type	Required	Default
`backupName`	The name of the backup snapshot, as listed in the response for List Backups	Payload	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-192 (Cont.) Parameters

Name	Description	Type	Required	Default
`targetName`	The name of the backup snapshot, without an extension, in the target environment	Payload	No	If you do not specify this parameter, the backup snapshot is restored to the target environment pre-pended with the current timestamp, for example, `2022-03-10T06:37:48_Artifact_Snapshot.zip` or `2022-03-30T06:22:35_EPRCS_Backup.tar.gz`.

Sample Request Payload

```
{
    "backupName": "<BACKUP-NAME>",
    "parameters": {
        "targetName": "<TARGET-NAME>"
    }
}
```

Response

Supported Media Types: `application/json`

Table 2-193 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-193 (Cont.) Parameters

Name	Description
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status of the copy snapshot
`intermittentStatus`	Status of each step performed; can be polled regularly from the job status URL

Example of Response Body

```
{
  "links": [
    {
      "rel": "self",
      "href": "https://<BASE-URL>/interop/rest/v2/backups/restore",
      "data": null,
      "action": "POST"
    },
    {
      "rel": "Job Status",
      "href": "https://<BASE-URL>/interop/rest/v2/status/jobs/<JOB_ID>",
      "data": null,
      "action": "GET"
    }
  ],
  "details": null,
  "status": -1,
  "items": null
}
```

Sample cURL Command

```
curl -s -u <USERNAME>:<PASSWORD> -H 'Content-Type: application/json' --
request POST https://<BASE-URL>/interop/rest/v2/backups/restore -d
{"backupName": "<BACKUP-NAME>","parameters": {"targetName": "<TARGET_NAME>"}}
```

Restore Environment (v1)

Restores an environment using an environment backup generated by the daily maintenance process.

Use this API to recover an environment after a crash or data loss caused by application changes, when backups you created are not sufficient for recovery.

Additionally, the restore operation can:

- Restore users and their application role assignments.
- Reset the environment's daily maintenance start time to the value captured in the backup.
- Restore the contents of the inbox and outbox, and stored snapshots, to match the backup.

Required Roles

Service Administrator

Copyright © 2017, 2026, Oracle and/or its affiliates.

Any application role and Migrations – Administer granular role

REST Resource

POST `/interop/rest/v1/services/restoreenvironment`

Request

Supported Media Types: `application/json`

Table 2-194 Parameters

Name	Description	Type	Required	Default
`backupName`	The environment backup name to restore.	Payload	Yes	None
`usersAndApplicationRoles`	If `true`, restores users and their assigned roles in the environment. To perform this operation, you must have the Identity Domain Administrator role.	Payload	No	`false`.
`dailyMaintenanceStartTime`	If `true`, restores the environment's daily maintenance start time from the backup. To keep the current maintenance start time, set to `false`.	Payload	No	`true`
`storedSnapshotsAndFiles`	If `true`, restores stored snapshots and files from inbox and outbox.	Payload	No	`false`

Sample Request Payload

```
{
    "backupName": "2026-04-23T08:48:06/Environment_Backup",
    "parameters": {
    "usersAndApplicationRoles": "false",
    "storedSnapshotsAndFiles": "true",
    "dailyMaintenanceStartTime": "true"
    }
  }
```

Response

Supported Media Types: `application/json`

Table 2-195 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the restore environment.
`intermittentStatus`	Status of each step performed; can be polled regularly from the job status URL

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example of Response Body

```
{
    "details": null,
    "status": -1,
    "items": null,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v1/services/
restoreenvironment/status/1776935926050",
            "action": "GET",
            "rel": "Job Status",
            "data": null
        }
    ],
    "intermittentStatus": null
}
```

Example of Response Body (In Progress)

```
{
    "details": "",
    "status": -1,
    "items": null,
    "links": null,
    "intermittentStatus": [
        {
            "Restoring Environment Backup": "In Progress"
        }
    ]
}
```

Example of Response Body (Completed Successfully)

```
{
    "details": "Environment backup restored successfully",
    "status": 0,
    "items": null,
    "links": null,
    "intermittentStatus": [
        {
            "Restoring Environment Backup": "Success"
        },
        {
            "Importing users and application roles": "NA"
        },
        {
            "Uploading stored snapshots and files": "Success"
        },
        {
            "Setting daily maintenance start time to that of the backup":
"Success"
        }
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    ]
}
```

Sample cURL Command

```
curl -s -u <USERNAME>:<PASSWORD> -H 'Content-Type: application/json' --
request POST https://<BASE-URL>/interop/rest/v1/services/restoreenvironment -
d '{ "backupName": "2026-03-15T06:40:34/Environment_Backup", "parameters":
{ "usersAndApplicationRoles": false, "dailyMaintenanceStartTime": true,
"storedSnapshotsAndFiles": false } }'
```

Application Snapshots

You can manage the file system artifacts or application snapshots using these APIs.

Note: The password of the source Oracle Fusion Cloud EPM environment must have already been encrypted using EPM Automate. The encrypted password must then be passed as one of the parameters for the `copysnapshot` REST API. See the *encrypt* command in Command Reference in *Working with EPM Automate*.

Table 2-196 REST APIs to Manage Application Snapshots

Manage Application Snapshots REST APIs		
Get Information About All Application Snapshots	Download Application Snapshot	Rename Application Snapshot
Upload Application Snapshot	Copy Application Snapshot	

Get Information About a Specific Application Snapshot

Returns information about all the operations that can be performed on a particular application snapshot. It provides details on operations such as Migration import and export, upload, download, and delete.

Required Roles

Service Administrator

REST Resource

GET `/interop/rest/11.1.2.3.600/applicationsnapshots/{applicationSnapshotName}`

Request

The following table summarizes the GET request parameters.

Table 2-197 Parameters

Name	Description	Type	Required	Default
`applicationSnapshotName`	Application snapshot name to retrieve the details	Path	Yes	N/A

Response

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-198 Parameters

Name	Description
details	In the case of an error, details are published with the error string
status	See Migration Status Codes
items	Detailed information about the API
name	Name of the application snapshot
type	Possible values: LCM, EXTERNAL
canexport	Identifies whether this application snapshot can be exported using Migration. Applicable only to Migration application artifacts
canimport	Identifies whether this application snapshot can be imported using Migration. Applicable only to Migration application artifacts
canupload	Identifies whether the application snapshot can be uploaded
candownload	Identifies whether the application snapshot can be downloaded
links	Detailed information about the link
href	Links to API call
action	The HTTP call type
rel	Possible values: self, import, export, upload, download, or delete depending on the operation permitted on an application snapshot
data	Parameters as key value pairs passed in the request

Example of Response Body

```
{
    "status":0,
    "items":[{
        "name":"snapshot1",
        "type":"LCM",
        "canexport":true,
        "canimport":true,
        "canupload":true,
        "candownload":true
    }],
    "details":null,
    "links":[{
        "data":null,
        "action":"GET",
        "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots/snapshot1",
        "rel":"self"
        },{
        "data":null,
        "action":"GET",
        "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots/snapshot1/contents",
        "rel":"download"
        },{
        "data":null,
        "action":"POST",
        "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots/snapshot1/contents?
isLast=true&chunkSize=52428800&isFirst=true",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        "rel":"upload"
        },{
        "data":null,
        "action":"POST",
        "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots/snapshot1/migrationq={type:"export}"
        "rel":"export"
        },{
        "data":null,
        "action":"POST",
        "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots/snapshot1/migrationq={type:"import}",
        "rel":"import"
        },{
        "data":null,
        "action":"DELETE",
        "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots/ss1",
        "rel":"delete"
    }]
}
```

cURL Sample

```
funcGetApplicationSnapshotDetails() {
    url=$SERVER_URL/interop/rest/$API_VERSION/applicationsnapshots/$1
    funcExecuteRequest "GET" $url

    output=`cat response.txt`
    status=`echo $output | jq '.status'`
    if [ $status == 0 ]; then
        echo "Application details :"
        echo "Application snapshot name : " `echo $output | jq
'.items[0].name'`
        echo "Application snapshot type : " `echo $output | jq
'.items[0].type'`
        echo "Can be exported flag : " `echo $output | jq
'.items[0].canExport'`
        echo "Can be imported flag : " `echo $output | jq
'.items[0].canImport'`
        echo "Can be uploaded flag : " `echo $output | jq
'.items[0].canUpload'`
        echo "Can be downloaded flag : " `echo $output | jq
'.items[0].canDownload'`
        count=`echo $output | jq '.links | length'`
        i=0
        echo "Services details :"
        while [ $i -lt $count ]; do
            echo "Service : " `echo $output | jq '.links['$i'].rel'`
            echo "URL :" `echo $output | jq '.links['$i'].href'`
            echo "Action :" `echo $output | jq '.links['$i'].action'`
            echo ""
            i=`expr $i + 1`
        done
    else
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        error=`echo $output | jq '.details'`
        echo "Error occurred. " $error
    fi
    funcRemoveTempFiles "respHeader.txt" "response.txt"
}
```

Get Information About All Application Snapshots

This API returns information about all application snapshots that are available in an Planning instance. It provides details such as name, type, size, and last modified time. Type signifies whether it is a Migration snapshot or an external snapshot. Size and last modified time are not available for Migration type snapshots.

Required Roles

Service Administrator

REST Resource

GET `/interop/rest/11.1.2.3.600/applicationsnapshots`

Response

Supported Media Types: `application/json`

Table 2-199 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`items`	Detailed information about the API
`name`	Name of the application snapshot
`type`	Possible values: `LCM`, `EXTERNAL`
`size`	Size of the application snapshot in bytes. Available only for type `EXTERNAL`
`lastmodifiedtime`	Time in Long value as per the last modified time of the file. Will be available only for type `EXTERNAL`
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Possible value: `self`
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
    "status":0,
    "items":[{
        "name":"sample.csv",
        "type":"EXTERNAL",
        "size":"18",
        "lastmodifiedtime":"1422534438000"
        },{
        "name":"snapshot1",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "type":"LCM",
            "size":null,
            "lastmodifiedtime":null
        }],
        "details":null,
        "links":[{
            "data":null,
            "action":"GET",
            "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots",
            "rel":"self"
        }]
}
```

Sample cURL command

```
curl -X GET -s -w '%{http_code}' -u <USERNAME>:<PASSWORD> -o response.txt -D
respHeader.txt -H 'Content-Type: application/json' https://<BASE-URL>/interop/
rest/11.1.2.3.600/applicationsnapshots
```

Upload Application Snapshot

Use these APIs to upload application snapshots to the Planning repository in Oracle Fusion Cloud Enterprise Performance Management.

Clients must call the upload API multiple times, depending on the size of the file being uploaded, and must split the input stream into multiple chunks such that each chunk is no larger than 50 * 1024 * 1024 bytes.

Required Roles

Service Administrator

Any application role and the Migrations – Administer granular role

Upload Application Snapshot (v1)

REST Resource

POST `/interop/rest/v1/applicationsnapshots`

Supported Media Types: `application/octet-stream`

Table 2-200 Parameters

Name	Description	Type	Default
`applicationSnapshotName`	Name of the application snapshot to be uploaded. A file with this name is created in the Planning repository. If a file or folder with this name exists in the repository, an error is thrown indicating that a file or folder exists.	Path	N/A
`isLast`	If the chunk being passed is the last one then set to true	Query	N/A
`chunkSize`	Size of the chunk being passed in bytes	Query	N/A
`isFirst`	If the chunk being passed is the first one and there will be subsequent requests for upload then set as true	Query	N/A
`fileSize`	The size of the file being uploaded	Query	N/A

Copyright © 2017, 2026, Oracle and/or its affiliates.

Response

Supported Media Types: `application/json`

Table 2-201 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Is `self`, which denotes the URL of this REST API.
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
    "status":0,
    "details":null,
    "links":[{
        "data":null,
        "action":"POST",
        "href":"https://<BASE-URL>/interop/rest/v1/applicationsnapshots/
ss2.zip/contents,
        "rel":"self"
    }]
}
```

Example Request 1: Initialise Step

```
curl -s -u <USERNAME>:<PASSWORD> -H 'Content-Type: application/octet-stream'
--request POST 'https://<BASE-URL>/interop/rest/v1/applicationsnapshots/
<SNAPSHOT-NAME>.zip/contents?
q=%7B%22isFirst%22%3Atrue%2C%22chunkSize%22%3A14%2C%22fileSize%22%3A%22<FILE-
SIZE>%22%2C%22isLast%22%3Afalse%7D'
```

Parameters

```
{
  "isFirst": true,
  "chunkSize": 14,
  "fileSize": "<FILE-SIZE>",
  "isLast": false
}
```

Response

```
{
  "details": null,
  "status": 0,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
  "links": [
    {
      "href": "http://<BASE-URL>/interop/rest/v1/applicationsnapshots/
<SNAPSHOT-NAME>.zip/contents",
      "action": "POST",
      "rel": "self",
      "data": null
    }
  ]
```

Example Request 2: Upload the Content

```
curl -s -u <USERNAME>:<PASSWORD> -H 'Content-Type: application/octet-stream'
--request POST 'https://<BASE-URL>/interop/rest/v1/applicationsnapshots/
<SNAPSHOT-NAME>.zip/contents?q=%7B%22startRange%22%3A%22<START-
RANGE>%22%2C%22isFirst%22%3Afalse%2C%22chunkSize%22%3A<CHUNK-
SIZE>%2C%22isLast%22%3Afalse%2C%22fileSize%22%3A<FILE-
SIZE>%22%2C%22endRange%22%3A%22<END-RANGE>%22%2C%22chunkNo%22%3A<CHUNK-
NO>%7D' --data-binary <PATH-TO-SNAPSHOT>
```

Parameters

```
{
  "startRange": "<START-RANGE>",
  "isFirst": false,
  "chunkSize": <CHUNK-SIZE>,
  "isLast": false,
  "fileSize": "<FILE-SIZE>",
  "endRange": "<END-RANGE>",
  "chunkNo": <CHUNK-NUMBER>
}
```

Response

```
{
  "details": null,
  "status": 0,
  "links": [
    {
      "href": "http://<BASE-URL>/interop/rest/v1/applicationsnapshots/
<SNAPSHOT-NAME>.zip/contents",
      "action": "POST",
      "rel": "self",
      "data": null
    }
  ]
}
```

Example Request 3: Extract the Content

```
curl -s -u <USERNAME>:<PASSWORD> -H 'Content-Type: application/octet-stream'
--request POST 'https://<BASE-URL>/interop/rest/v1/applicationsnapshots/
<SNAPSHOT-NAME>.zip/contents?
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
q=%7B%22isFirst%22%3Afalse%2C%22chunkSize%22%3A14%2C%22fileSize%22%3A%22<FILE-
SIZE>%22%2C%22isLast%22%3Atrue%7D'
```

Parameters

```
{
  "isFirst": false,
  "chunkSize": 14,
  "fileSize": "<FILE-SIZE>",
  "isLast": true
}
```

Response

```
{
  "details": null,
  "status": -1,
  "links": [
    {
      "href": "http://<BASE-URL>/interop/rest/v1/applicationsnapshots/
<SNAPSHOT-NAME>.zip/contents",
      "action": "POST",
      "rel": "self",
      "data": null
    },
    {
      "href": "http://<BASE-URL>/interop/rest/v1/services/jobs/<JOB-ID>",
      "action": "GET",
      "rel": "Job' 'Status",
      "data": null
    }
  ]
}
```

Upload Application Snapshot (v2)

REST Resource

POST `/interop/rest/v2/files/upload`

Table 2-202 Tasks for Upload Application Snapshot

Task	Request	REST Resource
Create file	POST	`/interop/rest/v2/files/upload`
Upload content	PATCH	`/interop/rest/v2/files/upload/<JOB-ID>`
Extract the content out of zip file	POST	`/interop/rest/v2/files/upload/<JOB-ID>/complete`
Extraction status	GET	`/interop/rest/v2/status/jobs/<JOB-ID>`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Request

Supported Media Types: `application/json`

Table 2-203 Parameters

Name	Description	Type	Required	Default
`fileName`	Name of the application snapshot to upload. A file with this name is created in Oracle Fusion Cloud Enterprise Performance Management. If a file or folder with this name already exists, an error is thrown indicating that a file or folder exists.	Payload	Yes	None
`fileSize`	The size of the file to upload	Payload	Yes	None

Response

Supported Media Types: `application/json`

Table 2-204 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Is `self`, which denotes the URL of this REST API.
`data`	Parameters as key value pairs passed in the request

Examples of Uploading with Postman

To upload a file named `snapshot.zip` of size 12606 bytes, select Basic Authorization header for all the requests.

Example URL and Payload to Create the File

Request Method: POST

Supported Media Types: `application/json`

```
https://<BASE-URL>/interop/rest/v2/files/upload
```

```
{
    "fileName": "snapshot.zip",
    "fileSize": "<FILE-SIZE>"
}
```

Example Response 1

```
{
    "status":0,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "details":null,
    "links":[{
        "data":null,
        "action":"POST",
        "href":"https://<BASE-URL>/interop/rest/v2/interop/rest/v2/files/
upload,
        "rel":"self"
    }]
}
```

Sample cURL command

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' -d
'{"fileName": "snapshot.zip", "fileSize":"<FILE-SIZE>"}' 'https://<BASE URL>/
interop/rest/v2/files/upload'
```

Example URL and Payload to Upload the Content

Request Method: PATCH

Supported Media Types: `application/octet-stream`

Chunk-Range has to be passed as a Header parameter`(0-2468889)`

> **Note**
>
> Ensure the value of the fileSize is equivalent to the total size of the file and end Range is set to fileSize -1.

```
https://<BASE-URL>/interop/rest/v2/files/upload/<JOB-ID>
```

To select the file: Select tab `Body`, radio button `Binary`, and choose `File` to upload.

Example Response 2

```
{
    "details": null,
    "status": 0,
    "links": [
        {
            "href": " https://<BASE-URL>/interop/rest/v2/files/upload/<JOB-
ID>",
            "action": "PATCH",
            "rel": "self",
            "data": null
        }
    ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Sample cURL command

```
curl -X PATCH -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt
-H 'Content-Type: application/octet-stream' -H
'Chunk-Range: <CHUNK-RANGE>' --data-binary '@snapshot.zip' 'https://<BASE
URL>/interop/rest/v2/files/upload/<JOB-ID>'
```

Example URL and Payload to Extract the Content Out of the Zip File

Request method: POST

Supported Media Types: `application/json`

```
https://<BASE-URL>/interop/rest/v2/files/upload/<JOB-ID>/complete
```

Example Response 3

```
{
    "details": null,
    "status": -1,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/files/upload/<JOB-ID>/
complete",
            "action": "POST",
            "rel": "self",
            "data": null
        },
        {
            "href": "https://<BASE-URL>/interop/rest/v2/status/jobs/<JOB-ID>",
            "action": "GET",
            "rel": "Job Status",
            "data": null
        }
    ]
}
```

Sample cURL command

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json'
'https://<BASE-URL>/interop/rest/v2/files/upload/<JOB-ID>/complete'
```

Example URL and Payload Extraction Status

Request method: POST

Supported Media Types: `application/json`

This API request needs to be requested when the status code received in the example 3 response is -1.

```
https://<BASE-URL>/interop/rest/v2/status/jobs/<JOB-ID>
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example Response 4

```
{
    "details": null,
    "status": 0,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/status/jobs/<JOB-ID>",
            "action": "GET",
            "rel": "self",
            "data": null
        }
    ]
}
```

Sample cURL command

```
curl -X GET -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json'
'https://<BASE-URL>/interop/rest/v2/status/jobs/<JOB-ID>'
```

Download Application Snapshot

Use these APIs to download the application snapshot from the EPM repository to the local location where the client is running.

After receiving the response, if the content type is `application/json`, it indicates a server error and the client should refer to the error details. If the content type is `application/octet-stream`, the snapshot content is included in the response and can be read from the response body.

Required Roles

Service Administrator

Any application role and the Migrations – Administer granular role

Download Application Snapshot (v1)

> **Note**
>
> The entire path to the file must be encoded; for example, changing `/` to `%2F`.
>
> For example, change this path to an .HTML file in the `apr` directory:
>
> `apr/2020-03-04 23_07_20/2020-03-04 23_07_20.html`
>
> to this:
>
> `apr%2F2020-03-04%2023_07_20%2F2020-03-04%2023_07_20.html`

Copyright © 2017, 2026, Oracle and/or its affiliates.

REST Resource

GET `/interop/rest/{api_version}/applicationsnapshots/{applicationSnapshotName}/contents`

Supported Media Types: `application/x-www-form-urlencoded`

Request

Table 2-205 Parameters

Name	Description	Type	Required	Default

`applicationSnapshotName`	Application snapshot name or file name to download (for example, `"Artifact Snapshot"` or `s112.csv`).
	The entire `applicationSnapshotName` must be encoded before sending the request.
	To download a particular file, provide the path to that file as the value of `applicationSnapshotName`. For example, to download a Data Management file called `s112.csv` in the inbox, refer to the file as `"inbox\s112.csv"` in the path parameter.
	To download the Activity Reports or access log, use the fully qualified file name as shown in the output of List Files.
	For example, to download a specific file from the `apr` directory, use the following format:
	`pr%2F2020-03-04%0A23_07_20%2F2020-03-04%0A23_07_20.html`
	`apr%2F%0A2020-03-04%2023_07_20%2F%0Aaccess_log.zip`
	`apr%2F%0A2020-03-04%2023_07_20%2F%0Aactivityreport.json.`
		Path	Yes	None

Example of Request

`https://<BASE-URL>/interop/rest/v1/applicationsnapshots/Vision.zip/contents`

Response

Supported Media Types: `application/json`

Response Header

`fileExtension`: This will have the file extension that can be used to create a file locally. Can contain values such as `zip` or `csv`.

Table 2-206 Parameters

Attribute	Description
`details`	Published in case of errors with the error string

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-206 (Cont.) Parameters

Attribute	Description
status	See Migration Status Codes
links	Detailed information about the link
href	Links to API call
action	The HTTP call type
rel	Possible value: self
data	Parameters as key value pairs passed in the request

Example of Response Body (Initiate the download)

```
{{
    "details": null,
    "status": -1,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v1/applicationsnapshots//
<SNAPSHOT-NAME>/contents",
            "action": "GET",
            "rel": "self",
            "data": null
        },
        {
            "href": "https://<BASE-URL>/interop/rest/v1/applicationsnapshots/
<SNAPSHOT-NAME>/contents/<JOB-ID>",
            "action": "GET",
            "rel": "Job Status",
            "data": null
        }
    ]
}
```

Example of Response Body (Compression of the file)

```
{
  "details": null,
  "status": 0,
  "items": null,
  "links": [
    {
      "href": "https://<BASE-URL>/interop/rest/v1/applicationsnapshots/
<SNAPSHOT-NAME>/contents/<JOB-ID>",
      "action": "GET",
      "rel": "self",
      "data": null
    },
    {
      "href": "https://<BASE-URL>/interop/rest/v1/applicationsnapshots/
<SNAPSHOT-NAME>/contents/<JOB-ID>/contents",
      "action": "GET",
      "rel": "Download link",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
      "data": null
    }
  ]
}
```

Example of Response Body (When the file is downloaded)

```
"The downloaded snapshot file is saved in the current working directory."
```

cURL Sample

```
#!/bin/sh

SERVER_URL="https://<BASE-URL>"
USERNAME="<USERNAME>"
PASSWORD="<PASSWORD>"
API_VERSION="v1"
FILE_NAME="<SNAPSHOT-NAME-WITH-PATH>"
DOWNLOADED_FILE_NAME="<DOWNLOADED-FILE-NAME>"

funcRemoveTempFiles() {
    for var in "$@"
    do
        if [ -f "$var" ]; then
            rm "$var"
        fi
    done
}

funcPrintErrorDetails() {
    contentType=$(grep 'Content-Type:' respHeader.txt | tr -d [:space:])
    if [ ! -z "$contentType" ] && [ "$contentType" = "Content-
Type:application/json" ]; then
        output=$(cat "$1")
        error=$(echo "$output" | jq '.details')
        echo "Error details: $error"
    fi
}

funcGetStatus() {
    output=$(cat response.txt)
    count=$(echo "$output" | jq '.links | length')
    i=0
    pingUrl=""
    while [ $i -lt $count ]; do
        rel=$(echo "$output" | jq -r ".links[$i].rel")
        if [ "$rel" = "Job Status" ]; then
            pingUrl=$(echo "$output" | jq -r ".links[$i].href")
        fi
        i=$(expr $i + 1)
    done
    echo "$pingUrl"
    completed="false"
    while [ "$completed" != "true" ]; do
        statusCode2=$(curl -X "$1" -s -w "%{http_code}" -u
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
"$USERNAME:$PASSWORD" -o "pingResponse.txt" -H "Content-Type: application/x-
www-form-urlencoded" "$pingUrl")
        if [ "$statusCode2" = "200" ]; then
            status2=$(jq '.status' pingResponse.txt)
            if [ "$status2" != "-1" ]; then
                completed="true"
                echo "Job completed"
            else
                echo "Please wait..."
                sleep 20
            fi
        else
            echo "Please wait..."
            sleep 20
        fi
    done
}

funcDownloadContent() {
    output=$(cat pingResponse.txt)
    count=$(echo "$output" | jq '.links | length')
    i=0
    pingUrlC=""
    while [ $i -lt $count ]; do
        rel=$(echo "$output" | jq -r ".links[$i].rel")
        if [ "$rel" = "Download link" ]; then
            pingUrlC=$(echo "$output" | jq -r ".links[$i].href")
            echo $pingUrlC
        fi
        i=$(expr $i + 1)
    done

    statusWrite=$(curl -s -w "%{http_code}" -u "$USERNAME:$PASSWORD" --
request GET -D "respHeader.txt" -o "$1" -H "Content-Type: application/x-www-
form-urlencoded" "$pingUrlC")
    if [ "$statusWrite" = "200" ]; then
        contentType=$(grep 'Content-Type:' respHeader.txt | tr -d [:space:])
        if [ ! -z "$contentType" ] && [ "$contentType" = "Content-
Type:application/json" ]; then
            echo "Error occurred."
        else
            echo "Downloaded file successfully."
        fi
    fi
    funcRemoveTempFiles "respHeader.txt"
}

funcDownloadFile() {

    FILENAME="$1"

    encodedFileName=$(echo "$FILENAME" | sed -f urlencode.sed)
    url=$SERVER_URL/interop/rest/$API_VERSION/
applicationsnapshots/$encodedFileName/contents

    statusCode=$(curl -X GET -s -w "%{http_code}" -u "$USERNAME:$PASSWORD" -H
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
"Content-Type: application/x-www-form-urlencoded" -D "respHeader.txt" -o
"response.txt" "$url")

    if [ "$statusCode" = "200" ]; then
        contentType=`echo $(grep 'Content-Type:' respHeader.txt) | tr -d
[:space:]`

        if [ -z $contentType ] && [[ $contentType = *"application/json"* ]];
then
            output=$(cat "$FILENAME")
            error=$(echo "$output" | jq '.details')
            echo "Error occurred. $error"
            funcRemoveTempFiles "$FILENAME"
        else
            pingUrl=$(funcGetStatus "GET")
            funcDownloadContent "$2"
        fi
    else
        echo "Error executing request"
        if [ "$statusCode" != "000" ]; then
            echo "Response error code : $statusCode"
            funcPrintErrorDetails "response.txt"
            funcRemoveTempFiles "respHeader.txt" "response.txt"
        fi
        exit 0
    fi

    funcRemoveTempFiles "respHeader.txt" "response.txt"
}

funcDownloadFile "$FILE_NAME" "$DOWNLOADED_FILE_NAME"
```

Download Application Snapshot (v2)

REST Resource

POST `/interop/rest/v2/files/download`

Table 2-207 Tasks for Download Application Snapshot

Task	Request	REST Resource
Initiate download	POST	`/interop/rest/v2/files/download`
Status of compression of file	GET	`/interop/rest/v2/status/download/<JOB-ID>`
Download link	GET	`/interop/rest/v2/files/download/<JOB-ID>`
Deletion of temporary file (Applicable to snapshots)	DELETE	`/interop/rest/v2/files/download/<JOB-ID>`

Request

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-208 Parameters

Name	Description	Type	Required	Default
`fileName`	Application snapshot name or to download (for example, `"Artifact Snapshot"`).	Payload	Yes	None

Response

Supported Media Types: `application/json`

Response Header

`fileExtension`:This will have the file extension that can be used to create a file locally. Can contain values such as `zip` or `csv`.

Table 2-209 Parameters

Attribute	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Possible value: `self`
`data`	Parameters as key value pairs passed in the request

Example of Downloading with Postman

To download a file named `<SNAPSHOT-NAME>.zip`, select Basic Authorization header for all the requests.

Example URL and Payload to Initiate Download

Request Method: POST

Supported Media Types: `application/json`

```
https://<BASE URL>/interop/rest/v2/files/download


{
    "fileName": "<SNAPSHOT-NAME>.zip"
}
```

Example Response 1

```
{
    "details": null,
    "status": -1,
    "links": [
        {
            "href": " https://<BASE-URL>/interop/rest/v2/files/download",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "action": "POST",
            "rel": "self",
            "data": null
        },
        {
            "href": " https://<BASE-URL>/interop/rest/v2/status/download/<JOB-
ID>",
            "action": "GET",
            "rel": "Job Status",
            "data": null
        }
    ]
}
```

Sample cURL command

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' -d
'{"fileName":"<SNAPSHOT-NAME>.zip"}' 'https://<BASE-URL>/interop/rest/v2/
files/download'
```

Example URL for Status of Compression File

Request Method: GET

Supported Media Types: `application/json`

```
https://<BASE-URL>/interop/rest/v2/status/download/<JOB-ID>
```

Example Response 2

```
{
    "details": null,
    "status": 0,
    "items": null,
    "links": [
        {
            "href": " https://<BASE URL>/v2/status/download/<JOB-ID>",
            "action": "GET",
            "rel": "self",
            "data": null
        },
        {
            "href": "https://<BASE URL>/v2/files/download/<JOB-ID>",
            "action": "GET",
            "rel": "Download link",
            "data": null
        }
    ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Sample cURL command

```
curl -X GET -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json'
'https://<BASE URL>/interop/rest/v2/status/download/<JOB-ID>'
```

Example URL and Payload for Download Link

Request method: POST

Supported Media Types: `application/json`

```
https://<BASE-URL>/interop/rest/v2/files/download/<JOB-ID>
```

Example Response 3

After receiving the response, if the content type is `application/json`, then there would be an error on the server and refer to details. Otherwise, if it's `application/octet-stream`, then the content to be downloaded is part of the response and can read from the response body.

Sample cURL command

```
curl -X GET -s -u '<USERNAME>:<PASSWORD>' -o <SNAPSHOT-NAME>.zip -D
respHeader.txt -H 'Content-Type: application/json'
'https://<BASE-URL>/interop/rest/v2/files/download/<JOB-ID>'
```

Example URL and Payload for Deletion of Temporary File

Request method: DELETE

Supported Media Types: `application/json`

```
https://<BASE URL>/interop/rest/v2/files/download/<JOB-ID>
```

Example Response 4

```
{
    "details": null,
    "status": 0,
    "links": [
        {
            "href": " https://<BASE-URL>/interop/rest/v2/files/download/<JOB-
ID>",
            "action": "DELETE",
            "rel": "self",
            "data": null
        }
    ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Sample cURL command

```
curl -X DELETE -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D
respHeader.txt -H 'Content-Type: application/json'
'https://<BASE-URL>/interop/rest/v2/files/download/<JOB-ID>'
```

Copy Application Snapshot

Use these REST APIs to copy snapshots from one environment (source) to another environment (target) and are executed on the target environment after providing the source environment details.

The v1 version of the API describes the original version of the REST API. You can also use the simplified v2 version of the REST API. The v2 version contains all parameters in the payload and does not require URL encoding while calling the REST APIs. This makes the v2 API easier to use. The v2 version is backwards compatible.

Required Roles

Service Administrator

Any application role and the Migrations – Administer granular role

Copy Application Snapshot (v1)

REST Resource

POST `/interop/rest/v1/services/{servicename}/copysnapshot`

Table 2-210 Tasks for Copy Application Snapshot

Task	Request	REST Resource
Trigger `copysnapshot`	POST	`/interop/rest/{api_version}/services/{servicename}/copysnapshot`
Retrieve `copysnapshot` status	GET	`/interop/rest/{api_version}/services/{servicename}/copysnapshot/777`

Request

Supported Media Types: `application/x-www-form-urlencoded`

Response

Supported Media Types: `application/x-www-form-urlencoded`

Table 2-211 Parameters

Name	Description	Type	Required	Default
`serviceName`	Name of the service, such as PBCS	Path	Yes	None
`snapshotName`	Name of the snapshot to be copied	Form	Yes	None
`userName`	User with access to the source instance	Form	Yes	None
`fpwd`	The Base64-encoded password for the source user.	Form	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-211 (Cont.) Parameters

Name	Description	Type	Required	Default
sourceURL	The URL of the source instance **Note**: This API also supports the previous name of this parameter, targetURL.	Form	Yes	None

Table 2-212 Parameters

Name	Description
details	In the case of errors, details are published with the error string
status	See Migration Status Codes
links	Detailed information about the link
href	Links to API call or status API
action	The HTTP call type
rel	Possible values: self or Job Status. If the value is set to Job Status, you can use the href to get the status of the copy snapshot
data	Parameters as key value pairs passed in the request

Example of Response Body

```
{
  "status": -1,
  "items": null,
  "links": [
    {
      "rel": "self",
      "href": "https://<BASE-URL>/interop/rest/v1/services/<SERVICE_TYPE>/
copysnapshot",
      "data": null,
      "action": "POST"
    },
    {
      "rel": "Job Status",
      "href": "https://<BASE-URL>/interop/rest/v1/services/<SERVICE_TYPE>/
copysnapshot/<JOB_ID>",
      "data": null,
      "action": "GET"
    }
  ],
  "details": null
}
```

cURL Sample

```
funcCopySnapshot() {
        url=$SERVER_URL/interop/rest/v1/services/PBCS/copysnapshot

        snapshotName="SNAPSHOT NAME"
        srcUserName="USER NAME"
        targetURL="https://<BASE-URL>";
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        srcDomain=""

        fpwd="BASE64-ENCODED PASSWORD"

if [ "X" == "X$ srcDomain " ]; then
param="snapshotName=$snapshotName&userName=$srcUserName
&fpwd=$fpwd&sourceURL=$targetURL"
else
param="snapshotName=$snapshotName&userName=$srcUserName
&fpwd=$fpwd&targetURL=$sourceURL&dom=$srcDomain"
fi

        funcExecuteRequest "POST" $url $param "application/x-www-form-
urlencoded"
        output=`cat response.txt`
        status=`echo $output | jq '.status'`
        if [ $status == -1 ]; then
        echo "Started Copysnapshot"
        funcGetStatus "GET"
        else
        error=`echo $output | jq '.details'`
        echo "Error occurred. " $error
        fi
        funcRemoveTempFiles "respHeader.txt" "response.txt"
}
```

Copy Application Snapshot (v2)

Use this REST API to copy a snapshot from one environment (source) to another environment (target).

This API is executed on the target environment after details are provided for the source environment from which the snapshot is to be copied.

Required Roles

Service Administrator

Any application role and the Migrations – Administer granular role

REST Resource

POST `/interop/rest/v2/snapshots/copyfrominstance`

Table 2-213 Tasks for Copy Application Snapshot

Task	Request	REST Resource
Trigger `copysnapshot`	POST	`/interop/rest/v2/snapshots/copyfrominstance`
Retrieve `copysnapshot` status	GET	`/interop/rest/v2/status/jobs/777`

Request

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-214 Parameters

Name	Description	Type	Required	Default
snapshotName	Name of the snapshot to be copied	Payload	Yes	None
userName	User with the Service Administrator application role in the source instance	Payload	Yes	None
fpwd	The Base-64 encloded password for the source user.	Payload	Yes	None
sourceURL	The URL of the source instance	Payload	Yes	None

Example URL and Payload

```
https://<BASE-URL>/interop/rest/snapshots/copyfrominstance
```

```
{
  "snapshotName": "<NAME>",
  "userName": "<USERNAME>",
  "fpwd": "e0VQTUFUfWtWV3czam8xdDJlcFZJbUVhSVQ3VWc9PS5lcHcyMDE1LmFkbW",
"sourceURL": "https://<BASE-URL>"
}
```

Response

Supported Media Types: application/json

Table 2-215 Parameters

Name	Description
details	In the case of errors, details are published with the error string
status	See Migration Status Codes
links	Detailed information about the link
href	Links to API call or status API
action	The HTTP call type
rel	Possible values: self or Job Status. If the value is set to Job Status, you can use the href to get the status of the copy snapshot
data	null

Example of Response Body

```
{
    "status": -1,
    "items": null,
    "links": [{
        "rel": "self",
        "href": "https://<BASE-URL>/interop/rest/v2/snapshots/
copyfrominstance",
        "data": null,
        "action": "POST"
    }, {
        "rel": "Job Status",
        "href": "https://<BASE-URL>/interop/rest/v2/status/jobs/
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
1502357937045",
        "data": null,
        "action": "GET"
    }],
    "details": null
}
```

Sample cURL command

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' -d
'{"snapshotName":"SNAPSHOT_TO_BE_COPIED",
"sourceURL":"SOURCE_URL","userName":"USER_NAME","fpwd":"BASE64ENCODED_PASSWORD
"}' 'https://<BASE URL>/interop/rest/v2/snapshots/copyfrominstance'
```

Rename Application Snapshot

Use these REST APIs to rename snapshots in Oracle Fusion Cloud Enterprise Performance Management instances to a desired name, providing flexibility in how snapshots are named.

Required Roles

Service Administrator

Any application role and the Migrations – Administer granular role

Rename Application Snapshot (v1)

REST Resource

PUT `/interop/rest/v1/renamesnapshot`

Request

Supported Media Types: `application/x-www-form-urlencoded`

Table 2-216 Parameters

Name	Description	Type	Required	Default
`snapshotName`	The name of the snapshot to be renamed.	Form	Yes	None
`newSnapshotName`	The desired name of the existing snapshot.	Form	Yes	None

Response

Supported Media Types: `application/json`

Table 2-217 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-217 (Cont.) Parameters

Name	Description
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
  "details": null,
  "status": 0,
  "links": [
    {
      "href": "https://<BASE-URL>/interop/rest/v1/renamesnapshot",
      "action": "PUT",
      "rel": "self",
      "data": null
    }
  ]
}
```

Sample cURL Command

```
curl -s -u <USERNAME>:<PASSWORD> -H 'Content-Type: application/x-www-form-
urlencoded' --request PUT https://<BASE-URL>/interop/rest/v1/renamesnapshot -
d 'snapshotName=<ARTIFACT-SNAPSHOT>&newSnapshotName=<NEW-SNAPSHOT-NAME>'
```

Rename Application Snapshot (v2)

REST Resource

PUT `/interop/rest/v2/snapshots/rename`

Request

Supported Media Types: `application/json`

Table 2-218 Parameters

Name	Description	Type	Required	Default
`snapshotName`	The name of the snapshot to be renamed.	Payload	Yes	None
`newSnapshotName`	The desired name of the existing snapshot.	Payload	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example URL and Payload

```
https://<BASE-URL>/interop/rest/v2/snapshots/rename
```

```
{
    "snapshotName": "Artifact Snapshot",
    "newSnapshotName": "Backup_snapshot"
}
```

Response

Supported Media Types: `application/json`

Parameters:

Table 2-219 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`data`	null

Example of Response Body

```
{
    "details": null,
    "status": 0,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/snapshots/rename",
            "action": "PUT",
            "rel": "self",
            "data": null
        }
    ]
}
```

Sample cURL Command

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H
'Content-Type: application/json' -d '{"snapshotName":"<ARTIFACT-
SNAPSHOT>","newSnapshotName"    :
"<NEW-SNAPSHOT-NAME>"}''https://<BASE-URL>/interop/rest/v2/snapshots/rename'
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Artifacts, Snapshots, and Migration Status

Use these APIs to manage migration-related activities.

Table 2-220 REST APIs to Manage Artifacts, Snapshots, and Migration Status

Manage Artifacts, Snapshots, and Migration Status REST APIs		
Get Categories (v2)	List the Artifacts in a Category (v2)	Export Categories Artifacts (v2)
List Updated Artifacts (v2)	List Snapshot Details (v2)	Get Snapshot Modification History (v2)
List the Artifacts in a Snapshot (v2)	List Import Options (v2)	Set Import Options (v2)
Get Migration Status (v2)		

Export Categories Artifacts (v2)

Creates an incremental backup of specific artifacts in a category in the environment. Generally, you use incremental backup of artifacts of a category to update another environment with incremental changes.

Required Roles

Service Administrator

REST Resource

`POST /interop/rest/v2/migration/categories/artifacts/export`

Request

Supported Media Types: `application/json`

Parameter	Description	Required	Type
`snapshotName`	The name of the backup snapshot that will be created by this export.	Yes	Payload
`categoryName`	Name of the category to export	Yes	Payload
`selectedArtifacts`	This is an optional parameter. If `selectedArtifacts` is not included in the payload, it will default to `//`, resulting in all artifacts within the specified category being exported. Folder paths must end with a `/`.	No	Payload

Example:

```
{
    "snapshotName": "Export_Users_and_AllCalcArtifacts",
    "categories": [
        {
            "categoryName": "Groups and Membership",
            "selectedArtifacts": [
                "/Native Directory/Users"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            ]
        },
        {
            "categoryName": "Calculation Manager"
        }
    ]
}
```

Response

Parameter	Description
name	Name of the task, usually "Task Information"
source	From where the navigation is being performed
destination	To where the navigation is being performed

Successful response body example - Export in progress:

```
{
    "status": -1,
    "items": null,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/migration/categories/
artifacts/export",
            "action": "POST",
            "rel": "self"
        },
        {
            "href": " https://<BASE-URL>/interop/rest/v2/status/migration/4",
            "action": "GET",
            "rel": "Job Status"
        }
    ]
}
```

Successful response body example - Export is complete:

```
"details": null
"status": 0,
"items": [
     {
        "name": "Task Information
        "source": "FDM Enterprise Edition",
        "destination": "/testuser@2025-10-17/FDMEE-FDM Enterprise Edition",
     "links": [
       {
         "href": "https<BASE-URL>/interop/rest/v2/status/migration/4/0/
details?limit=25&offset=0&msgtype=info",
          "action": "GET",
          "rel": "Job Details",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "data": null
          }
        ]
        }
    ],
     "links": [
        {
         "href": "https://<BASE-URL>/interop/rest/v2/status/migration/4",
         "action": "GET",
         "rel": "self",
         "data": null
      }
    ]
}
```


Response for invalid category:


```
{
    "status": 8,
    "details": "Invalid Category [Groups and Membership-1]",
    "items": null,
    "links": [
        {
            "href": "http://<BASE-URL>/interop/rest/v2/migration/categories/
artifacts/export",
            "action": "POST",
            "rel": "self"
        }
    ]
}
```


Get Categories (v2)

Gets the artifact categories, which group the artifacts based on the modules used by the business process.

Required Roles

Service Administrator

REST Resource

`GET /interop/rest/v2/migration/categories/list`

Supported Media Types: `application/json`

Response

The response contains the `categoryName` parameter value of each category.

Parameter	Description
`categoryName`	The name of the category or grouping of artifacts.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Successful response body example:

```
{
  "status": 0,
  "items": [
       { "categoryName": "Document Repository" },
       { "categoryName": "Core" },
       { "categoryName": "Data Management" },
       { "categoryName": "Calculation Manager" },
       { "categoryName": "Groups and Membership" }
            ],
  "links": [
             {
              "href": " https://<BASE-URL>/interop/rest/v2/migration/
categories/list",
              "action": "GET",
              "rel": "self"
              }
             ]
}
```

Get Migration Status (v2)

Gets information on the artifact migrations that were performed.

This API retrieves information similar to that contained in the Migration Status report. See Generating the Migration Status Report in *Administering Migration*.

Required Roles

Service Administrator

REST Resource

`GET /interop/rest/v2/migration/status`

Response

Parameter	Description
`action`	Migration operation type (export or import).
`duration`	The time taken for the action
`status`	Migration status. Can be `Completed`, `Completed with warning`, `Failed`, or `In Progress`.
`user`	The user name of the user who initiated the migration.
`snapshot`	The name or identifier of the snapshot that was used for the migration.
`endtime`	The time when the migration process finished (based on the browser time zone).
`startTime`	Time when the migration process started (based on the browser time zone).
`destination`	The name of the destination business process or component.
`source`	The name of the source business process or component.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Parameter	Description
status	Processing status for this specific migration. Can be processed, ongoing, or loading.
report	Array of migration report entries. Each entry includes processing status and any errors and warnings.
errors	Array of errors for this report entry. Empty array ([]) if no errors were reported.
warnings	Array of warnings for this report entry. Empty array ([]) if no warnings were reported.
artifact	Artifact path or identifier associated with the message.
msg	Detailed warning or error message text.

Successful response body example:


```
{
  "status": 0,
  "items": [
    {
      "action": "export",
      "duration": "00:00:03",
      "report": [
        {
          "destination": "Document Repository",
          "errors": [],
          "source": "DOCREP-Document Repository",
          "status": "processed",
          "warnings": []
        },
        {
          "destination": "Shared Services",
          "errors": [],
          "source": "HSS-Shared Services",
          "status": "processed",
          "warnings": []
        }
      ],
      "status": "completed",
      "user": "SYSTEM",
      "snapshot": "epm_default_cloud_admin 19-02-26",
      "endTime": "02/19/2026 03:41:42",
      "startTime": "02/19/2026 03:41:39"
    },
    {
      "action": "import",
      "duration": "00:00:34",
      "report": [
        {
          "destination": "Shared Services",
          "errors": [],
          "source": "epm_default_cloud_admin 26-01-279/HSS-Shared Services",
          "status": "processed",
          "warnings": []
        },
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        {
          "destination": "Vision",
          "errors": [],
          "source": "epm_default_cloud_admin 26-01-279/HP-Vision",
          "status": "processed",
          "warnings": [
            {
              "code": "EPMLCM-15000",
              "text": "Warning reported from Hyperion Planning.",
              "msgList": [
                {
                  "artifact": "/Essbase Data/Plan1",
                  "msg": "Essbase data import is only supported during create
application."
                },
                {
                  "artifact": "/Relational Data/Insights",
                  "msg": "Insight data import is only supported during create
application."
                }
              ]
            }
          ]
        }
      ],
      "status": "completedWithWarnings",
      "user": "SYSTEM",
      "snapshot": "epm_default_cloud_admin 26-01-279",
      "endTime": "02/18/2026 04:26:05",
      "startTime": "02/18/2026 04:25:31"
    }
  ],
  "links": [
    {
      "href": "http://<BASE-URL>/interop/rest/v2/migration/status",
      "action": "GET",
      "rel": "self"
    }
  ]
}
```


Response body for failed operation:


```
{
    "status": 6,
    "details": "Unable to fetch migration status",
    "items": null,
    "links": [
        {
            "href": "http://<BASE-URL>/interop/rest/v2/migration/status",
            "action": "POST",
            "rel": "self"
        }
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    ]
}
```

Get Snapshot Modification History (v2)

Lists the application artifacts that were modified after the snapshot was originally created. Identifying changed artifacts helps you create new snapshots to back up the changes.

This API retrieves information similar to that contained in the Modification History report. See Viewing Artifact Modification History in *Administering Migration*.

Required Roles

Service Administrator

REST Resource

`POST /interop/rest/v2/migration/modificationhistory`

Request

Supported Media Types: `application/json`

Parameter	Description	Required	Type
`snapshotName`	The name of a snapshot available in the environment.	Yes	Payload

Request Payload Example:

```
{
"snapshotName":"epm_test_snapshot"
}
```

Response

Parameter	Description
`applicationName`	The Oracle Fusion Cloud Enterprise Performance Management component to which the artifact belongs.
`artifactName`	The name of the artifact.
`artifactType`	The artifact type or folder.
`modifiedBy`	The user name of the user who modified the artifact.
`modifiedDate`	Last modified time for the artifact in YYYY-MM-DD format.
`path`	The location of the artifact.

Successful response body example:

```
{
    "status": 0,
    "items": [
        {
            "applicationName": "Shared Services",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "artifactName": "FDM Enterprise Edition",
            "artifactType": "Assigned Roles",
            "modifiedBy": "Shared Services System",
            "modifiedDate": "2025-11-17",
            "path": "/Native Directory/Assigned Roles/FDM"
        },
        {
            "applicationName": "Shared Services",
            "artifactName": "Roles",
            "artifactType": "Aggregated Roles",
            "modifiedBy": "epm_default_cloud_admin",
            "modifiedDate": "2025-11-17",
            "path": "/Native Directory"
        }
    ],
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/migration/
modificationhistory",
            "action": "POST",
            "rel": "self"
        }
    ]
}
```


Import Snapshot Artifacts (v2)

Imports selected artifacts or categories from a snapshot into the environment.

Required Roles

Service Administrator

REST Resource

`POST /interop/rest/v2/migration/snapshots/artifacts/import`

Request

Supported Media Types: `application/json`

Table 2-221 Request Parameters

Name	Description	Type	Required	Default
snapshotName	Name of the application snapshot from which artifacts are to be imported.	Payload	Yes	None
categoryName	Name of the category from which artifacts are to be imported.	Payload	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-221 (Cont.) Request Parameters

Name	Description	Type	Required	Default
selectedArtifacts	List of artifacts to be imported from the specified category. • `//` — Imports all artifacts from the category. • `/Native Directory/Users` — Imports the Users artifact under the Native Directory category .Directory paths must end with `/`, whereas individual artifact paths must not end with `/`.	Payload	No	`//` (Imports all artifacts from the category).

Example URL and Payload

`https://<BASE-URL>/interop/rest/v2/migration/snapshots/artifacts/import`

Request Payload Example 1: Import All Artifacts from Data Management Category

```
{
    "snapshotName": "testuser@2025-10-17",
    "categories": [
        {
            "categoryName": "Data Management",
            "selectedArtifacts": [
                "//"
            ]
        }
    ]
}
```

Request Payload Example 2: Import All Artifacts from Data Management Category Without Specifying `selectedArtifacts`

```
{
    "snapshotName": "testuser@2025-10-18",
    "categories": [
        {
            "categoryName": "Data Management"
        }
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    ]
}
```

Request Payload Example 3: Import Users Artifacts from Groups and Membership Category

```
{
    "snapshotName": "testuser@2025-10-19",
    "categories": [
        {
            "categoryName": "Groups and Membership",
            "selectedArtifacts": [
                "/Native Directory/Users"
            ]
        }
    ]
}
```

Request Payload Example 4: Import Multiple Categories from the Same Snapshot

```
{
  "snapshotName": "testuser@2025-10-20",
  "categories": [
    {
      "categoryName": "Data Management",
      "selectedArtifacts": [
        "//"
      ]
    },
    {
      "categoryName": "Groups and Membership",
      "selectedArtifacts": [
        "/Native Directory/Users"
      ]
    }
  ]
}
```

Response

Table 2-222 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Is `self`, which denotes the URL of this REST API.
`data`	Parameters as key value pairs passed in the request

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example 1: Import is in Progress :

```
{
    "status": -1,
    "items": null,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/migration/snapshots/
artifacts/import",
            "action": "POST",
            "rel": "self"
        },
        {
            "href": "https://<BASE-URL>/interop/rest/v2/status/migration/4",
            "action": "GET",
            "rel": "Job Status"
        }
    ]
}
```

Example 2: Import Completed Successfully:

```
{
    "details": null,
    "status": 0,
    "items": [
        {
            "name": "Task Information",
            "destination": "FDM Enterprise Edition",
            "source": "/testuser@2025-10-17/FDMEE-FDM Enterprise Edition",
            "links": [
                {
                    "href": "https://<BASE-URL>/interop/rest/v2/status/
migration/4/0/details?limit=25&offset=0&msgtype=info",
                    "action": "GET",
                    "rel": "Job Details",
                    "data": null
                }
            ]
        }
    ],
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/status/migration/4",
            "action": "GET",
            "rel": "self",
            "data": null
        }
    ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example 3: Snapshot Does Not Exist:

```
{
    "status": 8,
    "details": "Artifact Snapshot1245 snapshot does not exists.",
    "items": null,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/migration/snapshots/
artifacts/import",
            "action": "POST",
            "rel": "self"
        }
    ]
}
```

Example 4: Invalid Category:

```
{
    "status": 8,
    "details": "Invalid Category [Groups and Membership12]",
    "items": null,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/migration/snapshots/
artifacts/import",
            "action": "POST",
            "rel": "self"
        }
    ]
}
```

List the Artifacts in a Category (v2)

Lists the details of different artifacts available within a specific category.

Required Roles

Service Administrator

REST Resource

`POST /interop/rest/v2/migration/categories/artifacts/list`

Request

Supported Media Types: `application/json`

Parameter	Description	Required	Type
`categoryName`	The name of a category (for example, Data management, Core, Groups and Membership, and so on) defined within the application.	Yes	Payload

Copyright © 2017, 2026, Oracle and/or its affiliates.

Request Payload Example:

```
{
"categoryName":"Calculation Manager"
}
```

Response

Name	Description
parentName	Name of the artifact. An empty string indicates the root category.
displayName	The artifact name as displayed on the Migration screen.
name	The artifact name that is used within the module or component. This may not be identical to the display name.
id	The unique identifier of the artifact.
type	The artifact type.
modifiedDate	Last modified date in YYYY-MM-DD format. This value is an empty string if the artifact has never been updated.
modifiedBy	Username of the person or the system component that last modified the artifact.
path	Artifact path in the hierarchy
children	List of contained artifacts or folders; enables folder/file nesting recursively

Successful response body example:

```
"status": 0,
    "items": [
        {
            "parentName": "",
            "displayName": "Planning",
            "name": "Planning",
            "id": "",
            "type": "Folder",
            "modifiedDate": "",
            "modifiedBy": "",
            "path": "/",
            "children": [
                {
                    "parentName": "Planning",
                    "displayName": "Vision",
                    "name": "Vision",
                    "id": "",
                    "type": "Folder",
                    "modifiedDate": "",
                    "modifiedBy": "",
                    "path": "/Planning",
                    "children": [
{
                                        "parentName": "Vis1ASO",
                                        "displayName": "Templates",
                                        "name": "Templates",
                                        "id": "",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
                                    "type": "Folder",
                                    "modifiedDate": "",
                                    "modifiedBy": "",
                                    "path": "/Planning/Vision/Vis1ASO",
                                    "children": []
                                }
                            ]
                        }
                    ]
                }
            ]
        }
    ],
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/migration/categories/
artifacts/list",
            "action": "POST",
            "rel": "self"
        }
    ]
}
```


Response for failed operation:


```
{
    "status": 8,
    "details": "Invalid Category [Groups and Membership-1]",
    "items": null,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/migration/categories/
artifacts/list",
            "action": "POST",
            "rel": "self"
        }
    ]
}
```


List Updated Artifacts (v2)

Lists the application artifacts modified in a specific date range.

This API retrieves information similar to that present in the Artifact Updates Report. See Generating the Artifact Updates Report in *Administering Migration*.

Required Roles

Service Administrator

REST Resource

`POST /interop/rest/v2/migration/artifactupdates`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Request

Supported Media Types: `application/json`

Table 2-223 Request Parameters

Parameter	Description	Required	Type
`artifactName`	Optionally, specify the name of the artifact (for example, Currency) to list. Use * (asterisk) to report on all artifacts.	No	Payload
`artifactType`	Optionally, specify the artifact type. Use * (asterisk) to list the type for all modified artifacts.	No	Payload
`modifiedBy`	Optionally, specify the name of the user who modified the artifact. Use * (asterisk) to report on all users.	No	Payload
`startDate`	Optionally, the start date of the artifact update period may be specified. Default value is yesterday's date in YYYY-MM-DD format.	No	Payload
`endDate`	Optionally, the end date of the artifact update period may be specified. Default value is today's date in YYYY-MM-DD format.	No	Payload
`categories`	One or more categories for which data is to be retrieved.	Yes	Payload

Request Payload Example:

```
{
    "artifactName": "Groups",
    "artifactType": "*Groups",
    "startDate": "2024-11-19",
    "endDate": "2025-11-20",
    "categories": [
        "Groups and Membership"
    ]
}
```

Response

Table 2-224 Response Parameters

Name	Description
`categoryName`	Artifact category.
`artifactName`	The display name of the artifact or folder.
`artifacttype`	The artifact type.
`modifiedBy`	The name of the user who modified the artifact.
`modifiedDate`	The date when the artifact was updated.
`path`	Full path of the artifact.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Successful response body example:


```
{
    "status": 0,
    "items": [
        {
            "categoryName": "Groups and Membership",
            "artifactName": "Groups",
            "artifactType": "Groups",
            "modifiedBy": "SYSTEM",
            "modifiedDate": "2025-10-28 13:00:26",
            "path": "/Native Directory"
        }
    ],
    "links": [
        {
            "href": "http://<BASE_URL>interop/rest/v2/migration/
artifactupdates",
            "action": "POST",
            "rel": "self"
        }
    ]
}
```


Sample response for invalid category:


```
{
    "status": 8,
    "details": "Invalid Category [Groups and Membership-1]",
    "items": null,
    "links": [
        {
            "href": "http://<BASE-URL>/interop/rest/v2/migration/
artifactupdates",
            "action": "POST",
            "rel": "self"
        }
    ]
}
```


Sample response for invalid date format:


```
{
    "status": 8,
    "details": "Invalid date format startDate",
    "items": null,
    "links": [
        {
            "href": "http://<BASE-URL>/interop/rest/v2/migration/
artifactupdates",
            "action": "POST",
            "rel": "self"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        }
    ]
}
```

List Snapshot Details (v2)

Gets the list of categories within the snapshots available in the environment and the actions that can be performed with the snapshot.

Required Roles

Service Administrator

REST Resource

`GET /interop/rest/v2/migration/snapshots/list`

Response

Parameter	Description
`status`	Status of the request (usually, 0 for success)
`displayName`	The snapshot name as displayed on the Migration screen.
`displayName (within appList array)`	The category name.
`prodCode`	Short product code of the application or component in the snapshot.
`deleteEnabled`	Whether the snapshot can be deleted.
`importEnabled`	Whether the snapshot can be imported to create an application.
`appId`	The identifier of the application in the snapshot.
`projectName`	The project folder to which the application belongs.
`repeatExportEnabled`	Whether the settings of this snapshot can be used to repeat the export operation.
`renameEnabled`	Whether the snapshot can be renamed.
`modifiedSinceEnabled`	Whether the *modified by date* checks are enabled for the snapshot.
`downloadEnabled`	Whether the snapshot can be downloaded to a local computer.
`size`	File size of the snapshot. "-" if unknown.
`lastModifiedTime`	Time when the snapshot was last modified, in UNIX millisecond format.

Successful response body example:

```
{
    "status": 0,
    "items": [
        {
            "displayName": "Artifact_Snapshot",
            "appList": [
                {
                    "displayName": "CALC-Calculation Manager",
                    "prodCode": "CALC",
                    "importEnabled": true,
                    "appId": "Calculation Manager",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
                    "projectName": "Foundation"
                },
                {
                    "displayName": "DOCREP-Document Repository",
                    "prodCode": "DOCREP",
                    "exploreEnabled": true,
                    "importEnabled": true,
                    "appId": "Document Repository",
                    "projectName": "Default Application Group"
                },
                {
                    "displayName": "FDMEE-FDM Enterprise Edition",
                    "prodCode": "AIF",
                    "exploreEnabled": true,
                    "importEnabled": true,
                    "appId": "FDM Enterprise Edition",
                    "projectName": "FDM"
                },
                {
                    "displayName": "HSS-Shared Services",
                    "prodCode": "HUB",
                    "exploreEnabled": true,
                    "importEnabled": true,
                    "appId": "Shared Services",
                    "projectName": "Foundation"
                }
            ],
            "deleteEnabled": true,
            "importEnabled": true,
            "repeatExportEnabled": true,
            "renameEnabled": true,
            "modifiedSinceEnabled": true,
            "downloadEnabled": true,
            "size": "50607081234",
            "lastModifiedTime": 1759868521281
        }
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/migration/snapshots/
list",
            "action": "GET",
            "rel": "self"
        }
    ]
}
```


Response for failed operation:


```
{
    "status": 6,
    "details": "Unable to get list of snapshots",
    "items": null,
    "links": [
        {
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "href": "http://<BASE-URL>/interop/rest/v2/migration/snapshots/
list",
            "action": "GET",
            "rel": "self"
        }
    ]
}
```

List the Artifacts in a Snapshot (v2)

Gets a list of all artifacts of a specified category within a snapshot.

Required Roles

Service Administrator

REST Resource

`POST /interop/rest/v2/migration/snapshots/artifacts/list/`

Request

Supported Media Types: `application/json`

Parameter	Description	Required	Type
`snapshotName`	The name of the snapshot.	Yes	Payload
`categoryName`	Name of the category from which artifacts are to be listed.	Yes	Payload

Example Payload:

```
{
    "snapshotName":"Artifact Snapshot",
    "categoryName":"DOCREP-Document Repository"
}
```

Response

Name	Description
`parentName`	Name of the parent category. An empty string indicates the root category.
`displayName`	The category name as displayed on the Migration screen.
`Name`	The category name that is used within the module or component. This may not be identical to the display name.
`id`	The unique identifier of the artifact.
`type`	The artifact type.
`modifiedDate`	Last modified date in a human-readable format. This value can be empty if there is no data available from when it was last modified.
`modifiedBy`	Username of the person or the system component that last modified the artifact.
`path`	Artifact path in the hierarchy
`children`	List of contained artifacts or folders; enables folder/file nesting recursively

Copyright © 2017, 2026, Oracle and/or its affiliates.

Successful response body example:


```
{
    "status": 0,
    "items": [
        {
            "parentName": "",
            "displayName": "Global Setup Artifacts",
            "name": "Global Setup Artifacts",
            "id": "",
            "type": "Folder",
            "modifiedDate": "",
            "modifiedBy": "",
            "path": "/",
            "children": [
                {
                    "parentName": "Global Setup Artifacts",
                    "displayName": "Query Definition",
                    "name": "Query Definition",
                    "id": "Query Definition",
                    "type": "FDMEE Query Definition",
                    "modifiedDate": "",
                    "modifiedBy": "testuser@oracle.com",
                    "path": "/Global Setup Artifacts",
                    "children": []
                },
{
                    "parentName": "Cross Application Data",
                    "displayName": "Business Rule Assignments",
                    "name": "Business Rule Assignments",
                    "id": "Business Rule Assignments",
                    "type": "FDMEE Business Rule Assignments",
                    "modifiedDate": "",
                    "modifiedBy": "testuser@oracle.com",
                    "path": "/Cross Application Data",
                    "children": []
                }
            ]
        }
    ],
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/migration/snapshots/
artifacts/list/",
            "action": "POST",
            "rel": "self"
        }
    ]
```


Response for failed operation:


```
{
    "status": 8,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "details": "Artifact Snapshot123 snapshot or the sub-folder does not
exists.",
    "items": null,
    "links": [
        {
            "href": "http://<BASE-URL>/interop/rest/v2/migration/snapshots/
artifacts/list/",
            "action": "POST",
            "rel": "self"
        }
    ]
}
```

List Import Options (v2)

Gets the import options effective in the environment for the groups and group members information available in snapshots. This option specifies the conditions for importing group membership data of users and groups into an environment from snapshots.

Required Roles

Service Administrator

REST Resource

`GET /interop/rest/v2/migration/options/import/list`

Supported Media Types: `application/json`

Response

Parameter	Description
`optionName`	The import option. The only possible option name is `Groups and Membership - Import Mode`.
`optionValue`	Possible values are: • `Create or Update` to add new groups or update the group membership of existing groups in Access Control and to assign or unassign granular roles to users and groups. • `Create` to add new groups. Changes made to existing group are not imported. Also, assigns granular roles for users and groups. • `Update` to modify existing groups based on the information available in the import file. New groups are not added. Also, assigns or unassigns granular roles to users and groups. • `Delete` to remove existing groups available in the import file. Also, unassigns granular roles from users and groups.
`selectedOption`	The value currently selected and saved in the EPM application.

Successful response body example:

```
{
    "status": 0,
    "items": [
        {
            "optionName": "Groups and Membership - Import Mode",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "optionValues": [
                "Create/Update",
                "Create",
                "Update",
                "Delete"
            ],
            "selectedOption": "Create/Update"
        }
    ],
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/migration/options/
import/list",
            "action": "GET",
            "rel": "self"
        }
    ]
}
```


Response for failed operation:


```
{
    "status": 6,
    "details": "Unable to get migration options",
    "items": null,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/migration/options/
import/list",
            "action": "POST",
            "rel": "self"
        }
    ]
}
```


Repeat Export Snapshot (v2)

Creates a new snapshot by repeating the export operation from an existing application snapshot.

Required Roles

Service Administrator

REST Resource

`POST /interop/rest/v2/migration/snapshots/repeatexport`

Request

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-225 Request Parameters

Name	Description	Type	Required	Default
snapshotName	Name of the existing application snapshot to be used for the repeat export operation.	Payload	Yes	None
targetSnapshotName	Name of the new snapshot to be created as part of the repeat export operation.	Payload	Yes	None

Example URL and Payload

`https://<BASE-URL>/interop/rest/v2/migration/snapshots/repeatexport`

Request Payload Example: Repeat Export All Artifacts and Categories from the Artifact Snapshot

```
{
    "snapshotName": "Artifact Snapshot",
    "targetSnapshotName": "Artifact Snapshot ReExport"
}
```

Response

Table 2-226 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Is `self`, which denotes the URL of this REST API.
`data`	Parameters as key value pairs passed in the request

Example 1: Repeat Export is in Progress :

```
{
    "status": -1,
    "items": null,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/migration/snapshots/
repeatexport",
            "action": "POST",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "rel": "self"
        },
        {
            "href": "https://<BASE-URL>/interop/rest/v2/status/migration/3",
            "action": "GET",
            "rel": "Job Status"
        }
    ]
}
```


Example 2: Repeat Export Completed Successfully:


```
{
    "details": null,
    "status": 0,
    "items": [
        {
            "name": "Task Information",
            "source": "Shared Services",
            "destination": "/Artifact Snapshot ReExport/HSS-Shared Services",
            "links": [
                {
                    "href": "https://<BASE-URL>/interop/rest/v2/status/
migration/3/0/details?limit=25&offset=0&msgtype=info",
                    "action": "GET",
                    "rel": "Job Details",
                    "data": null
                }
            ]
        },
        {
            "name": "Task Information",
            "source": "Vision",
            "destination": "/Artifact Snapshot ReExport/HP-Vision",
            "links": [
                {
                    "href": "https://<BASE-URL>/interop/rest/v2/status/
migration/3/1/details?limit=25&offset=0&msgtype=info",
                    "action": "GET",
                    "rel": "Job Details",
                    "data": null
                }
            ]
        },
        {
            "name": "Task Information",
            "source": "Document Repository",
            "destination": "/Artifact Snapshot ReExport/DOCREP-Document
Repository",
            "links": [
                {
                    "href": "https://<BASE-URL>/interop/rest/v2/status/
migration/3/2/details?limit=25&offset=0&msgtype=info",
                    "action": "GET",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
                    "rel": "Job Details",
                    "data": null
                }
            ]
        },
        {
            "name": "Task Information",
            "source": "Calculation Manager",
            "destination": "/Artifact Snapshot ReExport/CALC-Calculation
Manager",
            "links": [
                {
                    "href": "https://<BASE-URL>/interop/rest/v2/status/
migration/3/3/details?limit=25&offset=0&msgtype=info",
                    "action": "GET",
                    "rel": "Job Details",
                    "data": null
                }
            ]
        },
        {
            "name": "Task Information",
            "source": "FDM Enterprise Edition",
            "destination": "/Artifact Snapshot ReExport/FDMEE-FDM Enterprise
Edition",
            "links": [
                {
                    "href": "https://<BASE-URL>/interop/rest/v2/status/
migration/3/4/details?limit=25&offset=0&msgtype=info",
                    "action": "GET",
                    "rel": "Job Details",
                    "data": null
                }
            ]
        }
    ],
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/status/migration/3",
            "action": "GET",
            "rel": "self",
            "data": null
        }
    ]
}
```


Example 3: Failed Response (Snapshot Does Not Exist):


```
{
    "status": 8,
    "details": "Artifact_Snapshot12 snapshot does not exists.",
    "items": null,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/migration/snapshots/
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
repeatexport",
            "action": "POST",
            "rel": "self"
        }
    ]
}
```

Example 3: Failed Response (Target Snapshot Already Exists):

```
{
    "status": 8,
    "details": "Artifact_Snapshot_ReExport snapshot already exists.",
    "items": null,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/migration/snapshots/
repeatexport",
            "action": "POST",
            "rel": "self"
        }
    ]
}
```

Set Import Options (v2)

Sets import options that specify how the import of group membership is handled during import of groups from a snapshot or file.

Required Roles

Service Administrator

REST Resource

`POST /interop/rest/v2/migration/options/import/save`

Request

Supported Media Types: `application/json`

Parameter	Description	Required	Type
`optionName`	The import option to set. The only acceptable option name is `Groups and Membership - Import Mode`.	Yes	Payload

Copyright © 2017, 2026, Oracle and/or its affiliates.

Parameter	Description	Required	Type
optionValue	The import action to perform. Possible values are: • Create/Update to add new groups or updates the group membership of existing groups in Access Control. Also, assigns or unassigns granular roles to users and groups. • Create to add new groups. Changes made to existing group are not imported. Also, assigns granular roles for users and groups. • Update to modify existing groups based on the information available in the import file. New groups are not added. Also, assigns or unassigns granular roles to users and groups. • Delete to remove existing groups available in the import file. Also, unassigns granular roles from users and groups.	Yes	Payload

Request Payload Example:

```
Request:
{
    "options": [
        {
            "optionName": "Groups and Membership - Import Mode",
            "optionValue": "Create/Update"
        }
    ]
}
```

Response

A successful response reports status 0 as shown in this example.

```
{
    "status": 0,
    "items": null,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/migration/options/
import/save",
            "action": "POST",
            "rel": "self"
        }
    ]
}
```

Response for failed operation reports status 4:

```
{
    "status": 4,
    "details": "Invalid input. Please check it",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "items": null,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/migration/options/
import/save",
            "action": "POST",
            "rel": "self"
        }
    ]
}
```

Services

Use these APIs to manage services-- to get information about services, idle session timeout, and recreate your service.

Table 2-227 REST APIs to Manage Services

Manage Services REST APIs		
Get Information About All Services	Get Idle Session Timeout (v2)	Set Idle Session Timeout (v2)
Restart the Service Instance (v1)	Restart the Service Instance (v2)	Run Recreate on a Service
Run Recreate on a Service (v2)		

Get Information About All Services

Returns information about all services that you can perform in a Planning environment.

Required Roles

Service Administrator

REST Resource

GET `/interop/rest/11.1.2.3.600/services`

Response

Supported Media Types: `application/json`

Table 2-228 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`details`	In case of error, details are published with the error string
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-228 (Cont.) Parameters

Name	Description
rel	Possible values: self, PBCS recreate service, PBCS reset service - details are for PBCS recreate service
data	Parameters as key value pair passed in the request

Example of Response Body

```
{
    "details":null,
    "status":0,
    "links":[{
        "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/services",
        "rel":"self",
        "data":null,
        "action":"GET"
        },{
        "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/services/PBCS/
recreate",
        "rel":"PBCS recreate service",
        "data":null,
        "action":"POST"
    },{
        "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/services/PBCS/
resetservice",
        "rel":"PBCS reset service",
        "data":null,
        "action":"POST"
    }]
}
```

cURL Sample

```
funcGetServices() {
    url=$SERVER_URL/interop/rest/$API_VERSION/services
    funcExecuteRequest "GET" $url

    output=`cat response.txt`
    status=`echo $output | jq '.status'`
    if [ $status == 0 ]; then
        echo "Services list :"
        count=`echo $output | jq '.links | length'`
        i=0
        while [ $i -lt $count ]; do
            rel=`echo $output | jq '.links['$i'].rel'`
            rel=`echo "$rel" | tr -d "\""`
            if [ "$rel" != "self" ]; then
                echo "Service : " `echo $output | jq '.links['$i'].rel'`
                echo "URL :" `echo $output | jq '.links['$i'].href'`
                echo "Action :" `echo $output | jq '.links['$i'].action'`
                echo ""
            fi
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            i=`expr $i + 1`
        done
    else
        error=`echo $output | jq '.details'`
        echo "Error occurred. " $error
    fi
    funcRemoveTempFiles "respHeader.txt" "response.txt"
}
```

Get Idle Session Timeout (v2)

Returns the session timeout (in minutes) of the Oracle Fusion Cloud EPM environment. After a session is idle for this duration, users are redirected to the Login page.

Required Roles

Service Administrator

REST Resource

GET `/interop/rest/v2/config/services/idlesessiontimeout`

Request

Supported Media Types: `application/json`

Response

Supported Media Types: `application/json`

Table 2-229 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	• 0 - Operation success • +ve - Operation failed, with the status signifying an error
`timeout`	Session Timeout value in minutes
`href`	Link to API call
`action`	HTTP call type
`rel`	Possible value: `self`
`data`	null

Example of Response Body

```
{
       "details": null,
       "links": [{
             "rel": "self",
             "href": "https://<BASE-URL>/interop/rest/v2/config/services/
idlesessiontimeout",
             "data": "null",
             "action": "GET"
       }],
       "status": "0",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        "items": [{
              "timeout": "30"
        }]
}
```

Sample cURL command

```
curl -X GET -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -H
'Content-Type: application/json' 'https://<BASE-URL>/interop/rest/v2/config/
services/idlesessiontimeout '
```

Set Idle Session Timeout (v2)

Changes the session timeout (in minutes) of the Oracle Fusion Cloud EPM environment. The new session timeout becomes active after the next daily maintenance of the environment.

Use this API to change the default session timeout (75 minutes) to a different value (15 - 480 minutes). After a session is idle for the duration specified using this API, the user is redirected to the Login page.

> **Note**
>
> You can also set the idle session timeout at the identity domain level. The effective timeout is the shorter of the identity domain timeout and the environment-level timeout. When a session remains idle for that period, the user is redirected to the Login page. See Changing the Session Time-Out in the *Oracle Cloud Infrastructure Documentation* for instructions to set the timeout at the domain level.

Required Roles

Service Administrator

REST Resource

PUT `/interop/rest/v2/config/services/idlesessiontimeout`

Request

Supported Media Types: `application/json`

Table 2-230 Parameters

Name	Description	Type	Required	Default
`timeout`	Session timeout value	Payload	Yes	None

Example of Request Body

```
{
  "timeout": "15"
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Response

Supported Media Types: `application/json`

Table 2-231 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	• 0 - Operation success • +ve - Operation failed, with the status signifying an error
`href`	Link to API call
`action`	HTTP call type
`rel`	Possible value: `self`
`data`	null

Example of Response Body

```
{
       "links": [{
              "rel": "self",
              "href": "https://<BASE-URL>/interop/rest/v2/config/services/
idlesessiontimeout",
              "data": null,
              "action": "PUT"
       }],
       "details": "null",
       "status": 0,
       "items": null
}
```

Sample cURL command

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' -d
'{"timeout":"<TIMEOUT-VALUE>"}' 'https://<BASE-URL>/interop/rest/v2/config/
services/idlesessiontimeout
```

Restart the Service Instance

Use these REST APIs to restart service instances.

This topic describes both the original and simplified v2 version of the REST API; the v2 version includes all parameters in the payload, does not require URL encoding, is easier to use, and is backward compatible. You can also use the optional AutoTune parameter to auto-tune environments before restarting them to ensure Essbase index caches for Block Storage Option (BSO) cubes are optimized for your applications.

Required Roles

Service Administrator

Copyright © 2017, 2026, Oracle and/or its affiliates.

Restart the Service Instance (v1)

REST Resource

POST `/interop/rest/v1/services/resetservice`

Request

Supported Media Types: `application/json`

Payload: `JSON`

Table 2-232 Parameters

Name	Description	Type	Required	Default
`service_type`	Value for the service type. Service type can be one of the following: PBCS for Planning and Budgeting, EPBCS for Enterprise Planning and Budgeting, FCCS for Financial Consolidation and Close, TRCS for Tax Reporting, EDMCS for Enterprise Data Management, PCMCS for Profitability and Cost Management, or ARCS for Account Reconciliation.	Path	Yes	None
`comment`	Comment about executing the restart	Payload	Yes	None
`autotune`	If set to `true`, runs the auto tune algorithm before the restart. This ensures that Essbase index caches for BSO cubes are optimized for your application.	Payload	No	false

Example of Request Body

```
{
  "comment": "Reset requested by Administrator",
  "autotune": "true"
}
```

Response

Table 2-233 Parameters

Name	Description
`Details`	In case of errors, details are published with the error string
`Status`	See Migration Status Codes
`Links`	Detailed information about the link
`Href`	Links to API call or status API
`Action`	The HTTP call type
`Rel`	Possible values: `self` and/or `Job Status`. If the value is set to Job Status, you can use the href to get the status of the reset service
`Data`	Parameters as key value pairs passed in the request

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example of Response Body

```
{
  "details": null,
  "status": -1,
  "items": null,
  "links": [
    {
      "href": "http://<BASE-URL>/interop/rest/v1/services/resetservice",
      "action": "POST",
      "rel": "self",
      "data": null
    },
    {
      "href": "http://<BASE-URL>/interop/rest/v1/services/jobs/hardreset/<JOB-
ID>",
      "action": "GET",
      "rel": "Job Status",
      "data": null
    }
  ]
}
```

Sample cURL Command

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -H 'Content-Type: application/
json' -d 'parameters={"comment":"<COMMENT>"}' 'http://<BASE-URL>/interop/
rest/v1/services/resetservice'
```

Restart the Service Instance (v2)

REST Resource

POST `/interop/rest/v2/config/services/reset`

Request

Supported Media Types: `application/json`

Payload: `JSON`

Table 2-234 Parameters

Name	Description	Type	Required	Default
`comment`	Comment about executing the restart	Payload	Yes	None
`autotune`	If set to `true`, runs the auto tune algorithm before the restart. This ensures that Essbase index caches for BSO cubes are optimized for your application.	Payload	No	false

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example of Request Body

```
{
  "comment": "Reset requested by Administrator",
  "parameters": {
     "autotune": "false"
  }
}
```

Response

Table 2-235 Parameters

Name	Description
`Details`	In case of errors, details are published with the error string
`Status`	See Migration Status Codes
`Links`	Detailed information about the link
`Href`	Links to API call or status API
`Action`	The HTTP call type
`Rel`	Possible values: `self` and/or `Job Status`.
	If the value is set to Job Status, you can use the href to get the status of the reset service
`Data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
    "details": null,
    "status": 0,
    "links": [{
        "href": "https://<BASE-URL>/interop/rest/v2/config/services/reset",
        "rel": "self",
        "data": null,
        "action": "POST"
    },
    {
        "href": "https://<BASE-URL>/interop/rest/v2/config/status/service/
hardreset/1",
        "rel": "Job Status",
        "data": null,
        "action": "GET"
    }]
}
```

Sample cURL Command

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' -d ' {"comment":"<COMMENT>","parameters":
{"autotune":"false"}}' 'https://<BASE-URL>/interop/rest/v2/config/services/
reset'
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Run Recreate on a Service (v2)

Use this API to restore an environment to a clean state by recreating the deployment.

This topic describes the simplified v2 version of this REST API. This version contains all parameters in the payload and does not require URL encoding while calling the REST APIs. This makes the v2 API easier to use. This API is backwards compatible.

Before using the REST resources, you must understand how to access the REST resources and other important concepts. See About the REST APIs. Using this REST API requires prerequisites. See Prerequisites.

You re-create the deployment to complete these tasks:

- Clean up an environment before importing a full snapshot.
- Change the business process that can be deployed in an environment.

Caution:

- This API deletes the existing application and, optionally, all user defined artifacts from the environment. Additionally, it re-creates the database and removes all existing data. After recreating the service, you can create a new business process or import one using REST APIs, Migration, or EPM Automate.
- This API deletes migration history. As a result, the Migration Status Report available in Migration will not contain historic information.
- Before using this API, perform a complete backup of the environment. You can create a backup snapshot by executing runDailyMaintenance.

For the previous version of this API, see Run Recreate on a Service.

Required Roles

Service Administrator

REST Resource

POST `/interop/rest/v2/config/services/recreate`

> **Note**
>
> Before using the REST resources, you must understand how to access the REST resources and other important concepts. See Cloud EPM REST APIs Best Practices. Using this REST API requires prerequisites. See Prerequisites.

Request

Supported Media Types: `application/json`

Payload: `JSON`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-236 Parameters

Name	Description	Type	Required	Default
`tempServiceType`	Optionally, convert an environment to a different service environment. The business processes that you can deploy in an environment is governed by the type of subscription that you have. For example, if you have an EPM Standard Cloud Service subscription, you cannot create a FreeForm application after converting the environment from Account Reconciliation to Planning. . If you have an EPM Enterprise Cloud Service subscription, you can create any business process in your environment after changing the service type appropriately. See "About the New Oracle Fusion Cloud EPM Services" in *Getting Started Guide for Administrators*. The behavior of this parameter is dependent on your subscription. For details and examples, see Recreate in *Working with EPM Automate*. Acceptable `tempServiceType` values: • ARCS to convert an environment to an Account Reconciliation environment • EDMCS to convert an environment to a Oracle Fusion Cloud Enterprise Data Management environment • EPCMC to convert an environment to an Enterprise Profitability and Cost Management environment • EPRCS to convert an environment to a Narrative Reporting environment • PCMCS to convert an environment to a Profitability and Cost Management environment • PBCS to convert a Profitability and Cost Management environment to a Planning or Enterprise Profitability and Cost Managementenvironment **Note**: You can create a Tax Reporting or Financial Consolidation and Close application in a new Planning environment. You do not need to change the service type of the environment. When you run this REST API with `tempserviceType`, the `serviceType` change can be verified by making a REST call to `/interop/rest`.	Payload	No	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-236 (Cont.) Parameters

Name	Description	Type	Required	Default
`removeAll`	If set to `true`, deletes all the snapshots, the content of the Inbox and Outbox folders, and the archived snapshots in Oracle Object Storage. Default is `false`, which retains the snapshots and the content of inbox and outbox. After this API is issued on an environment with `removeAll=true`, the behavior of these EPM Automate commands will be as follows: • listFiles will not list snapshots or the contents of the inbox and outbox • listBackups will not list any archived snapshots	Payload	No	None

Example of Request Payload

```
{
  "parameters": {
     "removeAll": "true",
     "tempServiceType": "SERVICE_TYPE"
  }
}
```

Response

Table 2-237 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` and/or `Job Status`. If the value is set to Job Status, you can use the href to get the status of the recreate service
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
    "details": null,
    "status": 0,
    "links": [{
        "href": "https://<BASE-URL>/interop/rest/v2/config/services/recreate",
        "rel": "self",
        "data": null,
        "action": "POST"
    },
    {
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        "href": "https://<BASE-URL>/interop/rest/v2/config/status/service/
recreate/1",
        "rel": "Job Status",
        "data": null,
        "action": "GET"
    }]
}
```

Sample cURL command

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' -d '"{"parameters":{"removeAll":"false",
"tempServiceType":"<SERVICE-TYPE>"}}"' 'https://<BASE-URL>/interop/rest/v2/
config/services/recreate
```

Sample cURL Code

```
#!/bin/sh

USERNAME="<USERNAME>"
PASSWORD="<PASSWORD>"
SERVER_URL="<SERVICE_URL>"

APP_NAME="Vision"
API_VERSION="v2"

funcRemoveTempFiles() {
    for var in "$@"
    do
        if [ -f $var ]; then
            rm $var
        fi
    done
}

funcPrintErrorDetails() {
    contentType=`echo $(grep 'Content-Type:' respHeader.txt) | tr -d
[:space:]`
    if [ ! -z $contentType ] && [[ $contentType = *"application/json"* ]];
then
        output=`cat $1`
        error=`echo $output | jq '.details'`
        echo "Error details: " $error
    fi
}

funcExecuteRequest() {
    if [ ! -z "$4" ]; then
        statusCode=`curl -X $1 -s -w "%{http_code}" -u "$USERNAME:$PASSWORD" -
o "response.txt" -D "respHeader.txt" -H "Content-Type: $4" -d "$3" $2`
    else
        statusCode=`curl -X $1 -s -w "%{http_code}" -u "$USERNAME:$PASSWORD" -
o "response.txt" -D "respHeader.txt" -H "Content-Type: $3" $2`
    fi
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    if [ $statusCode != 200 ]; then
        echo "Error executing request"
        if [ $statusCode != 000 ]; then
            echo "Response error code : " $statusCode
            funcPrintErrorDetails "response.txt"
            funcRemoveTempFiles "respHeader.txt" "response.txt"
        fi
        exit 0
    fi
}

funcGetStatus() {
    output=`cat response.txt`
    count=`echo $output | jq '.links | length'`
    i=0
    pingUrl=""

    while [ $i -lt $count ]; do
        rel=`echo $output | jq '.links['$i'].rel'`
        rel=`echo "$rel" | tr -d "\""`
        if [ "$rel" == "Job Status" ]; then
                pingUrl=`echo $output | jq '.links['$i'].href'`
                pingUrl=`echo "$pingUrl" | tr -d "\""`
        fi
        i=`expr $i + 1`
    done

    echo $pingUrl
    completed="false"

    while [ $completed != "true" ]; do
        statusCode2=`curl -X $1 -s -w "%{http_code}" -u "$USERNAME:$PASSWORD"
-o "pingResponse.txt"  -H "Content-Type: application/json" "$pingUrl"`
        if [ $statusCode2 == 200 ]; then
            status2=`jq '.status' pingResponse.txt`
            if [ $status2 != -1 ]; then
                completed="true"
                echo "Job completed"
            else
                echo "Please wait..."
                sleep 20
            fi
        else
            echo "Please wait..."
            sleep 20
        fi
        funcRemoveTempFiles "pingResponse.txt"
    done
}

funcHardReset() {
    echo "Are you sure you want to restart the service instance (yes/no): no?
[Press Enter] "
    read toReset
    if [ $toReset != "yes" ]; then
        echo "User cancelled the reset command"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        exit 0
    fi

    url=$SERVER_URL/interop/rest/$API_VERSION/config/services/reset
    comment=$(echo $1)
    param="{\"comment\":\"${comment}\",\"parameters\":
{\"autotune\":\"false\"}}"
    funcExecuteRequest "POST" "$url" "$param" "application/json"

    output=`cat response.txt`
    status=`echo $output | jq '.status'`

    if [ "${status}" == -1 ]; then
        echo "Started hard reset succesfully"
        funcGetStatus "GET"
    else
        error=`echo $output | jq '.details'`
        echo "Error occurred. " $error
    fi

    funcRemoveTempFiles "respHeader.txt" "response.txt"
}

funcRecreateService() {

    removeAll=$1
    essbaseChange=$2
    tempServiceType=$3

    echo "Are you sure you want to recreate the EPM environment (yes/no): no?
[Press Enter] "
    read toCreate

    if [ $toCreate != "yes" ]; then
        echo "User cancelled the recreate command"
        exit 0
    fi

    url=$SERVER_URL/interop/rest/$API_VERSION/config/services/recreate
    param="{\"parameters\":{\"removeAll\":\"${removeAll}
\",\"essbaseChange\":\"${essbaseChange}\", \"tempServiceType\":\"$
{tempServiceType}\"}}"

    funcExecuteRequest "POST" "$url" "$param" "application/json"
    output=`cat response.txt`
    status=`echo $output | jq '.status'`

    if [ $status == -1 ]; then
        echo "Started recreating the environment successfully"
                funcGetStatus "GET"
    else
        error=`echo $output | jq '.details'`
        echo "Error occurred. " $error
    fi

    funcRemoveTempFiles "respHeader.txt" "response.txt"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
}

if [[ "$#" != "1" ]]; then
    echo "Mandatory argument missing"
    echo "Usage: EPMRestSamples <option>"
    echo "  where <option> is -recreate or -reset"
    exit 1
fi

if [ "${1}" == "-reset" ]; then
    funcHardReset "POC Exit Criteria Check - cURL"
elif [ "${1}" == "-recreate" ]; then
    funcRecreateService "false" "default" ""
else
    echo "Incorrect usage"
    echo "Usage: EPMRestSamples <option>"
    echo "  where <option> is -recreate or -reset"
    exit 1
fi
```

First Generation REST APIs

These REST APIs use version **11.1.2.3.600** (their REST resource path includes **11.1.2.3.600** as the API version). They are retained for backward compatibility with existing integrations and are not recommended for new development.

Table 2-238 First-generation REST APIs

First Generation REST APIs		
LCM Import	Delete Files	Run Recreate on a Service
LCM Export	List Files	Provide Feedback

LCM Import

Initiates import of a Migration snapshot so that the contents of the application snapshot are imported into the application. You can complete these tasks for imported users: set a specific password for all users in the snapshot, set a unique temporary password for each user in the snapshot, and force password reset at first login.

The presence of status -1 in the response indicates that the import is in progress. You should use the job status URI to determine whether the import is complete.

If the Job completes with status 1, the task details will be mentioned in the items from which the source, destination, and URL to fetch the first set of errors is available. All issues for a particular task can be fetched in the manner of pagination. Acceptable values for msgtype are: `error/warn/info`; `limit` represents the number of issues requested per request, and `offset` marks the beginning number to fetch the issues.

Required Roles

Service Administrator or any user assigned to the Migrations - Administer granular role

Identity Domain Administrator role is required to import users and application roles

Copyright © 2017, 2026, Oracle and/or its affiliates.

REST Resource

POST `/interop/rest/11.1.2.3.600/applicationsnapshots/{applicationSnapshotName}/migration?q={type:"import"}`

Table 2-239 Tasks for LCM Import

Task	Request	REST Resource
LCM Import	POST	`/interop/rest/{api_version}/applicationsnapshots/{applicationSnapshotName}/migration?q={type:"import"}`
Import Status; the 9 in the resource is used as an example here	GET	`/interop/rest/{api_version}/applicationsnapshots/{applicationSnapshotName}/migration/9`
Details	GET	`/interop/rest/{api_version}/applicationsnapshots/{applicationSnapshotName}/migration/9/0/details?limit=25&msgtype=error&offset=0`

Request

Supported Media Types: `application/json`

Table 2-240 Parameters

Name	Description	Type	Required	Default
`applicationSnapshotName`	Application snapshot that is to be imported	Path	Yes	None
`type`	Type of migration being performed, `import`	Query	Yes	None
`importUsers`	Whether to import users; `true` imports users and their application role assignments. The import fails if the user does not have the Identity Domain Administrator role.	Query	No	`false`
`userPassword`	The default password for the imported users.	Query	No	A unique temporary password is assigned to each user
`resetPassword`	Whether to force reset password for the imported users on first login, `true` or `false`	Query	No	`true`

Response

Supported Media Types: `application/json`

Table 2-241 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-241 (Cont.) Parameters

Parameters	Description
`action`	The HTTP call type
`rel`	Can be `self` and/or `Job Status`. If set to `Job Status`, you can use the `href` to get the status of the import operation
`data`	Parameters as key value pairs passed in the request
`items`	Details about the resource
`source`	From where the navigation is being performed
`destination`	To where the navigation is being performed
`name`	Name of the task, usually "Task Information"
`links`	Details of the first URL to be requested to get the job details; rel is "Job Details"

Examples of Response Body

Example 1: Job is in Progress

```
{
    "details":null,
    "status":-1,
    "links":[{
        "data":null,
        "action":"POST",
        "rel":"self",
        "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots/ss2/migrationq={type:"import"}"
        },{
        "data":null,
        "action":"POST",
        "rel":"Job Status",
        "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots/ss2/migration/2"
    }]
}
```

Example 2: Job Completes with Errors

```
{"status":1,
"items":[{
   "source":"/Nasdaq/HSS-Shared Services",
   "name":"Task Information",
   "destination":"Shared Services",
   "links":[{
      "data":null,
      "action":"GET",
      "rel":"Job Details",
      "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots/ss2/migration/1/0/details?
limit=25&offset=0&msgtype=error"}]
   },
   {"source":"/Artifact Snapshot/HP-SS2",
   "name":"Task Information",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
   "destination":"",
   "links":[{
      "data":null,
      "action":"GET",
      "rel":"Job Details",
      "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots/ss2/migration/1/1/details?
limit=25&offset=0&msgtype=error"}]
   }],
   "details":null,
   "links":[{
      "data":null,
      "action":"POST",
      "rel":"self",
      "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots/ss2/migration/1"}
      ]}
         }
```


Example 3: Each Type of Task Informaton is Requested


```
{"status":0,
"items":[{
   "msgType":"error",
   "artifact":"/Native Directory/Groups",
   "msgText":"EPMIE-00069: Failed to find user during group children import.
User user0026 not found. Please ensure that a user exists in the system.",
      "msgCategory":"14000: Error reported.",
   "msgCategory":"14000: Error reported."
   },{
   "msgType":"error",
   "artifact":"/Native Directory/Groups",
   "msgText":"EPMIE-00069: Failed to find user during group children import.
User user0025 not found. Please ensure that a user exists in the system.",
   "msgCategory":"14000: Error reported." }
   ],
"details":null,
"links":[{
   "data":null,
   "action":"GET",
   "rel":"self",
   "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots/ss2/migration/1/0/details?
limit=2&msgtype=error&offset=25"},
   {"data":null,
   "action":"GET",
   "rel":"next",
   "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots/ss2/migration/1/0/details?
limit=2&offset=27&msgType=error"},
   {"data":null,
   "action":"GET",
   "rel":"prev",
   "href":https://<BASE-URL>/rest/11.1.2.3.600/applicationsnapshots/ss2/
migration/1/0/details?limit=2&offset=23&msgType=error
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
   }]
      }
```

Sample cURL Command Basic Auth

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -H
'Content-Type: application/x-www-form-urlencoded' 'https://<BASE-URL>
/interop/rest/11.1.2.3.600/applicationsnapshots/<APPLICATION-SNAPSHOT-NAME>/
migration?
q={type:"import",importUsers:"true"}'
```

Sample cURL Command OAuth 2.0

```
curl -X POST --header "Authorization: Bearer <OAUTH_ACCESS_TOKEN>" -H
'Content-Type: application/x-www-form-urlencoded' 'https://<BASE-URL>
/interop/rest/11.1.2.3.600/applicationsnapshots/<APPLICATION-SNAPSHOT-NAME>/
migration?
q={type:"import",importUsers:"true"}'
```

LCM Export

Initiates a repeat export of a Migration artifact based on the settings that were used to export artifacts using the Migration artifact export screen.

You can also use EPM Automate to automate the repeat export of artifacts.

The presence of status -1 in the response indicates that the reexport is in progress. You should use the job status URI to determine whether the reexport is complete.

If the Job completes with status 1, the task details will be mentioned in the items from which the source, destination, and URL to fetch the first set of errors is available. All issues for a particular task can be fetched in the manner of pagination. Acceptable values for `msgtype` are: `error/warn/info`; `limit` represents the number of issues requested per request, and `offset` marks the beginning number to fetch the issues.

Required Roles

Service Administrator or any user assigned to the Migrations - Administer granular role

REST Resource

POST `/interop/rest/11.1.2.3.600/applicationsnapshots/{applicationSnapshotName}/migration?q={type:"export}`

Table 2-242 Tasks for LCM Export

Task	Request	REST Resource
LCM Export	POST	`/interop/rest/{api_version}/applicationsnapshots/{applicationSnapshotName}/migration?q={type:"export"}`
Export Status	GET	`/interop/rest/{api_version}/applicationsnapshots/{applicationSnapshotName}/migration/8`
Details	GET	`/interop/rest/{api_version}/applicationsnapshots/{applicationSnapshotName}/migration/8/0/details?limit=25&msgtype=error&offset=0`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Request

Supported Media Types: `application/json`

Table 2-243 Parameters

Name	Description	Type	Required	Default
`applicationSnapshotName`	Application snapshot that has to be exported	Path	Yes	None
`type`	Type of migration being performed, can be export or import	Query	Yes	None

Response

Supported Media Types: `application/json`

Table 2-244 Parameters

Attribute	Description
`details`	In case of errors, details are published with the error string
`status`	See Error Handling and Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Possible values. Can be `self` and/or `Job Status`. If set to `Job Status`, you can use the `href` to get the status of the re-export operation
`data`	Parameters as key value pairs passed in the request
`items`	Details about the resource
`source`	From where the navigation is being performed
`destination`	To where the navigation is being performed
`name`	Name of the task, usually "Task Information"
`links`	Details of the first URL to be requested to get the job details; rel is "Job Details"

Examples of Response Body

Example 1: Export is in Progress

```
{
   "status":-1,
   "links":[{
      "data":null,
      "action":"POST",
      "rel":"self",
   "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots/ss2/migrationq={type:"export"}"
      },{
      "data":null,
      "action":"POST",
      "rel":"Job Status",
   "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots/ss2/migration/8"
   }],
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
   "details":null
}
```

Example 2: Export Completes with Errors

```
{"status":1,
"items":[{
   "source":"/Nasdaq/HSS-Shared Services",
   "name":"Task Information",
   "destination":"Shared Services",
   "links":[{
      "data":null,
      "action":"GET",
      "rel":"Job Details",
      "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots/ss2/migration/1/0/details?
limit=25&offset=0&msgtype=error"}]
   },
   {"source":"/Artifact Snapshot/HP-NASDAQ",
   "name":"Task Information",
   "destination":"",
   "links":[{
      "data":null,
      "action":"GET",
      "rel":"Job Details",
      "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots/ss2/migration/1/1/details?
limit=25&offse=0&msgtype=error"}]
   }],
   "details":null,
   "links":[{
      "data":null,
      "action":"POST",
      "rel":"self",
      "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots/ss2/migration/1"}
]}
```

Example 3: Information on Each Task is Requested

```
{"status":0,
"items":[{
     "msgType":"error",
     "artifact":"/Native Directory/Groups",
     "msgText":"EPMIE-00069: Failed to find user during group children
import. User user0026 not found. Please ensure that a user exists in the
system.",
          "msgCategory":"14000: Error reported.",
     "msgCategory":"14000: Error reported."
     },{
     "msgType":"error",
     "artifact":"/Native Directory/Groups",
     "msgText":"EPMIE-00069: Failed to find user during group children
import. User user0025 not found. Please ensure that a user exists in the
system.",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
     "msgCategory":"14000: Error reported." }
     ],
"details":null,
"links":[{
     "data":null,
     "action":"GET",
     "rel":"self",
     "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots/ss2/migration/1/0/details?
limit=2&msgType=error&offset=25"},
     {"data":null,
     "action":"GET",
     "rel":"next",
     "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots/ss2/migration/1/0/details?
limit=2&offset=27&msgType=error"},
     {"data":null,
     "action":"GET",
     "rel":"prev",
     "href":https://<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots/ss2/migration/1/0/details?limit=2&offset=23&msgType=error
     }]
          }
```

cURL Sample

```
funcExportSnapshot() {
    param=$(echo "{type:export}" | sed -f urlencode.sed)
    encodedFileName=$(echo $1 | sed -f urlencode.sed)
url=$SERVER_URL/interop/rest/$API_VERSION/
applicationsnapshots/$encodedFileName/migration?q=$param
    funcExecuteRequest "POST" $url

    output=`cat response.txt`
    status=`echo $output | jq '.status'`
    if [ $status == -1 ]; then
        echo "Started exporting successfully"
        funcGetMigrationStatus "POST"
    else
        error=`echo $output | jq '.details'`
        echo "Error occurred. " $error
    fi
    funcRemoveTempFiles "respHeader.txt" "response.txt"
}
```

List Files

This REST API lists the files in the Planning repository and returns information about the available file and application snapshots.

This topic describes the original version of this REST API. You can also use the simplified v2 version of the REST API. The v2 version contains all parameters in the payload and does not require URL encoding while calling the REST APIs. This makes the v2 API easier to use. The v2 version is backwards compatible.

Copyright © 2017, 2026, Oracle and/or its affiliates.

This API provides details such as name, type, size and last modified time. Size and last modified are not available for LCM snapshots. See About EPM Automate in *Working with EPM Automate*.

Required Roles

Service Administrator

Any application role and the Migrations – Administer granular role

REST Resource

GET `/interop/rest/11.1.2.3.600/applicationsnapshots`

Supported Media Types: `application/json`

Response

Table 2-245 Parameters

Name	Description
`Details`	Will be published in case of error with the error string
`Status`	See Migration Status Codes
`Items`	
`Name`	Name of the application snapshot
`Type`	Can be LCM or EXTERNAL Type signifies if this snapshot is for LCM or EXTERNAL. LCM indicates that the file is an LCM snapshot. EXTERNAL indicates that files are not LCM, such as Planning files.
`Size`	Size of the application snapshot in bytes. Available only for type EXTERNAL
`Lastmodifiedtime`	Time in Long value as per the last modified time of the file.
`Links`	Detailed information about the link
`Href`	Link to API call/ status API
`Action`	The HTTP call type
`Rel`	Will be `self`
`Data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
    "status":0,
    "items":[{
        "name":"sample.csv",
        "type":"EXTERNAL",
        "size":"18",
        "lastmodifiedtime":"1422534438000"
        },{
        "name":"snapshot1",
        "type":"LCM",
        "size":null,
        "lastmodifiedtime":null
    }],
    "details":null,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "links":[{
        "data":null,
        "action":"GET",
        "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots",
        "rel":"self"
    }]
}
```

cURL Sample

```
funcListFiles() {
    url=$SERVER_URL/interop/rest/$API_VERSION/applicationsnapshots
    funcExecuteRequest "GET" $url

    list=`cat response.txt | jq 'select(.items != null) | .items[].name'`
    if [[ ! -z $list ]]; then
        echo $list
    else
        echo "No files found"
    fi
    funcRemoveTempFiles "respHeader.txt" "response.txt"
}
```

Delete Files

Use this REST API to delete a file from the Planning repository.

This topic describes the original version of this REST API. You can also use the simplified v2 version of the REST API. The v2 version contains all parameters in the payload and does not require URL encoding while calling the REST APIs. This makes the v2 API easier to use. The v2 version is backwards compatible.

Specify the filename with path separators in percent-encoding format, for example, using `%5C` as the encoded value for \ (file separator). For a file named `inbox/file1.csv`, pass it as `inbox%5Cfile1.csv`. If you are calling the cURL command to trigger the REST API, you can use a backslash \ for the path separator without URL encoding. See About EPM Automate in *Working with EPM Automate*.

Required Roles

Service Administrator

Any application role and the Migrations – Administer granular role

REST Resource

DELETE `/interop/rest/11.1.2.3.600/applicationsnapshots/{applicationSnapshotName`

Request

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-246 Parameters

Name	Description	Type	Required	Default
`applicationSnapshotName`	Application snapshot name that needs to be deleted	Path	Yes	None

Response

Supported Media Types: `application/json`

Table 2-247 Parameters

Parameters	Description
`Details`	Published if there is an error with the error string
`Status`	See Migration Status Codes
`Links`	Detailed information about the link
`Href`	Links to the API call
`Action`	The HTTP call type
`Rel`	Possible value: `self`
`Data`	Parameters as key value pair passed in the request

Example of Response Body

```
{
    "status":0,
    "links":[{
        "data":null,
        "action":"DELETE",
        "rel":"self",
        "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots/ss2"
    }],
    "details":null
}
```

cURL Sample

```
funcDeleteFile() {
    encodedFileName=$(echo $1 | sed -f urlencode.sed)
    url=$SERVER_URL/interop/rest/$API_VERSION/
applicationsnapshots/$encodedFileName
    funcExecuteRequest "DELETE" $url

    output=`cat response.txt`
    status=`echo $output | jq '.status'`
    if [ $status == 0 ]; then
        echo "Deleted successfully"
    else
        error=`echo $output | jq '.details'`
        echo "Error occurred. " $error
    fi
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    funcRemoveTempFiles "respHeader.txt" "response.txt"
}
```

Run Recreate on a Service

Restores an environment to a clean state by recreating the deployment.

This is the original version of this API. You can also use the simplified v2 version of the REST API. The v2 version contains all parameters in the payload and does not require URL encoding while calling the REST APIs. This makes the v2 API easier to use. The v2 version is backwards compatible.

You re-create the deployment to complete these tasks:

- Clean up an environment before importing a full snapshot.
- Change the business process that can be deployed in an environment.

Caution:

- This API deletes the existing application and, optionally, all user defined artifacts from the environment., including the backup snapshot. Additionally, it re-creates the database and removes all existing data. After recreating the service, you can create a new business process or import one using REST APIs, Migration, or EPM Automate.
- This API deletes migration history. As a result, the Migration Status Report available in Migration will not contain historic information.
- Before using this API, perform a complete backup of the environment. You can create a backup snapshot by executing runDailyMaintenance.

Required Roles

Service Administrator

REST Resource

POST `/interop/rest/11.1.2.3.600/services/{servicename}/recreate`

Request

Supported Media Types: `application/x-www-form-urlencoded`

Table 2-248 Parameters

Name	Description	Type	Required	Default
`servicename`	Name of the service for which recreate needs to be run, such as PBCS	Path	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-248 (Cont.) Parameters

Name	Description	Type	Required	Default
`tempServiceType`	Optionally, convert an environment to a different service environment. The business processes that you can deploy in an environment is governed by the type of subscription that you have. For example, if you have an EPM Standard Cloud Service subscription, you cannot create a FreeForm application after converting the environment from Account Reconciliation to Planning. If you have an EPM Enterprise Cloud Service subscription, you can create any business process in your environment after changing the service type appropriately. See "About the New Oracle Fusion Cloud EPM Services" in *Getting Started Guide for Administrators*. The behavior of this parameter is dependent on your subscription. For details and examples, see Recreate in *Working with EPM Automate*. Acceptable `tempServiceType` values: • ARCS to convert an environment to an Account Reconciliation environment • EDMCS to convert an environment to a Oracle Fusion Cloud Enterprise Data Management environment • EPCMC to convert an environment to an Enterprise Profitability and Cost Management environment • EPRCS to convert an environment to a Narrative Reporting environment • PCMCS to convert an environment to a Profitability and Cost Management environment • PBCS to convert a Profitability and Cost Management environment to a Planning or Enterprise Profitability and Cost Managementenvironment **Note**: You can create a Tax Reporting or Financial Consolidation and Close application in a new Planning environment. You do not need to change the service type of the environment. When you run this REST API with `tempserviceType`, the `serviceType` change can be verified by making a REST call to `/interop/rest`.	Payload	No	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-248 (Cont.) Parameters

Name	Description	Type	Required	Default
`removeAll`	If set to `true`, deletes all the snapshots, the content of the Inbox and Outbox folders, and the archived snapshots in Oracle Object Storage. Default is `false`, which retains the snapshots and the content of inbox and outbox. After this API is issued on an environment with `removeAll=true`, the behavior of these EPM Automate commands will be as follows: • listFiles will not list snapshots or the contents of the inbox and outbox • listBackups will not list any archived snapshots	Payload	No	None

Response

Table 2-249 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` and/or `Job Status`. If the value is set to Job Status, you can use the href to get the status of the recreate service
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
    "details":null,
    "status":0,
    "links":[{
        "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/services/
<SERVICE-TYPE>/recreate",
        "rel":"self",
        "data":null,
        "action":"POST"
        },{
        "href":"https://<BASE-URL>/interop/rest/11.1.2.3.600/<SERVICE-TYPE>/
PBCS/recreate/<JOB_ID>",
        "rel":"Job Status",
        "data":null,
        "action":"GET"
    }]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

cURL Sample

```
funcRecreateService() {
        echo "Are you sure you want to recreate the EPM environment (yes/no):
no ?[Press Enter]"
        read toCreate
        if [ $toCreate != "yes" ]; then
                echo "User cancelled the recreate command"
                exit 0
        fi

        url=$SERVER_URL/interop/rest/$API_VERSION/services/EPM/recreate
        json=$(echo "{\"removeAll\":\"true\"}" | sed -f urlencode.sed)
        param="parameters=$json"
        funcExecuteRequest "POST" $url $param "application/x-www-form-
urlencoded"
        output=`cat response.txt`
        status=`echo $output | jq '.status'`
    if [ $status == -1 ]; then
        echo "Started recreating the environment successfully"
                funcGetStatus "GET"
    else
        error=`echo $output | jq '.details'`
        echo "Error occurred. " $error
    fi
        funcRemoveTempFiles "respHeader.txt" "response.txt"
}
```

Provide Feedback

This feedback service sends feedback or reports an issue to Oracle.

Required Roles

Service Administrator, Power User, User, Viewer

REST Resource

POST `/interop/rest/11.1.2.3.600/feedback`

Request

Supported Media Types: `application/json`

Table 2-250 Parameters

Name	Description
`details`	Published in case of errors with the error string
`status`	See Migration Status Codes
`items`	Details about the resource
`issueRef`	Feedback reference to contact Oracle support
`links`	Detailed information about the link
`href`	Links to API call

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-250 (Cont.) Parameters

Name	Description
`action`	The HTTP call type
`rel`	Possible value: `self`
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
    "details":null,
    "status":0,
    "items":[{"issueRef":"UDR_default_fin_superuser_2015_09_14_11_10_18"}],
    "links":[{
        "data":null,
        "action":"POST",
        "rel":"self",
        "href":"https://<BASE-URL>/interop/rest/{api_version}/feedback"
    }]
}
```

cURL Sample

```
funcProvideFeedback() {
    url=$SERVER_URL/interop/rest/$LCM_VERSION/feedback
    description=$(echo $1 | sed -f urlencode.sed)
    param="{\"configuration\":
{\"URL\":\"$SERVER_URL\"},\"description\":\"$description\"}"
    funcExecuteRequest "POST" $url $param "application/json"

    output=`cat response.txt`
    status=`echo $output | jq '.status'`
    if [ $status == 0 ]; then
        echo "Feedback successful"
    else
        error=`echo $output | jq '.details'`
        echo "Error occurred. " $error
    fi
    funcRemoveTempFiles "respHeader.txt" "response.txt"
}
```

Security and Access Control

This section describes the REST APIs to manage security features in Oracle Fusion Cloud Enterprise Performance Management.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-251 Security and Access Control REST APIs

Security and Access Control RESTAPIs		
Get Restricted Data Access (v2)	Set Restricted Data Access (v2)	Get Virus Scan on File Upload (v2)
Set Virus Scan on File Upload (v2)	Manage Permission for Manual Access to Database (v1)	Manage Permission for Manual Access to Database (v2)
Set Encryption Key (v1)	Set Encryption Key (v2)	

URL Structure for Security

This topic shows the general URL structure for the Security REST APIs.

Use the following URL structure to access the Security REST resources:

`https://<BASE-URL>/interop/rest/{api_version}/{path}`

Where:

- *<BASE-URL>*: The first part of your service URL, before the context.

  For example, if your service URL is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com`. Similarly, if your service URL is `https://epm2-acme.epm.us6.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm2-acme.epm.us6.oraclecloud.com`.
- *{api_version}*: API version you are developing with.
- *{path}*: Identifies the resource.

> **Note**
>
> Oracle does not authorize or support the use of REST APIs with the path token "`/internal/`" in the URL.

Get Restricted Data Access (v2)

The Get Restricted Data Access REST API returns *true* if the environment is configured so that "Submit Application Snapshot" cannot be selected by a Service Administrator while submitting Provide Feedback; otherwise, returns *false*.

Required Roles

Service Administrator

REST Resource

GET `/interop/rest/{api_version}/config/services/restricteddataaccess`

Request

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Response

Supported Media Types: `application/json`

Table 2-252 Parameters

Name	Description
`details`	Detailed status of the operation performed.
`status`	See Migration Status Codes
`links`	Detailed information about the link and HTTP call type
`items`	Detailed information about the API
`dataAccessRestriction`	Whether the restricted data access is enabled
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
    "details": null,
    "status": 0,
    "items": [
        {
            "dataAccessRestriction": "true"
        }
    ],
    "links": [
        {
            "href": "<uri>/interop/rest/v2/config/services/
restricteddataaccess",
            "action": "GET",
            "rel": "self",
            "data": null
        }
    ]
}
```

Sample cURL command

```
curl -X GET -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -H
'Content-Type: application/json' 'https://<BASE-URL>/interop/rest/v2/config/
services/restricteddataaccess'
```

Set Restricted Data Access (v2)

The Set Restricted Data Access REST API enables/disables the selection of "Submit Application Snapshot" by the Service Administrator while submitting Provide Feedback.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Required Roles

Service Administrator

REST Resource

PUT `/interop/rest/v2/config/services/restricteddataaccess`

Request

Supported Media Types: `application/json`

Table 2-253 Parameters

Name	Description	Type	Required	Default
`dataAccessRestriction`	Enable/Disable restricted data access; possible values are *true* and *false*	Payload	Yes	None

Example of Request Body

```
{
    "dataAccessRestriction": "true"
}
```

Response

Supported Media Types: `application/json`

Table 2-254 Parameters

Name	Description
`details`	Detailed status of the operation performed.
`status`	See Migration Status Codes
`links`	Detailed information about the link and HTTP call type
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`error`	Detailed information about the error
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
    "details": null,
    "status": 0,
    "items": null,
    "links": [
        {
            "href": "<uri>/interop/rest/v2/config/services/
restricteddataaccess",
            "action": "PUT",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "rel": "self",
            "data": null
        }
    ]
}
```

Sample cURL command

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H
'Content-Type: application/json' -d '{"dataAccessRestriction":"true"}'
'https://<BASE-URL>/interop/rest/v2/config/services/restricteddataaccess'
```

Get Virus Scan on File Upload (v2)

The Get Virus Scan on File Upload REST API returns *true* if virus scan on file upload is enabled; otherise, it returns *false*.

Required Roles

Service Administrator

REST Resource

GET `/interop/rest/{api_version}/config/services/virusscanonfileupload`

Request

Supported Media Types: `application/json`

Response

Supported Media Types: `application/json`

Table 2-255 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`items`	Detailed information about the API
`scanfiles`	Indicates whether the virus scan is enabled
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Can be `self` and/or `Job Status`. If set to `Job Status`, you can use the `href` to get the status of the import operation
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
       "details": null,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        "links": [{
              "rel": "self",
              "href": "<uri>/interop/rest/v2/config/services/
virusscanonfileupload",
              "data": "null",
              "action": "GET"
        }],
        "status": "0",
        "items": [{
              "scanfiles": "true"
        }]
}
```

Sample cURL command

```
curl -X GET -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -H
'Content-Type: application/json' 'https://<BASE-URL>/interop/rest/v2/config/
services/virusscanonfileupload'
```

Set Virus Scan on File Upload (v2)

The Set Virus Scan on File Upload REST API enables/disables the virus scan on a file upload.

Required Roles

Service Administrator

REST Resource

PUT `/interop/rest/v2/config/services/virusscanonfileupload`

Request

Supported Media Types: `application/json`

Table 2-256 Parameters

Name	Description	Type	Required	Default
`scanfiles`	Enable/Disable virus scan	Payload	Yes	None

Response

Supported Media Types: `application/json`

Table 2-257 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-257 (Cont.) Parameters

Parameters	Description
`rel`	Can be `self` and/or `Job Status`. If set to `Job Status`, you can use the `href` to get the status of the import operation
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
       "links": [{
              "rel": "self",
              "href": "<uri>/interop/rest/v2/config/services/
virusscanonfileupload",
              "data": null,
              "action": "PUT"
       }],
       "details": "null",
       "status": 0,
       "items": null
}
```

Sample cURL command

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' -d
'{"scanfiles":"true"}' 'https://<BASE-URL>/interop/rest/v2/config/services/
virusscanonfileupload'
```

Manage Permission for Manual Access to Database (v1)

Use this API to manage permission for manual access to database by Oracle. For more control over Oracle access to your data, refer to Using Break Glass to Control Access in Getting Started Guide for Administrators.

Required Roles

Service Administrator

REST Resource

`PUT /interop/rest/{api_version}/services/dataaccess?accessType={allow|revoke}&disableEmergencyAccess={true|false}`

Request

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-258 Parameters

Name	Description	Type	Required	Default
`accessType`	Allow or revoke the manual access to database by Oracle, where the value can be `allow` or `revoke`	Query	Yes	None
`disableEmergencyAccess`	Whether to prohibit all manual access to the database. The possible values are `true` and `false`. Setting this parameter value to `true` stops Oracle from manually accessing the database even if a service request is open. If you set this parameter to `true`, Oracle cannot access the database if access is required to troubleshoot and fix a down environment. If the environment is down, you will not be able to issue this REST API to allow Oracle to manually access the database.	Query	No	False

Response

Table 2-259 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Can be `self` and/or `Job Status`. If set to `Job Status`, you can use the `href` to get the status of the import operation
`data`	Parameters as key value pairs passed in the request

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
  "details": null,
  "status": 0,
  "links": [
    {
      "href": "https://<BASE-URL>/interop/rest/v1/services/dataaccess",
      "action": "PUT",
      "rel": "self",
      "data": null
    }
  ]
}
```

Sample cURL Command

```
curl -s -u <USERNAME>:<PASSWORD> -H 'Content-Type: application/json' --
request PUT 'http://<BASE-URL>/interop/rest/v1/services/dataaccess?
accessType=allow '
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Manage Permission for Manual Access to Database (v2)

Use this REST API to manage permission for manual access to database by Oracle.

This gives you the ability to allow or disallow Oracle personnel to manually access your database in emergency situations when an environment is unresponsive and you have not yet created a service request to investigate the issue.

In an emergency situation, Oracle follows an internal process whereby a high-level development executive, after an independent verification process, permits manual access to the database without your explicit approval. You can also prohibit Oracle from manually accessing the Oracle Fusion Cloud Enterprise Performance Management database, even if a service request to remedy a database issue is open.

By default, the manual data access by Oracle is allowed. Use this API to revoke this access. For more control over Oracle access to your data, refer to Using Break Glass to Control Access in Getting Started Guide for Administrators.

Required Roles

Service Administrator

REST Resource

PUT `/interop/rest/v2/services/setmanualdataaccess`

Request

Supported Media Types: `application/json`

Table 2-260 Parameters

Name	Description	Type	Required	Default
`accessType`	Allow or revoke the manual access to database by Oracle, where the value can be `allow` or `revoke`	Payload	Yes	None
`parameters`				
`disableEmergencyAccess`	Whether to prohibit all manual access to the database. The possible values are `true` and `false`. Setting this parameter value to `true` stops Oracle from manually accessing the database even if a service request is open. If you set this parameter to `true`, Oracle cannot access the database if access is required to troubleshoot and fix a down environment. If the environment is down, you will not be able to issue this REST API to allow Oracle to manually access the database.	Payload	No	False

Example URL and Payload

```
https://<BASE URL>/interop/rest/v2/services/setmanualdataaccess
```

```
{
    "accessType": "Revoke",
    "parameters": {
        "disableEmergencyAccess": "False"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    }
}
```

Response

Supported Media Types: `application/json`

Table 2-261 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Can be `self` and/or `Job Status`. If set to `Job Status`, you can use the `href` to get the status of the import operation
`data`	null

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
    "details": null,
    "status": 0,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/services/
setmanualdataaccess",
            "action": "PUT",
            "rel": "self",
            "data": null
        }
    ]
}
```

Sample cURL command

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' -d '{"accessType":"Revoke","parameters":
{"disableEmergencyAccess":"True"}}' 'https://<BASE-URL>/interop/rest/v2/
services/setmanualdataaccess'
```

Set Encryption Key (v1)

This API can be used to set and remove a user-defined encryption key for access to database used in a Oracle Fusion Cloud Enterprise Performance Management instance.

This topic describes the original version of this REST API. You can also use the simplified v2 version of the REST API. The v2 version contains all parameters in the payload and does not require URL encoding while calling the REST APIs. This makes the v2 API easier to use. The v2 version is backwards compatible.

Copyright © 2017, 2026, Oracle and/or its affiliates.

This is an asynchronous job and uses the job status URI to determine if the operation is complete.

Before using the REST resources, you must understand how to access the REST resources and other important concepts. See Cloud EPM REST APIs Best Practices. Using this REST API requires prerequisites. See Prerequisites.

Required Roles

Service Administrator

Table 2-262 Set Encryption Key Tasks

Task	Request	REST Resource
Execute a Job	PUT	`/interop/rest/{api_version}/services/encryptionkey`
Retrieve Job Status	GET	`/interop/rest/v1/services/jobs/{jobID}`

REST Resource

PUT `/interop/rest/v1/services/encryptionkey`

Request

Supported Media Types: `application/json`

The following table summarizes the request parameters.

Table 2-263 Parameters

Name	Description	Type	Required	Default
Key	The user-defined encryption key. If empty or no key is passed, encryption is reset.	Form	No	None

Response

Supported Media Types: `application/json`

Table 2-264 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Can be `self` and/or `Job Status`. If set to `Job Status`, you can use the `href` to get the status of the import operation
`data`	Parameters as key value pairs passed in the request

Example of Response Body

Copyright © 2017, 2026, Oracle and/or its affiliates.

The following shows an example of the response body in JSON format.

```
{
    "details":null,
    "status":-1,
    "links":[{
        "href":"https://<BASE-URL>/interop/rest/v1/services/encryptionkey",
        "rel":"self",
        "data":null,
        "action":"PUT"
        },{
        "href":"https://<BASE-URL>/interop/rest/v1/services/jobs/777",
        "rel":"Job Status",
        "data":null,
        "action":"GET"
    }]
}
```

Set Encryption Key (v2)

The API can be used to set and remove a user-defined encryption key for access to database used in a Oracle Fusion Cloud Enterprise Performance Management instance.

This is an asynchronous job and uses the job status URI to determine if the operation is complete.

Required Roles

Service Administrator

REST Resource

PUT `interop/rest/v2/services/setencryptionkey`

> **Note**
>
> Before using the REST resources, you must understand how to access the REST resources and other important concepts. See Cloud EPM REST APIs Best Practices. Using this REST API requires prerequisites. See Prerequisites.

Table 2-265 Set Encryption Key Tasks

Task	Request	REST Resource
Execute a Job	PUT	`/interop/rest/v2/services/setencryptionkey`
Retrieve Job Status	GET	`/interop/rest/v2/status/jobs/777`

Request

Supported Media Types: `application/json`

The following table summarizes the request parameters.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-266 Parameters

Name	Description	Type	Required	Default
parameters				
key	The user-defined encryption key. If empty or no key is passed, encryption is reset.	Payload	No	None

Example URL and Payload

```
https://<BASE URL>/interop/rest/v2/services/setencryptionkey


{"parameters": {"key": "se!m+a2J"}}
```

Response

Supported Media Types: `application/json`

Table 2-267 Parameters

Parameters	Description
details	In case of errors, details are published with the error string
status	See Migration Status Codes
links	Detailed information about the link
href	Links to API call or status API
action	The HTTP call type
rel	Can be self and/or Job Status. If set to Job Status, you can use the href to get the status of the import operation
data	null

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
    "status": -1,
    "items": null,
    "links": [{
        "rel": "self",
        "href": "https://<BASE-URL>/interop/rest/v2/services/
setencryptionkey",
        "data": null,
        "action": "PUT"
    }, {
        "rel": "Job Status",
        "href": "https://<BASE-URL>/interop/rest/v2/status/jobs/
8921378039543483",
        "data": null,
        "action": "GET"
    }],
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "details": null
}
```

Sample cURL command

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' -d '{"parameters":{"key":"abc"}}' 'https://
<BASE-URL>/interop/rest/v2/services/setencryptionkey'
```

IAM REST APIs

Cloud EPM supports IAM REST APIs. The IAM Identity Domain APIs enable you to securely manage your resources, including identities and configuration data.

The AIM REST APIs support SCIM 2.0 compliant endpoints with standard SCIM 2.0 core schemas and Oracle schema extensions to:

- Manage users, groups, and apps.
- Perform identity functions, including password generation and reset.
- Perform administrative tasks, including bulk operations and job scheduling.
- Manage settings for your instance, including re-branding and notification templates.

Learn more about the IAM REST APIs.

Maintenance Operations

Use these REST APIs to get the current build version and daily maintenance window time, and to set the daily maintenance window time. You can also run the daily maintenance while skipping the scheduled daily maintenance.

Table 2-268 REST APIs for Maintenance Operations

REST APIs for Maintenance Operations		
Get the Build Version and Daily Maintenance Time (v1)	Get the Build Version and Daily Maintenance Window Time (v2)	Set the Daily Maintenance Time (v1)
Set the Daily Maintenance Time (v2)	Running Daily Maintenance While Skipping the Scheduled Daily Maintenance (v1)	Running Daily Maintenance While Skipping the Scheduled Daily Maintenance (v2)

URL Structure for Daily Maintenance

This topic shows the general URL structure for the Daily Maintenance REST APIs.

Use the following URL structure to access the Daily Maintenance REST resources:

```
https://<BASE-URL>/interop/rest/{api_version}/{path}
```

Where:

- *<BASE-URL>*: The first part of your service URL, before the context.

Copyright © 2017, 2026, Oracle and/or its affiliates.

For example, if your service URL is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com`. Similarly, if your service URL is `https://epm2-acme.epm.us6.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm2-acme.epm.us6.oraclecloud.com`.

- {*api_version*}: API version you are developing with.
- {*path*}: Identifies the resource.

> **Note**
>
> Oracle does not authorize or support the use of REST APIs with the path token "`/internal/`" in the URL.

Get the Build Version and Daily Maintenance Time (v1)

This API returns information about the current build version and the scheduled daily maintenance window time.

This topic describes the original version of this REST API. You can also use the simplified v2 version of the REST API. The v2 version contains all parameters in the payload and does not require URL encoding while calling the REST APIs. This makes the v2 API easier to use. The v2 version is backwards compatible.

Required Roles

Service Administrator or any user assigned to the Migrations - Administer granular role

REST Resource

GET `/interop/rest/{api_version}/services/dailymaintenance`

Request

Response

Supported Media Types: `application/json`

Table 2-269 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`items`	Detailed information about the API
`amwTime`	Scheduled start time of the daily maintenance window in 24-hour format in Etc/UTC timezone by default or in the specified time zone when the "showTimeZone" optional parameter is true.
`buildVersion`	Current build version
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Possible value: `self`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-269 (Cont.) Parameters

Parameters	Description
data	Parameters as key value pairs passed in the request

Example of Response Body

```
{
"details":null,
"links":[
{
"rel":"self","href":"https://<BASE-URL>/interop/rest/v1/services/
dailymaintenance",
"data":"null",
"action":"GET"}],
"status":"0",
"items":[
{
"amwTime":"19",
"buildVersion":"16.10.17"}
]
}
```

Get Build Version and Daily Maintenance Time Sample Code

Get the Build Version and Daily Maintenance Window Time (v2)

This REST API returns information about the current build version and the scheduled daily maintenance window start time.

Required Roles

Service Administrator, or any application role and the Migrations - Administer granular role

REST Resource

GET `/interop/rest/v2/maintenance/getdailymaintenancestarttime`

Request

Table 2-270 Parameters

Name	Description	Type	Required	Default
showTimeZone	Displays the time in the time zone specified while setting it	Query	No	false

Example URL

```
https://<BASE URL>/interop/rest/v2/maintenance/getdailymaintenancestarttime?
showTimeZone=true
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Response

Supported Media Types: `application/json`

Table 2-271 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`items`	Detailed information about the API
`amwTime`	Scheduled start time of the daily maintenance window in 24-hour format in Etc/UTC timezone by default or in the specified time zone when the "showTimeZone" optional parameter is true.
`buildVersion`	Current build version
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Possible value: `self`
`data`	null

Example of Response Body

```
{
    "details": null,
    "status": 0,
    "items": [
        {
            "buildVersion": "22.09.40",
            "amwTime": "19:00",
            "timeZone": "Etc/UTC"
        }
    ],
    "links": [
        {
            "href": "https://<BASE URL>/interop/rest/v2/maintenance/
getdailymaintenancestarttime",
            "action": "GET",
            "rel": "self",
            "data": null
        }
    ]
}
```

Sample cURL command

```
curl -X GET -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' 'https://<BASE URL>/interop/rest/v2/
maintenance/getdailymaintenancestarttime?showTimeZone=true'
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Set the Daily Maintenance Time (v1)

Use this REST API to set the daily maintenance window start time.

This topic describes the original version of this REST API. You can also use the simplified v2 version of the REST API. The v2 version contains all parameters in the payload and does not require URL encoding while calling the REST APIs. This makes the v2 API easier to use. The v2 version is backwards compatible.

> **Note**
>
> To ensure that the use of this API does not interfere with the Oracle requirement for creating backups, this API will not change the maintenance start time if the daily maintenance process did not run in the last 36 hours.

Required Roles

Service Administrator, or any application role and the Migrations - Administer granular role

REST Resource

PUT `/interop/rest/{api_version}/services/dailymaintenance?StartTime={N}`

Request

Table 2-272 Parameters

Name	Description	Type	Required	Default
`StartTime`	Scheduled Time (in HH:00 format using a 24 hour clock) at which the maintenance process should start and an optional time zone. Acceptable start time value range is 00:00 - 23:00. If the start time is not to be set in UTC, specify a valid standard time zone; for example, "14:00 America/Los_Angeles" for 2:00 pm Pacific Standard Time.	Query	Yes	None

Response

Supported Media Types: `application/json`

Table 2-273 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Possible value: `self`
`data`	Parameters as key value pairs passed in the request

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example of Response Body

```
{
"links": [1]
0:  {
"rel":"self",
"href":"https://<BASE-URL>/interop/rest/v1/services/dailymaintenance?
StartTime=23"
"data":"null",
"action":"PUT,
}-
-
"details":"null",
"status":"0"
}
```

Maintenance Window Time Sample Code

Set the Daily Maintenance Time (v2)

Use this REST API to set the daily maintenance window start time.

> **Note**
>
> To ensure that the use of this API does not interfere with the Oracle requirement for creating backups, this API will not change the maintenance start time if the daily maintenance process did not run in the last 36 hours.

Required Roes

Service Administrator, or any application role and the Migrations - Administer granular role

REST Resource

PUT `/interop/rest/v2/maintenance/setdailymaintenancestarttime`

Request

Table 2-274 Parameters

Name	Description	Type	Required	Default
`StartTime`	Scheduled time (in HH:00 format using a 24 hour clock) at which the maintenance process should start and an optional time zone. Acceptable start time value range is 00:00 - 23:00. If the start time is not to be set in UTC, specify a valid standard time zone; for example, "14:00 America/ Los_Angeles" for 2:00 pm Pacific Standard Time.	Payload	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example URL and Payload

```
https://<BASE-URL>/interop/rest/v2/maintenance/setdailymaintenancestarttime


{"startTime":"08:00"}
```

Response

Supported Media Types: `application/json`

Table 2-275 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Possible value: `self`
`data`	null

Example of Response Body

```
{
    "details": null,
    "status": 0,
    "items": null,
    "links": [
        {
            "href": " https://<BASE-URL>/interop/rest/v2/maintenance/
setdailymaintenancestarttime",
            "action": "PUT",
            "rel": "self",
            "data": null
       }]
}
```

Sample cURL command

```
curl -X PUT -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' -d '{"startTime":"08:00"}' 'https://<BASE-
URL>/interop/rest/v2/maintenance/setdailymaintenancestarttime'
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Run Daily Maintenance While Skipping the Scheduled Daily Maintenance (v1)

Use this API if you want to run daily maintenance while skipping the scheduled daily maintenance.

This topic describes the original version of this REST API. You can also use the simplified v2 version of the REST API. The v2 version contains all parameters in the payload and does not require URL encoding while calling the REST APIs. This makes the v2 API easier to use. The v2 version is backwards compatible.

Required Roles

Service Administrator or any user assigned to the Migrations - Administer granular role

REST Resource

POST `/interop/rest/{api_version}/services/maintenancewindow`

Request

Table 2-276 Parameters

Name	Description	Type	Required	Default
`skipNext`	Specifies if the set maintenance time should be used, `true` or `false`	String	Yes	`false`

Response

Supported Media Types: `application/json`

Table 2-277 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Possible value: `self`
`data`	Parameters as key value pairs passed in the request

- Java Code using `skipNext`:
  `DailyMaintenanceWithSkipNextv1.java Main method:`
  `runDailyMaintenanceWithSkipNext() Helper method waitForCompletion`
- Curl Code using `skipNext`:
  `Main method: funcSetMaintenancewithSkipNext`
- Groovy Code using `skipNext`:
  `DailyMaintenanceWithSkipNextv1.groovy Main method:`
  `runDailyMaintenanceWithSkipNext()`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Maintenance Window Time Sample Code

Run Daily Maintenance While Skipping the Scheduled Daily Maintenance (v2)

Use this REST API if you want to run daily maintenance with an option to skip the next scheduled daily maintenance.

Required Roles

Service Administrator or any user assigned to the Migrations - Administer granular role

REST Resource

POST `/interop/rest/v2/maintenance/rundailymaintenance`

Request

Supported Media Types: `application/json`

Table 2-278 Parameters

Name	Description	Type	Required	Default
`skipNext`	Specifies if the next scheduled daily maintenance time should be skipped, `true` or `false`	String	Yes	`false`

Example URL and Payload

`https://<BASE URL>/interop/rest/v2/maintenance/rundailymaintenance`

Response

Supported Media Types: `application/json`

```
{"skipNext":"true"}
```

Table 2-279 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Possible value: `self`
`data`	Null

Example of Response Body

```
{
    "details": null,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "status": -1,
    "items": null,
    "links": [
        {
            "href": " https://<BASE-URL>/interop/rest/v2/maintenance/
rundailymaintenance",
            "action": "POST",
            "rel": "self",
            "data": null
        },
        {
            "href": " https://<BASE-URL>/interop/rest/v2/status/service/
maintenancewindow/1660115130723",
            "action": "GET",
            "rel": "Job Status",
            "data": null
        }
    ]
}
```

Sample cURL command

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' -d '{"skipNext":"true"}' 'https://<BASE
URL>/interop/rest/v2/maintenance/rundailymaintenance'
```

Usage Simulation

This section describes the REST APIs for simulating user activities for testing purposes.

Table 2-280 Usage Simulation

Task	Request	REST Resource
Simulate Concurrent Usage (v1)	POST	/interop/rest/v1/concurrentusage/run

URL Structure for Usage Simulation

This topic shows the general URL structure for the Usage Simulation REST APIs.

Use the following URL structure to access the Usage Simulation REST resources:

```
https://<BASE-URL>/interop/rest/{api_version}/{path}
```

Where:

- *<BASE-URL>*: The first part of your service URL, before the context.

  For example, if your service URL is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com`. Similarly, if your service URL is `https://epm2-acme.epm.us6.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm2-acme.epm.us6.oraclecloud.com`.

Copyright © 2017, 2026, Oracle and/or its affiliates.

- {*api_version*}: API version you are developing with.
- {*path*}: Identifies the resource.

> **Note**
>
> Oracle does not authorize or support the use of REST APIs with the path token "/internal/" in the URL.

Simulate Concurrent Usage (v1)

The Simulate Concurrent Usage REST API executes different concurrent operations on an environment by simulating users. It can be used to validate the performance of the environment to verify that the response time is acceptable when the service is under the load during specific operations run by a specific number of users. For example, it can be used to measure performance when 50 users simultaneously open a form using different POVs. It allows the self-service load testing of environments.

This REST API performs the simulation by executing the specified operations for a given number of users and iterations. It runs multiple iterations to calculate the minimum time, the maximum time and the average time for a particular operation. It supports these operations to perform concurrent usage load testing:

- Open forms
- Save forms
- Run business rules
- Run business rulesets
- Run data rules
- Open ad hoc grids
- Execute report
- Execute book

> **Note**
>
> This API executes the specified operations on the current environment and may, depending on the operation, update the data in the environment. Run this API on test environments. Running this API on production environments is not advised.

This REST API accepts a ZIP file, that must already have been uploaded to the environment, as input. The ZIP file contains one `requirement.csv` file, and the input files that support the use cases included in `requirement.csv`. It can also optionally contain a `UserVarMemberMapping.csv` file to provide user variable member mapping and an `options.xml` file to provide Smart View options for some use cases. The REST API then simulates the use cases and creates a report that may be emailed to one or more recipients.

Required Roles

Service Administrator (Identity Domain Administrator is also required to use testModes 0, 1, and 2.)

Copyright © 2017, 2026, Oracle and/or its affiliates.

REST Resource

POST `/interop/rest/v1/concurrentusage/run`

Supported Media Types: application/json

Table 2-281 Parameters

Name	Description	Type	Data Type	Required	Default
`inputFile`	The name of the zip file that contains concurrent usage test cases. The zip file should contain a file named `requirement.csv`, which contains the details of all the operations to execute for this simulation test, and the input files that contain the details of each operation. It can also optionally contain a `UserVarMemberMapping.csv` file to provide user variable member mapping and an `options.xml` file to provide Smart View options for some use cases. For information on how to create these files, see Preparing to Run the simulateConcurrentUsage Command in *Working with EPM Automate*. Use the Upload REST API to upload the zip file to the environment prior to calling this REST API.	Payload	String	Yes	None
`numberOfIterations`	Number of iterations each use case identified in `requirement.csv` has to run to measure the response time.	Payload	Integer	No	1
`notificationEmails`	Email addresses of the recipients to whom the result will be sent at the end of the concurrent usage simulation. The emails must be separated by semi-colons and enclosed in double quotes. For example: `"jdoe@example.com;jane.doe@example.com"`.	Payload	String	No	Email of the user who executed the API
`lagTime`	Number of seconds (5 seconds or more) between the execution of each use case in `requirement.csv`.	Payload	Integer	No	5

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-281 (Cont.) Parameters

Name	Description	Type	Data Type	Required	Default
`testMode`	Mode in which concurrent usages simulation has to run. Possible values are 0, 1, 2, 3, and 4. • **0 – Default mode**: Adds simulated users to the environment and assigns them the Service Administrator role, runs the simulation, and then deletes the simulated users. This mode is useful if you want to run the test only one time. Simulated user names are created using `<testName>User<userNo>` pattern. If `testName` is `Sim` then the simulated users have these properties: – **First Name**: SimUser1, SimUser2, and so on – **Last Name**: SimUser1, SimUser2, and so on – **Email Address**: SimUser1@example.oracle.com, SimUser2@example.oracle.com, and so on – **Username**: SimUser1, SimUser2, and so on • **1 – Add Users Only**: Adds simulated users to the environment and assigns them the Service Administrator role, but does not run the simulation or delete the simulated users. Simulated user names are created using the same pattern as for test mode 0. • **2 – Delete Users Only**: Deletes simulated users created in a previous concurrent usage simulation run. Does not create users or run the simulation. • **3 – Simulation Only**: Runs the simulation using already existing simulated users without adding or deleting users. • 4 – **Use Existing Users**: Includes users defined in the `users.csv` file included in the input ZIP file. In this mode, the simulated users are not created.	Payload	Integer	No	0

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 2-281 (Cont.) Parameters

Name	Description	Type	Data Type	Required	Default
`testName`	Indicates a unique name to identify this invocation of the REST API. It can be any alphanumeric value with a maximum length of 50 characters. `testName` is required for test modes 0, 1, 2, and 3, and is not required for test mode 4. You must use the same test name if you split the simulation sequentially with test modes 1 (to create users), 3 (to run simulation with the users created by test mode 1), and then 2 (delete the users created by test mode 1) using the same input file.	Payload	String	No	None
`reportFile`	Specifies the name and path of the file to which the summary report will be exported. The file name must use the `.csv` extension. If no path is specified, the report is stored in the default directory using the name provided in the `reportFile` parameter. For example: `"reportFile":"perf.csv"`. The parameter value can also be a filename in `inbox` or `outbox`. For example: `"reportFile":"outbox/scu/perf.csv"`. This file can be downloaded using Download REST API. If errors occur during the simulation, an error file named `<reportFile>_error.csv` will also be generated in the same folder where the `reportFile` is located. The error file can also be downloaded using Download REST API.	Payload	String	No	None

Example URL and Payload

```
https://<BASE URL>/interop/rest/v1/concurrentusage/run
{
      "inputFile": "<ZIP_FILE_NAME>",
    "numberOfIterations": 1,
    "testMode": 0,
    "notificationEmails": "<EMAIL_ADDRESS>",
    "lagTime": 5,
       "testName" : "<TEST_NAME>",
       "reportFile" : "<FILE_NAME>"
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Sample Request

```
{
    "inputFile" : "InputFiles2.zip",
    "numberOfIterations" : 1,
    "testMode" : 0,
    "notificationEmails" : "abc@example.oracle.com",
    "lagTime" : 10,
    "testName" : "MyTest2",
    "reportFile" : "perf.csv"
}
```

Response

Supported Media Types: `application/json`

Table 2-282 Parameters

Name	Description
`details`	In the case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`data`	null

Example of Response Body

Example 1: Error Case

```
{
    "details": "InputFile is missing in request body",
    "status": 1,
    "items": null,
    "links": [{
        "href": "https://<BASE URL>/interop/rest/v1/concurrentusage/run",
        "action": "POST",
        "rel": "self",
        "data": {
            "jobType": "RUN_CONCURRENTUSAGE",
            "numberOfIterations": 2,
            "testMode": 0,
            "lagTime": 5,
            "inputfile": "",
            "notificationEmails": "abc@example.oracle.com",
                    "testName": "MyTest",
                    "reportFile": "perf.csv"
        }
    }]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example 2: Success Case


```
{
    "details": null,
    "status": -1,
    "items": null,
    "links": [{
        "href": "https://<BASE URL>/interop/rest/v1/concurrentusage/run",
        "action": "POST",
        "rel": "self",
        "data": {
            "jobType": "RUN_CONCURRENTUSAGE",
            "numberOfIterations": 2,
            "testMode": 0,
            "lagTime": 5,
            "inputfile": "InputFiles2.zip",
            "notificationEmails": "abc@example.oracle.com",
                    "testName": "MyTest",
                     "reportFile": "perf.csv"

            }
            },
        {
            "href": "https://<BASE URL>/interop/rest/v1/concurrentusage/jobs/
437838742934700",
            "action": "GET",
            "rel": "Job Status",
            "data": null
        }
    ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

3

Cloud EPM Platform REST APIs

This table lists all the available Oracle Fusion Cloud Enterprise Performance Management Platform REST APIs.

Table 3-1 Platform REST APIs

REST API	Planning	FreeForm	Consolidation	Profitability	Tax Reporting
Applications					
Get Applications	✓	✓	✓	✓	✓
Get Application Summary	✓	✓	✓	✓	✓
Data Slices					
Clear Data Slice	✓	✓	✓	✓	✓
Export Data	✓	✓	✓	✓	✓
Export Form Data	✓	✓	✓	✓	✓
Export Data Slice	✓	✓	✓	✓	
Import Data Slice	✓	✓	✓	✓	✓
Dimensions					
Add Member	✓	✓	✓	✓	✓
Get Dimensions for a Plan Type	✓	✓	✓		
Get Dimension Details	✓	✓	✓		
Get Member	✓	✓	✓	✓	✓
Get Plan Types	✓	✓	✓		
Documents					
List Library Documents	✓	✓	✓	✓	✓
Jobs					
Calculate Model (v3)				✓	
Clear Data By Point of View (v3)				✓	
Copy Data by Point of View				✓	
Delete Point of View				✓	
Generate Model Documentation Report				✓	
Validate Model				✓	
Clear Data			✓		
Copy Data			✓		
Generate an Intercompany Matching Report			✓		
Get Job Definitions	✓	✓	✓	✓	✓

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-1 (Cont.) Platform REST APIs

REST API	Planning	FreeForm	Consolidation	Profitability	Tax Reporting
Execute a Job	✓	✓	✓	✓	✓
Retrieve Job Status for a Report			✓		✓
Retrieve Child Job Status Details	✓	✓	✓	✓	✓
Retrieve Job Status Details	✓	✓	✓	✓	✓
Validate Metadata			✓		
Journals					
Export Consolidation Journals			✓		
Import Consolidation Journals			✓		
Perform Journal Actions for Financial Consolidation and Close			✓		
Perform Journal Period Updates for Financial Consolidation and Close			✓		
Retrieve Journals for Financial Consolidation and Close			✓		
Planning Units					
Change Planning Unit Status	✓	✓	✓		
Get Available Planning Unit Actions	✓	✓	✓		
Get Planning Unit Owner Photo	✓	✓	✓		
Get Filters with All Possible Values	✓	✓	✓	✓	
Get Planning Unit History and Annotations	✓	✓	✓		
Get Planning Unit Promotional Path	✓	✓	✓		
List All Planning Units	✓	✓	✓		
Rulesets					
Export Configurable Consolidation Rulesets			✓		
Import Configurable Consolidation Rulesets			✓		
Generate Report for Financial Consolidation and Close, Tax Reporting, Enterprise Profitability and Cost Management and Planning			✓		

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-1 (Cont.) Platform REST APIs

REST API	Planning	FreeForm	Consolidation	Profitability	Tax Reporting
Generate User Details Report for Financial Consolidation and Close and Tax Reporting			✓		
Substitution Variables					
Create or Update All Substitution Variables Defined for the Application	✓	✓	✓	✓	
Delete a Substitution Variable at the Plan Type Level	✓	✓	✓	✓	
Delete a Substitution Variable for the Application	✓	✓	✓	✓	
Delete Substitution Variables at the Plan Type Level	✓	✓	✓		
Delete Substitution Variables for the Application	✓	✓	✓		
Get a Derived Substitution Variable Defined at the Plan Type Level	✓	✓	✓	✓	
Get a Substitution Variable Defined for the Application	✓	✓	✓	✓	
Get All Substitution Variables Defined for the Application	✓	✓	✓	✓	✓
Get Derived Substitution Variables at the Plan Type Level	✓	✓	✓	✓	
Get Substitution Variables Defined at the Plan Type Level	✓	✓	✓	✓	
User Preferences					
Get User Preferences	✓	✓	✓	✓	✓
User Variables					
Create User Variables	✓	✓	✓		✓
Delete a User Variable	✓	✓	✓		✓
Delete User Variable Definitions	✓	✓	✓		✓
Set the User Variable Values for the Application	✓	✓	✓	✓	✓
Get All User Variables	✓	✓	✓		✓

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-1 (Cont.) Platform REST APIs

REST API	Planning	FreeForm	Consolidation	Profitability	Tax Reporting
Get User Variable Values Defined for the Application	✔	✔	✔	✔	✔
Get User Variable Values Defined for the Application by the User Name	✔	✔	✔	✔	✔
Get User Variable Values Defined in the Application by the User Name and Value	✔	✔	✔	✔	✔
Get User Variable Values Defined in the Application by the User Variable Name	✔	✔	✔	✔	✔
Get User Variable Values Defined in the Application by Value	✔	✔	✔	✔	✔
Get a User Variable Using Its ID	✔	✔	✔		✔
Update User Variables	✔	✔	✔		✔
Versions					
Get Information about a Specific REST API Version for Planning	✔	✔	✔	✔	✔
Getting API Versions for Planning	✔	✔	✔	✔	✔
Get API Versions for Tax Reporting APIs					✔
Get Information about a Specific API Version for Tax Reporting			✔		✔
Get API Versions for Financial Consolidation and Close APIs			✔		
Get Information about a Specific API Version for Financial Consolidation and Close APIs			✔		

Applications and Related Settings

Related Topics

- Get Applications
  This REST API returns a list of applications to which the specified user is assigned. It also provides certain key information about the application.

Copyright © 2017, 2026, Oracle and/or its affiliates.

- Get Application Summary
  Use this AI REST API to return a comprehensive, AI focused markdown of the specified business process application.
- Get Dimension Details
  Use this REST API to retrieve the hierarchy of a specified dimension within a plan type, with support for selecting specific fields, choosing alias tables, and accessing both hidden and attribute dimensions.
- Get User Preferences
  Returns the requesting user's display preferences.
- List Library Documents
  Use this REST API to retrieve a list of documents based on the filter criteria specified in the query parameter. After listing documents, you can use them as input for other actions, such as deleting documents in bulk.

Get Applications

This REST API returns a list of applications to which the specified user is assigned. It also provides certain key information about the application.

Required Roles

Service Administrator

REST Resource

```
GET /HyperionPlanning/rest/{api_version}/applications
```

Request

Supported Media Types: `application/json`

Parameters:

The following table summarizes the client request.

Table 3-2 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None

Response

Supported Media Types: `application/json`

Parameters:

Table 3-3 Parameters

Name	Description
`Items`	A list of applications
`name`	Application name
`type`	Product type. Possible values: HFM, HP

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-3 (Cont.) Parameters

Name	Description
`adminMode`	Indicates if the application's login level is set to Administrators. Returns a Boolean value where `true` indicates that the login level for the application is set to Administrators and `false` indicates that the login level is set to All Users.
`theme`	Current theme of the application. Possible values: • REDWOOD_ORACLE_R13 • REDWOOD_LIGHT_R13 • REDWOOD_DARK_R13
`webBotDetails`	Web bot details of the application
`webBotAppId`	Web bot application ID register for the application
`dpEnabled`	Indicates if decision package is enabled in the application. Returns a Boolean value `true` when enabled.
`unicode`	Indicates if the application is Unicode enabled. Returns a Boolean value where `true` indicates that the application is Unicode enabled.
`appStorage`	Returns the storage type of the application, such as `Default`, `Multidim`, or `ASO`.
`appType`	Business process type. Possible values are `PBCS`, `EPBCS`, and so on.
`hybrid`	Indicates if the hybrid configuration is enabled in the application. Returns a Boolean value `true` when enabled.
`oglServerUrl`	The value of the Oracle Guided Learning (OGL) Server URL in the application settings. For more information, see Integrating EPM Cloud with Oracle Guided Learning in *Oracle Guided Learning User Guide*. Note that you can use a REST API to configure the OGL Server URL. See Configure the Oracle Guided Learning (OGL) Server.
`oglAppId`	The value of the Oracle Guided Learning (OGL) Application ID in the application settings. For more information, see Integrating EPM Cloud with Oracle Guided Learning in *Oracle Guided Learning User Guide*. Note that you can use a REST API to configure the OGL Application ID. See Configure the Oracle Guided Learning (OGL) Server.

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
    "type": "HP",
    "items": [
        {
            "appType": "PBCS",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
                "webBotDetails": "null",
                "helpServerUrl": "https://www.oracle.com",
                "workspaceServerUrl": "https://<BASE-URL>",
                "appStorage": "Multidim",
                "unicode": true,
                "name": "Vision",
                "type": "HP",
                "adminMode": "true",
                "theme": "REDWOOD_LIGHT_R13",
                "hybrid": "true"
                "oglServerUrl":"https://guidedlearning.oracle.com",
                "oglAppId":"vcQ6fAsJRySX_SSGc581Vg"
            }
        ],
        "links": [
            {
                "rel": "self",
                "href": "https://<BASE-URL>",
                "action": "GET"
            }
        ]
}
```

Get Application Summary

Use this AI REST API to return a comprehensive, AI focused markdown of the specified business process application.

This REST API is primarily used by AI agents, automation, and user interfaces to understand an application's structure at a high level without excessive detail.

Required Roles

Any Role

REST Resource

```
GET /HyperionPlanning/rest/v3/applications/summary
```

Request

Parameters:

Table 3-4 Parameters

Name	Description	Type	Require	Default
`application`	The name of the application	path	Yes	None
`fullHierarchyThreshold`	Show full hierarchy for dimensions with this many members	path	No	100
`aliasTableName`	The name of the alias table to use for retrieving alias names	path	No	Default
`dimensionsToInclude`	list of dimension names to restrict output	path	No	None

Example URL

Copyright © 2017, 2026, Oracle and/or its affiliates.

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/summary
```

Response

Supported Media Types: `application/json`

> **Note**
>
> The response format may change significantly between releases. It's designed for AI use and isn't meant for stable, programmatic consumption like the other APIs.

Get Dimension Details

Use this REST API to retrieve the hierarchy of a specified dimension within a plan type, with support for selecting specific fields, choosing alias tables, and accessing both hidden and attribute dimensions.

Required Roles

Any Role

REST Resource

```
GET /HyperionPlanning/rest/v3/applications/{application}/plantypes/{plantype}/
dimensions/{dimname}
```

Request

Parameters:

Table 3-5 Parameters

Name	Description	Type	Required	Default
`application`	The name of the application	Path	Yes	None
`plantype`	The name of the plan type	Path	Yes	None
`dimname`	The name of the dimension	Path	Yes	None
`fields`	Comma-separated list of fields to include in the response	Query	No	None
`aliasTableName`	The name of the alias table to use for retrieving alias names	Query	No	None

Example URL

```
https://<BASE-URL> /HyperionPlanning/rest/v3/applications/Vision/plantypes/
Plan1/dimensions/Entity?
fields=id,name,alias,path,children&aliasTableName=Default
```

Response

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-6 Parameters

Name	Description
id	The unique identifier of the dimension
name	The name of the dimension
path	The hierarchical path of the dimension
alias	The alias name of the dimension
children	An array of child members for the current parent, each containing name, path, id, and alias

Sample Response - (using aliasTableName=Default)

Example URL

```
http://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/plantypes/Plan1/
dimensions?aliasTableName=Default
```

```
{
  "links": [
    {
      "href": "http://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/
plantypes/Plan1/dimensions?aliasTableName=Default",
      "action": "GET",
      "rel": "self"
    }
  ],
  "items": [
    {
      "links": [
        {
          "href": "http://<BASE-URL>/HyperionPlanning/rest/v3/applications/
Vision/plantypes/Plan1/dimensions/Account",
          "action": "GET",
          "rel": "self"
        }
      ],
      "name": "Account",
      "dimType": "Account",
      "path": "/Account",
      "id": "9fce272d-f3c1-4b84-a2d6-c35e483b9bcc"
    },
    {
      "links": [
        {
          "href": "http://<BASE-URL>/HyperionPlanning/rest/v3/applications/
Vision/plantypes/Plan1/dimensions/Period",
          "action": "GET",
          "rel": "self"
        }
      ],
      "name": "Period",
      "dimType": "Period",
      "path": "/Period",
      "id": "c367a200-e0ef-446d-8c86-72d3153b7e97"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    },
    {
      "links": [
        {
          "href": "http://<BASE-URL>/HyperionPlanning/rest/v3/applications/
Vision/plantypes/Plan1/dimensions/HSP_View",
          "action": "GET",
          "rel": "self"
        }
      ],
      "name": "HSP_View",
      "dimType": "Custom",
      "path": "/HSP_View",
      "id": "7db76698-3e8f-4d55-8cb5-369a783724f7"
    },
    {
      "links": [
        {
          "href": "http://<BASE-URL>/HyperionPlanning/rest/v3/applications/
Vision/plantypes/Plan1/dimensions/Year",
          "action": "GET",
          "rel": "self"
        }
      ],
      "name": "Year",
      "dimType": "Year",
      "path": "/Year",
      "id": "20df0c5d-a287-4057-8b9e-1f99add8dbb1"
    },
    {
      "links": [
        {
          "href": "http://<BASE-URL>/HyperionPlanning/rest/v3/applications/
Vision/plantypes/Plan1/dimensions/Scenario",
          "action": "GET",
          "rel": "self"
        }
      ],
      "name": "Scenario",
      "dimType": "Scenario",
      "path": "/Scenario",
      "id": "63c49e04-37fb-403b-aa4c-534ac5eea098"
    },
    {
      "links": [
        {
          "href": "http://<BASE-URL>/HyperionPlanning/rest/v3/applications/
Vision/plantypes/Plan1/dimensions/Version",
          "action": "GET",
          "rel": "self"
        }
      ],
      "name": "Version",
      "dimType": "Version",
      "path": "/Version",
      "id": "c5103409-3601-4e75-86b9-370c0a7a7a40"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    },
    {
      "links": [
        {
          "href": "http://<BASE-URL>/HyperionPlanning/rest/v3/applications/
Vision/plantypes/Plan1/dimensions/Entity",
          "action": "GET",
          "rel": "self"
        }
      ],
      "name": "Entity",
      "dimType": "Entity",
      "path": "/Entity",
      "id": "b657a117-26f4-4539-bb36-ce5a13e86631"
    },
    {
      "links": [
        {
          "href": "http://<BASE-URL>/HyperionPlanning/rest/v3/applications/
Vision/plantypes/Plan1/dimensions/Product",
          "action": "GET",
          "rel": "self"
        }
      ],
      "name": "Product",
      "dimType": "Custom",
      "path": "/Product",
      "id": "7a0125fd-a1cf-49a2-bf4e-15cebcfbee73"
    },
    {
      "links": [
        {
          "href": "http://<BASE-URL>/HyperionPlanning/v3/applications/Vision/
plantypes/Plan1/dimensions/Market%20Size",
          "action": "GET",
          "rel": "self"
        }
      ],
      "name": "Market Size",
      "dimType": "Attribute Dimension",
      "path": "/Market Size",
      "id": "c0704a7f-cbd1-4d82-aed6-67fe5cd6f22c"
    }
  ],
  "totalResults": 9,
  "hasMore": false
}
```


Sample Response - (using selected fields (`id, name, alias, path`))

Example URL

Copyright © 2017, 2026, Oracle and/or its affiliates.

```
http://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/plantypes/Plan1/
dimensions?fields=id,name,path

{
    "items": [
        {
            "path": "/Account",
            "name": "Account",
            "id": "9fce272d-f3c1-4b84-a2d6-c35e483b9bcc"
        },
        {
            "path": "/Period",
            "name": "Period",
            "id": "c367a200-e0ef-446d-8c86-72d3153b7e97"
        },
        {
            "path": "/HSP_View",
            "name": "HSP_View",
            "id": "7db76698-3e8f-4d55-8cb5-369a783724f7"
        },
        {
            "path": "/Year",
            "name": "Year",
            "id": "20df0c5d-a287-4057-8b9e-1f99add8dbb1"
        },
        {
            "path": "/Scenario",
            "name": "Scenario",
            "id": "63c49e04-37fb-403b-aa4c-534ac5eea098"
        },
        {
            "path": "/Version",
            "name": "Version",
            "id": "c5103409-3601-4e75-86b9-370c0a7a7a40"
        },
        {
            "path": "/Entity",
            "name": "Entity",
            "id": "b657a117-26f4-4539-bb36-ce5a13e86631"
        },
        {
            "path": "/Product",
            "name": "Product",
            "id": "7a0125fd-a1cf-49a2-bf4e-15cebcfbee73"
        },
        {
            "path": "/Market Size",
            "name": "Market Size",
            "id": "c0704a7f-cbd1-4d82-aed6-67fe5cd6f22c"
        }
    ],
    "totalResults": 9,
    "hasMore": false
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Sample Response - (full payload)

Example URL

```
https://<BASE-URL> /HyperionPlanning/rest/v3/applications/Vision/plantypes/Plan1/
dimensions/entity
```


```
{
    "links": [
        {
            "href": "http://<BASE-URL>/HyperionPlanning/rest/v3/applications/
Vision/plantypes/Plan1/dimensions/entity",
            "action": "GET",
            "rel": "self"
        }
    ],
    "children": [
        {
            "name": "Total Entity",
            "path": "/Entity/Total Entity",
            "displayPath": "/Entity/Total Entity",
            "parentId": "b657a117-26f4-4539-bb36-ce5a13e86631",
            "id": "56777d3c-4b25-4f97-ace8-7d64f5789963",
            "children": [
                {
                    "name": "TD",
                    "path": "/Entity/Total Entity/TD",
                    "displayPath": "/Entity/Total Entity/TD",
                    "parentId": "56777d3c-4b25-4f97-ace8-7d64f5789963",
                    "id": "e1f09ef3-2905-4e09-b538-dc7d0301b0fb",
                    "dimName": "Entity",
                    "parentName": "Total Entity",
                    "level": 2,
                    "usedIn": [
                        "Plan1",
                        "Plan2",
                        "Plan3",
                        "VisASO",
                        "Vis1ASO"
                    ],
                    "aliasPath": "/Entity/Total Entity/Total Department",
                    "alias": "Total Department",
                    "valid": true,
                    "invalidDueToValidIntersection": false,
                    "objectTypeId": 33,
                    "twoPass": false,
                    "dataType": "Unspecified",
                    "dataStorage": "Never Share",
                    "oldName": "TD",
                    "generation": 3,
                    "objectType": "Entity"
                },
                {
                    "name": "Enterprise Global",
                    "path": "/Entity/Total Entity/Enterprise Global",
                    "displayPath": "/Entity/Total Entity/Enterprise Global",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
                    "parentId": "56777d3c-4b25-4f97-ace8-7d64f5789963",
                    "id": "4cc9dcee-9d49-44ab-a638-d8b09a25233f",
                    "dimName": "Entity",
                    "parentName": "Total Entity",
                    "level": 0,
                    "usedIn": [
                        "Plan1",
                        "Plan2",
                        "Plan3",
                        "VisASO",
                        "Vis1ASO"
                    ],
                    "aliasPath": "/Entity/Total Entity/Enterprise Global",
                    "valid": true,
                    "invalidDueToValidIntersection": false,
                    "objectTypeId": 33,
                    "twoPass": false,
                    "dataType": "Unspecified",
                    "dataStorage": "Store Data",
                    "oldName": "Enterprise Global",
                    "generation": 3,
                    "objectType": "Entity"
                }
            ],
            "dimName": "Entity",
            "parentName": "Entity",
            "level": 3,
            "usedIn": [
                "Plan1",
                "Plan2",
                "Plan3",
                "VisASO",
                "Vis1ASO"
            ],
            "aliasPath": "/Entity/Total Entity",
            "valid": true,
            "invalidDueToValidIntersection": false,
            "objectTypeId": 33,
            "twoPass": false,
            "dataType": "Unspecified",
            "dataStorage": "Never Share",
            "oldName": "Total Entity",
            "generation": 2,
            "objectType": "Entity"
        },
        {
            "name": "Management Rollup",
            "path": "/Entity/Management Rollup",
            "displayPath": "/Entity/Management Rollup",
            "parentId": "b657a117-26f4-4539-bb36-ce5a13e86631",
            "id": "612f695d-458e-4d97-8da1-7d22297a0751",
            "children": [
                {
                    "name": "Resources VP",
                    "path": "/Entity/Management Rollup/Resources VP",
                    "displayPath": "/Entity/Management Rollup/Resources VP",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "parentId": "612f695d-458e-4d97-8da1-7d22297a0751",
            "id": "d1293874-f51b-4e06-8676-009f1d45eae5",
            "dimName": "Entity",
            "parentName": "Management Rollup",
            "level": 1,
            "usedIn": [
                "Plan1",
                "Plan2",
                "Plan3",
                "Vis1ASO"
            ],
            "aliasPath": "/Entity/Management Rollup/Resources VP",
            "valid": true,
            "invalidDueToValidIntersection": false,
            "objectTypeId": 33,
            "twoPass": false,
            "dataType": "Unspecified",
            "dataStorage": "Dynamic Calc",
            "oldName": "Resources VP",
            "generation": 3,
            "objectType": "Entity"
        },
        {
            "name": "Sales VP",
            "path": "/Entity/Management Rollup/Sales VP",
            "displayPath": "/Entity/Management Rollup/Sales VP",
            "parentId": "612f695d-458e-4d97-8da1-7d22297a0751",
            "id": "05ae0324-fa0e-4d8d-974d-5c3314f16a25",
            "dimName": "Entity",
            "parentName": "Management Rollup",
            "level": 2,
            "usedIn": [
                "Plan1",
                "Plan2",
                "Plan3",
                "Vis1ASO"
            ],
            "aliasPath": "/Entity/Management Rollup/Sales VP",
            "valid": true,
            "invalidDueToValidIntersection": false,
            "objectTypeId": 33,
            "twoPass": false,
            "dataType": "Unspecified",
            "dataStorage": "Dynamic Calc",
            "oldName": "Sales VP",
            "generation": 3,
            "objectType": "Entity"
        }
    ],
    "dimName": "Entity",
    "parentName": "Entity",
    "level": 3,
    "usedIn": [
        "Plan1",
        "Plan2",
        "Plan3",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "Vis1ASO"
        ],
        "aliasPath": "/Entity/Management Rollup",
        "valid": true,
        "invalidDueToValidIntersection": false,
        "objectTypeId": 33,
        "twoPass": false,
        "dataType": "Unspecified",
        "dataStorage": "Dynamic Calc",
        "oldName": "Management Rollup",
        "generation": 2,
        "objectType": "Entity"
    },
    {
        "name": "OAD",
        "path": "/Entity/OAD",
        "displayPath": "/Entity/OAD",
        "parentId": "b657a117-26f4-4539-bb36-ce5a13e86631",
        "id": "1ad12c5a-b1f8-495d-a212-afbf4b431258",
        "dimName": "Entity",
        "parentName": "Entity",
        "level": 0,
        "usedIn": [
            "Plan1",
            "Plan2",
            "Plan3",
            "VisASO",
            "Vis1ASO"
        ],
        "aliasPath": "/Entity/Business Operations",
        "alias": "Business Operations",
        "valid": true,
        "invalidDueToValidIntersection": false,
        "objectTypeId": 33,
        "twoPass": false,
        "dataType": "Unspecified",
        "dataStorage": "Never Share",
        "oldName": "OAD",
        "generation": 2,
        "objectType": "Entity"
    },
    {
        "name": "MW",
        "path": "/Entity/MW",
        "displayPath": "/Entity/MW",
        "parentId": "b657a117-26f4-4539-bb36-ce5a13e86631",
        "id": "dc1a4815-aa31-4375-9eae-8541b968f8a5",
        "dimName": "Entity",
        "parentName": "Entity",
        "level": 0,
        "usedIn": [
            "Plan1",
            "Plan2",
            "Plan3",
            "VisASO",
            "Vis1ASO"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
                ],
                "aliasPath": "/Entity/Sales Midwest Region",
                "alias": "Sales Midwest Region",
                "valid": true,
                "invalidDueToValidIntersection": false,
                "objectTypeId": 33,
                "twoPass": false,
                "dataType": "Unspecified",
                "dataStorage": "Never Share",
                "oldName": "MW",
                "generation": 2,
                "objectType": "Entity"
            }
        ],
        "level": 4,
        "usedIn": [
            "Plan1",
            "Plan2",
            "Plan3",
            "VisASO",
            "Vis1ASO"
        ],
        "valid": true,
        "invalidDueToValidIntersection": false,
        "path": "/Entity",
        "displayPath": "/Entity",
        "aliasPath": "/Entity",
        "dimName": "Entity",
        "dimType": "Entity",
        "density": "Sparse",
        "enforceSecurity": true,
        "evaluationOrder": 0,
        "objectTypeId": 2,
        "generation": 1,
        "objectType": "Dimension",
        "name": "Entity",
        "id": "b657a117-26f4-4539-bb36-ce5a13e86631"
}
```


Get User Preferences

Returns the requesting user's display preferences.

Before using the REST resources, you must understand how to access the REST resources and other important concepts. See Cloud EPM REST APIs Best Practices. Using this REST API requires prerequisites. See Prerequisites.

Required Roles

Service Administrator

REST Resource

```
GET /HyperionPlanning/rest/{api_version}/applications/{application}/
userpreferences
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Request

Parameters:

The following table summarizes the client request.

Table 3-7 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	The name of the application	Path	Yes	None
`userpreferences`	The requesting user's display preferences	path	Yes	None

Example URL

`https://<BASE-URL>/HyperionPlanning/rest/v3/applications/PS4app1/userpreferences`

Response

Supported Media Types: `application/json`

Table 3-8 Parameters

Name	Description
`decimal separator`	Preference for decimal separator
`scale`	Preference for scale
`thousandsSeparator`	Preference for the thousands separator
`thousandsSeparator`	Preference for the style of negative numbers
`negativeStyle`	Preference for the minimum precision
`minPrecision`	Preference for the minimum precision
`maxPrecision`	Preference for the maximum precision
`showPUAlias`	Preference for showing the planning unit alias
`currSymbol`	Preference for the currency symbol
`type`	The type of application, such as HP

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
    "decimalSeparator": "",
    "scale": 0,
    "thousandsSeparator": "",
    "negativeStyle": 255,
    "minPrecision": 0,
    "maxPrecision": 0,
    "showPUAlias": false,
    "currSymbol": "",
    "links": [{
        "rel": "self",
        "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
PS4app1/userpreferences",
        "action": "GET"
    }]
}
```

List Library Documents

Use this REST API to retrieve a list of documents based on the filter criteria specified in the query parameter. After listing documents, you can use them as input for other actions, such as deleting documents in bulk.

This API allows you to:

- Retrieve all documents
- Retrieve documents with a specific path
- Retrieve documents by ID
- Retrieve multiple documents by ID array
- Retrieve specific fields only
- Retrieve documents by parent folder ID, filtered by MIME type, and with a combination of filters
- Paginate results
- Sort documents by name (ascending)
- Sort documents by name (descending)

You can use the Inbox/Outbox Explorer to view details on the listed files. Use the Download REST API to download files.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs. For additional details, see Job Types.

Before using the REST resources, you must understand how to access the REST resources and other important concepts. See Cloud EPM REST APIs Best Practices.

Required Roles

Service Administrator

REST Resource

```
GET HyperionPlanning/rest/v3/applications/{application}/documents
```

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-9 Parameters

Name	Description	Type	Default	Required
`offset`	Index (0-based) from which records are returned	Integer	0	No
`limit`	Number of items to return	Integer	25	No
`fields`	Comma-separated list of field names to be returned	String	None	No
`path`	The path for the documents if retrieving them with a specific path	String	None	No
`orderBy`	The order in which results are returned, optionally followed by `:asc` or `:desc` (such as `name:asc`). Sorting fields should match document properties	String	None	No

Example URL

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/{application}/documents?
q={"path":"/Library/sample.doc"}
```

Example queries:

Example 1: Retrieve all documents

```
GET /HyperionPlanning/rest/v3/applications/{application}/documents
```

Example 2: Retrieve documents with a specific path

```
GET /HyperionPlanning/rest/v3/applications/{application}/documents?
q={"path":"/Library/sample.doc"}
```

Example 3: Retrieve documents by ID

```
GET /HyperionPlanning/rest/v3/applications/{application}/documents?
q={"id":"3bbd16df-4da0-4e04-0000-c3c3f3c5ca96"}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example 4: Retrieve multiple documents by ID array

```
GET /HyperionPlanning/rest/v3/applications/{application}/documents?q={"id":
{"$in": ["3bbd16df-4da0-4e04-0000-c3c3f3c5ca96",
"a4a788e5-97cd-44fc-0000-0009642a266b"]}}
```

Example 5: Retrieve specific fields only

```
GET /HyperionPlanning/rest/v3/applications/{application}/documents?
q={"id":"a4a788e5-97cd-44fc-0000-0009642a266b"}&fields=id,name
```

Example 6: Paginate results

```
GET /HyperionPlanning/rest/v3/applications/{application}/documents?
offset=10&limit=5
```

Example 7: Sort documents by name (ascending)

```
GET /HyperionPlanning/rest/v3/applications/{application}/documents?
orderBy=name:asc
```

Example 8: Sort documents by name (descending)

```
GET /HyperionPlanning/rest/v3/applications/{application}/documents?
orderBy=name:desc
```

Response

Supported Media Types: `application/json`

Example of Response Body

The following shows an example of the response body in JSON format.


```
{
    "totalResults": 2,
    "items": [
        {
            "name": "page1.doc",
            "displayName": "page1.doc",
            "description": "Pagination test 1",
            "objectType": "Document",
            "path": "/Library/page1.doc",
            "displayPath": "/Library/page1.doc",
            "parentId": "0c000b50-25f1-48f9-0000-c385c846b761",
            "created": "26/02/25 12:33 PM",
            "modified": "26/02/25 12:33 PM",
            "modifiedBy": "epm_default_cloud_admin",
            "access": [
                "Read",
                "Manage"
            ],
            "operations": [
                "Rename",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
                    "Update",
                    "Move",
                    "Delete",
                    "AssignAccess"
                ],
                "id": "0c000b50-25f1-48f9-0000-0016c4e2a558",
                "mimeType": "application/msword"
            },
            {
                "name": "page10.doc",
                "displayName": "page10.doc",
                "description": "Pagination test 10",
                "objectType": "Document",
                "path": "/Library/page10.doc",
                "displayPath": "/Library/page10.doc",
                "parentId": "da2f51ec-d322-48a7-0000-c386676eba9d",
                "created": "26/02/25 12:33 PM",
                "modified": "26/02/25 12:33 PM",
                "modifiedBy": "epm_default_cloud_admin",
                "access": [
                    "Read",
                    "Manage"
                ],
                "operations": [
                    "Rename",
                    "Update",
                    "Move",
                    "Delete",
                    "AssignAccess"
                ],
                "id": "0c000b50-25f1-48f9-0000-c3c4cfc98fb2",
                "mimeType": "application/msword"
            }
        ],
        "hasMore": false,
        "links": [
            {
                "href": "{{protocol}}://{{hostname}}:{{port}}/HyperionPlanning/
rest/v3/applications/{{application}}/documents",
                "rel": "self",
                "method": "GET"
            }
        ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Data Slices

You can import, export, and clear data slices, as summarized here. Note that attribute dimensions are not supported in the payload.

Table 3-10 Working with Data Slices

Working with Data Slices		
Clear Data Slices Import Data Slices	Export Data Slices Export Data	Export Form Data

Clear Data Slices

Use this REST API to clear Planning and Essbase data for a specified region. In order to run this operation, the user must be an administrator.

Required Roles

Service Administrator

REST Resource

`POST /HyperionPlanning/rest/{api_version}/applications/{application}/plantypes/{plantype}/cleardataslice`

Request

Supported Media Types: `application/json`

Parameters:

The following table summarizes the client request.

Table 3-11 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	The name of the application for which to clear the data slice	Path	Yes	None
`plantype`	Name of the plan type for which to clear the data slice	Path	Yes	None

Example URL and Payload:

`https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/plantypes/plan1/cleardataslice`
Payload Parameters

The Payload is JSON with the following parameters.

Table 3-12 Parameters

Name	Description
`gridDefinition`	JSON grid definition to define the region

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-12 (Cont.) Parameters

Name	Description
`clearEssbaseData`	True or false. If true, will clear Essbase numeric data. Default is true.
`clearPlanningData`	True or false. If true, will delete the cell notes, attachments, and supporting details. Default is false.

Sample Payload

Providing dimension names as follows in the `gridDefinition` is recommended and is more efficient.

```
{
    "clearEssbaseData": true,
    "clearPlanningData": false,
    "gridDefinition": {
        "suppressMissingBlocks": true,
        "pov": {
            "dimensions": [
                "HSP_View",
                "Year",
                "Scenario",
                "Version",
                "Entity",
                "Product"
            ],
            "members": [
                [
                    "BaseData"
                ],
                [
                    "FY15"
                ],
                [
                    "Plan"
                ],
                [
                    "Working"
                ],
                [
                    "410"
                ],
                [
                    "P_160"
                ]
            ]
        },
        "columns": [
            {
                "dimensions": [
                    "Period"
                ],
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
                "members": [
                    [
                        "IDescendants(Q1)"
                    ]
                ]
            },
            {
                "dimensions": [
                    "Period"
                ],
                "members": [
                    [
                        "IDescendants(Q2)"
                    ]
                ]
            }
        ],
        "rows": [
            {
                "dimensions": [
                    "Account"
                ],
                "members": [
                    [
                        "Project Number",
                        "Request Date",
                        "Project Type",
                        "Project Investment"
                    ]
                ]
            }
        ]
    }
}
```

OR

No dimension names provided is less efficient:

```
{
    "clearEssbaseData": true,
    "clearPlanningData": false,
    "gridDefinition": {
        "suppressMissingBlocks": true,
        "pov": {
            "members": [
                [
                    "BaseData"
                ],
                [
                    "FY15"
                ],
                [
                    "Plan"
                ],
                [
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
                    "Working"
                ],
                [
                    "410"
                ],
                [
                    "P_160"
                ]
            ]
        },
        "columns": [
            {
                "members": [
                    [
                        "IDescendants(Q1)"
                    ]
                ]
            },
            {
                "members": [
                    [
                        "IDescendants(Q2)"
                    ]
                ]
            }
        ],
        "rows": [
            {
                "members": [
                    [
                        "Project Number",
                        "Request Date",
                        "Project Type",
                        "Project Investment"
                    ]
                ]
            }
        ]
    }
}
```

Response

Supported Media Types: `application/json`

JSON Output

The following shows an example of the response body with `clearEssbaseData` true and `clearPlanningData` false. There is one rejected cell due to the presence of supporting details because `clearPlanningData` is false:

```
{
    "numClearedCells": 31,
    "numRejectedCells": 1,
    "rejectedCells": [
        "Project Investment,Feb,BaseData,FY15,Plan,Working,410,P_160"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    ]
}
```

Import Data Slices

This REST API can be used to import data given a JSON data grid with a point of view, columns, and one or more data rows.

Data will be imported only for cells that the user has read-write access to. Imports data of types Text, Date and Smart List along with numeric data. Returns JSON with details on the number of cells that were accepted, the number of cells that were rejected, and the first 100 cells that were rejected. You can set custom parameters to view rejected cells to understand the reason for the rejection.

Required roles

Any role

REST Resource

`POST /HyperionPlanning/rest/{api_version}/applications/{application}/plantypes/{plantype}/importdataslice`

Request

Supported Media Types: `application/json`

Parameters:

The following table summarizes the client request.

Table 3-13 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	The name of the application for which to import the data slice	Path	Yes	None
`plantype`	Name of the plan type for which to import the data slice	Path	Yes	None

Example URL and Payload:

`https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/plantypes/plan1/importdataslice`
Payload Parameters

The Payload is JSON with the following parameters.

Table 3-14 Parameters

Name	Description
`dataGrid`	JSON data grid

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-14 (Cont.) Parameters

Name	Description
`aggregateEssbaseData`	True or false. If true, the values being saved will be added to the existing values. Only numeric values can be aggregated. Cells with Smart list, Text and Date data types will be rejected. If false, the data values will be overwritten. A value of "#missing" will clear the cell value as shown in the example. The default is false. **Note**: Values provided in the "data" section of the JSON payload will be used even for cells with supporting details provided. For cells with supporting details, make sure the total calculated for the incoming supporting details matches the value provided in the row "data" section. See the following table for examples.
`cellNotesOption`	Possible values are: "Overwrite", "Append", and "Skip". • "Overwrite": The existing cell notes will be overwritten. An empty array for cell notes [] will indicate deletion of existing cell notes. A value of "null" will leave the existing cell notes intact. • "Append": New cell notes will be appended to existing cell notes. • "Skip": Cell notes will not be processed.
`dateFormat`	Date format used in the input data grid. Valid formats are: "MM-DD-YYYY", "DD-MM-YYYY", "YYYY-MM-DD", "MM/DD/YYYY", "DD/MM/YYYY", "YYYY/MM/DD"
`strictDateValidation`	Optionally, influence how Date cell values are validated. When set to `true`, date values are validated against the `dateFormat` specified in the payload and are rejected if the format for the value does not conform to the `dateFormat`. If set to `false`, date values are interpreted more leniently. Default is `true`.
`customParams`	
`PostDataImportRuleNames`	Optionally, provide the post data import rule names. This is primarily used by Data Management for planners to run embedded business rules. Default is `false`.
`includeRejectedCells`	Optionally, indicate if the response should include the first 100 rejected cells. Default is `true`.
`includeRejectedCellsWithDetails`	Optionally, indicate if the response should include the reasons why cells are rejected.

Table 3-15 Import Data Slice Examples

Source Cell	Target Cell	Resulting Target Cell
Supporting Detail (SD)	#missing	SD
SD	Value	Add SD value to the existing value, do not add SD
Value	SD	Delete SD, add Value to the existing value
SD1	SD2	Delete SD2, add SD value to the existing value, do not add SD1

Sample payload:

```
{
    "aggregateEssbaseData": true,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "cellNotesOption": "Overwrite",
    "dateFormat": "DD/MM/YYYY",
    "strictDateValidation": true,
    "customParams": {
        "PostDataImportRuleNames": "Post data rule 1, \"post, data rule 2\"",
        "IncludeRejectedCells": true,
        "IncludeRejectedCellsWithDetails": true
    },
    "dataGrid": {…}
}
```

Response

Supported Media Types: `application/json`

JSON Output

The response provides detailed information on how much Essbase data was actually updated compared to the amount of data that was imported, as well as which cells were rejected and why.

- `numAcceptedCells` shows the total number of cells that were accepted for save without errors.
- `numUpdateCells` indicates how many cells out of `numAcceptedCells` were updated in Essbase. Only cells where the input values are different from the values in Essbase are updated.
- `numRejectedCells` indicates the number of cells that the user does not have read-write access to; cells where row or column member names are invalid and do not exist; cells where the data is invalid (for example, an invalid Smart List value); and cells that are non-numeric (Smart List, Text, or Date type) with data when `aggregateEssbaseData` is set to `true`.
- `rejectedCells` shows the cells that were rejected if `IncludeRejectedCells` is true.
- `rejectedCellsWithDetails` shows the reasons why the cells were rejected if `IncludeRejectedCellsWithDetails` is true.

Example: Importing a data slice (Project Assumptions) with one dimension on the row and column and with cells of Text/Date and SL data types.

Sample Payload:

```
{
    "dateFormat": "MM/DD/YYYY",
    "customParams": {
        "IncludeRejectedCells": true,
        "IncludeRejectedCellsWithDetails": true
    },
    "dataGrid": {
        "pov": [
            "BaseData",
            "FY24",
            "No Product",
            "Plan",
            "Working",
            "Computer Resources"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            ],
            "columns": [
                [
                    "BegBalance"
                ]
            ],
            "rows": [
                {
                    "headers": [
                        "Project Number"
                    ],
                    "data": [
                        "1"
                    ]
                },
                {
                    "headers": [
                        "Request Date"
                    ],
                    "data": [
                        "1/1/24"
                    ]
                },
                {
                    "headers": [
                        "Project Type"
                    ],
                    "data": [
                        "IT"
                    ]
                },
                {
                    "headers": [
                        "Project Investment"
                    ],
                    "data": [
                        10000
                    ]
                }
            ]
        }
}
```

JSON Output:

```
{
    "numAcceptedCells": 4,
    "numUpdateCells": 4,
    "numRejectedCells": 0,
    "rejectedCells": [],
    "rejectedCellsWithDetails": []
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example: Importing a data slice (Sales Driver Assumptions) with multiple dimensions on rows and columns. Here you see a few cells being rejected due to Invalid Intersection rules.

```
{
    "dateFormat": "MM/DD/YYYY",
    "customParams": {
        "includeRejectedCells": true,
        "IncludeRejectedCellsWithDetails": true
    },
    "dataGrid": {
        "pov": [
            "BaseData",
            "FY24",
            "BegBalance"
        ],
        "columns": [
            [
                "Mexico",
                "Mexico",
                "Canada",
                "Canada"
            ],
            [
                "Plan",
                "Forecast",
                "Plan",
                "Forecast"
            ]
        ],
        "rows": [
            {
                "headers": [
                    "Units",
                    "P_100",
                    "Working"
                ],
                "data": [
                    "100",
                    "150",
                    "1500",
                    "1500"
                ]
            },
            {
                "headers": [
                    "Avg Order Size",
                    "P_000",
                    "Best Case"
                ],
                "data": [
                    "1000",
                    "2000",
                    "10000",
                    "15000"
                ]
            },
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            {
                "headers": [
                    "Close Rate",
                    "P_000",
                    "Best Case"
                ],
                "data": [
                    "70%",
                    "90%",
                    "85%",
                    "95%"
                ]
            }
        ]
    }
}
```

JSON Output:

The following shows an example of the response body with a few cells rejected due to Invalid Intersection rules.

```
{
    "numAcceptedCells": 8,
    "numUpdateCells": 8,
    "numRejectedCells": 4,
    "rejectedCells": [
        "[BaseData, FY24, BegBalance, Mexico, Plan, Avg Order Size, P_000,
Best Case]",
        "[BaseData, FY24, BegBalance, Canada, Plan, Avg Order Size, P_000,
Best Case]",
        "[BaseData, FY24, BegBalance, Mexico, Plan, Close Rate, P_000, Best
Case]",
        "[BaseData, FY24, BegBalance, Canada, Plan, Close Rate, P_000, Best
Case]"
    ],
    "rejectedCellsWithDetails": [
        {
            "memberNames": [
                "BaseData",
                "FY24",
                "BegBalance",
                "Mexico",
                "Plan",
                "Avg Order Size",
                "P_000",
                "Best Case"
            ],
            "readOnlyReasons": [
                "Invalid Intersection"
            ],
            "otherReasons": []
        },
        {
            "memberNames": [
                "BaseData",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
                    "FY24",
                    "BegBalance",
                    "Canada",
                    "Plan",
                    "Avg Order Size",
                    "P_000",
                    "Best Case"
                ],
                "readOnlyReasons": [
                    "Invalid Intersection"
                ],
                "otherReasons": []
            },
            {
                "memberNames": [
                    "BaseData",
                    "FY24",
                    "BegBalance",
                    "Mexico",
                    "Plan",
                    "Close Rate",
                    "P_000",
                    "Best Case"
                ],
                "readOnlyReasons": [
                    "Invalid Intersection"
                ],
                "otherReasons": []
            },
            {
                "memberNames": [
                    "BaseData",
                    "FY24",
                    "BegBalance",
                    "Canada",
                    "Plan",
                    "Close Rate",
                    "P_000",
                    "Best Case"
                ],
                "readOnlyReasons": [
                    "Invalid Intersection"
                ],
                "otherReasons": []
            }
        ]
    }
```


Export Data Slices

Use this REST API to export data for a specified region.

The exported data will be in the form of a JSON grid with pov, columns, and 0 or more data rows. Data will be exported only for cells for which the user has read-write access.

Required Roles

Copyright © 2017, 2026, Oracle and/or its affiliates.

Any role

REST Resource

`POST /HyperionPlanning/rest/v3/applications/{application}/plantypes/{plantype}/exportdataslice`

Request

Supported Media Types: `application/json`

Parameters:

Table 3-16 Parameters

Name	Description	Type	Required	Default
`application`	The name of the application for which to export the data slice	Path	Yes	None
`plantype`	Name of the plan type for which to export the data slice	Path	Yes	None

Example URL and payload:

`https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/plantypes/plan1/exportdataslice`
Payload Parameters

The Payload is JSON with the following parameters.

Table 3-17 Parameters

Name	Description
`gridDefinition`	JSON grid definition to define the region
`exportPlanningData`	True or false. Optionally, you can provide the parameter `exportPlanningData`, which, when set to true, will export supporting details and cell notes along with Essbase numeric data. Default is false.
`suppressMissingBlocks`	True or false. Optionally, you can set `suppressMissingBlocks` to true to suppress blocks with missing data.
`suppressMissingRows`	True or false. Optionally, you can set `suppressMissingRows` to true to suppress rows with missing data.
`suppressMissingColumns`	True or false. Optionally, you can set `suppressMissingColumns` to true to suppress rows with missing data.

Supported Media Type: application

Sample Payload

Example 1: Providing dimension names as follows in the `gridDefinition` is recommended and is more efficient.

```
{
   "exportPlanningData": false,
   "gridDefinition": {
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
"suppressMissingBlocks": true,
"pov": {
   "dimensions": [
      "HSP_View",
      "Year",
      "Scenario",
      "Version",
      "Entity",
      "Product"
   ],
   "members": [
      [
         "BaseData"
      ],
      [
         "FY15"
      ],
      [
         "Plan"
      ],
      [
         "Working"
      ],
      [
         "410"
      ],
      [
         "P_160"
      ]
   ]
},
"columns": [
   {
      "dimensions": [
         "Period"
      ],
      "members": [
         [
            "IDescendants(Q1)"
         ]
      ]
   },
   {
      "dimensions": [
         "Period"
      ],
      "members": [
         [
            "IDescendants(Q2)"
         ]
      ]
   }
],
"rows": [
   {
      "dimensions": [
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "Account"
         ],
         "members": [
            [
               "Project Number",
               "Request Date",
               "Project Type",
               "Project Investment"
            ]
         ]
      }
   ]
}
}
```

OR

No dimension names provided is less efficient:

```
{
   "exportPlanningData": true,
   "gridDefinition": {
      "suppressMissingBlocks": true,
      "pov": {
         "members": [
            [ "BaseData" ], [ "FY15" ], [ "Plan"],[ "Working" ],["410" ],
["P_160" ]
         ]
      },
      "columns": [
         {
            "members": [
               [
                  "IDescendants(Q1)"
               ]
            ]
         },
         {
            "members": [
               [ "IDescendants(Q2)" ]
            ]
         }
      ],
      "rows": [
         {
            "members": [
               [
                  "Project Number",
                  "Request Date",
                  "Project Type",
                  "Project Investment"
               ]
            ]
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            }
         ]
      }
   }
```

JSON Output

The following shows an example of the response body with exportPlanningData : true.


```
{
   "pov": [
      "BaseData",
      "FY15",
      "Plan",
      "Working",
      "410",
      "P_160"
   ],
   "columns": [
      [
         "Jan",
         "Feb",
         "Mar",
         "Q1",
         "Apr",
         "May",
         "Jun",
         "Q2"
      ]
   ],
   "rows": [
      {
         "headers": [
            "Project Number"
         ],
         "data": [
            "1",
            "2",
            "3",
            " ",
            " ",
            " ",
            " ",
            " ",
            " "
         ],
         "cellNotes": [
            [
               {
                  "contents": "Internal Project<br/>"
               },
               {
                  "contents": "Project delayed<br/>"
               }
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            ],
            [],
            [],
            [],
            [],
            [],
            [],
            []
         ]
      },
      {
         "headers": [
            "Request Date"
         ],
         "data": [
            "",
            "",
            "",
            "",
            "",
            "",
            "",
            ""
         ]
      },
      {
         "headers": [
            "Project Type"
         ],
         "data": [
            "Other",
            "IT",
            "Construction",
            "",
            "",
            "",
            "",
            ""
         ]
      },
      {
         "headers": [
            "Project Investment"
         ],
         "data": [
            "100000",
            "110000",
            "200000",
            "410000",
            "",
            "",
            "",
            ""
         ],
         "cellNotes": [
            [],
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            [
               {
                  "contents": "Internal + External investments made
here.<br/>"
               }
            ],
            [],
            [],
            [],
            [],
            [],
            []
         ],
         " supportingDetail": [
            null,
            {
               "items": [
                  {
                     "value": "60000",
                     "position": 0,
                     "label": "Internal",
                     "generation": 0,
                     "operator": "+"
                  },
                  {
                     "value": "50000",
                     "position": 1,
                     "label": "External",
                     "generation": 0,
                     "operator": "+"
                  }
               ]
            },
            null,
            null,
            null,
            null,
            null,
            null
         ]
      }
   ]
}
```


Example 2: Suppress missing blocks, rows, and columns when exporting a data slice:


```
{
   "exportPlanningData": false,
   "gridDefinition": {
      "suppressMissingBlocks": true,
      "suppressMissingRows": true,
      "suppressMissingColumns": true,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
"pov": {
   "dimensions": [
      "HSP_View",
      "Year",
      "Scenario",
      "Version",
      "Entity",
      "Product"
   ],
   "members": [
      [
         "BaseData"
      ],
      [
         "FY15"
      ],
      [
         "Plan"
      ],
      [
         "Working"
      ],
      [
         "410"
      ],
      [
         "P_160"
      ]
   ]
},
"columns": [
   {
      "dimensions": [
         "Period"
      ],
      "members": [
         [
            "IDescendants(Q1)"
         ]
      ]
   },
   {
      "dimensions": [
         "Period"
      ],
      "members": [
         [
            "IDescendants(Q2)"
         ]
      ]
   }
],
"rows": [
   {
      "dimensions": [
         "Account"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            ],
            "members": [
               [
                  "Project Number",
                  "Request Date",
                  "Project Type",
                  "Project Investment"
               ]
            ]
         }
      ]
   }
}
```

JSON Output:

```
{
   "pov": [
      "BaseData",
      "FY15",
      "Plan",
      "Working",
      "410",
      "P_160"
   ],
   "columns": [
      [
         "Jan",
         "Feb",
         "Mar",
         "Q1",
         "Apr",
         "May",
         "Jun",
         "Q2"
      ]
   ],
   "rows": [
      {
         "headers": [
            "Project Number"
         ],
         "data": [
            "1",
            "2",
            "3",
            " "
         ]
      },
      {
         "headers": [
            "Project Type"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            ],
            "data": [
               "Other",
               "IT",
               "Construction",
               ""
            ]
         },
         {
            "headers": [
               "Project Investment"
            ],
            "data": [
               "100000",
               "110000",
               "200000",
               "410000"
            ]
         }
      ]
}
```

Example payload with multiple dimensions:

```
{
   "exportPlanningData": false,
   "gridDefinition": {
      "suppressMissingBlocks": true,
      "pov": {
         "dimensions": [
            "HSP_View",
            "Scenario",
            "Version",
            "Product"
         ],
         "members": [
            [
               "BaseData"
            ],
            [
               "Plan"
            ],
            [
               "Working"
            ],
            [
               "P_160"
            ]
         ]
      },
      "columns": [
         {
            "dimensions": [
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "Year", "Period"
         ],
         "members": [
            [
               "FY19"
            ],
            [
               "IDescendants(Q1)"
            ]
         ]
      },
      {
         "dimensions": [
            "Year", "Period"
         ],
         "members": [
            [
               "FY20"
            ],
            [
               "IDescendants(Q1)"
            ]
         ]
      }
   ],
   "rows": [
      {
         "dimensions": [
            "Entity", "Account"
         ],
         "members": [
             [
               "410",
               "420"
            ],
            [
               "Project Number",
               "Request Date",
               "Project Type",
               "Project Investment"
            ]
         ]
      },
      {
         "dimensions": [
            "Entity", "Account"
         ],
         "members": [
             [
               "430"
            ],
            [
               "Project Investment"
            ]
         ]
      }
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        ]
    }
}
```

Export Data

Use this AI REST API to export Planning data as a JSON data grid based on an axis-based query definition.

This REST API is designed for programmatic export of large or complex datasets such as analytics, budgets, and forecasts. The request explicitly defines POV (point of view), column, and row axes, including dimensions and member segments; members are cross-joined within segments to form the output cells. Data will be exported only for cells for which the user has read or write access.

Required Roles

Any Role

REST Resource

`POST /HyperionPlanning/rest/v3/applications/{application}/plantypes/{plantype}/exportdata`

Request

Supported Media Types: `application/json`

Parameters:

Table 3-18 Parameters

Name	Description	Type	Required	Default
`application`	The name of the application for which to export the data slice	Path	Yes	None
`plantype`	Name of the plan type for which to export the data slice	Path	Yes	None

Example URL and Payload:

`https://<BASE-URL>/HyperionPlanning/rest/v3/applications/{application}/plantypes/{plantypes}/exportdata`
Payload Parameters:

The Payload is JSON with the following parameters.

Table 3-19 Parameters

Name	Description
`exportPlanningData`	`True` or `False`. Optionally, you can provide the parameter `exportPlanningData`, which, when set to `true`, will export supporting details and cell notes along with Essbase numeric data. Default is `false`.
`formatPercentageAsPercent`	If `true`, formats numeric values between 0 and 1 as percent values (for example, `0.5` becomes `50%`).
`gridDefinition`	JSON grid definition to define the region

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-19 (Cont.) Parameters

Name	Description
`suppressMissingBlocks`	Suppresses entire blocks of data where all cells are missing, default is `false`.
`suppressMissingColumns`	Suppresses output columns that only contain missing values, default is `false`.
`suppressMissingRowsNative`	Suppresses output rows using native Essbase row suppression, default is `false`.
`suppressMissingSuppressesZero`	Suppresses output rows or columns by treating zero values as missing for suppression, default is `false`.
`suppressInvalidScenarioTps`	Suppresses invalid scenario or time period (TP) intersections, default is `false`.
`suppressInvalidColumns`	Suppresses invalid columns from output, default is `false`.
`suppressInvalidRows`	Suppresses invalid rows from output, default is `false`.
`predictionSupportForDynCalcMbrs`	Enables data prediction for dynamic calc members if supported.
`autoCorrectSegments`	Automatically corrects segment formats as needed. Typically `true`.
`PovAxisDefinition`	Defines the POV axis (dimensions and members).
`ColumnAxisDefinition`	Defines the column axis (dimensions and segments).
`RowAxisDefinition`	Defines the row axis (dimensions and segments).

Sample Payload

Providing dimension names as follows in the `gridDefinition` is recommended and is more efficient.

```
{
  "exportPlanningData": false,
  "formatPercentageAsPercent": true,
  "gridDefinition": {
    "suppressMissingBlocks": true,
    "suppressMissingRows": true,
    "suppressMissingColumns": true,
    "suppressMissingRowsNative": true,
    "suppressMissingSuppressesZero": true,
    "suppressInvalidScenarioTps": true,
    "suppressInvalidColumns": true,
    "suppressInvalidRows": true,
    "predictionSupportForDynCalcMbrs": true,
    "autoCorrectSegments": true,
    "PovAxisDefinition": {
      "dimensions": ["HSP_View", "Scenario", "Version", "Product"],
      "members": [ "BaseData", "Plan", "Working", "P_160" ]
    },
    "ColumnAxisDefinition": [
    {
      "dimensions": ["Year", "Period"],
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
      "segments": [
        [ ["FY20"], ["IDescendants(Q1)"] ]
      ]
    }
    ],
    "RowAxisDefinition": [
    {
      "dimensions": ["Entity", "Account"],
      "segments": [
       [ ["410"], ["Project Number"] ],
       [ ["420"], ["Request Date"] ],
       [ ["430"], ["Project Investment"] ]
      ]
     }
    ]
  }
}
```

Response

Supported Media Types: `application/json`

Returns a JSON object describing the exported grid, including POV, columns, rows, and when `exportPlanningData` is true, additional content such as cell notes and supporting detail (if available).

Table 3-20 Throws

Exception	Description
`EPMException`	Returned on validation failures or export errors.

Export Form Data

Use this AI REST API to export data as a JSON grid for a slice defined by a specified Planning form.

> **Note**
>
> This REST API is ideal when you want to extract data using a form (by name or ID), especially when the full member intersection is not known in advance or when the form is asymmetric.

Required Roles

Any Role

REST Resource

```
GET       /HyperionPlanning/rest/v3/applications/{application}/forms/
{idorname}/data
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 3-21 Parameters

Name	Description	Type	Required	Default
`application`	The name of the application	Path	Yes	None
`idorname`	ID or name of the form that defines the slice to export	Path	Yes	None
`pageMbrList`	List of page member names for which data is exported	Query	No	None
`displayMemberAs`	Controls how member headers are displayed (values from `DisplayMemberAs`). Here are the various `DisplayMemberAs` options: • `MEMBER_NAME` or `Member Name` • `MEMBER_NAME_THEN_ALIAS` or `Member Name Then Alias` • `ALIAS_THEN_MEMBER_NAME` or `Alias Then Member Name`	Query	No	None
`memberAliasDelimiter`	Delimiter between member and alias (for "Then" display options)	Query	No	`:`
`forceStartExpanded`	If `true`, forces all rows and columns to be expanded. If `false`, the `forceStartExpanded` for dimension will be applied.	Query	No	`False`
`filterMembers`	List of member values used to further filter the form	Query	No	None
`fields`	Comma-separated list of field names to be returned.	Query	No	All fields

Example URL

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/<APPLICATION>/forms/
<FORM_ID_OR_NAME>/data?
page=<PAGE_MEMBER_1>&page=<PAGE_MEMBER_2>&displayMemberAs=<DISPLAY_MEMBER_AS>&for
ceStartExpanded=<TRUE_FALSE>&fields=<FIELDS_LIST>
```

> **Note**
>
> For new forms, first call the endpoint with `fields=gridInfo,pov` to discover the grid structure. Then make a second call requesting rows/columns (and applying filters/expansion flags) as needed.

Response

Supported Media Types: `application/json`

Parameters

The following table summarizes the parameters.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-22 Parameters

Name	Description
gridInfo	Provides metadata about the grid layout, including page, row, and column dimensions and allowed page members.
pageDimNames	List of dimension names on the page axis.
allowedPageMembersByDim	Map of page dimension name to the list of allowed page members for that dimension.
rowDimNames	List of dimension names on the row axis.
columnDimNames	List of dimension names on the column axis.
rows	Row data returned by the form slice.
headers	Row header member(s) for the row (for example, account).
data	Data values for the row aligned to the columns returned.
columns	Column header where each entry represents the member combination for a column (for example, Year, Scenario,Version).

Sample Response

```
{
  "gridInfo": {
    "pageDimNames": ["Product"],
    "allowedPageMembersByDim": { "Product": ["Total Product", "Widget",
"Gadget"] },
    "rowDimNames": ["Account"],
    "columnDimNames": ["Year", "Scenario", "Version"]
  },
  "pov": {
    "Year": "FY25",
    "Scenario": "Plan",
    "Version": "Working"
  },
  "rows": [
    { "headers": ["Sales"], "data": [12345, 23456] },
    { "headers": ["COGS"], "data": [3456, 4567] }
  ],
  "columns": [
    ["FY25", "Plan", "Working"],
    ["FY26", "Forecast", "Final"]
  ]
}
```

Jobs

You can manage jobs using a set of REST resources, as summarized here.

Before using the REST resources, you must understand how to access the REST resources and other important concepts. See Cloud EPM REST APIs Best Practices.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs. For additional details, see Job Types.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Jobs:

- Get Job Definitions
- Execute a Job
- Retrieve Job Status
- Retrieve Job Status Details
- Rules
- Ruleset
- Plan Type Map
- Import Data
- Export Data
- Export Metadata
- Import Metadata
- Cube Refresh
- Clear Cube
- Administration Mode
- Compact Cube
- Restructure Cube
- Merge Data Slices
- Optimize Aggregation
- Import Security
- Export Security
- Export Audit
- Export Job Console
- Sort Members
- Import Exchange Rates
- Auto Predict
- Import Cell-Level Security
- Export Cell-Level Security
- Import Valid Intersections
- Export Valid Intersections
- Execute a Report Bursting Definition
- Export Library Documents
- Import Library Documents
- Delete Library Documents
- Configure the Oracle Guided Learning (OGL) Server

Copyright © 2017, 2026, Oracle and/or its affiliates.

Execute a Job

Use this resource to execute several jobs simultaneously by providing the job name and type. The job is expected to be defined in Planning with all the required parameters saved with the job definition. For some job types, the parameters can be either provided or overwritten at runtime.

This topic describes general information for executing a job. Details for each job type are described in separate topics for individual jobs.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs. For additional details, see Job Types.

Before using the REST resources, you must understand how to access the REST resources and other important concepts. See Cloud EPM REST APIs Best Practices.

REST Resource

POST `/HyperionPlanning/rest/{api_version}/applications/{application}/jobs`

Request

Supported Media Types: `application/json`

Parameters

This table summarizes the request parameters that are generic to all jobs. The following tables describe parameters specific to individual jobs.

Note that all parameter names and values are case sensitive.

Table 3-23 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	Name of the application for which the job will be executed	Path	Yes	None

Example URL and Payload

`https://<BASE-URL>/HyperionPlanning/rest/v3/applications/PS4app1/jobs`

```
{"jobType":"jobType","jobName":"jobName","parameters":
{"parameter1":"value","parameter2":"value2"}}
```

Response

Supported Media Types: `application/json`

Parameters

This table summarizes the response parameters that are generic to all jobs. The following topics describe parameters specific to individual jobs:

- Rules

Copyright © 2017, 2026, Oracle and/or its affiliates.

- Ruleset
- Plan Type Map
- Import Data
- Export Data
- Export Metadata
- Import Metadata
- Cube Refresh
- Clear Cube
- Administration Mode
- Compact Cube
- Restructure Cube
- Merge Data Slices
- Optimize Aggregation
- Import Security
- Export Security
- Export Audit
- Export Job Console
- Sort Members
- Import Exchange Rates
- Auto Predict
- Import Cell-Level Security
- Export Cell-Level Security
- Import Valid Intersections
- Export Valid Intersections
- Execute a Report Bursting Definition
- Export Library Documents
- Import Library Documents
- Delete Library Documents
- Configure the Oracle Guided Learning (OGL) Server

Table 3-24 Parameters

Name	Description
`status`	Status of the job: -1 = in progress; 0 = success; 1 = error; 2 = cancel pending; 3 = cancelled; 4 = invalid parameter; Integer.MAX_VALUE = unknown
`details`	Details about the job status, such as "Metadata import was successful" for metadata import
`jobID`	The ID of the job, such as 145
`jobName`	The name of the job, such as Refresh Database.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-24 (Cont.) Parameters

Name	Description
`descriptiveStatus`	The status of the job, such as Completed or Error

Administration Mode

Changes the login level for a Planning application. If you set login level to Administrators, all Interactive Users and Planners will be logged off of the application upon completion of the job. For details on administration mode, see Scheduling Jobs.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Table 3-25 Parameters

Name	Description	Required	Default
`jobType`	Administration Mode	Yes	None
`jobName`	The job name to be used for this job execution. **Example:** AppAdminJob	No	Administration Mode
`loginLevel`	Specify the login level for users using `loginLevel`. Possible values are **Administrators** or **All Users**	Yes	None

For a sample URL, see Sample URL and Payload in Execute a Job.

Sample Payload

Example: This request will change the login level of the application to "Administrators" level.

```
{
    "jobType": "Administration Mode",
    "jobName": "AppAdminJob",
    "parameters": {
        "loginLevel": "Administrators"
    }
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Auto Predict

You can use this REST API to schedule predictions using the Auto Predict job.

With Auto Predict, administrators can define a prediction to predict future performance based on historical data and schedule a job to run that prediction definition, automating the prediction process. For details about Auto Predict, see Setting Up Predictions to Run Automatically in *Administering Planning*.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Job Types.

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Table 3-26 Import Exchange Rates

Name	Description	Required	Default
`jobType`	`Auto Predict`	Yes	None
`jobName`	The name used to define Auto Predict in the user interface in Overview, then Actions, and then Auto Predict. This name will be used for the job execution. **Important**: You must use the exact name of a job that is already defined in Planning as described in Managing Jobs. **Example**: `Prediction1`	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-26 (Cont.) Import Exchange Rates

Name	Description	Required	Default
`forceRun`	If this is set to `true`, the job will always execute. If not, the job executes only for the first time. In subsequent attempts, if there is no change in the job definition, this message displays: "Auto Prediction definition hasn't changed since the last time the Auto Predict job ran; the job will not execute. If you want to run the Auto Predict definition, for example if there are new actual values, you can run the Auto Predict definition from the Auto Predict page. From the Actions menu, click Actions and then click Run."	No	False
`paginatedDim`	Speeds up an Auto Predict job by running predictions in parallel in separate prediction threads. For the parallel jobs to be efficient, choose a dimension that will result in evenly spread data for each prediction thread. Example: Entity	No	False

For a sample URL, see Sample URL and Payload in Execute a Job.

Sample Payload

Example 1: Executes the Auto Predict job `ASO->BSO`.

```
{
    "jobType": "Auto Predict",
    "jobName": "ASO->BSO",
    "parameters": {
        "forceRun": true,
        "paginatedDim": "Entity"
    }
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Compact Cube

Use this REST API to compact the outline file of an ASO cube.

Compaction helps keep the outline file at an optimal size. Compacting the outline does not clear the data. For more information, see Scheduling Jobs.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Table 3-27 Parameters

Name	Description	Required	Default
`jobType`	Compact Cube	Yes	None
`jobName`	The job name to be used for this job execution. **Example:** `CompactCube`	No	Compact Outline
`cubeName`	Name of the ASO cube	Yes	None

For a sample URL, see Sample URL and Payload in Execute a Job.

Sample Payload

Example: This request will compact the outline of Vis1ASO ASO cube.

```
{
    "jobType": "Compact Cube",
    "jobName": "CompactCube",
    "parameters": {
        "cubeName": "Vis1Aso"
    }
}
```

Configure the Oracle Guided Learning (OGL) Server

Use this REST API to update the Oracle Guided Learning (OGL) server URL and application ID in application settings. This makes the process of updating the OGL server configuration more efficient than configuring it manually in application settings.

You can also use a REST API to get the value of the Oracle Guided Learning (OGL) Application ID and Server URL in application settings. See Get Applications.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Required Roles

Service Administrator

REST Resource

`POST /HyperionPlanning/rest/{api_version}/applications/(application)/(jobs)`

Request

Supported Media Types: `application/json`

Parameters:

The following table summarizes the client request parameters specific to this job. For parameters that are common to all jobs, see Execute a Job.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Table 3-28 Parameters

Name	Description	Required	Default
`jobType`	OGL Server Settings	Yes	None
`jobName`	The name of this job. Example: Set OGL Parameters	No	None
`parameters`	You can specify these parameters: • **`oglAppId`**: the value of the OGL application ID to be set in application settings. For more information, see Integrating EPM Cloud and EDM Cloud with Oracle Guided Learning. • **`oglServerUrl`**: The value of the OGL Server URL to be set in application settings. For more information, see Integrating EPM Cloud and EDM Cloud with Oracle Guided Learning. **Notes**: • One of these parameters must be specified to update the OGL settings. • The OGL application ID must not be more than 100 characters. • The OGL server URL must not be more than 300 characters.	No	No

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example URL and Payload

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/jobs
```

Payload Example: Sets the OGL application ID and server URL in application settings.

```
{
    "jobType": "OGL Server Settings",
    "jobName": "Set OGL Parameters",
    "parameters":
        {
             "oglAppId": "vcQ6fAsJRySX_SSGc581Vg",
             "oglServerUrl": "https://guidedlearning.oracle.com"
        }
}
```

Clear Cube

Use this REST API to clear specific data within input and reporting cubes.

You can clear the data using member selection or a valid MDX query. Using member selection, you can also optionally clear related supporting details, comments, and attachments. You can also elect to do a physical or logical clear of data. This gives you more flexibility and granularity when clearing the cube.

NOTE: The Clear Cube job deletes the data you specify within input and reporting cubes, but it does not delete the application definition in the application's relational tables.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Table 3-29 Clear Cube

Name	Description	Required	Default
`jobType`	`Clear Cube` or `CLEAR_CUBE` (both parameters are supported)	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-29 (Cont.) Clear Cube

Name	Description	Required	Default
`jobName`	Name of the job to run. **Important**: You must use the exact name of a job that is already defined in the application. **Example**: `ClearPlan1`	Yes	None
`cube`	Valid ASO cube name	No	As per the job definition
`members`	Valid member selection that is comma separated. Applicable only for Partial Clear Job, for an ASO cube, defined with member selection. **Example**: `"ILvl0Descendants(Exchange Rates),Total Expense"`	No	As per the job definition
`mdxQuery`	Valid MDX query. Applicable only for Partial Clear Job, for an ASO cube, defined with MDX query support. **Example**: `"Crossjoin({[Apr],[May],[Jun]},{[Expense1]})"`	No	As per the job definition
`clearSupportingDetails`	Specify if supporting details should be cleared. Allowed values: `true` or `false`. Applicable only for Partial Clear Job, for an ASO cube, defined with member selection.	No	As per the job definition
`clearComments`	Specify if comments should be cleared. Allowed values: `true` or `false`. Applicable only for Partial Clear Job, for an ASO cube, defined with member selection.	No	As per the job definition
`clearAttachments`	Specify if attachments should be cleared. Allowed values: `true` or `false`. Applicable only for Partial Clear Job, for an ASO cube, defined with member selection.	No	As per the job definition

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-29 (Cont.) Clear Cube

Name	Description	Required	Default
`clearPhysicalOnEssbase`	Specify if this is a physical clear on Essbase. Allowed values: `true` or `false`. Applicable only for Partial Clear Job, for an ASO cube, defined with member selection or MDX query support.	No	As per the job definition

For a sample URL, see Sample URL and Payload in Execute a Job.

Sample Payload

```
{"jobType":"CLEAR_CUBE", "jobName":"ClearPlan1"}
```

Example: Executes the clear job `Clear_Partial_Basic`, which is defined with member selection, and overrides the `cube` and `members` parameters.

```
{
    "jobType": "Clear Cube",
    "jobName": "Clear_Partial_Basic",
    "parameters": {
        "cube": "HP1_ASO",
        "members": "ILvl0Descendants(Exchange Rates),Siblings(Total Expense)"
    }
}
```

Example: Executes the clear job `Clear_Partial_Basic`, which is defined with member selection, and overrides the `cube`, `clearSupportingDetails`, `clearComments`, and other parameters.

```
{
    "jobType": "Clear Cube",
    "jobName": "Clear_Partial_Basic",
    "parameters": {
        "cube":"HP1_ASO",
        "members":"ILvl0Descendants(Exchange Rates),Siblings(Total Expense)",
        "clearSupportingDetails":"false",
        "clearComments":false,
        "clearAttachments":false,
        "clearPhysicalOnEssbase":false
    }
}
```

Example: Executes the clear job `Clear_Partial_Advanced`, which is defined with the MDX query, and overrides the `mdxQuery` parameter.

```
{
    "jobType": "Clear Cube",
    "jobName": "Clear_Partial_Advanced",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "parameters": {
            "mdxQuery":"Crossjoin({[Apr],[May],[Jun]},{[Expense1]})"
    }
}
```

Example: Executes the clear job `Clear_Partial_Advanced`, which is defined with the MDX query, and overrides the `cube`, `mdxQuery`, and `clearPhysicalOnEssbase` parameters.

```
{
    "jobType": "Clear Cube",
    "jobName": "Clear_Partial_Advanced",
    "parameters": {
        "cube":"HP1_ASO",
        "mdxQuery":"Crossjoin({[Apr],[May],[Jun]},{[Expense1]})",
         "clearPhysicalOnEssbase":false
    }
}
```

Cube Refresh

Use this REST API to refresh the Planning application cube. Typically, you refresh the cube after importing metadata into the application.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Table 3-30 Cube Refresh

Name	Description	Required	Default
`jobType`	`Cube Refresh` or `CUBE_REFRESH` (both parameters are supported)	Yes	None
`jobName`	Name of the job to run. You must use the exact name of a job that is already defined in the application. **Example**: `refreshcube`	Yes	None
`allowedUsersDuringCubeRefresh`	Possible values: `Administrators` or `All Users`	No	None
`terminateActiveRequestsBeforeCubeRefresh`	Possible values: `true` or `false`	No	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-30 (Cont.) Cube Refresh

Name	Description	Required	Default
`logOffAllUsersBeforeCubeRefresh`	Possible values: `true` or `false`	No	None
`allowedUsersAfterCubeRefresh`	Possible values: `Administrators` or `All Users`	No	None

For a sample URL, see Sample URL and Payload in Execute a Job.

Sample Payload

```
{
"jobType": "CUBE_REFRESH",
"jobName": "CubeRefresh"
}
```

Sample Payload overriding parameters:

```
{"jobType":"CUBE_REFRESH","jobName":"MyRefreshCube","parameters":
{"allowedUsersDuringCubeRefresh":"   All Users",
"terminateActiveRequestsBeforeCubeRefresh":"false","logOffAllUsersBeforeCubeRe
fresh":"true","allowedUsersAfterCubeRefresh":"Administrators"}}
```

Delete Library Documents

Creates a job to delete documents from the library. This allows you to to perform batch document deletions, aiding in the automation of document cleanup processes.

The Delete Library Document job deletes documents using the fully qualified path. You can provide multiple document identifiers (UUIDs or paths) in a comma-separated list.

Prior to deleting, you can list files or use the Inbox/Outbox Explorer to view details of files. Use the Download REST API to download the file.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs. For additional details, see Job Types.

Before using the REST resources, you must understand how to access the REST resources and other important concepts. See Cloud EPM REST APIs Best Practices.

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-31 Parameters

Name	Description	Required	Default
`jobType`	Delete Artifacts From Library, Delete Library Documents, or DELETE_ARTIFACTS_FROM_LIBRARY (all values are supported)	Yes	None
`jobName`	The name of this job. **Example:** Delete_Quarterly_Sales	No	`Delete Library Documents`
`idOrFullyQualifiedNames`	Comma-separated list of document identifiers (UUIDs or paths) being deleted	Yes	None
`removeEmptyParentFolders`	Boolean parameter that controls whether empty parent folders should be deleted after document removal. When set to `true`, the job will delete parent folders that become empty after document deletion. This includes recursive deletion of empty parent folders up the root, if found.	No	`false`
`errorFile`	The error file name, in the default download location, which contains the details (including errors) of the operation. Any existing error file with the same name is overwritten. If you don't provide the extension in `errorFile`, the file will use `.log` as the default extension. Use the Inbox/Outbox Explorer to view the details of the error file. Use the Download REST API to download the file.	No	`false`

For a sample URL, see Sample URL and Payload in Execute a Job.

Example payloads

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example #1: Deleting a single document by a fully qualified path

```
{
    "jobType": "DELETE_ARTIFACTS_FROM_LIBRARY",
    "jobName": "Delete Monthly Report",
    "parameters": {
        "idsOrFullyQualifiedNames": ["Library/Reports/MonthlySales.xlsx"]
    }
}
```

Example #2: Deleting multiple documents by fully qualified paths

```
{
    "jobType": "DELETE_ARTIFACTS_FROM_LIBRARY",
    "jobName": "BatchDeleteDocuments",
    "parameters": {
        "idsOrFullyQualifiedNames": [
            "Library/Reports/QuarterlySales.xlsx",
            "Library/Reports/AnnualBudget.xlsx"
        ],
        "errorFile": "BatchDeleteLog.log"
    }
}
```

Example #3: Deleting a single document using the UUID

```
{
    "jobType": "DELETE_ARTIFACTS_FROM_LIBRARY",
    "jobName": "Delete Single Document",
    "parameters": {
        "idsOrFullyQualifiedNames": ["a9e8e37c-85ea-4c99-0000-c72160e3335f"],
        "errorFile": "DeleteSingle.log"
    }
}
```

Example #4: Deleting documents using mixed identifiers (UUID and path)

```
{
    "jobType": "DELETE_ARTIFACTS_FROM_LIBRARY",
    "jobName": "Delete Mixed Identifiers",
    "parameters": {
        "idsOrFullyQualifiedNames": [
            "a9e8e37c-85ea-4c99-0000-c72160e3335f",
            "Library/Reports/FinancialSummary.xlsx"
        ],
        "errorFile": "DeleteMixed.log"
    }
}
```

Example #5: Deleting documents and empty parent folders

```
{
    "jobType": "DELETE_ARTIFACTS_FROM_LIBRARY",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "jobName": "CleanupDocumentsAndFolders",
    "parameters": {
        "idsOrFullyQualifiedNames": [
            "Library/Forecast Reports/SampleFolder1/LastDocument.xlsx",
            "Library/Plan Reports/SampleFolder2/LastDocument.xlsx"
        ],
        "removeEmptyParentFolders": true,
        "errorFile": "CleanupLog.log"
    }
}
```

Execute Job Code Samples

Example 3-1 Java Sample – executeJob.java

```
//
// BEGIN - Execute a Job (EXPORT_DATA, EXPORT_METADATA, IMPORT_DATA,
IMPORT_METADATA, CUBE_REFRESH, ...)
//
public void executeJob(String jobType, String jobName, String parameters)
throws Exception {
    String urlString = String.format("%s/HyperionPlanning/rest/%s/
applications/%s/jobs", serverUrl, apiVersion, applicationName);
    JSONObject payload = new JSONObject();
    payload.put("jobName",jobName);
    payload.put("jobType",jobType);
    payload.put("parameters",new JSONObject(parameters));
    String response = executeRequest(urlString, "POST", payload.toString());
    System.out.println("Job started successfully");
    getJobStatus(fetchPingUrlFromResponse(response, "self"), "GET");
}
//
// END - Execute a Job (EXPORT_DATA, EXPORT_METADATA, IMPORT_DATA,
IMPORT_METADATA, CUBE_REFRESH, ...)
//
```

Example 3-2 cURL Sample – ExecuteJob.sh

```
funcExecuteJob() {
    url="$SERVER_URL/HyperionPlanning/rest/$API_VERSION/
applications/$APP_NAME/jobs"
    encodedJobName=$(echo $2 | sed -f urlencode.sed)
    if [ ! -z "$3" ]; then

param="{\"jobType\":\"$1\",\"jobName\":\"$encodedJobName\",\"parameters\":$3}"
    else
            param="{\"jobType\":\"$1\",\"jobName\":\"$encodedJobName\"}"
    fi
    funcExecuteRequest "POST" $url $param


    output=`cat response.txt`
    status=`echo $output | jq '.status'`
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    if [ $status == -1 ]; then
        echo "Started executing job successfully"
        funcGetStatus "GET"
    else
        error=`echo $output | jq '.details'`
        echo "Error occurred. " $error
    fi
    funcRemoveTempFiles "respHeader.txt" "response.txt"
}
```

Example 3-3 Groovy Sample – ExecuteJob.groovy

```
def executeJob(jobType, jobName, parameters) {
    def url = new URL(serverUrl + "/HyperionPlanning/rest/" + apiVersion + "/
applications/" + appName + "/jobs");
        JSONObject payload = new JSONObject();
        try {
            if (parameters != null) {
                    JSONObject params = new JSONObject();
                    def args = parameters.split(';');
                    for (int i = 0; i < args.length; i++) {
                            if (args[i].indexOf("=") != -1) {
                                    String[] param = args[i].split("=");
                                    if
(param[0].equalsIgnoreCase("clearData")) {

params.put("clearData",Boolean.valueOf(param[1]));
                                    }
                                    else {
                                            params.put(param[0],param[1]);
                                    }
                            }
                    }
                    payload.put("jobName",jobName);
                    payload.put("jobType",jobType);
                    payload.put("parameters",params);
            }
            else {
                    payload.put("jobName",jobName);
                    payload.put("jobType",jobType);
            }
    } catch (MalformedURLException e) {
        println "Malformed URL. Please pass valid URL"
        System.exit(0);
    }
    response = executeRequest(url, "POST", payload);
    if (response != null) {
        getJobStatus(fetchPingUrlFromResponse(response, "self"), "GET");
    }
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Export Audit

This REST API exports the audit records for a range of days or a number of days, such as a month.

The audit records are exported to one or more Comma Separated Values (CSV) files. The output CSV file contains the first character as a Byte Order Mark (BOM) character `\ufeff`. The API writes an encrypted application identifier following the BOM character. This application identifier is written between double-quotes. Headers for the CSV file follow the application identifier. For more information, see Auditing Tasks and Data.

You can use an optional `excludeApplicationId` parameter to not write the application identifier in the export file. Exported audit reports without the application identifier cannot be imported back into the application.

You can use `maxNumberOfRecordsPerFile` to split the export across multiple CSV files when the export exceeds the specified number of records, and all CSV files are then compressed into a single ZIP.

The generated CSV file is compressed and the output is a ZIP file. The file can be downloaded using the Download REST API.

Required Roles

Service Administrator and users with the roles Audit - Manage or Audit - View

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Table 3-32 Parameters

Name	Description	Required	Default
`jobType`	Export Audit	Yes	None
`jobName`	The job name to be used for this job execution. **Example:** `ExportAudit`	No	Export Audit
`userNames`	Comma separated user names. Audit records created by only the specified users are exported. If not specified, audit records created by all users are exported.	No	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-32 (Cont.) Parameters

Name	Description	Required	Default
`fileName`	The name of the file to which records should be exported. The file containing the exported data is stored in the Oracle Planning and Budgeting Cloud repository. If `fileName` is not specified, a file is auto-generated with a name containing the user name, current date, and time stamp. For example, `test_admin_AuditRecords_2019-02-26-04-34-45-420.zip`	No	The file name is auto-generate
`maxNumberOfRecordsPerFile`	An optional parameter that suggests how many records should be written per file. Min value: `-100,000` Max value: `-1,000,000` If the export exceeds this limit, output is split into multiple CSV files within the ZIP.	No	`-1` (all records)

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-32 (Cont.) Parameters

Name	Description	Required	Default
`nDays`	Number of days for which audit records should be exported. Possible values are: • **1**: Export audit records for the last 24 hours • **2**: Export audit records for the last two days • **7**: Export audit records for the last seven days • **30**: Export audit records for the last 30 days • **60**: Export audit records for the last 60 days • **180**: Export all existing audit records for the last 180 days • **All**: Export all audit records **Note**: Audit information is maintained for up to 365 days from the current system date.	No	7
`excludeApplicationId`	Optionally, you can specify if the application identifier should be written in the export file. Possible values: `true` or `false` This parameter can benefit those customers who do not want the application identifier to be included in the export file to help import into their own systems. This export file cannot be used to import into a Oracle Fusion Cloud EPM environment.	No	`false`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-32 (Cont.) Parameters

Name	Description	Required	Default
startDate	A start date in the format YYYY-MM-DD. The start date must be earlier than the end date and cannot be later than the current date. If the ndays parameter is used, it takes precedence over the start and end dates.	No	None
endDate	An end date in the format YYYY-MM-DD. The end date must be later than the start date and cannot be later than the current date. If the ndays parameter is used, it takes precedence over the start and end dates.	No	None

Notes:

- This job does not export records based on group names.
- If a user name contains a comma, escape the comma in the request. For example, if a user name is `test,User` then add `test\\,User` to the request.

For a sample URL, see Sample URL and Payload in Execute a Job.

Sample Payload

Example 1: Exports the last 180 days of audit records to the `ExportAuditLast180Days.zip` file.

```
{
    "jobType": "Export Audit",
    "jobName": "Export180DaysAudit",
    "parameters": {
        "fileName": "ExportAuditLast180Days.zip",
          "ndays": "180"
    }
}
```

Example 2: Exports the last seven days of audit records created by planner1 and planner2. Records are exported to a zip file with an auto-generated file name.

```
{
    "jobType": "Export Audit",
    "jobName": "AllAuditRecordsOfPlanners",
    "parameters": {
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        "userNames": "planner1, planner2"
    }
}
```

Example 3: Exports the last 180 days of audit records to the `ExportAuditLast180Days.zip` file. The application identifier will be not written in the generated file. This export file cannot be used to import into a Cloud EPM environment.

```
{
    "jobType": "Export Audit",
    "jobName": "Export180DaysAudit",
    "parameters": {
        "fileName": "ExportAuditLast180Days.zip",
      "ndays": "180",
        "excludeApplicationId": "true"
    }
}
```

Example 4: Exports the last three months of audit records.

```
{
    "jobType": "Export Audit",
    "jobName": "ExportLast3MonthsAudit",
    "parameters": {
        "fileName": "Last3MonthsAudit.zip",
        "startDate" : "2024-05-01",
        "endDate" : "2024-08-31"
    }
}
```

Example 5: Export Audit data using `maxNumberOfRecordsPerFile` parameter.

```
{
  "jobType": "Export Audit",
  "jobName": "ExportAuditData",
  "parameters": {
    "fileName": "exportAuditData8.zip",
    "ndays": "All",
    "maxNumberOfRecordsPerFile": 1000000
  }
}
```

Export Cell-Level Security

This REST API exports cell-level security settings from Planning or Tax Reporting into a ZIP file that contains an Excel file.

Cell-level security enables Service Administrators to restrict who can view data in the application by defining rules that remove read or write access to cells that a user would normally have access to due to their regular security.

The generated file is compressed, and the output is a ZIP file that is added to the Outbox. You can download the file using the Download REST API.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Note the following requirements for the format of the Excel file used with this REST API.

The exported Excel file contains two worksheets with these names:

1. `Rules`
2. `Sub Rules`

The `Rules` worksheet has the following column headings:

- **Name**
- **Position**
- **Description**
- **Enabled**
- **Valid Cubes** - This column contains either `All` or a list of comma-separate names of cubes, such as `Plan1, Plan2`
- **Anchor Dim Name**
- **Anchor Dimension Apply to Unselected Members**
- **Dim1**
- **Dim1 Required**
- **Dim2**
- **Dim2 Required**
- **Dim*X* Members**
- **Dim*X* Required**

The `Sub Rules` worksheet has the following column headings:

- **Name** - This column contains the names of the Rules from the first sheet
- **Users**
- **User Groups**
- **Restriction** - This column can contain `Deny Read` or `Deny Write`
- **Anchor Members**
- **Anchor Exclusion**
- **Dim1 Members**
- **Dim1 Exclusion**
- **Dim2 Members**
- **Dim2 Exclusion**
- **Dim*X* Members**
- **Dim*X* Exclusion**

Required Roles

Service Administrator

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Copyright © 2017, 2026, Oracle and/or its affiliates.

REST Resource

```
POST       /HyperionPlanning/rest/{api_version}/applications/{application}/
jobs
```

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For parameters that are common to all jobs, see Execute a Job.

Table 3-33 Export Cell Level Security

Name	Description	Required	Default
`jobType`	`Export Cell-Level Security` or `EXPORT_CELL_LEVEL_SECURITY`	Yes	None
`jobName`	The name of the job to be used. This job name appears on the job console. **Example**: `ExportCLSDPlan1`	No	Export Cell-Level Security Definitions
`fileName`	The name of the ZIP file that will be created to hold the Excel file containing cell-level security information. The file containing the exported data is stored in the Outbox.	Yes	None
`names`	Optionally, include a comma-separated list of cell-level security definitions in the application. Information from each definition is exported to a separate Excel file and then zipped. For example, the list could contain `CLSDAccountPeriod,CLSDEntityPeriod,CLSDProductPeriod` . If this parameter is not provided, all cell-level security records are exported.	No	All records are exported

For a sample URL, see the sample URL and payload in Execute a Job

Example 1: Exports all cell-level security records to the file `ExportCLSDRecordsFile.zip`.

Sample Payload

```
{
    "jobType": "Export Cell-Level Security",
    "jobName": "ExportCellLevelSecurityJob",
    "parameters": {
        "fileName": "ExportCLSDRecordsFile.zip"
    }
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example 2: Exports three cell-level security records with names `CLSDAccountPeriod`, `CLSDEntityPeriod`, and `CLSDProductPeriod` to the file `Export3CLSDRecordsFile.zip`.

```
{
    "jobType": "Export Cell-Level Security",
    "jobName": "ExportCellLevelSecurityJob",
    "parameters": {
        "fileName": "Export3CLSDRecordsFile.zip",
        "names": "CLSDAccountPeriod,CLSDEntityPeriod,CLSDProductPeriod"
    }
}
```

Export Data

Use this REST API to export application data into a file using the export data settings, including file name, specified in a job of type export data. The file containing the exported data is stored in the repository.

You can override some of the parameters of the job definition while executing this job with a REST API.

You can also export application data into a file using the parameter values provided, without an explicit predefined `Export Data` job definition.

Exporting data supports substitution variables. You can use substitution variables while providing the `rowMembers`, `columnMembers`, and `povMembers` definitions. See *Exporting Data* and *Creating and Assigning Values to Substitution Variables* in *Administering Planning*.

Required Roles

Service Administrator

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Table 3-34 Export Data

Name	Description	Required	Default
`jobType`	`Export Data` or `EXPORT_DATA` (both parameters are supported)	Yes	None
`jobName`	The name of this job. **Example**: `dailydataexport`	No	Export Data
`exportFileName`	The file name for the exported data. Data is exported as a ZIP file only. The exported file is stored in the Planning repository. The value must use JSON syntax.	No	The file name for the exported data will be the same as `jobName`.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-34 (Cont.) Export Data

Name	Description	Required	Default
`delimiter`	Parameter to specify a delimiter. Allowed value is `comma` or `tab`.	No	`comma`
`exportSmartListAs`	Parameter to specify how Smart Lists are exported. Allowed value is `label` or `name`.	No	`label`, which signifies that Smart View labels will be exported.
`includeDynamicMembers`	Parameter to include or exclude dynamic members. Allowed value is `true` or `false`.	No	`true`, which signifies that dynamic members will be exported.
`cube`	Parameter to specify the cube from which to export data.	Yes	None
`rowMembers`	Parameter to specify the row members. **Example**: "Name,Price,Discount %"	Yes	None
`columnMembers`	Parameter to specify the column members. **Example**: "Name,Price,Discount %"	Yes	None
`povMembers`	Parameter to specify the POV members. **Example**: "Name,Price,Discount %"	Yes	None
`exportDataDecimalScale`	Parameter to specify the number of decimal positions (0-16) that will be returned when exporting data from Essbase. If the default `None` is selected, the data that is returned will not be formatted and will return as Essbase returns it. Selecting a numeric value will result in the exported data displaying that number of digits to the right of the decimal point, wherever applicable. For example, specifying 3 in the Decimals field will result in the exported data being formatted to display three digits to the right of the decimal point. Selecting 0 formats the data to display a whole number. **Example**: A value 27.07000001 can be formatted and written as 27.07 in the export data file if the value for this parameter is set to 2.	No	None
`customMissingValue`	Parameter to specify a label for empty intersection or cells. Enter an alphabetic value that does not exceed 16 characters. You may begin the value with a # (number sign). If no value is entered, the system defaults to `#missing`.	No	#missing
`exportImpliedShareEnabled`	Parameter to disable or enable implied share behavior.	No	true

For a sample URL, see Sample URL and Payload in Execute a Job.

Sample Payloads

Example 1: Executes the export data job `ExportJobDaily` and overrides the `exportFileName` parameter.

```
{
     "jobType":"EXPORT_DATA",
     "jobName":"ExportJobDaily",
     "parameters":{
          "exportFileName":"myExportfile.zip"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
          }
}
```

Example 2: Executes the export data job `ExportJobDaily` and overrides the delimiter, `exportSmartListAs`, and `includeDynamicMembers` parameters.

```
{
     "jobType":"EXPORT_DATA",
     "jobName":"ExportJobDaily",
     "parameters":{
          "delimiter":"tab",
          "exportSmartListAs":"name",
          "includeDynamicMembers":"true"
     }
}
```

Example 3: Executes the export data job `ExportJobDaily` and overrides the cube parameter only. This job will now execute for the cube Vis1ASO.

```
{
     "jobType":"EXPORT_DATA",
     "jobName":"ExportJobDaily",
     "parameters":{
          "cube":"Vis1ASO
     }
}
```

Example 4: Executes the export data job `ExportJobDaily` and overrides the cube name along with the `rowMembers`, `columnMembers`, and `povMembers` parameters. This job will now execute for the cube Vis1ASO.

```
{
     "jobType":"EXPORT_DATA",
     "jobName":"ExportJobDaily",
     "parameters":{
          "cube":"Vis1ASO",
          "rowMembers":"Current,Variance,Actual,Scenario",
          "columnMembers":"Statistics,Account",
          "povMembers":"Period,Year,Version,Entity,Product,Channel"
     }
}
```

Example 5: Executes the export data job `ExportJobDaily` and overrides the cube name along with the parameters `rowMembers`, `columnMembers`, and `povMembers`. We use substitution variables while overriding the `rowMembers`, `columnMembers`, and `povMembers` definition. This job executes for the cube `Vis1ASO`.

```
{
     "jobType":"EXPORT_DATA",
     "jobName":"ExportJobDaily",
     "parameters":{
          "cube":"Vis1ASO",
          "rowMembers":"ILvl0Descendants(&Param1)",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
          "columnMembers":"ILvl0Descendants(&Param2)",
          "povMembers":"Period,Year,Version,&Param3,Product,Channel"
     }
}
```

Example 6: Executes the export data job `ExportJobDaily` and overrides the cube name along with the parameters `exportDataDecimalScale`, `rowMembers`, and `columnMembers`. We use substitution variables while overriding the `rowMembers`, `columnMembers`, and `povMembers` definition. This job executes for the cube `Vis1ASO`.

```
{
     "jobType":"EXPORT_DATA",
     "jobName":"ExportJobDaily",
     "parameters":{
          "cube":"Vis1ASO",
          "rowMembers":"ILvl0Descendants(&Param1)",
          "columnMembers":"ILvl0Descendants(&Param2)",
          "povMembers":"Period,Year,Version,&Param3,Product,Channel",
          "exportDataDecimalScale":"2"
     }
}
```

Example 7: Executes the export data job `ExportJobDaily` with all the mandatory parameters, `cube`, `rowMembers`, `columnMembers`, and `povMembers`. Default values are assumed for other non-mandatory parameters.

```
{
     "jobType": "EXPORT_DATA",
     "jobName":"ExportJobDaily",
     "parameters": {
          "cube": "Vis1ASO",
          "rowMembers": "ILvl0Descendants(&Param1)",
          "columnMembers": "ILvl0Descendants(&Param2)",
          "povMembers": "Period,Year,Version,&Param3,Product,Channel"
     }
}
```

Example 8: Executes the export data job `ExportJobDaily` with all the mandatory parameters, `cube`, `rowMembers`, `columnMembers`, and `povMembers`. Decimal precision is set to 3. Default values are assumed for other non-mandatory parameters.

```
{
     "jobType": "EXPORT_DATA",
     "jobName":"ExportJobDaily",
     "parameters":{
          "cube": "Plan1",
          "rowMembers": "ILvl0Descendants(&Param1)",
          "columnMembers": "ILvl0Descendants(&Param2)",
          "povMembers": "Period,Year,Version,&Param3,Product,Channel",
          "exportDataDecimalScale": 3
     }
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example 9: Executes the export data job `ExportJobDaily` with all the mandatory parameters, `cube`, `rowMembers`, `columnMembers`, and `povMembers`. Decimal precision is set to 3. Dynamic members are not exported. Default values are assumed for all other non-mandatory parameters.

```
{
     "jobType": "EXPORT_DATA",
     "jobName":"ExportJobDaily",
     "parameters":{
          "cube": "Plan1",
          "rowMembers": "ILvl0Descendants(&Param1)",
          "columnMembers": "ILvl0Descendants(&Param2)",
          "povMembers": "Period,Year,Version,&Param3,Product,Channel",
          "exportDataDecimalScale": 3,
          "includeDynamicMembers": false
     }
}
```

Example 10: Executes the export data job with all the mandatory parameters. `customMissingValue` is set to `#MyNoData`. Default values are assumed for all other non-mandatory parameters.

```
{
     "jobType":"EXPORT_DATA",
     "jobName":"ExportPlan1Data",
     "parameters":{
          "customMissingValue" : #MyNoData"
     }
}
```

Example 11: Executes the export data job with all the mandatory parameters. The parameter `exportImpliedShareEnabled` is set to `false`. Default values are assumed for all other non-mandatory parameters.

```
{
     "jobType":"EXPORT_DATA",
     "jobName":"Test_Data_Export_Job",
     "parameters":{
         "exportImpliedShareEnabled": false
     }
}
```

Export Job Console

Use this REST API to export the job console records to a Comma Separated Values (CSV) file.

The output CSV file contains the first character as a Byte Order Mark (BOM) character, `\ufeff`. The API writes an encrypted application identifier following the BOM character. This application identifier is written between double-quotes. Headers for the CSV file follow the application identifier.

You can use an optional `excludeApplicationId` parameter to not write the application identifier in the export file. Exported job console data files without the application identifier cannot be imported back into the application.

Copyright © 2017, 2026, Oracle and/or its affiliates.

The generated CSV file is compressed and the output is a ZIP file. The file can be downloaded using the Download REST API.

To view pending jobs, see Viewing Pending Jobs and Recent Activity.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Required Roles

Service Administrator and users with the roles Job - Manage or Job - View

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Table 3-35 Parameters

Name	Description	Required	Default
`jobType`	Export Job Console	Yes	None
`jobName`	The job name to be used for this job execution. **Example:** `ExportWeeklyJobStatusRecords`	No	Export Job Console
`userNames`	Comma separated user names. Job console records created by only the specified users are exported. If not specified, job console records created by all users are exported.	No	None
`fileName`	The name of the file to which records should be exported. The file containing the exported data is stored in the Planning repository. If `fileName` is not specified, a file is auto-generated with a name containing the user name, current date, and time stamp. For example, `test_admin_JobConsoleRecords_2019-02-26-04-34-45-420.zip`	No	The file name is auto-generated
`ndays`	Number of days for which audit records should be exported. Possible values are. • **1**: Export job console records for the last 24 hours • **2**: Export job console records for the last two days • **7**: Export job console records for the last seven days • **30**: Export job console records for the last 30 days • **60**: Export job console records for the last 60 days • **All**: Export all job console records	No	7
`jobNames`	Comma-separated job names for which job console records should be exported.	No	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-35 (Cont.) Parameters

Name	Description	Required	Default
`jobTypes`	Comma-separated job codes for which job console records should be exported. Possible values are: • ALL • Rules or RULES • Ruleset or RULESET • Clear Cell Details or CLEAR_CELL_DETAILS • Copy Data or COPY_DATA • Invalid Intersection Report/ INVALID_INTERSECTION_RPT • Copy Versions or COPY_VERSIONS • Content Upgrade or CONTENT_UPGRADE • Plan Type Map or PLAN_TYPE_MAP • Import Data or IMPORT_DATA • Export Data or EXPORT_DATA • Export Metadata or EXPORT_METADATA • Import Metadata or IMPORT_METADATA • Cube Refresh or CUBE_REFRESH • Clear Cube or CLEAR_CUBE • Administration Mode or ADMIN_MODE • Compact Cube or COMPACT_CUBE • Restructure Cube or RESTRUCTURE_CUBE • Merge Data Slices or MERGE_DATA_SLICES • Optimize Aggregation or OPTIMIZE_AGGREGATION • Import Security or SECURITY_IMPORT • Export Security or SECURITY_EXPORT • Export Audit or AUDIT_EXPORT • Export Job Console or JOBCONSOLE_EXPORT • Sort Members or SORT_MEMBERS • Smart Push or SMART_PUSH • Import Exchange Rates or IMPORT_EXCHANGE_RATES • Execute Bursting Definition or EXECUTE_MR_BURST	No	Rules
`jobStatusCodes`	Comma-separated status code of the jobs for which job records are exported. Possible values are: `1` - Processing `2` - Completed successfully `3` - Failed with errors `4` - Completed with unknown status `5` - Completed with threshold violation status `6` - Pending cancellation `7` - Cancelled `8` - Completed with errors `9` - Completed with warnings `all` - All jobs with any status	No	2

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-35 (Cont.) Parameters

Name	Description	Required	Default
`exportErrorDetails`	If true, exports the details of failed/error jobs as separate error log file in the final output file. Job status details of jobs having one of the status listed below are exported in separate files. • Error • Unknown • Completed with Threshold Exception • Completed with Errors • Completed with Warnings	No	true
`topCountDuration`	Filters the top *n* job status records by completion time. This is useful for finding the longest running jobs. For example, enter `10` for this parameter to review the top 10 longest running jobs, as in this example: `"topCountDuration":"10"`	No	0 Represents all records
`excludeApplicationId`	Optionally, you can specify if the application identifier should be written in the export file. Possible values: `true` or `false` This parameter can benefit those customers who do not want the application identifier to be included in the export file to help import into their own systems. This export file cannot be used to import into a Oracle Fusion Cloud EPM environment.	No	false

For a sample URL, see Sample URL and Payload in Execute a Job.

Sample Payload

Example 1: Exports the job console records for all default parameters into the `NewFile.csv` file. Exports status of all Rule jobs completed in the last seven days.

```
{
     "jobType":"JOBCONSOLE_EXPORT",
     "jobName":"AllJobConsoleExports",
     "parameters":{"fileName":"NewFile.csv"}
}
```

Example 2: Exports the job console records for Rule and Export Data jobs that completed normally or with an error status over the last month into the `exportFile.csv` file. Job details of the failed jobs are exported in separate files in the final compressed file.

```
{
  "jobType": "JOBCONSOLE_EXPORT",
  "parameters": {
    "fileName": "exportFile.csv",
    "jobTypes": "Rules, EXPORT_DATA",
    "jobStatusCodes": "2,3",
    "ndays": "30"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
  }
}
```

Example 3: Exports the job console records for the jobs named Daily Consolidation and Smart Push to a Reporting Cube. Includes jobs that completed normally or with an error status over the last month into the `exportFile.csv` file. Job details of the failed jobs are not exported in separate files because `exportErrorDetails` is `false`.

```
{
  "jobType":"JOBCONSOLE_EXPORT",
  "parameters":{
     "fileName":"exportFile.csv",
     "jobNames":"Daily Consolidation, Smart Push to Reporting Cube",
      "jobStatusCodes": "2,3", "ndays":"30",
      "exportErrorDetails":"false"
      }
}
```

Example 4: Exports the top 10 longest running jobs:

```
{
     "jobType":"JOBCONSOLE_EXPORT",
     "parameters":{"fileName":"exportFile.csv", "jobStatusCodes": "all",
     "ndays":"all", "jobTypes":"all", "exportErrorDetails":"false",
     "topCountDuration":"10"}
}
```

Example 5: Exports the job console records for all default parameters into to the `NewFile.csv` file. This exports status of all Rule jobs completed in the last seven days. The application identifier will be not written in the generated file. This export file cannot be used to import into a Cloud EPM environment.

```
{
  "jobType": "JOBCONSOLE_EXPORT",
  "jobName": "AllJobConsoleExports",
  "parameters": {
    "fileName": "NewFile.csv",
    "excludeApplicationId": "true"
  }
}
```

Export Security

Exports the security records or access control list (ACL) records for specified users or groups to a Comma Separated Values (CSV) file.

For information about access permissions to application artifacts, see Setting Up Access Permissions.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Required Roles

Service Administrator

Copyright © 2017, 2026, Oracle and/or its affiliates.

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Table 3-36 Parameters

Name	Description	Required	Default
`jobType`	Export Security	Yes	None
`jobName`	The name of this job. **Example:** ExportSecurity	No	Export Security
`fileName`	The name of the file to which records should be exported. The file containing the exported data is stored in the Planning repository. If `fileName` is not specified, a file is auto-generated with a name containing the user name, current date, and time stamp. For example, `test_admin_SecurityRecords_2019-02-26-04-34-45-420.csv`.	No	The file name is auto-generated
`exportUsers`	Comma separated user names. Only ACL records related to the specified users are exported.	No	None
`exportGroups`	Comma separated user names. Only ACL records related to the specified groups are exported.	No	None

Notes:

- This job can take only `exportGroups` or `exportUsers` at one time. If you need to export groups and users, you must run the job twice, once with each parameter.
- If a user name or group name contains a comma, escape the comma in the request. For example, if a user name is `test,User`, the request should contain `test\\,User`.
- For the file format, see the definition in Import Security Records.

For a sample URL, see Sample URL and Payload in Execute a Job.

Sample Payload

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example 1: Exports all security records to the `ExportSecurityRecordsFile.csv file`.

```
{
    "jobType": "Export Security",
    "jobName": "ExportSecurity",
    "parameters": {
        "fileName": "ExportSecurityRecordsFile.csv"
    }
}
```

Example 2: Exports security records of two groups, group1 and group2, to the `ExportSecurityRecordsFile.cv` file.

```
{
    "jobType": "Export Security",
    "jobName": "ExportSecurity",
    "parameters": {
        "exportGroups": "group1,group2"
        "fileName": "ExportSecurityRecordsFile.csv"
    }
}
```

Example 3: Exports security records of two users, `test1` and `test,User2` to the `ExportSecurityRecordsFile.csv` file. Note that one user name contains a comma in it.

```
{
    "jobType": "Export Security",
    "jobName": "ExportSecurity",
    "parameters": {
        "exportUsers": "test1,test\\,User2"
        "fileName": "ExportSecurityRecordsFile.csv"
    }
}
```

Execute a Report Bursting Definition

You can execute bursting for a single report or book for more than one member of a single dimension, and publish a PDF or Excel output for each member.

The bursting definition must be present in the folder that you specify with the `burstingDefinitionName` parameter.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Required Roles

Service Administrator

REST Resource

```
POST       /HyperionPlanning/rest/{api_version}/applications/{application}/
jobs
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For parameters that are common to all jobs, see Execute a Job.

Table 3-37 Execute a Report Bursting Definition

Name	Description	Required	Default
`jobType`	`Execute Bursting Definition` or `EXECUTE_MR_BURST` (both parameters are supported)	Yes	None
`jobName`	The name of the job to be used. This job name appears on the job console. **Example**: `MonthlySalesBurstDev`	No	Execute Bursting Definition
`burstingDefinitionName`	Bursting definition name with the complete path to where the bursting definition is stored. **Example**: `/Library/Jan/MonthlySalesBurstDef`	Yes	None

For a sample URL, see the sample URL and payload in Execute a Job

Sample Payload

Example 1: Executes the bursting definition named `MonthlySalesBurstDev` that is present in the Library folder.

```
{
  "jobType":"Execute Bursting Definition",
  "jobName":"Execute MonthlySalesBurstDef",
  "parameters": {
    "burstingDefinitionName":"Library/MonthlySalesBurstDef"
  }
}
```

Example 2: Executes the bursting definition named `MonthlySalesBurstDev` that is present in the Reports subfolder under the Library folder.

```
{
  "jobType":"Execute Bursting Definition",
  "jobName":"Execute MonthlySalesBurstDef",
  "parameters": {
    "burstingDefinitionName":"Library/Reports/MonthlySalesBurstDef"
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Export Library Documents

Creates a job to export documents from the library. This allows you to automate the tasks of exporting and downloading documents.

The Export Library Document job copies the content of library documents to the default download location, where you can download them to your local computer. The job enables batch exporting of documents using a list of document dientifiers (UUIDs or paths).

You can use the Inbox/Outbox Explorer to view the details of the copied file. Use the Download REST API to download the file.

You can provide multiple document identifiers (UUIDs or paths) in a comma-separated list via the `idOrFullyQualifiedName` parameter. Depending on the specified `exportFormat`, documents can be exported individually or collectively in a zipped file to the Inbox/Outbox.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs. For additional details, see Job Types.

Before using the REST resources, you must understand how to access the REST resources and other important concepts. See Cloud EPM REST APIs Best Practices.

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Table 3-38 Parameters

Name	Description	Required	Default
`jobType`	Copy Artifact From Library, Export Library Document, or COPY_ARTIFACT_FROM_LIBRARY (all values are supported)	Yes	None
`jobName`	The name of this job. **Example:** Copy_Quarterly_Sales	No	`Export Library Document`
`idOrFullyQualifiedName`	Comma-separated list of document identifiers (UUIDs or paths) being exported	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-38 (Cont.) Parameters

Name	Description	Required	Default
`saveAsFile`	The output file name, in the default download location, to which the document should be copied. If a file with the same name exists, the job will error out unless the overwrite flag is passed as true. See the usage guidelines for important considerations.	No	None
`overwrite`	If a file with the same name exists in the default download location, the file will not be overwritten by default unless the `overwrite` flag is passed as `true`. See the usage guidelines for important considerations.	No	`false`
`errorFile`	The error file name, in the default download location, which contains the details (including errors) of the operation. Any existing error file with the same name is overwritten. If you don't provide the extension in `errorFile`, the file will use `.log` as the default extension. Use the Inbox/Outbox Explorer to view the details of the error file. Use the Download REST API to download the file.	No	`false`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-38 (Cont.) Parameters

Name	Description	Required	Default
`exportFormat`	The format of the copied document. Allowed values are `file` and `zip`. • `file` - copies the document in its original binary format. For example, if the document is a PDF or Microsoft Word document, it is copied as a PDF or a Microsoft Word document. • `zip` - copies the document in its original binary format and zips it.	No	`file`

For a sample URL, see Sample URL and Payload in Execute a Job.

Sample Payload Example: Exporting one document to a ZIP file

Copies a document called `WeeklySales.txt`, identified with the complete path of the document, to the default download location and compresses it. The output file name will be `WeeklySales.zip`. If a file with the same name exists in the Inbox/Outbox, the existing file will be overwritten. An error file with the name `WeeklySalesErrorLog.log` will be created with the details of the activity.

```
{
    "jobType": "COPY_ARTIFACT_FROM_LIBRARY",
    "jobName": "Copy Invalid SKU Q1 List",
    "parameters":
        {
                "artifactName": "Library/folder1/WeeklySales.txt",
                "saveAsFile": "WeeklySales.zip",
                "overwrite": "true",
                "errorFile": "WeeklySalesErrorLog.log",
                "exportFormat": "zip"
       }
}
```

Sample Payload Example: Exporting multiple documents to a ZIP file

Exports a list of documents identified by paths into a ZIP file. The export process generates a log file, `BatchExportLog.log`, with details and outcomes of all exported documents.

```
{
    "jobType": "COPY_ARTIFACT_FROM_LIBRARY",
    "jobName": "BatchExportDocuments",
    "parameters": {
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        "idOrFullyQualifiedName": "Library/FinancialReport2023.xlsx, Library/
FinancialReport2022.xlsx, Library/FinancialReport2021.xlsx",
        "exportFormat": "zip",
        "overwrite": true,
        "saveAsFile": "BatchExport.zip",
        "errorFile": "BatchExportLog.log"
    }
}}
```

Usage Guidelines

Notes on the `overwrite` flag

- The `overwrite` flag is especially critical when dealing with multiple documents.
- A single overwrite value applies uniformly across all documents in the batch:
  - If set to `true`, any existing files matching the exported documents' names will be overwritten without prompt.
  - If set to `false`, the system will not overwrite existing files and will skip those documents.

Caveats for using the `saveAsFile` parameter

- The `saveAsFile` parameter influences the naming of exported files but has specific behaviors depending on the number of documents and the selected export format.
- **Single Document**: If only one document ID is provided, the file will be saved with the name specified in `saveAsFile`, assuming the file extension matches the document's format.
- **Multiple Documents**:
  - If the `exportFormat` is set to `zip`, regardless of the number of documents, `saveAsFile` determines the name of the resulting ZIP file. Ensure that the `.zip` extension is used.
  - If `exportFormat` is not set to `zip`, the `saveAsFile` parameter will be ignored, and each document will be exported under its original name.

Export Metadata

Use this REST API to export metadata into a file using the settings specified in a Planning job of type `export metadata`. The file containing the exported metadata is stored in the Planning repository.

You can also override some of the parameters of the job definition while executing this job from a REST API.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters

Copyright © 2017, 2026, Oracle and/or its affiliates.

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Table 3-39 Export Metadata

Name	Description	Required	Default
`jobType`	`Export Metadata` or `EXPORT_METADATA` (both parameters are supported)	Yes	None
`jobName`	The name of a job of type **export metadata** exactly as it is already defined in the Planning application. **Example**: `dailyAccountExport`	Yes	None
`exportZipFileName`	Optionally, you can specify a file name for the exported metadata. Metadata is exported as a ZIP file only. The value must use JSON syntax. **Example**: `{exportZipFileName:Accountexport.zip}`	No	The file name for the exported metadata will be the same as Job Name

For a sample URL, see Sample URL and Payload in Execute a Job.

Example Payload

Example: Executes the export metadata job "ExportMetadataDaily" and overrides the `exportZipFileName` parameter.

```
{
    "jobType": "EXPORT_METADATA",
    "jobName": "ExportMetadataDaily",
    "parameters": {
        "exportZipFileName": "dailyMetaData.zip"
    }
}
```

Export User Variable Values

Use this REST API to export user variable values from Planning business process, including context-sensitive user variables. You can optionally filter the exported data by "username", "variable", or "member".

The output is a CSV file that is added to the Outbox. You can download the file using Inbox/Outbox Explorer or tools like EPM Automate or REST APIs, for example, with the Download API.

Using this REST resource requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Required Roles

Service Administrator

REST Resource

```
POST     /HyperionPlanning/rest/{api_version}/applications/{application}/jobs
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Table 3-40 Parameters

Name	Description	Required	Default
`jobType`	Export User Variable Values or `EXPORT_USER_VARIABLE_VALUES` (both parameters are supported)	Yes	None
`jobName`	The name of the job to be used. This job name appears on the job console. Example: `ExportUVValJob`	No	Auto generated
`fileName`	The name of the output CSV file. If this is not specified, a CSV file is auto generated with a name containing the username, current date, and time stamp. For example, `test_userUVValuesImportErrorLog2025-07-14-12-08-45-441.csv` Before using this REST API, you can use the Upload REST API to upload the file. You can download it using the Download API . This API overrides any existing CSV file with the same name.	No	Auto generated
`userName`	This is an optional filter used for filtering the result set based on the username.	No	No

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-40 (Cont.) Parameters

Name	Description	Required	Default
member	This is an optional filter used for filtering the result set based on the member.	No	No
variable	This is an optional filter used for filtering the result set based on the variable	No	No

For a sample URL, see Sample URL and Payload in Execute a Job.

Sample Payload

Example 1: Exports all the user variable values to an auto generated CSV file as the "fileName" parameter is missing.

```
{
   "jobType": "EXPORT_USER_VARIABLE_VALUES",
   "jobName": "Export User Variable Values",
   "parameters": {
        }
}
```

Example 2: Exports user variable values to the UserVarVal.csv file after applying the "userName", "member" and "variable" filter.

```
{
   "jobType": "EXPORT_USER_VARIABLE_VALUES",
   "jobName": "Export User Variable Values",
   "parameters": {
         "fileName": "UserVarVal.csv",
      "userName": ["testuser1", "testuser1"],
      "member": "Jan",
      "variable": "uservar1",
}
}
```

Export Valid Intersections

This REST API exports valid intersection groups (certain cell intersections filtered by rules when users enter data or select runtime prompts) from Financial Consolidation and Close, Planning, or Tax Reporting business processes.

The output is a ZIP file that is added to the Outbox. You can download the file using the Download REST API.

Note the following requirements for the format of the Excel file used with this REST API.

The exported Excel file contains two worksheets with these names:

Copyright © 2017, 2026, Oracle and/or its affiliates.

1. `Rules`
2. `Sub Rules`

The `Rules` worksheet has the following column headings:

- **Name**
- **Position**
- **Description**
- **Enabled**
- **Anchor Dim Name**
- **Anchor Dimension Apply to Unselected Members**
- **Dim1**
- **Dim1 Required**
- **Dim2**
- **Dim2 Required**
- **Dim*X***
- **Dim*X* Required**

The `Sub Rules` worksheet has the following column headings:

- **Name** - This column contains the names of the Rules from the first worksheet
- **Anchor Members**
- **Anchor Exclusion**
- **Dim1 Members**
- **Dim1 Exclusion**
- **Dim2 Members**
- **Dim2 Exclusion**
- **Dim*X* Members**
- **Dim*X* Exclusion**

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Required Roles

Service Administrator

REST Resource

```
POST       /HyperionPlanning/rest/{api_version}/applications/{application}/
jobs
```

Request

Supported Media Types: `application/json`

Parameters

Copyright © 2017, 2026, Oracle and/or its affiliates.

The following table summarizes the client request parameters specific to this job. For parameters that are common to all jobs, see Execute a Job.

Table 3-41 Export Valid Intersections

Name	Description	Required	Default
`jobType`	`Export Valid Intersections` or `EXPORT_VALID_INTERSECTIONS`	Yes	None
`jobName`	The name of the job to be used. This job name appears on the job console. **Example**: `ExportVIRecords`	No	Export Valid Intersections
`fileName`	The name of the ZIP file that will be created to hold the Excel file containing valid intersection records. The file containing the exported data is stored in the Outbox.	Yes	None
`names`	If provided, exports some of the records using the names in a comma-separated list of valid intersection record names. For example, the list could contain `VIAccountPeriod,VIEntityPeriod,VIProductPeriod` . If this parameter is not provided, all valid intersection records are exported.	No	All records are exported

For a sample URL, see the sample URL and payload in Execute a Job

Sample Payload

Example 1: Exports all valid intersections records to the file `ExportVIRecordsFile.zip`.

```
{
    "jobType": "Export Valid Intersections",
    "jobName": "ExportVIJob",
    "parameters": {
        "fileName": "ExportVIRecordsFile.zip"
    }
}
```

Example 2: Exports three valid intersection records with names `VIAccountPeriod`, `VIEntityPeriod`, and `VIProductPeriod` to the file `Export3VIRecordsFile.zip`.

```
{
    "jobType": "Export Valid Intersections",
    "jobName": "ExportVIJob",
    "parameters": {
        "fileName": "Export3VIRecordsFile.zip",
        "names": "VIAccountPeriod,VIEntityPeriod,VIProductPeriod"
    }
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Import Cell-Level Security

This REST API imports cell-level security settings from a ZIP file that contains an Excel file with cell-level security definitions into Planning or Tax Reporting business processes. Cell-level security enables Service Administrators to restrict who can view data in the application by defining rules that remove read or write access to cells that a user would normally have access to due to their regular security.

The file must be present in the Inbox. You can use the Upload REST API to upload the file. Any rejected records are generated in an Excel file that is zipped and copied to the Outbox.

The best method to get the import file format template is to export cell-level security from the application.

The following is a general explanation of the Excel file. The file contains two Excel worksheets:

1. `Rules` - contains cell-level security definitions, dimensions included, properties such as Unspecified Valid, and Additional Dims Required
2. `Sub Rules` - contains member selections and exclusions

The `Rules` worksheet has the following column headings:

- **Name**
- **Position**
- **Description**
- **Enabled**
- **Valid Cubes** - This column can contain either `All` or a list of comma-separate names of cubes, such as `Plan1, Plan2`
- **Anchor Dim Name**
- **Anchor Dimension Apply to Unselected Members**
- **Dim1**
- **Dim1 Required**
- **Dim2**
- **Dim2 Required**
- **Dim***X*
- **Dim***X* **Required**

The `Sub Rules` worksheet has the following column headings:

- **Name** - This column must contain the name of the Rules from the first worksheet
- **Users**
- **User Groups**
- **Restriction** - This column can contain `Deny Read` or `Deny Write`
- **Anchor Members**
- **Anchor Exclusion**
- **Dim1 Members**
- **Dim1 Exclusion**

Copyright © 2017, 2026, Oracle and/or its affiliates.

- **Dim2 Members**
- **Dim2 Exclusion**
- **Dim*X* Members**
- **Dim*X* Exclusion**

Required Roles

Service Administrator

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

REST Resource

```
POST       /HyperionPlanning/rest/{api_version}/applications/{application}/
jobs
```

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For parameters that are common to all jobs, see Execute a Job.

Table 3-42 Import Cell-Level Security

Name	Description	Required	Default
`jobType`	`Import Cell-Level Security` or `IMPORT_CELL_LEVEL_SECURITY`	Yes	None
`jobName`	The name of the job to be used. This job name appears on the job console. **Example**: `ImportCLSPlan1`	No	Import Cell-Level Security Definitions
`fileName`	The name of the ZIP file containing the input Excel file. The file must be present in the Inbox. Before using this REST API, you can use the Upload REST API to upload the file.	Yes	None
`errorFile`	Optionally, create a separate error file for recording any errors that occur during the import process. If this is not specified, an error file is auto-generated with a name containing the user name, current date, and time stamp. For example, `admin_ImportError_2020-02-26-04-34-45-420.txt`. The file containing the error messages is stored in the Outbox. You can download it using the Download API. This API overrides any existing error file with the same name.	No	The file is auto-generated

Copyright © 2017, 2026, Oracle and/or its affiliates.

For a sample URL, see the sample URL and payload in Execute a Job

Example 1: Imports cell-level security records from the input file `ImportCLSRecordsFile.zip`.

```
{
    "jobType": "Import Cell-Level Security",
    "jobName": "ImportCLSJob",
    "parameters": {
        "fileName": "ImportCLSRecordsFile.zip"
    }
}
```

Example 2: Imports cell-level security records from the input file `ImportCLSRecordsFile.zip` and exports the error messages to the file `ImportCLSFileLog.txt`.

```
{
    "jobType": "Import Cell-Level Security",
    "jobName": "ImportCLSJob",
    "parameters": {
        "fileName": "ImportCLSRecordsFile.zip",
        "errorFile": "ImportCLSRecordsFileLog.txt"
    }
}
```

Import Data

Use this REST API to import data from a file in the repository into the application using the import data settings specified in a job of type `Import Data`.

You can override some of the parameters of the job definition while executing this job from a REST API.

You can also import data using the parameter values provided, without an explicit predefined `Import Data` job definition.

For Planning, Financial Consolidation and Close, and Tax Reporting, you can review the rejected data records that have errors. To do this, specify an error file that captures the data records that are not imported for each dimension. If an errop file is specified, the ZIP file is stored in the Outbox where you can download the file using Inbox/Outbox Explorer or tools like EPM Automate or REST APIs, for example, with the Download API.

Required Roles

Service Administrator

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-43 Import Data

Name	Description	Required	Default
`jobType`	`Import Data` or `IMPORT_DATA` (both parameters are supported)	Yes	None
`jobName`	Name of this job. **Example:** dailydataload	No	Import Data
`importFileName`	You can specify the name of the ZIP, CSV or TXT (Oracle Essbase format data file) file from which data is to be imported. If the parameter passed to import data is in Essbase format, the ZIP file must contain an Essbase format TXT file. For other import jobs, the ZIP file may contain one or more CSV files that identify the import sequence in the file names; for example `data1-3.csv`, `data2-3.csv`, and `data3-3.csv`. The value must use JSON syntax.	Yes	None
`sourceType`	Paramter to specify the source of data. Allowed value is `Planning` or `Essbase`.	Yes	None
`delimiter`	Parameter to specify a delimiter. Allowed value is `comma` or `tab`. This is only applicable when the source type is `Planning`.	No	`comma`
`dateFormat`	Parameter to specify the data format. Allowed value is one of the following: `MM-DD-YYYY`, `DD-MM-YYYY`, or `YYYY-MM-DD`.	No	`MM-DD-YYYY`
`includeMetaData`	Parameter to specify to include metadata from the data file. Allowed value is `true` or `false`. This is only applicable when the source type is `Planning`.	No	`false`
`cube`	Parameter to specify the cube name. This is only applicable (and becomes mandatory) when the source type is `Essbase`.	Yes	None
`errorFile`	Paramter to specify the `errorFile` to store the rejected records (maximum 1,000). The error file is zipped with the name of this parameter. The ZIP file is stored in the Outbox. You can download it with the Download API. This API overrides any existing error file with the same name. Example: ImportDataErrorFile.zip	No	No error files are created

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-43 (Cont.) Import Data

Name	Description	Required	Default
`stopOnError`	Parameter to stop the import process if an intermediate error is encountered during the import, for example, if data load finds an unknown member or invalid data value. This setting can only be used when `sourceType` is `Essbase`. When using this option, if you specified an error file, you can then review the rejected data record that has the error. The record is included in a ZIP file that is stored in the outbox where you can download it for review, for example, with the Download API. Allowed value is `true` or `false`.	No	`true`
`customMissingValue`	Parameter to specify a label for empty intersection or cells. Enter an alphabetic value that does not exceed 16 characters. You may begin the value with a # (number sign). If no value is entered, the system defaults to `#missing`.	No	#missing

For a sample URL, see Sample URL and Payload in Execute a Job.

Sample Payloads

Example 1: Executes the import data job ImportJob and overrides the `importFileName` parameter.

```
{"jobType":"IMPORT_DATA","jobName":"ImportJob",
"parameters":{
     "importFileName":"myImportfile123.zip"
     }
}
```

Example 2: Executes the import data job ImportJob and overrides the `delimiter`, `dateFormat`, and `includeMetaData` parameters.

```
{"jobType":"IMPORT_DATA","jobName":"ImportJob",
"parameters":{
     "delimiter":"comma",
     "dateFormat":"MM-DD-YYYY",
     "includeMetaData":"false"
     }
}
```

Example 3: Executes the import data job ImportJob defined with `sourceType` as `Essbase` and overrides the `sourceType` and `cube` parameters.

```
{"jobType":"IMPORT_DATA","jobName":"ImportJob",
"parameters":{
     "sourceType":"Essbase",
     "cube":"Plan1"
     }
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example 4: Executes the ImportData job ImportDataJob and overrides the `errorFile` parameter with a value ImportDataErrorFile.zip. If error records are found during the Import Data operation, a ZIP file called ImportDataErrorFile.zip is created in the Planning repository. The generated error file can be downloaded from the Outbox from the job status page or using the Download REST API or EPM Automate downloadfile command.

```
{"jobType": "IMPORT_DATA",
    "jobName": "ImportDataJob",
    "parameters": {
      "errorFile":"ImportDataErrorFile.zip"
    }
}
```

Example 5: Executes the ImportData job ImportDataJob_Sample defined with `sourceType` as `Essbase`, and overrides the `stopOnError` parameter with the value as `true`. The data load will stop loading in case of an intermediate error.

```
{
    "jobType": "IMPORT_DATA",
    "jobName": "ImportDataJob_Sample",
    "parameters": {
        "importFileName":"importDataFile_Essabse.txt",
        "cube":"Plan1",
        "stopOnError":"true"
    }
}
```

Example 6: Executes the import data job with all the mandatory parameters.

```
{
   "jobType": "IMPORT_DATA",
   "jobName": "ImportDataJob",
   "parameters":{
      "sourceType": "Planning",
      "importFileName": "myImportfile123.zip",
      "delimiter": "comma"
   }
}
```

Example 7: Executes the import data job with all the mandatory parameters. The `sourceType` parameter is specified as `Essbase`, and `cube` provides the cube name. Default values are assumed for other non-mandatory parameters.

```
{
   "jobType": "Import Data",
   "jobName": "ImportDataJob",
   "parameters":{
      "sourceType": "Essbase",
      "cube": "Plan1",
      "importFileName": "EssbasePlan1_data.zip"
   }
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example 8: Executes the import data job with all the mandatory parameters. The `customMissingValue` parameter is specified as `#MyNoData`, which should match the `customMissingValue` label present in the exported file. Default values are assumed for other non-mandatory parameters.

```
{
   "jobType":"IMPORT_DATA",
   "jobName":"Import Plan1 Data",
   "parameters":{
      "customMissingValue" : "#MyNoData"
   }
}
```

Import Exchange Rates

Export the Exchange Rates template in the Planning repository and change the rates if required. You can then import the rates into the application using the Import Exchange Rates settings specified in a Planning job of type import exchange rates.

For more information, see Job Types.

You can also override some of the parameters of the job definition while executing this job from a REST API.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Table 3-44 Import Exchange Rates

Name	Description	Required	Default
`jobType`	`Import Exchange Rates` or `IMPORT_EXCHANGE_RATES` (both parameters are supported)	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-44 (Cont.) Import Exchange Rates

Name	Description	Required	Default
`jobName`	The name of the job to be used for this job execution. **Important**: You must use the exact name of a job that is already defined in Planning as described in Managing Jobs. **Example**: `importNewExchangeRate`	Yes	None
`importFileName`	Optionally, you can specify the name of the CSV file from which exchange rates are to be imported. If you specify a file name, the Import Exchange Rate file name in the job is ignored.	No	The source file of the job definition
`includeMetaData`	You can override the option to include metadata. Allowed value is `true` or `false`.	No	Include Metadata parameter of the job definition

For a sample URL, see Sample URL and Payload in Execute a Job.

Sample Payload

Example 1: Executes the import exchange rates job `MyExchangeRates` and overrides the `importFileName` parameter.

```
{"jobType":"Import Exchange Rates","jobName":"MyExchangeRates",
 "parameters":{
     "importFileName":"ExportExchangeRatesTemplate.csv"
     }
}
```

Example 2: Executes the import exchange rates job `MyExchangeRates` and overrides the `importFileName` and `includeMetaData` parameters.

```
{"jobType":"Import Exchange Rates","jobName":"MyExchangeRates",
 "parameters":{
     "importFileName":"ExchangeRateTemplate2.csv",
     "includeMetaData":"false"
     }
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Import Library Documents

Creates a job to import documents from the library. The Import Document to Library job imports the content from a local source to the library in the specified upload location. Using REST APIs allows you to automate the tasks of uploading library artifacts.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs. For additional details, see Job Types.

Before using the REST resources, you must understand how to access the REST resources and other important concepts. See Cloud EPM REST APIs Best Practices.

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Table 3-45 Parameters

Name	Description	Required	Default
`jobType`	Import Document to Library or IMPORT_DOCUMENT_TO_LIBRARY	Yes	None
`jobName`	The name of this job. **Example:** Import_Annual_Report	No	`Import Document to Library`
`name`	The name of the document or ZIP file containing documents being imported.	Yes	
`description`	Brief description of the document being imported. For ZIP files, this description applies to all documents within it.	Yes	None
`idOrFullyQualifiedDestinationPath`	The library destination path where the document(s) will be imported. This can be a path with folders or UUID of the folder.	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-45 (Cont.) Parameters

Name	Description	Required	Default
`overwrite`	If a file with the same name exists in the default download location, the file will not be overwritten by default unless the `overwrite` flag is passed as `true`.	No	`false`
`deleteAfterImport`	Determines whether the file should be deleted from the local source after import. For imports using a ZIP file, the source file will be deleted only if all contained documents are imported successfully.	No	`false`
`errorFile`	The error file name, in the default download location, which contains the details (including errors) of the operation. Any existing error file with the same name is overwritten. If you don't provide the extension in `errorFile`, the file will use `.log` as the default extension. Use the Inbox/Outbox Explorer to view the details of the error file. Use the Download REST API to download the file.	No	None

For a sample URL, see Sample URL and Payload in Execute a Job.

Sample Payload Example

Imports a document called `FinancialReport2022.xlsx` into a folder called `Insights` with a description. If a file with the same name exists, it will be overwritten. An error file named `FinancialReport2022ImportLog.log` will be created with details of the activity.

```
{
    "jobType": "IMPORT_DOCUMENT_TO_LIBRARY",
    "jobName": "ImportSingleDocument",
    "parameters": {
        "name": "FinancialReport2022.xlsx",
        "description": "Annual Financial Report for 2022",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        "idOrFullyQualifiedDestinationPath": "Library/Insights",
        "overwrite": true,
        "deleteAfterImport": false,
        "errorFile": "FinancialReport2022ImportLog.log"
    }
}
```

Sample Payload Example: Importing a ZIP File

Imports a ZIP file named `Reports2022.zip` into the folder `Reports`. The import process generates a common log file, `Reports2022ImportLog.log`, which aggregates the details and outcomes of all child jobs associated with the documents contained within the `Reports2022.zip` file.

```
{
    "jobType": "IMPORT_DOCUMENT_TO_LIBRARY",
    "jobName": "ImportMultipleDocuments",
    "parameters": {
        "name": "Reports2022.zip",
        "description": "Collection of Financial Reports for 2022",
        "idOrFullyQualifiedDestinationPath": "Library/Reports",
        "overwrite": true,
        "deleteAfterImport": false,
        "errorFile": "Reports2022ImportLog.log"
    }
}
```

Import Metadata

Imports metadata from a file in the Planning repository into the application using the import metadata settings specified in a Planning job of type `import metadata`.

You can also override some of the parameters of the job definition while executing this job from a REST API.

For Planning, Financial Consolidation and Close, and Tax Reporting, you can specify an error file that captures the metadata records that are not imported for each dimension. If an error file is specified, a separate error file is created for each dimension. The error files are then zipped together and the zip file is stored in the Outbox where you can download the file using Inbox/Outbox Explorer or tools like EPM Automate or REST APIs, for example, with the Download API.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters

Copyright © 2017, 2026, Oracle and/or its affiliates.

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Table 3-46 Import Metadata

Name	Description	Required	Default
`jobType`	Import Metadata or IMPORT_METADATA (both parameters are supported)	Yes	None
`jobName`	The name of a job of type **import metadata** exactly as it is already defined in the Planning application. **Example**: `importAccount`	Yes	None
`importZipFileName`	Optionally, you can specify the name of the ZIP file from which metadata is to be imported. The contents of the ZIP file that you specify take precedence over the file names defined in the job. The ZIP file may contain one or more CSV files. The file names containing metadata for dimensions should match the import file names defined in the job or end with *_DIMENSIONNAME.csv*; for example, `metadata_Entity.csv`, `metadata_HSP_SmartLists.csv`, and `metadata_Exchange Rates.csv`. Only metadata for the dimensions for which metadata import is set up in the job is imported. Metadata for other dimensions, if contained in the ZIP file, is ignored. **Example:** {importZipFileName:importAccount.zip}	No	The import file name defined in the job definition.
`refreshCube`	You can override the option to perform a refresh cube action defined in the job. Allowed values are either `true` or `false`.	No	"Refresh Database if Import Metadata is successful" parameter of the job definition.
`errorFile`	Optionally, create a separate error file for each dimension. The error files are zipped with the name of this parameter. The ZIP file is stored in the Outbox. You can download it with the Download API. This API overrides any existing error file with the same name **Example**: ImportMetaDataErrorFile.zip	No	No error files are created.

For a sample URL, see Sample URL and Payload in Execute a Job.

Sample Payload

Example: Executes the job `ImportMetaDataJob` and overrides only the `importZipFileName` parameter.

```
{
    "jobType": "IMPORT_METADATA",
    "jobName": "ImportMetaDataJob",
    "parameters": {
        "importZipFileName": "myMetaDataDailyJob.zip"
    }
}
```

Example: Executes the job `ImportMetaDataJob` and overrides the `errorFile` parameter with a value `ImportMetaDataErrorFile.zip`. If there are error records found during the Import

Copyright © 2017, 2026, Oracle and/or its affiliates.

Metadata operation for one or more dimensions, a ZIP file called `ImportMetaDataErrorFile.zip` is created in the repository that contains one error CSV file for each failed dimension. The generated error file can be downloaded from the Outbox from the job status page or using the Download REST API or EPM Automate `downloadfile` command.

```
{
    "jobType": "IMPORT_METADATA",
    "jobName": "ImportMetaDataJob",
    "parameters": {
            "errorFile":"ImportMetaDataErrorFile.zip"
    }
}
```

Import Security

Use this REst API to import the security records or access control list (ACL) records from a Comma Separated Values (CSV) file.

For information about access permissions to application artifacts, see Setting Up Access Permissions.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Excel File Format

- Object Name: The name of the object for which the ACL is defined
- Name: The name of the user or group for which the ACL is defined
- Parent: The name of the parent of the object
- Is User: The flag (Y or N) that determines if the ACL is defined for a user or for a group
- Object Type: The type of object, for example, `Forms folder`
- Access Type: The type of privilege, such as READ or READWRITE
- Access Mode: Additional information, such as if the ACL is applicable on the descendants
- Remove: To remove a particular ACL, set this to Y

All possible values:

Object Type:

- SL_FORM - Form
- SL_COMPOSITE - Composite Form
- SL_TASKLIST - Tasklist
- SL_CALCRULE - Rule
- SL_FORMFOLDER - Form Folder
- SL_CALCFOLDER - Rule Folder
- SL_DIMENSION - Dimension
- SL_CALCTEMPLATE - Template
- SL_REPORT - Management Report
- SL_REPORTSSHOT - Management Report Snapshot

Copyright © 2017, 2026, Oracle and/or its affiliates.

Access Type:

- NONE - None
- READ - Read
- WRITE - Write
- READWRITE - Read Write
- LAUNCH - Launch

Access Mode:

- MEMBER
- CHILDREN
- @ICHILDREN
- @DESCENDANTS
- @IDESCENDANTS

CSV File Example:

```
Object Name,Name,Parent,Is User,Object Type,Access Type,Access Mode,Remove

"Exchange Rates to USD","ats_user3","Y","SL_FORM","READWRITE","MEMBER","N"

"Exchange Rates to USD","ats_user4","Y","SL_FORM","READWRITE","MEMBER","N"

"Exchange Rates to USD","ats_user15","Y","SL_FORM","READ","MEMBER","N"

"Exchange Rates to USD","ats_user10","Y","SL_FORM","NONE","MEMBER","N"

"Calculate Benefits","group_1","N","SL_COMPOSITE","READWRITE","MEMBER","N"
```

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Table 3-47 Parameters

Name	Description	Required	Default
`jobType`	Import Security	Yes	None
`jobName`	The job name to be used for this job execution. **Example:** ImportSecurity	No	Import Security

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-47 (Cont.) Parameters

Name	Description	Required	Default
`fileName`	The input CSV file for import. The file containing the ACL records should be present in the Planning Cloud repository.	Yes	None
`clearAll`	Clear existing access permissions when importing new access permissions. Possible values are `true` or `false`	No	False
`errorFile`	Optionally, create a separate error file for recording any errors that occur during the import process. The file containing the error messages is stored in the Outbox. You can download it with the Download API. This API overrides any existing error file with the same name.	No	None

For a sample URL, see Sample URL and Payload in Execute a Job.

Sample Payload

Example 1: Imports security records from the input file `ImportSecurityRecordsFile.csv`. Existing security records are retained.

```
{
    "jobType": "Import Security",
    "jobName": "ImportSecurity",
    "parameters": {
        "fileName": "ImportSecurityRecordsFile.csv"
    }
}
```

Example 2: Imports security records from the input file `ImportSecurityRecordsFile.csv`. Clears existing security records before importing.

```
{
    "jobType": "Import Security",
    "jobName": "ImportSecurity",
    "parameters": {
        "fileName": "ImportSecurityRecordsFile.csv"
        "clearAll": "true"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    }
}
```

Example 3: Imports security records from the input file `ImportSecurityRecordsFile.csv` and exports the error messages to the file `SecurityImportErrors.txt`. Existing security records are retained.

```
{
    "jobType": "Import Security",
    "jobName": "ImportSecurity",
    "parameters": {
        "fileName": "ImportSecurityRecordsFile.csv"
        "clearAll": "true"
        "errorFile": "SecurityImportErrors.txt"
    }
}
```

Import User Variable Values

Use this REST API to import user variable values from a file in the Planning repository into the application using the Planning job of type `IMPORT_USER_VARIABLE_VALUE`.

For Planning, you can specify an error file that captures the user variable value records that are not imported, with the cause for the failure. If an error file is specified, a separate error file is created. If this is not specified, an error file is auto generated with a name containing the username, current date, and time stamp. For example, `test_userUVValuesImportErrorLog2025-07-14-12-08-45-441.csv`

The file containing the error messages is stored in the Outbox. This API overrides any existing error file with the same name. You can download the file using Inbox/Outbox Explorer or tools like EPM Automate or REST APIs, for example, with the Download API.

The generated error file can be reimported after fixing the rows as per the error logs in the error column.

Using this REST resource requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

The best method to get the import file format template is to export user variable values from the application.

The input CSV has the following column headings in the described order:

1. User Name
2. Dimension
3. Variable Name
4. Member

The error CSV file has the following column heading:

1. User Name
2. Dimension
3. Variable Name
4. Member

Copyright © 2017, 2026, Oracle and/or its affiliates.

5. Error

Required Roles

Service Administrator

REST Resource

```
POST     /HyperionPlanning/rest/{api_version}/applications/{application}/jobs
```

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Table 3-48 Parameters

Name	Description	Required	Default
`jobType`	Import User Variable Values(non case sensitive) or `IMPORT_USER_VARIABLE_VALUES` (both parameters are supported)	Yes	None
`jobName`	The name of the job to be used. This job name appears on the job console. Example: `ImportUVValJob`	Yes	None
`fileName`	The name of the input CSV file. The file must be present in the Inbox. Before using this REST API, you can use the Upload REST API to upload the file.	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-48 (Cont.) Parameters

Name	Description	Required	Default
`errorFileName`	Optionally, create a separate error file for recording any errors that occur during the import process. If this is not specified, an error file is auto-generated with a name containing the user name, current date, and time stamp. For example, `test_userUVValuesImportErrorLog2025-07-14-12-08-45-441.csv` The file containing the error messages is stored in the Outbox. You can download it using the Download API. This API overrides any existing error file with the same name. The generated error file can be reimported after fixing the rows as per the error logs in the error column.	No	Auto generated

For a sample URL, see Sample URL and Payload in Execute a Job.

Sample Payload

Example 1: Imports user variable values from the input file `ImportUVVal.csv` .

```
{
   "jobType": "IMPORT_USER_VARIABLE_VALUES",
   "jobName": "Import User Variable Values",
   "parameters": {
       "fileName": "ImportUVVal.csv"
   }
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example 2: Imports user variable values from the input file `ImportUVVal.csv` and exports the error messages to the file `ImportUVValFileLog.csv`.

```
{
   "jobType": "IMPORT_USER_VARIABLE_VALUES",
   "jobName": "Import User Variable Values",
   "parameters": {
       "fileName": "ImportUVVal.csv",
  "errorFileName": "ImportUVValFileLog.csv"
}
}
```

Import Valid Intersections

This REST API imports valid intersections groups from a ZIP file that contains an Excel file with valid intersection definitions into a Financial Consolidation and Close, Planning, or Tax Reporting business process.

The Excel file must be present in the Inbox. You can use the Upload REST API to upload the file. Any rejected records are generated in an Excel file that is zipped and copied to the Outbox.

The following is a general explanation of the Excel file. The file contains two Excel worksheets:

1. `Rules` - defines the intersection group, dimensions included, and properties such as Unspecified Valid and Additional Dims Required
2. `Sub Rules` - provides member selections and exclusions

The `Rules` worksheet has the following column headings.

- **Name**
- **Position**
- **Description**
- **Enabled**
- **Valid Cubes** - This column can contain either `All` or a list of comma-separate names of cubes, such as `Plan1, Plan2`
- **Anchor Dim Name**
- **Anchor Dimension Apply to Unselected Members**
- **Dim1**
- **Dim1 Required**
- **Dim2**
- **Dim2 Required**
- **Dim***X*
- **Dim***X* **Required**

The `Sub Rules` worksheet must have the following column headings:

- **Name** - This column must contain the name of the Rule from the first worksheet
- **Users**
- **User Groups**

Copyright © 2017, 2026, Oracle and/or its affiliates.

- **Restriction** - This column can contain `Deny Read` or `Deny Write`
- **Anchor Members**
- **Anchor Exclusion**
- **Dim1 Members**
- **Dim1 Exclusion**
- **Dim2 Members**
- **Dim2 Exclusion**
- **Dim*X* Exclusion**

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Required Roles

Service Administrator

REST Resource

```
POST       /HyperionPlanning/rest/{api_version}/applications/{application}/
jobs
```

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For parameters that are common to all jobs, see Execute a Job.

Table 3-49 Import Valid Intersections

Name	Description	Required	Default
`jobType`	`Import Valid Intersections` or `IMPORT_VALID_INTERSECTIONS`	Yes	None
`jobName`	The name of the job to be used for this job execution, exactly as it is defined in the application. **Example**: `ImportVIAccountPeriod`	No	Import Valid Intersections
`fileName`	The name of the ZIP file containing the input Excel file. The file must be present in the Outbox. Before using this REST API, you can use the Upload REST API to upload the file.	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-49 (Cont.) Import Valid Intersections

Name	Description	Required	Default
`errorFile`	Optionally, identify the name of a text file for recording any errors that occur during the import process. If this is not specified, an error file is auto-generated with a name containing the user name, current date, and time stamp. For example, `admin_ImportError_2020-02-26-04-34-45-420.txt`. The file containing the error messages is stored in the Outbox. You can download it using the Download REST API.	No	The file name is auto-generated

For a sample URL, see the sample URL and payload in Execute a Job

Example 1: Imports valid intersections records from the input file `ImportVIRecordsFile.zip`.

```
{
    "jobType": "Import Valid Intersections",
    "jobName": "ImportVIJob",
    "parameters": {
        "fileName": "ImportVIRecordsFile.zip"
    }
}
```

Example 2: Imports valid intersections records from the input file `ImportVIRecordsFile.zip` and exports the error messages to the file `ImportVIRecordsFileLog.txt`.

```
{
    "jobType": "Import Valid Intersections",
    "jobName": "ImportVIJob",
    "parameters": {
        "fileName": "ImportVIRecordsFile.zip",
        "errorFile": "ImportVIRecordsFileLog.txt"
    }
}
```

Merge Data Slices

This REST API merges incremental data slices of an ASO cube. Fewer slices improve a cube's performance.

You can merge all incremental data slices into the main database slice or merge all incremental data slices into a single data slice without changing the main database slice. You can optionally remove cells that have a value of zero. For more information, see Scheduling Jobs.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Table 3-50 Parameters

Name	Description	Required	Default
`jobType`	Merge Data Slices	Yes	None
`jobName`	The job name to be used for this job execution. **Example:** MergeDataSlice	No	Merge Data Slices
`cubeName`	Name of the ASO cube	Yes	None
`keepZeroCells`	Possible values are ***true*** or ***false***	Yes	None
`mergeSliceType`	Possible values are ***allIncrementalSlicesInMain*** (Merge all into the main slice) Or ***allIncrementalSlicesInOneIncremental*** (Merge all incremental into a single incremental slice)	Yes	None

For a sample URL, see Sample URL and Payload in Execute a Job.

Sample Payload

Example: This request will merge all incremental data slices in the main data slice and keep zero value cells.

```
 {
    "jobType": "Merge Data Slices",
    "jobName": "MergeDataSlice",
    "parameters": {
        "cubeName": "VisASO",
        "mergeSliceType": "allIncrementalSlicesInMain",
        "keepZeroCells": "true"
    }
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Optimize Aggregation

Use this REST API to improves the performance of ASO cubes.

This job has two actions: Enable query tracking and Execute aggregation process. It performs an aggregation, optionally specifying the maximum disk space for the resulting files, and optionally basing the view selection on user querying patterns. This API is only applicable to aggregate storage databases. For information about scheduling jobs, see Scheduling Jobs.

Before using this API, you must first enable query tracking to capture tracking statistics on the aggregate storage cube. Then, after you enable query tracking, you must allow sufficient time to collect user data-retrieval patterns before you execute the aggregation process based on query data. The execute aggregation process deletes existing aggregated views and generates optimized views based on the collected query tracking data.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Required Roles

Service Administrator

REST Resource

```
POST     /HyperionPlanning/rest/{api_version}/applications/{application}/jobs/
{jobId}
```

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Table 3-51 Parameters

Name	Description	Required	Default
`jobType`	Optimize Aggregation	Yes	None
`jobName`	The job name to be used for this job execution	No	Optimize Aggregation
`parameters`	Parameters required for the job	Yes	None
`cubeName`	Name of the ASO cube	Yes	None
`type`	Can take one of these values: **enableQueryTracking** or **executeAggregationProcess**	Yes	None
`useQueryData`	Aggregate the views the server selects based on collected user querying patterns. This option is only available if query tracking is turned on. Permissible values: **true** or **false**. Default: false. Applicable only if type is **executeAggregationProcess**.	No	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-51 (Cont.) Parameters

Name	Description	Required	Default
`includeAlternateRollups`	Include secondary hierarchies (with default level usage) in the view selection. Permissible values: **disable** or **enable**. Default: disable (no secondary hierarchies are considered). Applicable only if type is **executeAggregationProcess**.	No	None
`growthSizeRatio`	Aggregates the views the server selects until the maximum growth of the aggregated database exceeds the limits you specify. The value can be a real number such as 1.01. Default is that the database will grow without any growth ratio limit. Applicable only if type is **executeAggregationProcess** .	No	None

For a sample URL, see Sample URL and Payload in Execute a Job.

Sample Payload

Example 1: This request will enable query tracking on the Vis1ASO cube.

```
{
    "jobType": "Optimize Aggregation",
    "jobName": "CubeOptimizeAggr",
    "parameters": {
        "cubeName": "Vis1ASO",
        "type": "enableQueryTracking"
    }
}
```

Example 2: This request will execute the aggregation process on the Vis1ASO cube.

```
{
    "jobType": "Optimize Aggregation",
    "jobName": "CubeOptimizeAggr",
    "parameters": {
        "cubeName": "Vis1ASO",
        "type": "executeAggregationProcess"
    }
}
```

Example 3: This request will execute aggregation process on the Vis1ASO cube. Aggregation process will use the query tracking data, will not include alternate roll ups, and use growth size ratio as 1.01.

```
{
    "jobType": "Optimize Aggregation",
    "jobName": "CubeOptimizeAggr",
    "parameters": {
        "cubeName": "Vis1ASO",
        "type": "executeAggregationProcess",
        "useQueryData": "true",
        "includeAlternateRollups": "disable",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "growthSizeRatio": "1.01"
        }
    }
```

Plan Type Map

Copies data from a block storage cube to an aggregate storage cube or from one to another based on the settings specified in a job of type `plan type map`.

For details about data maps, see Defining Data Maps.

This API is not supported for Financial Consolidation and Close or Tax Reporting.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Table 3-52 Plan Type Map

Name	Description	Required	Default
`jobType`	`Plan Type Map` or `PLAN_TYPE_MAP` (both parameters are supported)	Yes	None
`jobName`	The name of a job of type **plan type map** that is already defined in the application. Example: `CampaignToReporting`	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-52 (Cont.) Plan Type Map

Name	Description	Required	Default
`parameters`	Optionally, you can specify these parameters: • `clearData` - Whether the data in the target database should be moved before copying data (defult: `true`). The value must use JSON syntax. Example: `{clearData:false}` • `overrideMembersMap` - A map containing the dimension name as the key and a member selection string as a value. Members specified in the map will replace the members in the data map definition during execution. • `overrideExclusionMembersMap` - A map containing the dimension name as the key and a member selection string as a value. Members specified in the map will be excluded from the member selection in the data map definition during execution. Any members from the evaluated exclusion selection not present in the evaluated member selection from the data map definition will be ignored. Notes: • The override parameters execute this data map using the specified override members map, clearing data in the target region beforehand if requested. The data map push will error out when the override members map contains members from unmapped dimensions of the target location. • The member selection string is a comma-separated string consisting of member names, functions or expressions.	No	None

Example URL and Payload

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/PS4app1/jobs
```

```
{
  "jobType": "PLAN_TYPE_MAP",
  "jobName": "MapReporting",
  "parameters": {
    "cubeLinkName": "name",
    "clearData": true
  }
}
```

Examples of overriding selections of the data map:

```
{
  "jobType": "PLAN_TYPE_MAP",
  "jobName": " MapReporting",
  "parameters": {
    "cubeLinkName": "MapChannels",
    "clearData": true,
    "overrideMembersMap": {
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
      "Period": "ILvl0Descendants(Q1)"
    },
    "overrideExclusionMembersMap": {
      "Period": "Jan"
    }
  }
}

  "overrideMembersMap": {
    "Period": "ILvl0Descendants(Q1)"
  }

  "overrideMembersMap": {
    "Period": "ILvl0Descendants(Q1)",
    "Account": "Sales"
  }
```

Examples of excluding members:

```
"overrideExclusionMembersMap": {
    "Period": "Jan"
  }


  "overrideExclusionMembersMap": {
    "Period": "Jan, Feb, &CurrMonth, ILvl0Descendants(Q1), YearTotal, Red"
  }
```

Restructure Cube

This REST API performs a full restructure of a BSO cube to eliminate or reduce fragmentation.

For more information, see Scheduling Jobs.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Required Roles

Service Administrator

REST Resource

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Table 3-53 Parameters

Name	Description	Required	Default
`jobType`	Restructure Cube	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-53 (Cont.) Parameters

Name	Description	Required	Default
jobName	The job name to be used for this job execution. **Example:** RestructureCube	No	Restructure Cube
cubeName	Name of the BSO cube	Yes	None

For a sample URL, see Sample URL and Payload in Execute a Job.

Sample Payload

Example: This request will restructure Plan1 BSO

```
{
    "jobType": "Restructure Cube",
    "jobName": "RestructureCube",
    "parameters": {
        "cubeName": "Plan1"
    }
}
```

Rules

Use this REST API to launch a business rule.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Required Roles

Service Administrator, Power User (if Rule Launch access is granted)

REST Resource

```
POST       /HyperionPlanning/rest/{api_version}/applications/{application}/
jobs
```

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For parameters that are common to all jobs, see Execute a Job.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-54 Rules

Name	Description	Required	Default
`jobType`	`Rules` or `RULES` (both parameters are supported)	Yes	None
`jobName`	The name of a **business rule** exactly as it is defined in the Planning application. **Example**: `RollupUSSales`	Yes	None
`parameters`	Optionally you can specify the runtime prompts and their values required to execute the business rule. Note: The rule is executed against the plan type to which it was deployed. The value must use JSON syntax.	No, unless default values for the run time prompts are not provided in Calculation Manager.	Default values for the runtime prompts as provided in Calculation Manager will be used.

Example URL and Payload

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/PS4app1/jobs
```

```
{
    "jobType":"Rules",
    "jobName":"Operating Expense Adj Plan",
    "parameters":
        {
            "MyScenario1":"Current",
            "MyVersion1":"BU Version_1",
            "ToEntity":"CA",
            "Rule_Level_Var":"AZ",
            "planType":"Plan1"
        }
}
```

Ruleset

Launches a business ruleset.

Supports rulesets with no runtime prompts or runtime prompts with default values. You can add parameters to rulesets for greater flexibility. Use the sample rulesets and POST requests below to help you quickly understand different scenarios when running this job. For details about rulesets, see Designing Business Rulesets.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs. For information about creating rulesets, see *Designing with Calculation Manager*.

Required Roles

Service Administrator, Power User (if Rule Launch access is granted)

Request

Supported Media Types: `application/json`

Parameters

Copyright © 2017, 2026, Oracle and/or its affiliates.

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Table 3-55 Ruleset

Name	Description	Required	Default
`jobType`	`Ruleset` or `RULESET` (both parameters are supported).	Yes	None
`jobName`	The name of a **business ruleset** exactly as is defined in the Planning application. **Example**: `RollupUSSales`	Yes	None
`parameters`		No	Default values for the runtime prompts as provided in Calculation Manager will be used.

Example URL and Payload

```
https://<BASE_URL>/HyperionPlanning/rest/v3/applications/PS4app1/jobs

{
    "jobType":"Ruleset",
    "jobName":"Calculate Plan Operating Expenses"
}
```


Example Ruleset Scenarios and POST Requests

These examples based on the Vision application illustrate how to run rulesets with parameters. For each example, review the sample ruleset in Calculation Manager to understand the sample POST request.

Example 1: Ruleset "Revenue Plan" when variables are merged and not hidden

In Revenue Plan, by default the variables are merged and hidden. When variables are hidden, the default values defined in Calculation Manager will be used when executing the ruleset and any values provided in the payload will be ignored.

Sample Ruleset in Calculation Manager

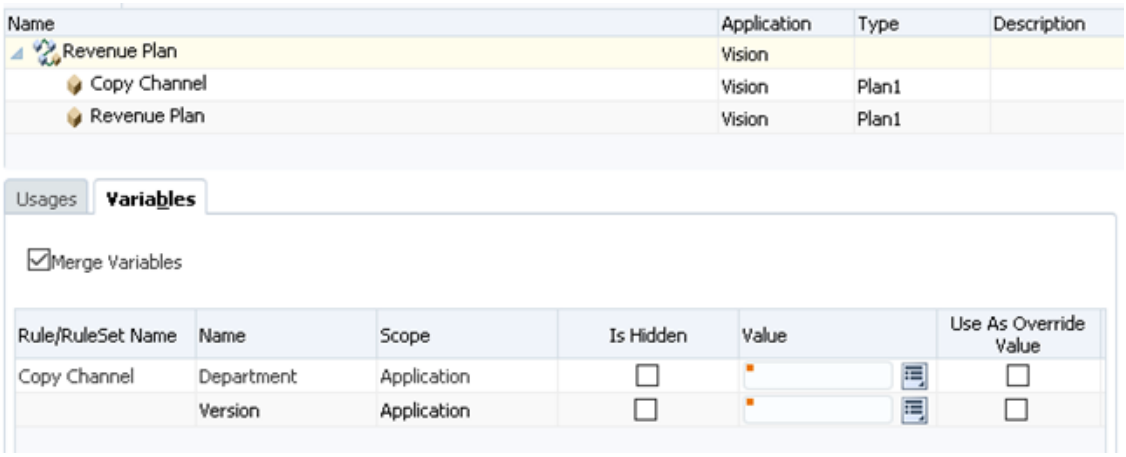


Copyright © 2017, 2026, Oracle and/or its affiliates.

Sample POST request

```
{
    "jobType":"Ruleset",
    "jobName":"Revenue Plan",
    "parameters":
    {
        "Version":"Worst Case",
        "Department":"No Entity"
    }
}
```

Example 2: Ruleset "Revenue Plan" when variables are not merged and not hidden

Sample Ruleset in Calculation Manager

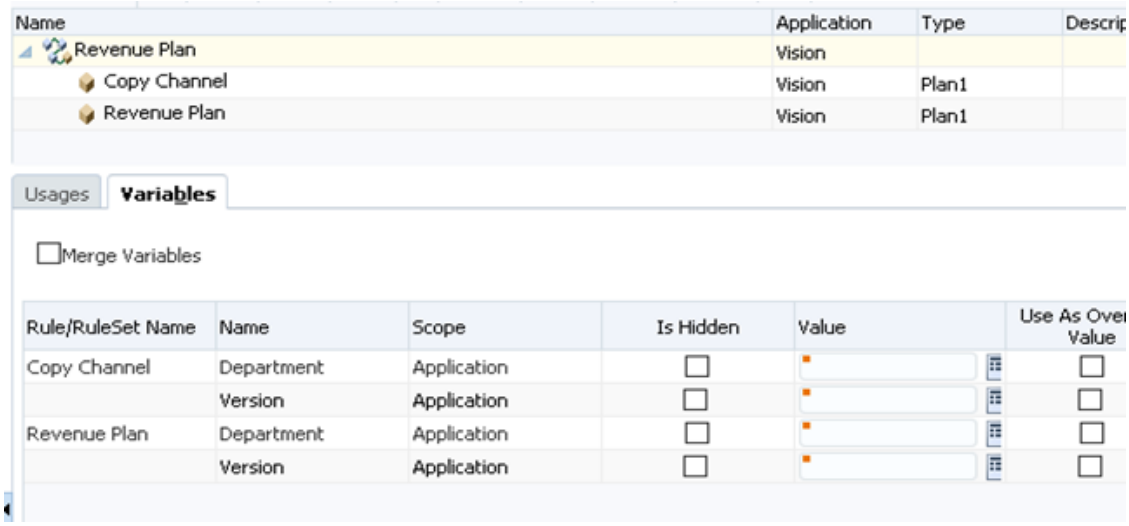

Sample POST request


```
{
    "jobType":"Ruleset",
    "jobName":"Revenue Plan",
    "parameters":
    {
        "Copy Channel.Department":"No Entity",
        "Copy Channel.Version":"Worst Case",

        "Revenue Plan.Department":"New Entity",
        "Revenue Plan.Version":"Best Case"
    }
}
```

Example 3: Ruleset "Calculate Plan Operating Expenses" with nested ruleset ("Revenue Plan") and variables are merged and not hidden

Sample Ruleset in Calculation Manager

Copyright © 2017, 2026, Oracle and/or its affiliates.

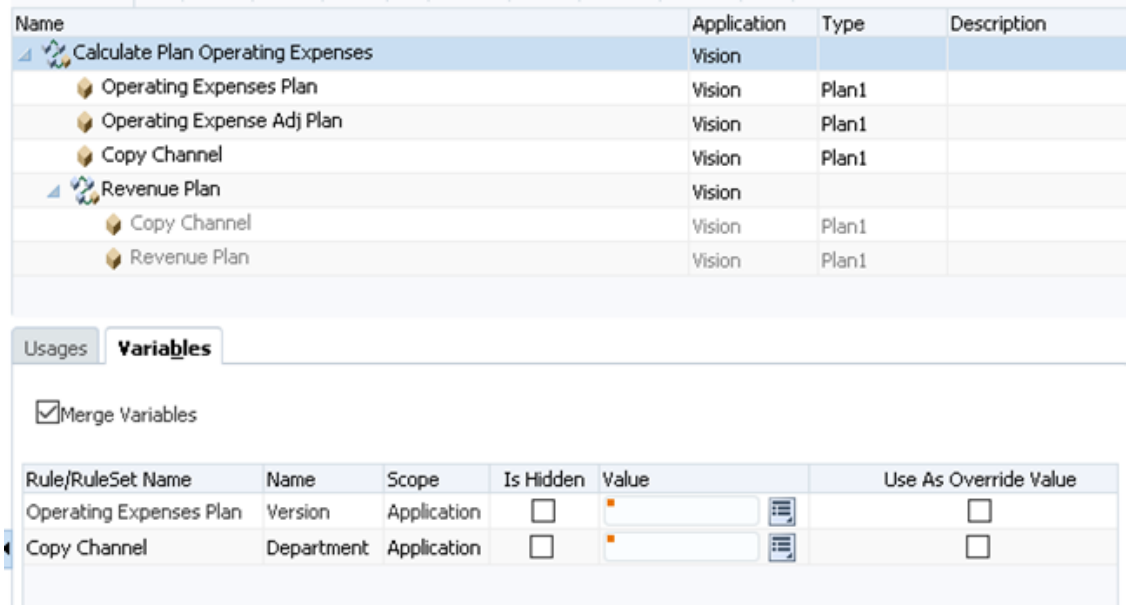


Sample POST request

```
{
    "jobType":"Ruleset",
    "jobName":"Calculate Plan Operating Expenses",
    "parameters":
    {
        "Department":"Unspecified Entity",
        "Version":"Most Likely"
    }
}
```

Example 4: Ruleset "Calculate Plan Operating Expenses" with a nested ruleset ("Revenue Plan") and variables that are not merged and not hidden

Sample Ruleset in Calculation Manager

Copyright © 2017, 2026, Oracle and/or its affiliates.

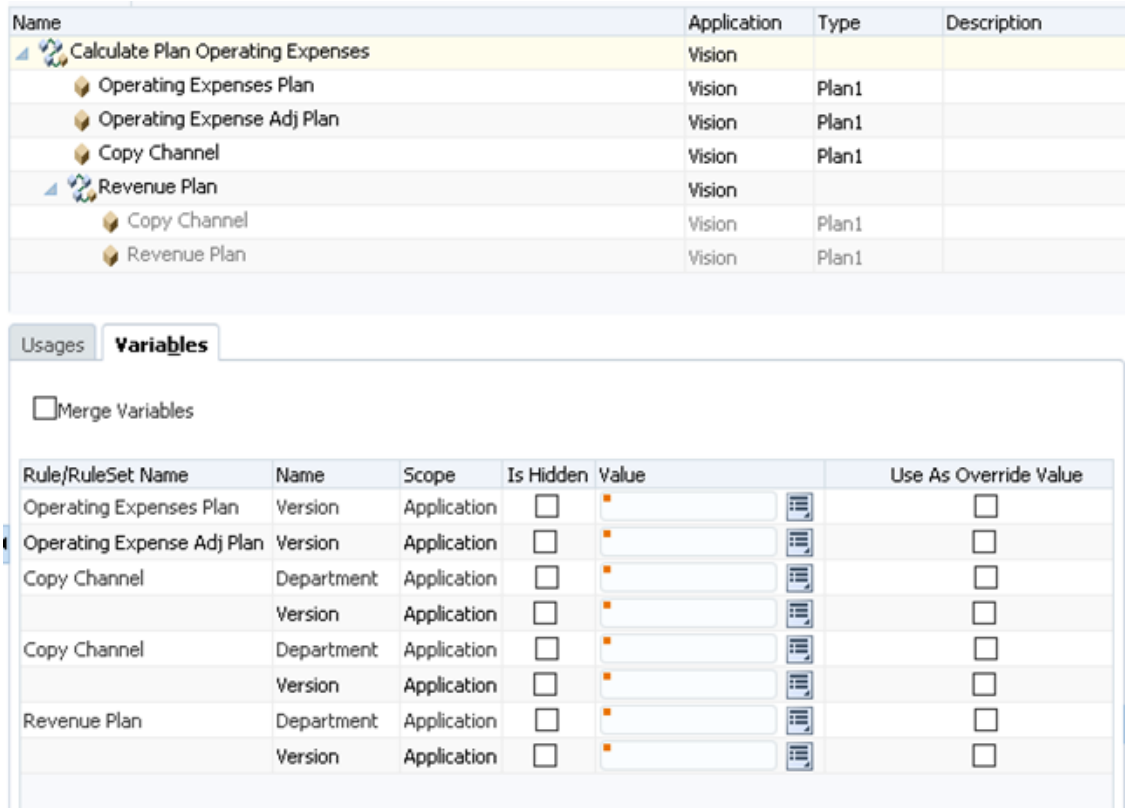

Name	Application	Type	Description
Calculate Plan Operating Expenses	Vision		
Operating Expenses Plan	Vision	Plan1	
Operating Expense Adj Plan	Vision	Plan1	
Copy Channel	Vision	Plan1	
Revenue Plan	Vision		
Copy Channel	Vision	Plan1	
Revenue Plan	Vision	Plan1	

Usages | **Variables**

Merge Variables

Rule/RuleSet Name	Name	Scope	Is Hidden	Value	Use As Override Value
Operating Expenses Plan	Version	Application	☐		☐
Operating Expense Adj Plan	Version	Application	☐		☐
Copy Channel	Department	Application	☐		☐
	Version	Application	☐		☐
Copy Channel	Department	Application	☐		☐
	Version	Application	☐		☐
Revenue Plan	Department	Application	☐		☐
	Version	Application	☐		☐

Sample POST request

In this example, the same rule, Copy Channel, appears twice – once under Calculate Plan Operating Expenses, and once under Revenue Plan. This demonstrates how to provide the variables with their fully qualified paths.

```
{
    "jobType":"Ruleset",
    "jobName":"Calculate Plan Operating Expenses",
    "parameters":
    {
        "Operating Expenses Plan.Version":"Most Likely",
        "Operating Expense Adj Plan.Version":"What If",

        "Copy Channel.Department":"Unspecified Entity",
        "Copy Channel.Version":"Working",

        "Revenue Plan.Copy Channel.Department":"New Entity",
        "Revenue Plan.Copy Channel.Version":"Best Case",

        "Revenue Plan.Revenue Plan.Department":"No Entity",
        "Revenue Plan.Revenue Plan.Version":"Worst Case"
    }
}
```

Optionally, you can provide the sequence indexes in the paths, as shown below.

```
{
    "jobType":"Ruleset",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "jobName":"Calculate Plan Operating Expenses",
    "parameters":
    {
        "(1)Operating Expenses Plan.Version": "Most Likely",
        "(2)Operating Expense Adj Plan.Version": "What If",

        "(3)Copy Channel.Department": "Unspecified Entity",
        "(3)Copy Channel.Version": "Working",


        "(4.1)Revenue Plan.Copy Channel.Department": "New Entity",
        "(4.1)Revenue Plan.Copy Channel.Version": "Best Case",

        "(4.2)Revenue Plan.Revenue Plan.Department": "No Entity",
        "(4.2)Revenue Plan.Revenue Plan.Version": "Worst Case"
    }
}
```

Example 5: Ruleset "Revenue Plan" with variables that are merged and not hidden

This example shows two Revenue Plan rules within a ruleset. This demonstrates how to differentiate the variables when there are multiple variables with the same paths within the same parent in the ruleset.

Sample Ruleset in Calculation Manager

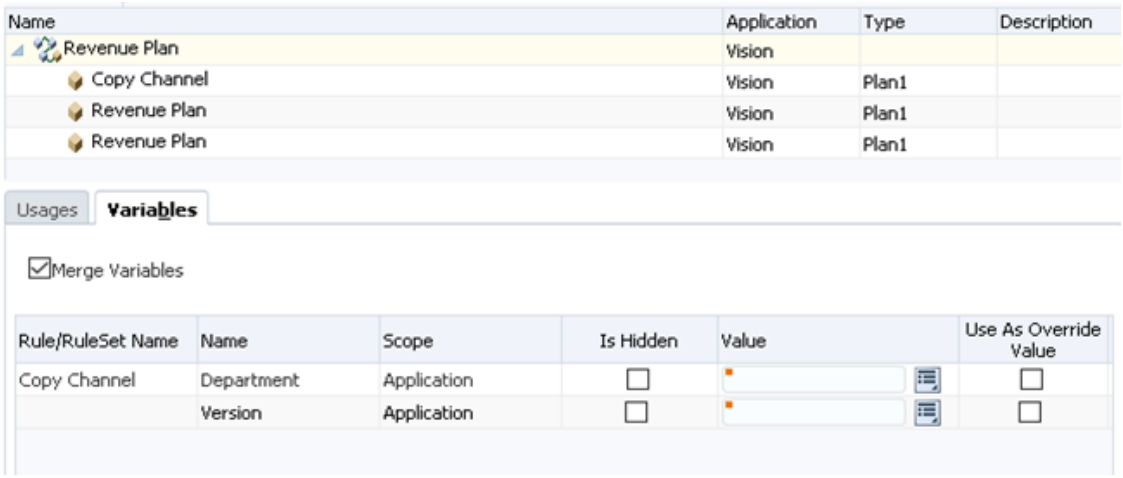

Sample POST request


```
{
    "jobType":"Ruleset",
    "jobName":"Revenue Plan",
    "parameters":
    {
        "Version":"Worst Case",
        "Department":"New Entity"
    }
}
```

Example 6: Ruleset "Revenue Plan" with variables that are not merged and not hidden

Copyright © 2017, 2026, Oracle and/or its affiliates.

This example shows two Revenue Plan rules within a ruleset. This demonstrates how to differentiate the variables when there are multiple variables with the same paths within the same parent in the ruleset.

Sample Ruleset in Calculation Manager

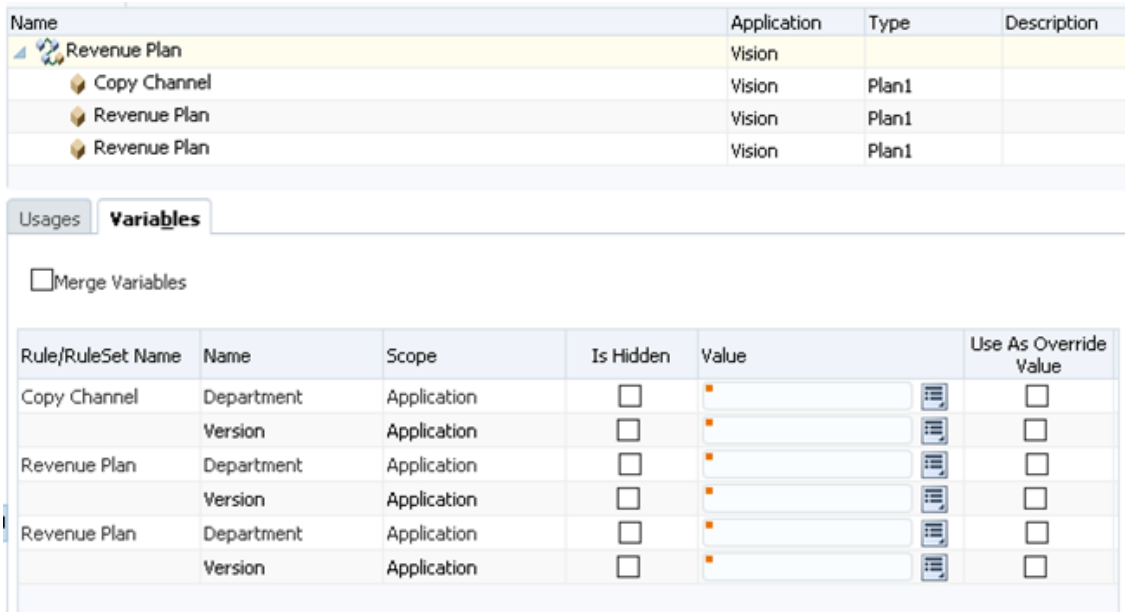

Sample POST request

```
{
    "jobType":"Ruleset",
    "jobName":"Revenue Plan",
    "parameters":
    {
        "(1)Copy Channel.Department":"No Entity",
        "(1)Copy Channel.Version":"Worst Case",

        "(2)Revenue Plan.Department":"New Entity",
        "(2)Revenue Plan.Version":"Best Case",

        "(3)Revenue Plan.Version":"What If",
        "(3)Revenue Plan.Department":"Unspecified Entity"
    }
}
```

Sort Members

This REST API sorts the dimension members of a business process.

You can sort Entity, Account, Scenario, Version, and user-defined custom dimension members. You cannot sort Period, Years, or Currency dimension members. This feature is only supported for the Planning, Module, and Free Form business processes. For more information, see Sorting Members.

For Planning Module applications, you cannot sort these dimensions:

Copyright © 2017, 2026, Oracle and/or its affiliates.

- Any dense dimension
- The "Plan Element" dimension, even if it is renamed, from Financials
- The "Project Element" dimension, even if it is renamed, from Projects

After sorting members, administrators must perform a cube refresh.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Table 3-56 Parameters

Name	Description	Required	Default
`jobType`	Sort Members	Yes	None
`jobName`	The job name to be used for this job execution. **Example:** SortEntity	No	Sort Members
`member`	Parent member whose children or descendants are being sorted.	Yes	None
`order`	Order of sorting. Possible values are: • `ascending` • `descending`	No	ascending
`type`	Sort children or descendants. Possible values are: • `children` - sorting by children affects only members in the level immediately below the specified member • `descendants` - sorting by descendants affects all descendants of the specified member.	No	children

For a sample URL, see Sample URL and Payload in Execute a Job.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Sample Payload

Example 1: Sorts the child members of the Account dimension in ascending order.

```
{
    "jobType":   "Sort Members",
    "jobName":  "SortAccount",
    "parameters":
    {
    "member":"Account"
    }
}
```

Example 2: Sorts the child members of the Account dimension in descending order.

```
{
    "jobType":   "Sort Members",
    "jobName":  "SortAccountDesc",
    "parameters":
    {
    "member":"Account", "order":"descending"
    }
}
```

Example 3: Sorts the descendants of member account200 in descending order.

```
{
    "jobType":   "Sort Members",
    "jobName":  "SortAccount200Desc",
    "parameters":
    {
    "member":"account200", "order":"descending", "type":"descendants"
    }
}
```

Get Job Definitions

Use this resource to get job definitions for the types of jobs that can be scheduled to run.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs. For additional details, see Job Types.

Required Roles

Service Administrator

REST Resource

```
GET       /HyperionPlanning/rest/{api_version}/applications/{application}/
jobdefinitions
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 3-57 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	The name of the application	Path	Yes	None
`jobIdentifier`	The ID of the job, such as 224	Path	Yes	None
`q`	Query string	Query	No	None
`jobType`	Optionally, retrieve job definitions for a particular job type, such as RULES. These jobs are supported: • Rules • Ruleset • Plan Type Map • Import Data • Export Data • Export Metadata • Import Metadata • Cube Refresh • Clear Cube • Administration Mode • Compact Cube • Restructure Cube • Merge Data Slices • Optimize Aggregation • Import Security • Export Security • Export Audit • Export Job Console • Sort Members • Import Exchange Rates • Auto Predict • Import Cell-Level Security • Export Cell-Level Security • Import Valid Intersections • Export Valid Intersections • Execute a Report Bursting Definition • Export Library Documents • Import Library Documents • Delete Library Documents • Configure the Oracle Guided Learning (OGL) Server			

Example URLs

`https://<BASE-URL>/HyperionPlanning/rest/v3/applications/PS4app1/jobdefinitions`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Specifying an optional jobType, RULES:

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/PS4app1/jobdefinitions?
q={"jobType":"RULES"}
```

Response

Supported Media Types: `application/json`

Parameters

The following table summarizes the parameters.

Table 3-58 Parameters

Name	Description
`items`	Collection of job definitions
`jobType`	Job type, such as RULESET. For a list of supported jobs, see the list of jobs in the previous table.
`jobName`	The exact name of the job, such as `Financial Statements - Forecast`.
`type`	Application type

Example of Response Body

The following shows an example of the response body specifying jobType with a value of RULESET.

```
{
    "items": [{
        "jobType": "RULESET",
        "jobName": "Financial Statements - Forecast",
        "links": null
    }, {
        "jobType": "RULESET",
        "jobName": "Financial Statements - Plan",
        "links": null
    }, {
        "jobType": "RULESET",
        "jobName": "Revenue Forecast",
        "links": null
    }, {
        "jobType": "RULESET",
        "jobName": "Revenue Plan",
        "links": null
    }, {
        "jobType": "RULESET",
        "jobName": "RS 60 RTP vars test2",
        "links": null
    }],
    "links": [{
        "rel": "self",
        "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
vision/jobdefinitions?q=%7BjobType:RULESET%7D",
        "action": "GET"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    }],
}
```

Retrieve Job Status

Use this REST API to poll the server to get the processing state for a job with a specified ID.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Required Roles

Service Administrator

REST Resource

GET `/HyperionPlanning/rest/{api_version}/applications/{application}/jobs/{jobIdentifier}`

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 3-59 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`applicationName`	The name of the application	Path	Yes	None
`jobIdentifier`	The ID of the job	Path	Yes	None

Response

Parameters

The following table summarizes the response parameters.

Table 3-60 Parameters

Name	Description
`status`	Status of the job: -1 = in progress; 0 = success; 1 = error; 2 = cancel pending; 3 = cancelled; 4 = invalid parameter; Integer.MAX_VALUE = unknown
`details`	Details about the job status, such as "Metadata import was successful" for metadata import
`jobID`	The ID of the job, such as 224
`jobName`	The name of the job, such as Refresh Database
`descriptiveStatus`	The status of the job, such as Completed or Error
`detailedStatus`	Granular details about job status information

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example of Response Body

The following shows an example of the response body for metadata import:

```
{
    "status": 0,
    "details": "Metadata import was successful",
    "jobId": 224,
    "detailedStatus": 2,
    "jobName": "Import Account Metadata",
    "descriptiveStatus": "Completed",
    "links": [{
        "rel": "self",
        "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
test2/jobs/224",
        "action": "GET"
    }, {
        "rel": "job-details",
        "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
test2/jobs/224/details",
        "action": "GET"
    }]
}
```

The following shows an example of the response body when an error occurs during cube refresh:

```
{
    "status": 1,
    "details": "An error occurred while updating the relational database.",
    "jobStatus": "Error",
    "detailedStatus": 3,
    "jobId": 145,
    "jobName": "Refresh Database",
    "links": [{
        "rel": "self",
        "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
PS4app1/jobs/145",
        "action": "GET"
    }, {
        "rel": "job-details",
        "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
test2/jobs/145/details",
        "action": "GET"
    }]
}
```

Retrieve Job Status Details

Use this REST API to poll the server to get execution details for a Job with the specified Job ID.

The job types for which details are returned by this service are: `IMPORT_DATA`, `EXPORT_DATA`, `EXPORT_METADATA`, and `IMPORT_METADATA`.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Supports paging for jobs of type IMPORT_DATA, IMPORT_METADATA, EXPORT_DATA, and EXPORT_METADATA using the offset and limit query parameters shown in the table.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Required Roles

Service Administrator

REST Resource

```
GET     /HyperionPlanning/rest/{api_version}/applications/{application}/jobs/
{jobIdentifier}/details
```

Request

Supported Media Types: application/json

Parameters:

The following table summarizes the client request.

Table 3-61 Parameters

Name	Description	Type	Required	Default
api_version	Version of the API you are developing with	Path	Yes	None
application	The name of the application	Path	Yes	None
jobIdentifier	The ID of the job, such as 224	Path	Yes	None
q				
msgType	Optionally, return messages for a particular message type. If no messageType is provided, returns messages of types ERROR, WARNING, and INFO.	Query	No	None
offset	For paging of jobs. Indicates the actual index from which the records are returned. It is 0 based.	Query	No	0
limit	For paging for jobs. Controls how many items to return. Defaults to 25 if not specified.	Query	No	25

Example Requests

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/PS4app1/jobs/145/details
```

Optionally specifying messageType:

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/PS4app1/jobs/145/
details?q={"messageType":"ERROR"}
```

Optionally specifying paging for jobs of type IMPORT_DATA and EXPORT_DATA with the offset and limit:

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/PS4app1/jobs/145/
details?q={"messageType":"ERROR"}&offset=0&limit=5}
```

Response

The following table summarizes the response parameters.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-62 Parameters

Name	Description
items	Version of the API you are developing with
recordsRead	The name of the application
recordsRejected	The ID of the job for records rejected
recordsProcessed	The ID of the job for records processed
dimensionName	For paging of jobs. Indicates the actual index from which the records are returned. It is 0 based.
loadType	For paging for jobs. Controls how many items to return. Defaults to 25 if not specified.

Supported Media Types: `application/json`

Example of Response Body

The following shows an example of the response body for metadata import with messageType = ERROR:

```
{
    "items": [{
        "links": [{
            "rel": "child-job-details",
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
test2/jobs/224/childjobs/12/details?
limit=10&q=%7BmessageType:ERROR%7D&offset=10",
            "action": "GET"
        }],
        "recordsRead": 8,
        "recordsRejected": 0,
        "recordsProcessed": 8,
        "dimensionName": "Entity",
        "loadType": "Metadata Import"
    }, {
        "links": [{
            "rel": "child-job-details",
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
test2/jobs/224/childjobs/13/details?
limit=10&q=%7BmessageType:ERROR%7D&offset=10",
            "action": "GET"
        }],
        "recordsRead": 2,
        "recordsRejected": 0,
        "recordsProcessed": 2,
        "dimensionName": "Job",
        "loadType": "Metadata Import"
    }],
    "links": [{
        "rel": "self",
        "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
test2/jobs/224/details?limit=10&q=%7BmessageType:ERROR%7D&offset=10",
        "action": "GET"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    }],
}
```

Retrieve Child Job Status Details

Use this REST API to get the execution details for the child Job with the specified ID.

Certain types of jobs, such as metadata import and export, create child jobs for each dimension being exported or imported.

The job types for which child details are returned by this service are `IMPORT_METADATA` and `EXPORT_METADATA`. Supports paging for jobs of type `IMPORT_DATA` and `EXPORT_DATA` using the offset and limit query parameters shown in the table.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Required Roles

Service Administrator

REST Resource

```
GET     /HyperionPlanning/rest/{api_version}/applications/{application}/jobs/
{jobIdentifier}/childjobs/{childJobIdentifier}/details
```

Request

Supported Media Types: `application/json`

Parameters:

The following table summarizes the client request.

Table 3-63 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`applicationName`	The name of the application	Path	Yes	None
`jobIdentifier`	The ID of the job, such as 224	Path	Yes	None
`childJobIdentifier`	The ID of the child job	Path	Yes	None
`childJobID`	The ID of the child job, such as 8	Path	Yes	None
`q`				
`messageType`	Optionally, return messages for a particular message type. If no messageType is provided, returns messages of types ERROR, WARNING, and INFO.	Query	Yes	None
`offset`	For paging of jobs. Indicates the actual index from which the records are returned. It is 0 based.	Query	No	0
`limit`	For paging of jobs. Controls how many items to return. Defaults to 25 if not specified.	Query	No	25

Example Requests

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/PS4app1/jobs/145/
childjobs/123/details
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Optionally specifying messageType:

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/PS4app1/jobs/145/
childjobs/123/details?q={"messageType":"ERROR"}
```

Optionally specifying paging for jobs of type IMPORT_METADATA and EXPORT_METADATA with an offset and limit:

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/PS4app1/jobs/145/
childjobs/123/details?q={"messageType":"ERROR"}&offset=0&limit=5
```

Response

The following table summarizes the response parameters.

Table 3-64 Parameters

Name	Description
`items`	The number of records read, such as 8
`msgType`	Message type, such as INFO
`msgCategory`	Message category, such as Argument parsing
`msgText`	Message text

Supported Media Types: `application/json`

Example of Response Body

The following example shows a response body with messageType = INFO, offset=5, limit=5. Notice the prev and next links.


```
{
    "items": [{
        "msgType": "INFO",
        "msgCategory": "Argument parsing",
        "msgText": "The column alias mapping list specified with the /C2A
switch did not match a key in the Command Properties file \"null\" so it will
be used as the mapping directly: \"(<ignoreUndefined>,@Plan*)\"."
    }, {
        "msgType": "INFO",
        "msgCategory": "Unclassified",
        "msgText": "Header record fields: Entity, Parent, Alias: Default,
Alias: SLAliases, Valid For Consolidations, Data Storage, Two Pass
Calculation, Description, Formula, UDA, Smart List, Data Type, Hierarchy
Type, Enable for Dynamic Children, Number of Possible Dyn..."
    }, {
        "msgType": "INFO",
        "msgCategory": "Dimension, member, or cube retrieval",
        "msgText": "Located and using \"Entity\" dimension for loading data
in \"Test2\" application."
    }, {
        "msgType": "INFO",
        "msgCategory": "Unclassified",
        "msgText": "HspOutlineLoad::dateFormatSpecified is true,
SessionHalDateFormat stored on session: M/d/yy, sessionId: 759992870"
    }, {
        "msgType": "INFO",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        "msgCategory": "Dimension, member, or cube retrieval",
        "msgText": "Load dimension \"Entity\" has been unlocked successfully."
    }],
    "links": [{
        "rel": "self",
        "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
test2/jobs/224/childjobs/12/details?limit=5&offset=5",
        "action": "GET"
    }, {
        "rel": "prev",
        "href": "https:<BASE-URL>/HyperionPlanning/rest/v3/applications/test2/
jobs/224/childjobs/12/details?offset=0&limit=5",
        "action": "GET"
    }, {
        "rel": "next",
        "href": "https:/<BASE-URL>/HyperionPlanning/rest/v3/applications/
test2/jobs/224/childjobs/12/details?offset=10&limit=5",
        "action": "GET"
    }],
}
```

Members

You can get and add members using a set of REST resources, as summarized here.

Table 3-65 Working with Members

Working with Members	
Add Member	Get Member

Add Member

Use this REST API to add a new member to the application outline in the specified dimension and plan type and under the specified parent member.

> **Note**
>
> **Prerequisite**: The parent member must be enabled for dynamic children and a cube refresh must have happened after the parent was enabled.

Required Roles

Service Administrator

REST Resource

`POST /HyperionPlanning/rest/{api_version}/applications/{application}/dimensions/{dimname}/members`

Request

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Parameters:

The following table summarizes the client request.

Table 3-66 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	The name of the application to which to add a member	Path	Yes	None
`dimname`	Name of the dimension to which to add a member	Path	Yes	None

Example URL and Payload

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/dimensions/
Entity/members
```

```
{"memberName":"North America","parentName":"Enterprise Global"}
```

Response

Payload Parameters:

The following table summarizes the payload parameters.

Table 3-67 Parameters

Name	Description
`name`	Name of the member, such as North America
`children`	Whether the member has children
`description`	Description of the member
`parentName`	Name of the parent, such as Enterprise Global
`dataType`	Data type, if available
`objectType`	Type of object
`dataStorage`	Storage attribute for the member, such as STOREDATA
`dimName`	Dimension name
`twoPass`	Boolean value to indicate whether the member has the Two-Pass Calculation associated attribute
`instance`	Information about the instance
`type`	Type of member
`detail`	Detailed information in case of error
`status`	Request status, such as 400
`errorPath`	Path of the error, if available
`title`	Error title, if available
`errorCode`	Error code, if available
`errorDetails`	Error details, if available
`message`	Message text
`localizedMessage`	Localized message, if available

Example of Response Body

Copyright © 2017, 2026, Oracle and/or its affiliates.

Sample response body where the member is added successfully

```
{
    "name": "North America",
    "children": null,
    "description": null,
    "parentName": "Enterprise Global",
    "dataType": "UNSPECIFIED",
    "objectType": 33,
    "dataStorage": "STOREDATA",
    "dimName": "Entity",
    "twoPass": false,
    "links": [{
        "rel": "self",
        "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
Vision/dimensions/Entity/members/North%20America",
        "action": "GET"
    }]
}
```

Sample response when an error occurs when adding the member:

```
{
    "detail": "Error occurred adding member. Unable to find parent
<Enterprise GlobalX> defined for a dynamic member.",
    "status": 400,
    "message": "com.hyperion.planning.HspRuntimeException: Error occurred
adding member. Unable to find parent <Enterprise GlobalX> defined for a
dynamic member.",
    "localizedMessage": "com.hyperion.planning.HspRuntimeException: Error
occurred adding member. Unable to find parent <Enterprise GlobalX> defined
for a dynamic member."
}
```

Get Member

Use this REST API to get the specified member's properties.

Required Roles

Service Administrator

REST Resource

```
GET /HyperionPlanning/rest/{api_version}/applications/{application}/dimensions/
{dimname}/members/{member}
```

Request

Supported Media Types: `application/json`

Parameters:

The following table summarizes the client request.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-68 Parameters

Name	Description	Type	Required	Default
api_version	Version of the API you are developing with	Path	Yes	None
application	The name of the application for which to get member properties	Path	Yes	None
dimname	Name of the dimension for which to get member properties	Path	Yes	None
member	Name of the member for which to get member properties	Path	Yes	None

Request Payload:

The following table summarizes the payload parameters.

Table 3-69 Parameters

Name	Description
name	Name of the member, such as North America
children	Whether the member has children
description	Description of the member
parentName	Name of the parent, such as Enterprise Global
dataType	Data type, if available
objectType	Type of object
dataStorage	Storage attribute for the member, such as STOREDATA
dimName	Dimension name
twoPass	Boolean value to indicate whether the member has the Two-Pass Calculation associated attribute

Example URL and Payload

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/dimensions/
Entity/North%20America
```

```
{"memberName":"North America","parentName":"Enterprise Global"}
```

Example of Response Body

Sample response body where the member is added successfully

```
{
    "name": "North America",
    "children": null,
    "description": null,
    "parentName": "Enterprise Global",
    "dataType": "UNSPECIFIED",
    "objectType": 33,
    "dataStorage": "STOREDATA",
    "dimName": "Entity",
    "twoPass": false,
    "links": [{
        "rel": "self",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
Vision/dimensions/Entity/members/North%20America",
        "action": "GET"
    }]
}
```

Plan Types

Related Topics

- Get Dimensions for a Plan Type
  Use this REST API to retrieve the dimensions associated with a specified plan type within an application.
- Get Plan Types
  Use this REST API to retrieve the plan types associated with a specified application.

Get Dimensions for a Plan Type

Use this REST API to retrieve the dimensions associated with a specified plan type within an application.

Required Roles

Any Role

REST Resource

```
GET /HyperionPlanning/rest/v3/applications/{application}/plantypes/{plantype}/
dimensions
```

Request

Parameters:

Table 3-70 Parameters

Name	Description	Type	Required	Default
`application`	The name of the application	Path	Yes	None
`plantype`	The name of the plan type	Path	Yes	None
`q`	MongoDB style query parameters in JSON format for filtering results by `name`, `dimType`, or other custom logic	Query	No	None
`offset`	The index from which the records are returned. It is a 0 based non-negative integer.	Query	No	0
`limit`	The number of items to return. A limit of 0 or -1 will return all records starting from the index defined by the offset.	Query	No	25
`fields`	Comma-separated list of field names to be returned	Query	No	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example URL using MongoDB-style query (q) parameter:

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/plantypes/
Plan1/dimensions?q={"objectType":"DIMENSION","level":{$gt:1},"dimType":
{$ne:"Attribute
Dimension"}}&offset=1&limit=2&fields=id,name,level,dimType,objectType,links
```

Response

Supported Media Types: `application/json`

Table 3-71 Parameters

Name	Description
`id`	The unique ID of the dimension
`name`	The name of the dimension
`level`	The hierarchical level of the dimension
`dimType`	The type of the dimension such as `Period`, `Account`, `Currency`, `Scenario`
`objectType`	The object type, typically Dimension.
`links`	The links related to the dimension
`totalResults`	The total number of dimensions matching the filter criteria
`hasMore`	True or False, if there are more pages of records

Sample Response

```
{
    "links": [
        {
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
Vision/plantypes/Plan1/dimensions?
q=%7B%22objectType%22%3A%22DIMENSION%22%2C%22level%22%3A%7B%24gt%3A1%7D%2C%22d
imType%22%3A%7B%24ne%3A%22Attribute%2BDimension%22%7D%7D&offset=1&limit=2&fiel
ds=id%2Cname%2Clevel%2CdimType%2CobjectType%2Clinks",
            "action": "GET",
            "rel": "self"
        },
        {
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
Vision/plantypes/Plan1/dimensions?
q=%7B%22objectType%22%3A%22DIMENSION%22%2C%22level%22%3A%7B%24gt%3A1%7D%2C%22d
imType%22%3A%7B%24ne%3A%22Attribute%2BDimension%22%7D%7D&fields=id%2Cname%2Cle
vel%2CdimType%2CobjectType%2Clinks&offset=0&limit=1",
            "action": "GET",
            "rel": "prev"
        },
        {
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
Vision/plantypes/Plan1/dimensions?
q=%7B%22objectType%22%3A%22DIMENSION%22%2C%22level%22%3A%7B%24gt%3A1%7D%2C%22d
imType%22%3A%7B%24ne%3A%22Attribute%2BDimension%22%7D%7D&fields=id%2Cname%2Cle
vel%2CdimType%2CobjectType%2Clinks&offset=3&limit=2",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "action": "GET",
            "rel": "next"
        }
    ],
    "items": [
        {
            "links": [
                {
                    "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/
applications/Vision/plantypes/Plan1/dimensions/Period",
                    "action": "GET",
                    "rel": "self"
                }
            ],
            "level": 3,
            "dimType": "Period",
            "objectType": "Dimension",
            "name": "Period",
            "id": "c367a200-e0ef-446d-8c86-72d3153b7e97"
        },
        {
            "links": [
                {
                    "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/
applications/Vision/plantypes/Plan1/dimensions/Scenario",
                    "action": "GET",
                    "rel": "self"
                }
            ],
            "level": 2,
            "dimType": "Scenario",
            "objectType": "Dimension",
            "name": "Scenario",
            "id": "63c49e04-37fb-403b-aa4c-534ac5eea098"
        }
    ],
    "totalResults": 6,
    "hasMore": true
}
```


Get Plan Types

Use this REST API to retrieve the plan types associated with a specified application.

Required Roles

Any Role

REST Resource

```
GET /HyperionPlanning/rest/v3/applications/{application}/plantypes
```

Request

Parameters:

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-72 Parameters

Name	Description	Type	Required	Default
application	The name of the application	path	Yes	None

Example URL

`https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/plantypes`

Response

Supported Media Types: `application/json`

Table 3-73 Parameters

Name	Description
planTypeName	The name of the plan type
planType	The identifier of the plan type
cubeName	The name of the cube such as Plan1, Plan2
numDimensions	The number of dimensions assoiated with the plan type within the application
cubeType	The type of the cube. cubeType: 0 indicates the "standard" Planning cube type (commonly the **BSO** plan type). cubeType: 136 indicates an **ASO-type** cube (aggregate storage) plan type.

Sample Response

```
{
    "links": [
        {
            "href": "http://<BASE-URL>/HyperionPlanning/rest/v3/applications/
Vision/plantypes",
            "action": "GET",
            "rel": "self"
        }
    ],
    "items": [
        {
            "planTypeName": "Plan1",
            "planType": 1,
            "cubeName": "Plan1",
            "numDimensions": 9,
            "cubeType": 0
        },
        {
            "planTypeName": "Plan2",
            "planType": 2,
            "cubeName": "Plan2",
            "numDimensions": 9,
            "cubeType": 0
        },
        {
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "planTypeName": "Plan3",
            "planType": 4,
            "cubeName": "Plan3",
            "numDimensions": 9,
            "cubeType": 0
        },
        {
            "planTypeName": "VisASO",
            "planType": 8,
            "cubeName": "VisASO",
            "numDimensions": 9,
            "cubeType": 136
        },
        {
            "planTypeName": "Vis1ASO",
            "planType": 16,
            "cubeName": "Vis1ASO",
            "numDimensions": 9,
            "cubeType": 136
        }
    ]
}
```

Planning Units

You can manage planning units using a set of REST resources, as summarized here.

Before using the REST resources, you must understand how to access the REST resources and other important concepts. See Cloud EPM REST APIs Best Practices. Using this REST API requires prerequisites. See Prerequisites.

For detailed information on managing planning units, see Managing Approvals.

Note: The manage planning unit resources use the parameters `puIdentifier` and `puhIdentifier`:

- `puIdentifier`: Planning unit identifier
- `puhIdentifier`: Planning unit hierarchy identifier

Use the following format for these parameters:

- `puIdentifier`:

  `"scenarioName"::"versionName"::"pmMember"`

- `pmMember`:

  `"Entity: SecondaryMember"`

- `puhIdentifier`

  `"scenarioName"::"versionName"`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-74 Manage Planning Units

Manage Planning Units		
Change Planning Unit Status Get Planning Unit History and Annotations Get Planning Unit Owner Photo	Get Planning Unit Promotional Path Get Available Planning Unit Actions Get Filters with All Possible Values	List All Planning Units

Change Planning Unit Status

You can use REST APIs to change the status of the planning units consisting of the specified scenario, version, and PM Members (Entity: Secondary member) that are owned by the requesting user.

An error will display if the planning units belong to same hierarchy but different levels, or if the statuses for the planning units are not the same.

Supported actions for limited approvals functionality are: "PROMOTE" (6), "SIGN_OFF" (3), "APPROVE" (2), "DELEGATE" (7), "TAKE_OWNERSHIP" (8), "ORIGINATE" (9), "FREEZE" (10)

Required Roles

Service Administrator

REST Resource

```
POST /HyperionPlanning/rest/{api_version}/applications/{application}/
planningunits/{puhIdentifier}/actions
```

Request

Supported Media Types: `application/x-www-form-urlencoded`

Parameters:

The following table summarizes the client request.

Table 3-75 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	The name of the application	Path	Yes	None

Example URL and Payload

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/PS4app1/planningunits/
Forecast::"BU Version_1"/actions
```

Payload

```
actionId=actionId&pmMembers=pmMemberNames&comments=comments
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Response

Supported Media Types: `application/json`

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
    "links": [{
        "rel": "self",
        "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
PS4app1/planningunits/Forecast::%22BU%20Version_1%22/actions",
        "action": "POST",
        "data": {
            "pmMembers": "\"Dev\"",
            "action": "PROMOTE",
            "comments": "\"Promoting the PU\""
        }
    }]
}
```

Get Planning Unit History and Annotations

You can use REST APIs to return a merged list of history and annotations for the planning unit that the requesting user owns for the specified Scenario, Version, and PM Member.

If both `annotSeq` and `logSeq` are < 0, parent level nodes are returned. If `annotSeq` or `logSeq` is provided, the replies to that annotation or history are returned respectively.

Required Roles

Any user can invoke the REST API. They will retrieve data only for the planning units they own.

REST Resource

```
GET /HyperionPlanning/rest/{api_version}/applications/{application}/
planningunits/{puIdentifier}/historyandannotations?
q={annotSeq=-1,logSeq=-1}&offset=10&limit=10}
```

Request

Parameters:

The following table summarizes the client request.

Table 3-76 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	The name of the application	Path	Yes	None
`puIdentifier`	Planning unit identifier For details on the `puIdentifier` parameter, see Planning Units.	Path	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-76 (Cont.) Parameters

Name	Description	Type	Required	Default
logSeq	The log sequence, a sequential and incremental identifier assigned to each entry in the planning unit's history	Query	No	None
annotSeq	The annotation sequence, a unique, sequential identifier assigned to each annotation related to a planning unit	Query	No	None
offset	Indicates the actual index from which the records are returned; 0 based.	Query	No	1
limit	Controls how many items to return; defaults to 25 if not specified.	Query	No	25

Example URL and Payload

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/PS4app1/planningunits/
Forecast::"BU Version_1"::Marketing::/historyandannotations?
q={annotSeq:-1,logSeq:-1}
```

Response

Supported Media Types: `application/x-www-form-urlencoded`

Parameters:

Table 3-77 Parameters

Name	Description
comment	Comment entered by the planning unit owner when performing an action
hasHistory	True if the planning unit has history
logSeq	Sequence of the action performed on the planning unit
staticImage	Whether a static image exists for this note
authorImagePath	The path to the user image for the user who performed the action
commentTitle	The author name and the action the author performed
commentDate	The date when the action was performed or the annotation was added
commentSubTitle	Processing state of the planning unit when the action was performed
parentAnntSeq	Sequence of the annotation or the parent annotation added to the planning unit
isChildNode	`true` if this is a reply to an annotation

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
    "items": [{
        "comment": "Enough justification provided, Approving it.<p></p>",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "hasHistory": false,
            "logSeq": -1,
            "staticImage": true,
            "authorImagePath": "/Images/GhostUser.png",
            "commentTitle": "admin",
            "commentDate": "8/22/14 3:41 PM",
            "commentSubTitle": "",
            "parentAnntSeq": 1,
            "isChildNode": false,
            "links": [{
                "rel": "annotation-replies",
                "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
PS4app1/planningunits/%22Forecast%22:%22BU%20Version_1%22:%22Marketing%22:/
historyandannotations?q=%7B%22annotSeq%22:1,%22logSeq%22:-1%7D",
                "action": "GET"
            }]
        }, {
            "comment": "",
            "hasHistory": true,
            "logSeq": 2,
            "staticImage": true,
            "authorImagePath": "/Images/GhostUser.png",
            "commentTitle": "Originate by admin",
            "commentDate": "4/22/14 12:26 PM",
            "commentSubTitle": "Under Review",
            "parentAnntSeq": -1,
            "isChildNode": false,
            "type": "HP",
            "links": [{
                "rel": "annotation-replies",
                "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
PS4app1/planningunits/%22Forecast%22:%22BU%20Version_1%22:%22Marketing%22:/
historyandannotations?q=%7B%22annotSeq%22:-1,%22logSeq%22:2%7D",
                "action": "GET"
            }]
        }, {
            "comment": "",
            "hasHistory": true,
            "logSeq": 1,
            "staticImage": true,
            "authorImagePath": "/Images/GhostUser.png",
            "commentTitle": "Originate by admin",
            "commentDate": "4/22/14 12:26 PM",
            "commentSubTitle": "Under Review",
            "parentAnntSeq": -1,
            "isChildNode": false,
            "type": "HP",
            "links": [{
                "rel": "annotation-replies",
                "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
PS4app1/planningunits/%22Forecast%22:%22BU%20Version_1%22:%22Marketing%22:/
historyandannotations?q=%7B%22annotSeq%22:-1,%22logSeq%22:1%7D",
                "action": "GET"
            }]
        }],
    "type": "HP",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
"links": [{
        "rel": "self",
        "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
PS4app1/planningunits/
%22Forecast%22::%22BU%20Version_1%22::%22Marketing%22::%22%22/
historyandannotations?q=%7B%22annotSeq%22:-1,%22logSeq%22:-1%7D",
        "action": "GET"
    }],
        "type": "HP",

}
```

Get Planning Unit Owner Photo

You can use REST APIs to get an image for the requested planning unit owner if a photo is uploaded for the owner.

Required Roles

Service Administrator

REST Resource

```
GET /HyperionPlanning/rest/{api_version}/applications/{application}/users/
{userId}/photo
```

Request

Supported Media Types: `application/json`

Parameters:

The following table summarizes the client request.

Table 3-78 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	The name of the application	Path	Yes	None
`userID`	The identifier of the user for whom to retrieve a photo	Path	Yes	

Example URL

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/PS4app1/users/5000100/
photo
```

Response

Supported Media Types: In case of success, returns `application/octet-stream`. In case of error, returns `application/json`.

Error Response:

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-79 Parameters

Name	Description
`detail`	Detail about the status of the planning unit photo for this user. For example: `PU photo not available, make sure that a valid user identifier is provided`.
`status`	HTTP status, such as 400.
`message`	Informational message about the status of the photo for this user.
`localizedMessage`	A localized informational message about the status.

Example of Error Response Body

The following shows an example of the response body in JSON format.

```
{
    "detail": "PU photo not available, make sure the a valid user identifier
is provided.",
    "status": 400,
    "message": "java.lang.RuntimeException: PU photo not available, make sure
the a valid user identifier is provided.",
    "localizedMessage": "java.lang.RuntimeException: PU photo not available,
make sure the a valid user identifier is provided."
}
```

Get Planning Unit Promotional Path

You can use REST APIs to get a list of promotion path nodes for a given application, user, and planning unit. The planning unit is identified by the provided scenario, version, and PM member.

The list can have up to three nodes: the node before the current location, the node at the current location, and the one after the current location. If the planning unit is at the starting location or the last location in the path, only two nodes are returned.

Required Roles

Service Administrator

REST Resource

GET `/HyperionPlanning/rest/{api_version}/applications/{application}/planningunits{puIdentifier}/promotionpath`

Request

Parameters:

The following table summarizes the client request.

Table 3-80 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-80 (Cont.) Parameters

Name	Description	Type	Required	Default
`application`	The name of the application	Path	Yes	None
`puIdentifier`	The name of the planning unit, such as Sales	Path	Yes	None

Example URL

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/PS4app1/planningunits/
Forecast::"BU Version_1"::Dev/promotionpath
```

Response

Supported Media Types: `application/json`

Parameters:

Table 3-81 Parameters

Name	Description
`Items`	Planning unit promotional path information
`name`	Name of the planning unit
`ownerType`	Planning unit owner type
`group`	Returns whether the owner is a group of users or an individual users, true or false
`staticImage`	Returns whether the image is a static manage, true or false
`nodeImagePath`	Path to the planning unit owner photo
`ownerName`	Name of the planning unit owner
`currentLoc`	Returns if this is the current location of the planning unit, true or false

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
    "items": [{
        "name": "ent_111: Regular Coke",
        "ownerType": 0,
        "group": false,
        "staticImage": true,
        "nodeImagePath": "../ui_themes/tadpole/images_product/pm/75X89/
PUOwner.png",
        "ownerName": "Planner1",
        "currentLoc": true
    }, {
        "name": "Total Entity",
        "ownerType": 0,
        "group": false,
        "staticImage": false,
        "nodeImagePath": "v3/applications/PS4app1/puphoto?appOwner=50001",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "ownerName": "admin",
            "currentLoc": false
        }],
        "links": [{
            "rel": "self",
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
PS4app1/planningunits/Forecast::%22BU%20Version_1%22::Dev/promotionpath",
            "action": "GET"
        }],
}
```

Get Available Planning Unit Actions

You can use REST APIs to return a list of the next set of applicable actions available for the planning units, consisting of the specified scenario, version, and PM Members (Entity: Secondary member) that are owned by the requesting user.

Required Roles

Service Administrator

REST Resource

`POST`

`/HyperionPlanning/rest/{api_version}/applications/{application}/planningunits{puhIdentifier}/availableactions`

Request

Parameters:

The following table summarizes the client request.

Table 3-82 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	The name of the application	Path	Yes	None
`puIdentifier`	The name of the planning unit, such as Sales	Path	Yes	None
`q`	Optionally, return limited or full approvals functionality. Options are listed here.	Query	No	None
`0`	Returns limited approvals functionality - useful for mobile clients	Query	No	None
`1`	Returns full approvals functionality; default is 1.	Query	No	None

URL and Payload Examples

`https://<BASE-URL>/rest/v3/applications/PS4app1/planningunits/Forecast::"BU Version_1"/availableactions?q={"options":1}`

Payload examples:

`pmMembers=pmMemberNames`

`pmMembers=Dev,Marketing`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Response

Supported Media Types: `application/json`

Parameters:

Table 3-83 Parameters

Name	Description
`Items`	Planning unit available actions
`actionId`	ID of the action
`Name`	Name of the action

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
    "items": [{
        "actionId": 6,
        "name": "Promote"
    }, {
        "actionId": 3,
        "name": "Sign Off"
    }, {
        "actionId": 1,
        "name": "Reject"
    }, {
        "actionId": 7,
        "name": "Delegate"
    }, {
        "actionId": 8,
        "name": "Take Ownership"
    }, {
        "actionId": 9,
        "name": "Originate"
    }, {
        "actionId": 10,
        "name": "Freeze"
    }],
    "links": [{
        "rel": "self",
        "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
PS4_HP2/planningunits/Current::%22BU%20Version_1%22/availableactions?
q=%7Boptions:1%7D",
        "action": "GET",
        "data": {
            "pmMembers": "ent_111: Regular Coke"
        }
    }],
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Get Filters with All Possible Values

Returns all filter types with all possible values by which users can filter planning units for a given application. For every value, there is a label (in the client locale) representation and an integer value. The labels are shown to end users to pick from, but whenever possible, the client should submit the integer value that is unique to the server. Every application supports several types of filters that are indicated by the type field.

Name is optional. The `defIndex` is the index in the value array for the default selection value.

Required Roles

Service Administrator

REST Resource

```
GET /HyperionPlanning/rest/{api_version}/applications/{application}/pufilters
```

Request

Supported Media Types: `application/json`

Parameters:

The following table summarizes the client request.

Table 3-84 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	The name of the application	Path	Yes	None
`q`	Optionally, return filters for limited or full functionality. Options are listed here.	Query	No	None
`0`	Returns filters for limited Approvals functionality - useful for mobile clients.	Query	No	None
`1`	Returns filters for full Approvals functionality; default is 1.	Query	No	None

Example URL

```
https://<BASE-URL>-/HyperionPlanning/rest/v3/applications/PS4app1/pufilters?
q={"options":"0"}
```

Response

Supported Media Types: `application/json`

Parameters:

Table 3-85 Parameters

Name	Description
`Names`	Planning unit available actions
`aliases`	Aliases for values to be displayed instead of labels if user preference is defined as such
`name`	Name for the filter

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-85 (Cont.) Parameters

Name	Description
`type`	Type of the filter
`values`	Integer values; usually the client will submit this value to indicate the selected filter
`labels`	Labels for values to be displayed in the client for the filter
`defIndex`	Index of the value to be displayed as the default value

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
    "items": [{
        "aliases": ["Forecast"],
        "name": "Scenarios",
        "type": 1,
        "values": [50218],
        "labels": ["Forecast"],
        "defIndex": 0
    }, {
        "aliases": ["BU Version_1"],
        "name": "Versions",
        "type": 2,
        "values": [1500],
        "labels": ["BU Version_1"],
        "defIndex": 0
    }, {
        "aliases": null,
        "name": "SubStatus",
        "type": 3,
        "values": [0, 1, 2, 3, 4, 10008, 10009, 10000],
   "labels": ["", "Processing", "Aborted", "Validating", "No Additional
Approval Required", "Invalid Data", "Additional Approval Required", "Failed"],
        "defIndex": 0
    }, {
        "aliases": null,
        "name": "Status",
        "type": 4,
        "values": [2, 3, 4, 5, 6],
        "labels": ["Under Review", "Approved", "Signed Off", "Not Signed
Off", "Frozen"],
        "defIndex": 0
    }],
    "links": [{
        "rel": "self",
        "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
PS4app1/pufilters?q=%7Boptions:%220%22%7D",
        "action": "GET"
    }],
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

List All Planning Units

You can use REST APIs to return a list of planning units for the specified application and owned by the user initiating the REST API. (Note that this does not return all planning units for all applications and users.)

Paging is supported if the optional offset and limit parameters are provided.

Required Roles

Service Administrator

REST Resource

`POST`

```
/HyperionPlanning/rest/{version}/applications/{application}/planningunits?
q={"scenario":"scenarioName","version":"versionName"}&offset=10&limit=10
```

Request

Supported Media Types: `application/x-www-form-urlencoded`

Parameters:

The following table summarizes the client request.

Table 3-86 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	The name of the application	Path	Yes	None
`q`	Paging options for planning units. Possible values are described in the following rows.	Query	No	Limit = 25
`scenario`	Scenario for the application; required	Query	No	None
`version`	Version for the application; required	Query	No	None
`offset`	Indicates the actual index from which the records are returned; 0 based.	Query	No	1
`limit`	Controls how many items to return; defaults to 25 if not specified.	Query	No	25

Request Payload:

The following table summarizes the payload parameters.

Table 3-87 Parameters

Name	Description	Type	Required
`filter`	Name, type, and values to filter on. Example: `filter={name:"SubStatus",type:3, values:[0,4]}`	Payload	No

Example URL and Payload

Copyright © 2017, 2026, Oracle and/or its affiliates.

```
https://<BASE-URL>/HyperionPlanning/rest/{version}/applications/{application}/
planningunits?
q={"scenario":"scenarioName","version":"versionName"}&offset=10&limit=10
```

Example without filters:

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/PS4app1/planningunits?
q={"scenario":"Forecast","version":"BU Version_1"}
```

Example with two filters, multiple values provided:

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/PS4app1/planningunits?
q={"scenario":"Forecast","version":"BU Version_1"}
```

Payload:

```
filter={name:"Status",type:4,values:
[2,5]}&filter={name:"SubStatus",type:3,values:[0,4]}
```

Response

Supported Media Types: `application/json`

Parameters:

Table 3-88 Parameters

Name	Description
`name`	Planning unit name, such as Marketing
`value`	Planning unit value
`owner`	Planning unit owner, such as Admin
`version`	Planning unit version, such as BU Version_1
`entity`	Planning unit entity, such as Marketing
`status`	Planning unit status, such as Under Review
`scenario`	Planning unit scenario, such as Forecast
`Formatted value`	Formatted value, if any
`puName`	Planning unit name, such as Marketing
`subStatus`	Planning unit substatus
`secMember`	Secondary dimension member, if any
`puAlias`	Planning unit alias, such as Marketing
`versionAlias`	Version alias, if any

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
    "items": [{
        "name": null,
        "value": -1.0,
        "owner": "admin",
        "version": "BU Version_1",
        "entity": "Marketing",
        "status": "Under Review",
        "scenario": "Forecast",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "formattedValue": "",
            "puName": "Marketing",
            "subStatus": "",
            "secMember": null,
            "puAlias": "Marketing",
            "scenarioAlias": null,
            "versionAlias": null,
            "puId": 50410,
            "links": [{
                "rel": "promotion-path",
                "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
PS4app1/planningunits/
%22Forecast%22::%22BU%20Version_1%22::%22Marketing%22::%22%22/promotionpath",
                "action": "GET"
            }, {
                "rel": "annotations-and-history",
                "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
PS4app1/planningunits/
%22Forecast%22::%22BU%20Version_1%22::%22Marketing%22::%22%22/
historyandannotations?q=%7B%22annotSeq%22:-1,%22logSeq%22:-1%7D",
                "action": "GET"
            }, {
                "rel": "actions",
                "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
PS4app1/planningunits/%22Forecast%22::%22BU%20Version_1%22/actions",
                "action": "POST",
                "data": {
                    "pmMembers": "Marketing"
                }
            }, {
                "rel": "change-status",
                "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
PS4app1/planningunits/
%22Forecast%22::%22BU%20Version_1%22::%22Marketing%22::%22%22/actions/6",
                "action": "POST",
                "data": {
                    "pmMembers": "Marketing",
                    "comments": "comments"
                }
            }]
        }],
        "links": [{
            "rel": "self",
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
PS4app1/planningunits?
q=%7Bscenario:%22Forecast%22,version:%22BU+Version_1%22%7D",
            "action": "POST",
            "data": {
                "filter": [{
                    "name": "Status",
                    "type": 4,
                    "values": [2, 5],
                    "defIndex": 0
                }, {
                    "name": "SubStatus",
                    "type": 3,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
                "values": [0, 4],
                "defIndex": 0
            }]
        }
    }],
    "type": "HP"
}
```

User Variables and Substitution Variables

Related Topics

- Get and Set User Variable Values
  You can use REST APIs to get and set user variable values as summarized here. This allows administrators to manage user variable values for users and to provide default values for user variable values when creating new users as well as query the user variable values for different selection criteria.
- Manage User Variables
- Delete Substitution Variables
  You can use REST APIs to delete substitution variables at the plan level and application level, as summarized here.
- Get and Set Substitution Variables
  Use these REST APIs to get and set substitution variables at the plan level and application level, as summarized here.

Get and Set User Variable Values

You can use REST APIs to get and set user variable values as summarized here. This allows administrators to manage user variable values for users and to provide default values for user variable values when creating new users as well as query the user variable values for different selection criteria.

Table 3-89 Getting and Setting User Variables

Getting and Setting User Variables REST APIs		
Get User Variable Values Defined for the Application	Get User Variable Values Defined in the Application by Value	Get User Variable Values Defined in the Application by the User Name and Value
Get User Variable Values Defined in the Application by the User Variable Name	Get User Variable Values Defined for the Application by the User Name	Set the User Variable Values for the Application

Get User Variable Values Defined for the Application

Administrators can use this REST API to retrieve user variable values set for all users and for all user variables defined for the application. Other users can use this REST API to retrieve user variable values set for themselves for all user variables.

Required Roles

Service Administrator, Power User, User, Viewer

Copyright © 2017, 2026, Oracle and/or its affiliates.

REST Resource

```
GET       /HyperionPlanning/rest/{api_version}/applications/{application}/
uservariablevalues
```

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 3-90 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	The name of the application	Path	Yes	None
`offset`	Indicates the actual index from which the records are returned. It is a 0 based non-negative integer.	Query	No	0
`limit`	Controls how many items to return. A limit of 0 or -1 will return all records starting from the index defined by the offset.	Query	No	25

Example URL

`https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/uservariablevalues`

Optionally specifying paging with an offset and limit:

`https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/uservariablevalues?offset=0&limit=5`

Response

Supported Media Types: `application/json`

Parameters

The following table summarizes the parameters.

Table 3-91 Parameters

Name	Description
`items`	Collection of information about the resource
`userName`	Name of the user
`name`	Name of the user variable, such as Account View
`dimension`	Name of the dimension to which the member belongs, such as Account
`member`	The value set for the user variable

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example of Response Body

The following shows an example of the response body for an administrator.

```
{
    "items": [
        {
            "userName": "testuser1",
            "name": "Period",
            "dimension": "Period",
            "member": "Apr"
        },
        {
            "userName": "testuser1",
            "name": "uservar2",
            "dimension": "Period",
            "member": "Jun"
        },
        {
            "userName": "testuser2",
            "name": "uservar3",
            "dimension": "Period",
            "member": "Jan"
        }
    ],
    "links": [
        {
            "rel": "self",
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
Vision/uservariablevalues",
            "action": "GET",
            "data": null
        }
    ]
}
```

Get User Variable Values Defined in the Application by the User Variable Name

Administrators can use this REST API to retrieve user variable values set for all users for a user variable with a specific name. Other users can use this REST API to retrieve the user variable value set for themselves for a user variable with a specific name.

Required Roles

Service Administrator, Power User, User, Viewer

REST Resource

```
GET       /HyperionPlanning/rest/{api_version}/applications/{application}/
uservariablevalues/{variableName}
```

Request

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Parameters

The following table summarizes the client request.

Table 3-92 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	The name of the application	Path	Yes	None
`variableName`	The name of the user variable for which the result set will be returned	Path	Yes	None
`offset`	Indicates the actual index from which the records are returned. It is a 0 based non-negative integer.	Query	No	0
`limit`	Controls how many items to return. A limit of 0 or -1 will return all records starting from the index defined by the offset.	Query	No	25

Example URL

`https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/uservariablevalues/uservar2`

Optionally specifying paging with an offset and limit:

`https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/uservariablevalues/uservar2?offset=0&limit=5`

Response

Supported Media Types: `application/json`

Parameters

The following table summarizes the parameters.

Table 3-93 Parameters

Name	Description
`items`	Collection of information about the resource
`userName`	Name of the user
`name`	Name of the user variable, such as Account View
`dimension`	Name of the dimension to which the member belongs, such as Account
`member`	The value set for the user variable

Example of Response Body

The following shows an example of the response body.

```
{
    "items": [
        {
            "userName": "testuser1",
            "name": "uservar2",
            "dimension": "Period",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
                "member": "May"
            },
            {
                "userName": "viewuser",
                "name": "uservar2",
                "dimension": "Period",
                "member": "May"
            }
        ],
        "links": [
            {
                "rel": "self",
                "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
Vision/uservariablevalues/uservar2",
                "action": "GET",
                "data": null
            }
        ]
}
```

Get User Variable Values Defined in the Application by Value

Administrators can use this REST API to retrieve user variable values for all users where the value is set to a specific member name. Other users can use this REST API to retrieve user variable values for themselves where the value is set to a specific member name.

Required Roles

Service Administrator, Power User, User, Viewer

REST Resource

```
GET       /HyperionPlanning/rest/{api_version}/applications/{application}/
uservariablesvalues?q={"member":"member_name"}
```

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 3-94 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	The name of the application	Path	Yes	None
`member`	Name of the member	Query	Yes	None
`offset`	Indicates the actual index from which the records are returned. It is a 0 based non-negative integer.	Query	No	0
`limit`	Controls how many items to return. A limit of 0 or -1 will return all records starting from the index defined by the offset.	Query	No	25

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example URL

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/
uservariablevalues?q={"member":"Apr"}
```

Optionally specifying paging with an offset and limit:

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/
uservariablevalues?q={"member":"Apr"}&offset=0&limit=5
```

Response

Supported Media Types: `application/json`

Parameters

The following table summarizes the parameters.

Table 3-95 Parameters

Name	Description
`items`	Collection of information about the resource
`userName`	Name of the user for whom the user variable value is set
`name`	Name of the user variable, such as Account View
`dimension`	Name of the dimension to which the member belongs, such as Account
`member_name`	Name of the member that is set for the user variable value, such as Units

Example of Response Body

The following shows an example of the response body.

```
{
    "items": [
        {
            "userName": "testuser1",
            "name": "Period",
            "dimension": "Period",
            "member": "Apr"
        },
        {
            "userName": "testuser2",
            "name": "uservar2",
            "dimension": "Period",
            "member": "Apr"
        }
    ],
    "links": [
        {
            "rel": "self",
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
Vision/uservariablevalues",
            "action": "GET",
            "data": null
        }
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    ]
}
```

Get User Variable Values Defined for the Application by the User Name

Administrators can use this REST API to retrieve user variable values for one or more users. Other users named in the request can use this REST API to retrieve user variable values for themselves.

Required Roles

Service Administrator, Power User, User, Viewer

REST Resource

```
GET       /HyperionPlanning/rest/{api_version}/applications/{application}/
uservariablevalues?q={"userName":["user_name1","user_name2"]}
```

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 3-96 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with.	Path	Yes	None
`application`	The name of the application.	Path	Yes	None
`userName`	Name of the user whose user variable values are to be retrieved. If retrieving the values for multiple users, use a comma separated array to list users.	Query	Yes	None
`offset`	Indicates the actual index from which the records are returned. It is a 0 based non-negative integer.	Query	No	0
`limit`	Controls how many items to return. A limit of 0 or -1 will return all records starting from the index defined by the offset.	Query	No	25

Example URL to retrieve user variable values of one user:

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/
uservariablevalues?q={"userName":"testuser1"}
```

Example URL to retrieve user variable values of multiple users:

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/
uservariablevalues?q={"userName":["testuser1","testuser2"]}
```

Optionally specifying paging with an offset and limit:

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/
uservariablevalues?q={"userName":"testuser1"}&offset=0&limit=5
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Response

Supported Media Types: `application/json`

Parameters

The following table summarizes the parameters.

Table 3-97 Parameters

Name	Description
`items`	Collection of information about the resource
`userName`	Name of the user for whom the user variable values are returned
`name`	Name of the user variable, such as Account View
`dimension`	Name of the dimension to which the member belongs, such as Account
`member`	Name of the member that is set for the user variable value, such as Units

Example of Response Body

The following shows an example of the response body.

```
 {
    "items": [
        {
            "userName": "testuser1",
            "name": "Period",
            "dimension": "Period",
            "member": "Apr"
        },
        {
            "userName": "testuser1",
            "name": "uservar2",
            "dimension": "Period",
            "member": "Jun"
        },
        {
            "userName": "testuser1",
            "name": "uservar3",
            "dimension": "Period",
            "member": "Jan"
        }
    ],
    "links": [
        {
            "rel": "self",
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
Vision/uservariablevalues?q=%7B%22username%22%3A%22testuser1%22%7D",
            "action": "GET",
            "data": null
        }
    ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Get User Variable Values Defined in the Application by the User Name and Value

Administrators can use this REST API to retrieve user variable values for one or more users and with a value set to a specific member name. Other users can use this REST API to retrieve user variable values for themselves and with a value set to a specific member name.

Required Roles

Service Administrator, Power User, User, Viewer

REST Resource

```
GET       /HyperionPlanning/rest/{api_version}/applications/{application}/
uservariablevalues?q={"userName":["user_name1","user_name2"],
"member":"member_name"}
```

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 3-98 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with.	Path	Yes	None
`application`	The name of the application.	Path	Yes	None
`userName`	Name of the user whose user variable values are to be retrieved. If retrieving the values for multiple users, use a comma separated array to list users.	Query	Yes	None
`member`	The value set for the user variable.	Query	Yes	None
`offset`	Indicates the actual index from which the records are returned. It is a 0 based non-negative integer.	Query	No	0
`limit`	Controls how many items to return. A limit of 0 or -1 will return all records starting from the index defined by the offset.	Query	No	25

Example URL - retrieve user variable values of one user:

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/
uservariablevalues?q={"userName":"testuser1", "member":"Apr"}
```

Example URL - to retrieve user variable values of multiple users:

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/
uservariablevalues?q={"userName":["testuser1","testuser2"], "member":"Apr"}
```

Optionally specifying paging with an offset and limit:

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/
uservariablevalues?q={"userName":"testuser1", "member":"Apr"}&offset=0&limit=5
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Response

Supported Media Types: `application/json`

Parameters

The following table summarizes the parameters.

Table 3-99 Parameters

Name	Description
`items`	Collection of information about the resource
`userName`	Name of the user for whom the user variable values are returned
`name`	Name of the user variable, such as Account View
`dimension`	Name of the dimension to which the member belongs, such as Account
`member`	Name of the member that is set for the user variable value, such as Units

Example of Response Body

The following shows an example of the response body.

```
{
    "items": [
        {
            "userName": "testuser1",
            "name": "PeriodVar",
            "dimension": "Period",
            "member": "Apr"
        },
        {
            "userName": "testuser1",
            "name": "uservar2",
            "dimension": "Period",
            "member": "Apr"
        }
    ],
    "links": [
        {
            "rel": "self",
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
Vision/uservariablevalues?
q=%7B%22username%22%3A%22testuser1%22%2C%22member%22%3A%22Apr%22%7D",
            "action": "GET",
            "data": null
        }
    ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Set the User Variable Values for the Application

This REST API can be used by administrators to set the user variables values for any user in the application. It can also be used by other users to set user variable values for themselves.

Required Roles

Service Administrator, Power User, User, Viewer

REST Resource

```
POST       /HyperionPlanning/rest/{api_version}/applications/{application}/
uservariablevalues
```

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 3-100 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	The name of the application	Path	Yes	None

Example URL

`https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/uservariables`

Example Payload

With the following payload, the user variable values will be set for the user `viewuser` and `testuser1` as per the payload

```
{
       "items": [
        {
            "userName": "viewuser",
            "name": "uservar2",
            "dimension": "Period",
            "member": "May"
        },
         {
            "userName": "testuser1",
            "name": "uservar2",
            "dimension": "Period",
            "member": "Apr"
        }
    ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Response

Supported Media Types: `application/json`

Example of a successful reponse

```
Http status code: 204 (No content)
```

Example of an error response

```
Http status: 400
```

To confirm the results, you can go to the application to see the updates. In case of any error, a detailed error message will be a part of the response body.

Table 3-101 Error Parameters

Parameters	Description
items	Collection of error messages with the details.
id	Name of the erroneous parameter.
details	In case of errors, details are published with the error string.

Manage User Variables

User variables are associated with forms. They are used to limit the number of members displayed in the form to help you focus only on certain members.

You can use the User Variables API to complete these activities:

- Get All User Variables
- Get a User Variable Using Its ID
- Create User Variables
- Update User Variables
- Delete a User Variable
- Delete User Variable Definitions

Required Roles

Service Administrator

Create User Variables

Creates user variables to help filter the members displayed in a form in the application.

Method and URI

Method: `POST`

Path: `/HyperionPlanning/rest/v3/applications/{application}/uservariables`
In this path, `application` is a required parameter. Use a valid application name.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example: `https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/uservariables`

Request

Supported Media Types: `application/json`

Table 3-102 Parameters

Name	Description	Required
`items`	Collection of information about the resource.	Yes
`dimension`	The name of the dimension for which the user variable is to be created.	Yes
`name`	The name of the user variable definition.	Yes
`definition`	The user variable limit defined by a member selection. In addition to setting the limits by members, Service Administrators can select limits by function (for example, `IChildren(Existing Employees)`.	No
`useContext`	Use context for the variable. **Note:** This setting determines whether users can choose this value from user preferences or is inherited from another form based on its Point of View context, in which case it changes dynamically based on the context of the form.	No

Example Payload

```
{
    "items": [
        {
            "dimension": "Account",
            "name": "Account View",
            "definition": "\"No Account\",CF, \"Cash Flow Hierarchies\"",
            "useContext": true
        },
        {
            "dimension": "Period",
            "name": "Applicable Periods",
            "definition": "QTD,Rolling,YTD",
            "useContext": false
        }
    ]
}
```

Response

Supported Media Types: `application/json`

Response for successful operation: `Http status code: 201 Created`

Response for failed Operation: `Http status code: 400 Bad Request`. A detailed error message will be a part of the response body.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-103 Error Parameters

Parameters	Description
items	Collection of error messages with the details.
id	Name of the erroneous parameter.
details	In case of errors, details are published with the error string.

Delete a User Variable

Deletes a specific user variable, identified by its id, from the application.

Method and URI

Method: `DELETE`

Path: `/HyperionPlanning/rest/{api_version}/applications/{application}/uservariables/{id}`

Example: `https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/uservariables/935d4dc1-5b2b-457f-0000-002bc846b761`

Request

Supported Media Types: `application/json`

Table 3-104 Parameters

Name	Description	Type	Required	Default
`application`	The name of the application.	Path	Yes	None
`id`	The unique id of the user variable to be deleted.	Path	Yes	None

Response

Example of a successful delete: `204 No Content`

Example of a failed delete: `Http status code: 400 Bad Request`.

```
{
    "items":
        {
            "id": "935d4dc1-5b2b-457f-0000-002bc846b761",
            "details": "Unable to find a user variable with the specified ID:
935d4dc1-5b2b-457f-0000-002bc846b761. Try again with a valid user variable
ID." },
}
```

Table 3-105 Error Parameters

Parameters	Description
items	Collection of error messages with the details.
id	Name of the erroneous parameter.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-105 (Cont.) Error Parameters

Parameters	Description
details	In case of errors, details are published with the error string.

Delete User Variable Definitions

Deletes one or more user variables, identified by their ids, from the application.

Method and URI

Method: `POST`

Path: `/HyperionPlanning/rest/v3/applications/{application}/uservariables:delete`

Example: `https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/uservariables:delete`

Request

This request payload must include a list of comma separated user variable IDs to delete from the application.

Request payload example

```
{
"ids": ["935d4dc1-5b2b-457f-0000-002bc846b761",
"0f8828d0-30f1-4d04-0000-002c676eba9d"]
}
```

Response

Example of a successful delete: `204 No Content`

Example of a failed delete: `Http status code: 400`.

```
{
    "items": [
        {
            "id": "935d4dc1-5b2b-457f-0000-002bc846b761",
            "details": "Unable to find a user variable with the specified ID:
935d4dc1-5b2b-457f-0000-002bc846b761. Try again with a valid user variable
ID."
        },
        {
            "id": "0f8828d0-30f1-4d04-0000-002c676eba9d",
            "details": "Unable to find a user variable with the specified ID:
0f8828d0-30f1-4d04-0000-002c676eba9d. Try again with a valid user variable
ID."
        }
    ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-106 Error Parameters

Parameters	Description
items	Collection of error messages with the details.
id	Name of the erroneous parameter.
details	In case of errors, details are published with the error string.

Get All User Variables

Returns a list of all the user variables defined for the specified application.

Method and URI

Method: `GET`

Path: `/HyperionPlanning/rest/v3/applications/{application}/uservariables?offset=0&limit=2`
Example 1 (without optional parameters): `https://<BASE_URL>/HyperionPlanning/rest/v3/applications/Vision/uservariables`

Example 2 (optionally specifying an offset and limit): `https://<BASE_URL>/HyperionPlanning/rest/v3/applications/Vision/uservariables?offset=0&limit=2`

Table 3-107 Parameters

Name	Description	Type	Required	Default
`application`	The name of the application.	Path	Yes	None
`offset`	The index from which the records are returned. It is a 0 based non-negative integer.	Query	No	0
`limit`	The number of items to return. A limit of 0 or -1 will return all records starting from the index defined by the offset.	Query	No	25

Response

Supported Media Types: `application/json`

Table 3-108 Parameters

Name	Description
`items`	Collection of information about the resource.
`id`	The unique ID of the user variable.
`dimension`	Dimension to which the user variable belongs.
`name`	The name of the user variable.
`definition`	Current value of the user variable limit defined by a member selection.
`useContext`	Current Use Context value.

Examples of Response Body

Copyright © 2017, 2026, Oracle and/or its affiliates.

This is an example of a body from a request without optional parameters:

```
{
"links": [
        {
            "rel": "self",
            "href":"http://<BASE-URL>/HyperionPlanning/rest/v3/applications/
Vision/uservariables,
            "action": "GET"
        },
    ],
  "items": [
      {
            "id": "935d4dc1-5b2b-457f-0000-0010cfc98fb2",
            "dimension": "Account",
            "name": "Account View",
            "definition": "No Account,CF,Cash Flow Hierarchies",
            "useContext": true
        },
  ],
}
```

This is an example of a response body from a request with offset and limit:

```
{
"links": [
        {
            "rel": "self",
            "href":"http://<BASE-URL>/HyperionPlanning/rest/v3/applications/
Vision/uservariables?offset=0&limit=2",
            "action": "GET"
        },
        {
            "rel": "next",
            "href":"http://<BASE-URL>/HyperionPlanning/rest/v3/applications/
Vision/uservariables?offset=2&limit=2",
            "action": "GET"
        }
    ],
  "items": [
      {
            "id": "935d4dc1-5b2b-457f-0000-0010cfc98fb2",
            "dimension": "Account",
            "name": "Account View",
            "definition": "No Account,CF,Cash Flow Hierarchies",
            "useContext": true
        },
        {
            "id": "0f8828d0-30f1-4d04-0000-001160e3335f",
            "dimension": "Period",
            "name": "Applicable Periods",
            "definition": "QTD,Rolling,YTD",
            "useContext": false
        }
  ],
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "totalResults": 2,
    "hasMore": true
}
```

Get a User Variable Using Its ID

Returns the user variable identified by a unique id.

Method and URI

Method: `GET`

Path: `/HyperionPlanning/rest/v3/applications/{application}/uservariables/{id}`

Example: `https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/uservariables/29e76e76-e79e-4af6-0000-002ac4e2a55`

Table 3-109 Parameters

Name	Description	Type	Required	Default
`application`	The name of the application.	Path	Yes	None
`id`	The unique id of the user variable that you want to retrieve.	Path	Yes	None

Response

Supported Media Types: `application/json`

Table 3-110 Parameters

Name	Description
`id`	The unique ID of the user variable.
`dimension`	The name of the dimension to which the user variable belongs.
`name`	The name of the user variable definition.
`definition`	Current value of the user variable limit defined by a member selection.
`useContext`	Current Use Context value.

```
{
    "links": [
        {
            "rel": "self",
            "href": "http://<BASE-URL>/HyperionPlanning/rest/v3/applications/
             Vision/uservariables/935d4dc1-5b2b-457f-0000-0010cfc98fb2",
             "action": "GET"
        }
    ],
    "id": "935d4dc1-5b2b-457f-0000-0010cfc98fb2",
    "dimension": "Account",
    "name": "Account View",
    "definition": "No Account,CF,Cash Flow Hierarchies",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "useContext": true
}
```

Update User Variables

Modifies the `Definition` and/or `Use Context` values of user variables currently used in the application.

Method and URI

Method: `POST`

Path: `/HyperionPlanning/rest/v3/applications/{application}/uservariables`
In this path, `application` is a required parameter. Use a valid application name.

Example: `https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/uservariables`

Request

Supported Media Types: `application/json`

Table 3-111 Payload Parameters

Name	Description
`items`	Collection of information about the resource.
`id`	The unique id of the user variable to be updated.
`definition`	The user variable limit defined by a member selection. In addition to setting the limits by members, Service Administrators can select limits by function (for example, `IChildren(Existing Employees)`.
`useContext`	The new `Use Context` value. **Note:** This setting determines whether users can choose this value from user preferences or is inherited from another form based on its Point of View context, in which case it changes dynamically based on the context of the form.

Example Payload

```
{
    "items": [
        {
            "id": "935d4dc1-5b2b-457f-0000-0010cfc98fb2",
            "definition": "No Account,CF",
            "useContext": false
        },
        {
            "id": "0f8828d0-30f1-4d04-0000-001160e3335f",
            "definition": "QTD,YTD",
            "useContext": false
        }
    ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Response

Example of a successful update: `Http status code: 201 Created`

Example of a failed update: `Http status code: 400 Bad Request`. A detailed error message will be a part of the response body.

Table 3-112 Error Parameters

Parameters	Description
items	Collection of error messages with the details.
id	Name of the erroneous parameter.
details	In case of errors, details are published with the error string.

Delete Substitution Variables

You can use REST APIs to delete substitution variables at the plan level and application level, as summarized here.

Before deleting substitution variables, you can use REST APIs to get information on what substitution variables are defined for the application or plan type. See Get and Set Substitution Variables.

Required Roles

Service Administrator

Before using the REST resources, you must understand how to access the REST resources and other important concepts. See Cloud EPM REST APIs Best Practices. Using this REST API requires prerequisites. See Prerequisites.

Table 3-113 Deleting Substitution Variables

Task	Request	REST Resource
Delete a Substitution Variable at the Plan Type Level	DELETE	`/HyperionPlanning/rest/{api_version}/applications/{application}/plantypes/{plantype}/substitutionvariables/subvarname`
Delete a Substitution Variable for the Application	DELETE	`/HyperionPlanning/rest/{api_version}/applications/{application}/substitutionvariables/subvarname`
Delete Substitution Variables at the Plan Type Level	POST	`/HyperionPlanning/rest/{api_version}/applications/{application}/plantypes/{plantype}/substitutionvariables:delete`
Delete Substitution Variables for the Application	POST	`/HyperionPlanning/rest/{api_version}/applications/{application}/substitutionvariables:delete`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Delete a Substitution Variable at the Plan Type Level

Use this REST API to delete a substitution variable defined at the plan type level.

Before deleting substitution variables, you can use REST APIs to get information on what substitution variables are defined for the application or plan type. See Get and Set Substitution Variables.

Required Roles

Service Administrator

REST Resource

```
Delete       /HyperionPlanning/rest/{api_version}/applications/{application}/
plantypes/{plantype}/substitutionvariables/subvarname
```

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 3-114 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with, v3	Path	Yes	None
`plantype`	The name of the plan type for which to delete the substitution variable	Path	Yes	None
`subvarname`	Name of the substitution variable to be deleted	Path	Yes	None

Example URL

The following URL will delete `CurrPeriod` at `Plan1`.

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/plantypes/Plan1/
substitutionvariables/CurrPeriod
```

Response

Supported Media Types: `application/json`

Example of a successful response

```
Http status code: 204 (No content)
```

Example of an error response

```
Http status: 400
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Delete a Substitution Variable for the Application

Use this REST API to delete a substitution variable defined at the application level.

Before deleting substitution variables, you can use REST APIs to get information on what substitution variables are defined for the application or plan type. See Get and Set Substitution Variables.

Required Roles

Service Administrator

REST Resource

```
DELETE       /HyperionPlanning/rest/{api_version}/applications/{application}/
substitutionvariables/subvarname
```

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 3-115 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with, v3	Path	Yes	None
`subvarname`	The name of the substitution variable to be deleted	Path	Yes	None

Example URL

The following URL will delete `CurrPeriod` at the application level.

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/
substitutionvariables/CurrPeriod
```

Response

Supported Media Types: `application/json`

Example of a successful response

```
Http status code: 204 (No content)
```

Example of an error response

```
Http status: 400
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Delete Substitution Variables at the Plan Type Level

Use this REST API to delete substitution variables at the plan type level. Variables in the payload that exist at the plan type level are deleted.

Before deleting substitution variables, you can use REST APIs to get information on what substitution variables are defined for the application or plan type. See Get and Set Substitution Variables.

Required Roles

Service Administrator

REST Resource

```
POST       /HyperionPlanning/rest/{api_version}/applications/{application}/
plantypes/{plantype}/substitutionvariables:delete
```

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 3-116 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with, v3	Path	Yes	None
`plantype`	The name of the plan type for which to delete the substitution variables	Path	Yes	None

Example URL

`https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/plantypes/Plan1/substitutionvariables:delete`

Example Payload

The following payload will delete `CurrYear` and `CurrPeriod` at the `Plan1` level.

```
{
    "items": [{
        "name": "CurrYear",
        "value": "FY23",
        "planType": "Plan1"
    }, {
        "name": "CurrPeriod",
        "value": "Jan",
        "planType": "Plan1"
    }]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Response

Supported Media Types: `application/json`

Example of a successful response

```
Http status code: 204 (No content)
```

Example of an error response

```
Http status: 400
```

Delete Substitution Variables for the Application

Use this REST API to delete substitution variables defined for the application (for all plan types). Variables that exist at the plan type level or application level are deleted.

Before deleting substitution variables, you can use REST APIs to get information on what substitution variables are defined for the application or plan type. See Get and Set Substitution Variables.

Required Roles

Service Administrator

REST Resource

```
POST       /HyperionPlanning/rest/{api_version}/applications/{application}/
substitutionvariables:delete
```

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 3-117 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with, v3	Path	Yes	None

Example URL

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/
substitutionvariables:delete
```

Example Payload

The following payload will delete `CurrPeriod` at the application level and `CurrYear` at `Plan1`.

```
{
    "items": [{
        "name": "CurrPeriod",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        "value": "Jan",
        "planType": "ALL"
    }, {
        "name": "CurrYear",
        "value": "FY23",
        "planType": "Plan1"
    }]
}
```

Response

Supported Media Types: `application/json`

Example of a successful response

```
Http status code: 204 (No content)
```

Example of an error response

```
Http status: 400
```

Example of Response Body

The following shows an example of the response body.

```
{
    "items": [{
        "name": "CurrYear",
        "value": "FY16",
        "planType": "ALL"
    }, {
        "name": "CurrYear",
        "value": "FY17",
        "planType": "Plan2"
    },{
        "name": "CurrPeriod",
        "value": "Jan",
        "planType": "Plan1"
    }, {
        "name": "CurrPeriod",
        "value": "Feb",
        "planType": "ALL"
    }]
}
```

Get and Set Substitution Variables

Use these REST APIs to get and set substitution variables at the plan level and application level, as summarized here.

You can also use REST APIs to delete substitution variables. See Delete Substitution Variables.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-118 Getting and Setting Substituion Variables

Getting and Setting Substituion Variables REST APIs		
Get All Substitution Variables Defined for the Application	Get Substitution Variables Defined at the Plan Type Level	Get a Derived Substitution Variable Defined at the Plan Type Level
Get a Substitution Variable Defined for the Application	Get Derived Substitution Variables at the Plan Type Level	Create and Update Substitution Variables at the Plan Type Level
Create or Update All Substitution Variables Defined for the Application	Get a Substitution Variable Defined at the Plan Type Level	

Get All Substitution Variables Defined for the Application

You can use REST APIs to retrieve all substitution variables defined for the application (all plan types).

Required Roles

Any Role

REST Resource

```
GET       /HyperionPlanning/rest/{api_version}/applications/{application}/
substitutionvariables
```

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 3-119 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	The name of the application	Path	Yes	None

Example URL

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/
substitutionvariables
```

Response

Supported Media Types: `application/json`

Parameters

The following table summarizes the parameters.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-120 Parameters

Name	Description
items	Collection of information about the resource
name	Name of the substitution variable, such as CurrYear
value	Value of the substitution variable, such as FY16
planType	Plan type, such as Plan1, or ALL for all plan types

Example of Response Body

The following shows an example of the response body.

```
{
    "items": [{
        "name": "CurrYear",
        "value": "FY16",
        "planType": "ALL"
    }, {
        "name": "CurrYear",
        "value": "FY17",
        "planType": "Plan2"
    },{
        "name": "CurrPeriod",
        "value": "Jan",
        "planType": "Plan1"
    }, {
        "name": "CurrPeriod",
        "value": "Feb",
        "planType": "ALL"
    }]
}
```

Get a Substitution Variable Defined for the Application

You can use REST APIs to retrieve a substitution variable defined for the application.

Required Roles

Any Role

REST Resource

```
GET       /HyperionPlanning/rest/{api_version}/applications/{application}/
substitutionvariables/{name}
```

Request

Parameters

The following table summarizes the client request.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-121 Parameters

Name	Description	Type	Required	Default
api_version	Version of the API you are developing with	Path	Yes	None
application	The name of the application	Path	Yes	None
name	Namer of the substitution variable defined for the application	Path	Yes	None

Example URL

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/
substitutionvariables/CurrPeriod
```

Response

Supported Media Types: application/json

Parameters

The following table summarizes the parameters.

Table 3-122 Parameters

Name	Description
name	Name of the substitution variable, such as CurrPeriod
value	Value of the substitution variable, such as Jan
planType	Plan type, such as Plan1, or ALL for all plan types

Example of Response Body

The following shows an example of the response body.

```
{
    "name": "CurrPeriod",
    "value": "Jan",
    "planType": "ALL",
    "links": [{
        "rel": "self",
        "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
vision/substitutionvariables/CurrPeriod",
        "action": "GET"
    }]
}
```

Create or Update All Substitution Variables Defined for the Application

Can be used to create or update substitution variables for the application.

Variables in the payload that exist in the application at the defined scope will be updated; new variables will be created at the defined scope.

Required Roles

Any Role

Copyright © 2017, 2026, Oracle and/or its affiliates.

REST Resource

```
POST       /HyperionPlanning/rest/{api_version}/applications/{application}/
substitutionvariables
```

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 3-123 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	The name of the application	Path	Yes	None

Example URL

`https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/substitutionvariables`

Example Payload

With the following payload, `CurrYear` at the application level will be updated, and `CurrPeriod` will be created at the `Plan3` level.

```
{
    "items": [{
        "name": "CurrYear",
        "value": "FY18",
        "planType": "ALL"
    }, {
        "name": "CurrPeriod",
        "value": "Dec",
        "planType": "Plan3"
    }]
}
```

Response

Supported Media Types: `application/json`

Example of a successful response

```
Http status code: 204 (No content)
```

Example of an error response

```
Http status: 400
```

To confirm the results, you can go to the application to see the updates.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Get Substitution Variables Defined at the Plan Type Level

You can use REST APIs to retrieve a list of retrieve a list of substitution variables defined at the plan type level.

Required Roles

Any Role

REST Resource

```
GET       /HyperionPlanning/rest/{api_version}/applications/{application}/
plantypes/{plantype}/substitutionvariables
```

Request

Parameters

The following table summarizes the client request.

Table 3-124 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	The name of the application	Path	Yes	None
`plantype`	The plan type for which to get substitution variables	Path	Yes	None

Example URL

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/plantypes/Plan1/
substitutionvariables
```

Response

Supported Media Types: `application/json`

Parameters

The following table summarizes the parameters.

Table 3-125 Parameters

Name	Description
`items`	Collection of information for the resource
`name`	Name of the substitution variable, such as CurrPeriod
`value`	Value of the substitution variable, such as Jan
`planType`	Name of the plan type, such as Plan1

Example of Response Body

The following shows an example of the response body.

```
{
    "items": [{
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        "name": "CurrPeriod",
        "value": "Jan",
        "planType": "Plan1"
    }]
}
```

Get Derived Substitution Variables at the Plan Type Level

You can use REST APIs to retrieve a list of substitution variables at the plan type level.

Required Roles

Any Role

REST Resource

```
GET       /HyperionPlanning/rest/{api_version}/applications/{application}/
plantypes/{plantype}/substitutionvariables?q={"derivedValues":true}
```

Request

Parameters

The following table summarizes the client request.

Table 3-126 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	The name of the application	Path	Yes	None
`plantype`	Name of the plan type for which to get substitution variables	Path	Yes	None
`derivedValues`	If set to `true`, the derived list shows all variables available at run time to be used against the plan type. This includes variables defined at the application level and at the plan type level. If a substitution variable with the same name is defined both at the plan type level and at the application level, the plan type level is returned. If set to `false`, only plan type level substitution variables are returned.	Query	No	False

Example URL

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/plantypes/Plan1/
substitutionvariables?q={"derivedValues":true}
```

Response

Supported Media Types: `application/json`

Parameters

The following table summarizes the parameters.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-127 Parameters

Name	Description
items	Collection of information about the resource
name	Name of the substitution variable, such as CurrYear
value	Value of the substitution variable, such as FY16
planType	Name of the plan type, such as Plan1, or ALL for all plan types

Example of Response Body

The following shows an example of the response body.

```
{
    "items": [{
        "name": "CurrYear",
        "value": "FY16",
        "planType": "ALL"
    }, {
        "name": "CurrPeriod",
        "value": "Jan",
        "planType": "Plan1"
    }]
}
```

Get a Substitution Variable Defined at the Plan Type Level

You can use REST APIs to retrieve a substitution variable defined at the plan type level.

Required Roles

Any Role

REST Resource

```
GET   /HyperionPlanning/rest/{api_version}/applications/{application}/
plantypes/{plantype}/substitutionvariables/CurrYear
```

Request

Parameters

The following table summarizes the client request.

Table 3-128 Parameters

Name	Description	Type	Required	Default
api_version	Version of the API you are developing with	Path	Yes	None
application	The name of the application	Path	Yes	None
plantype	Name of the plan type for which to get substitution variables	Path	Yes	None

Example URL

Copyright © 2017, 2026, Oracle and/or its affiliates.

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/vision/plantypes/plan1/
substitutionvariables/CurrYear
```

Response

Supported Media Types: `application/json`

Parameters

The following table summarizes the parameters.

Table 3-129 Parameters

Name	Description
`name`	Name of the substitution variable, such as CurrYear
`value`	Value of the substitution variable, such as FY16
`planType`	Name of the plan type, such as Plan1

Example of Response Body

The following shows an example of the response body.

```
{
    "name": "CurrYear",
    "value": "FY17",
    "planType": "Plan1",
    "links": [{
        "rel": "self",
        "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
vision/plantypes/plan1/substitutionvariables/CurrYear",
        "action": "GET"
    }]
}
```

Get a Derived Substitution Variable Defined at the Plan Type Level

You can use REST APIs to retrieve a substitution variable defined at the plan type level.

Required Roles

Any Role

REST Resource

```
GET       /HyperionPlanning/rest/{api_version}/applications/{application}/
plantypes/{plantype}/substitutionvariables/{name}?q={"derivedValues":true}
```

Request

Parameters

The following table summarizes the client request.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-130 Parameters

Name	Description	Type	Required	Default
api_version	Version of the API you are developing with	Path	Yes	None
application	The name of the application	Path	Yes	None
plantype	Name of the plan type for which to get substitution variables	Path	Yes	None
derivedValues	If set to true, the derived list shows all variables available at run time to be used against the plan type. This includes variables defined at the application level and at the plan type level. If a substitution variable with the same name is defined both at the plan type level and at the application level, the plan type level is returned. If set to false, only plan type level substitution variables are returned.	Query	No	False

Example URL

```
https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/plantypes/Plan1/
substitutionvariables?q={"derivedValues"=true}
```

Response

Supported Media Types: application/json

Parameters

The following table summarizes the parameters.

Table 3-131 Parameters

Name	Description
items	Collection of information about the resource
name	Name of the substitution variable, such as CurrYear
value	Value of the substitution variable, such as FY16
planType	Name of the plan type, such as Plan1, or ALL for all plan types

Example of Response Body

The following shows an example of the response body.

```
{
    "name": "CurrPeriod",
    "value": "Jan",
    "planType": "ALL",
    "links": [{
        "rel": "self",
        "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
vision/plantypes/plan1/substitutionvariables/CurrPeriod?
q=%7B%22derivedValues%22:true%7D",
        "action": "GET"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    }]
}
```

Create and Update Substitution Variables at the Plan Type Level

You can use REST APIs to create and update substitution variables at the plan type level. Variables in the payload that exist at the plan type level are updated. New variables are created at the plan type level.

Required Roles

Any Role

REST Resource

```
POST       /HyperionPlanning/rest/{api_version}/applications/{application}/
plantypes/{plantype}/substitutionvariables
```

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 3-132 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	The name of the application	Path	Yes	None
`plantype`	Name of the plan type for which to get and set substitution variables	Path	Yes	None

Example URL

`https://<BASE-URL>/HyperionPlanning/rest/v3/applications/Vision/plantypes/Plan1/substitutionvariables`

Response

Supported Media Types: `application/json`

Example of a successful response

```
Http status code: 204 (No content)
```

Example of an error response

```
Http status: 400
```

To confirm the results, you can go to the application to see the updates.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Essbase and Application Settings

Table 3-133 Working with Essbase

Task	Request	REST Resource
Export Essbase Data (v2)	POST	`/interop/rest/v2/essbase/export`
Essbase Block Analysis Report (v1)	POST	`/interop/rest/diag/v1/services/essbaseblockanalysisreport`
Get Essbase Query Governor Execution Time (v2)	GET	`/interop/rest/{api_version}/config/services/essbaseqrygovexectime`
Set Essbase Query Governor Execution Time (v2)	PUT	`/interop/rest/{api_version}/config/services/essbaseqrygovexectime`

Export Essbase Data (v2)

The Export Oracle Essbase (v2) REST API exports level 0 or all data for the specified cube. Export data files are written to the Outbox directory as a zip file. You can download it using the EPM Automate downloadFile command or the Download REST API. Running an export places the cube into read-only mode and prevents any write activity during the period of the execution of the export.

Required Roles

Service Administrator

REST Resource

POST `/interop/rest/v2/essbase/export`

Request

Supported Media Types: `application/json`

Table 3-134 Parameters

Name	Description	Type	Required	Default
`cubeName`	Name of the BSO or ASO cube	Payload	Yes	None
`fileName`	Name of a zip file in which the Essbase data will be exported. This file will be available in the outbox from where it can be downloaded.	Payload	Yes	None
`level`	The value is 0 or ALL, Level 0 and ALL are valid for BSO cubes. Only level 0 is valid for ASO cubes.	Payload	Yes	level=0

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example URL and Payload

```
https://<BASE-URL>/interop/rest/v2/essbase/export
```

```
{
    "cubeName": "Plan1",
    "fileName": "Plan1Export.zip",
    "parameters": {
        "level": "0"
    }
}
```

Response

Supported Media Types: `application/json`

Table 3-135 Parameters

Attribute	Description
`details`	In case of errors, details are published with the error string
`status`	See Error Handling and Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Possible values. Can be `self` and/or `Job Status`. If set to `Job Status`, you can use the `href` to get the status of the re-export operation
`data`	Parameters as key value pairs passed in the request

Examples of Response Body

Example 1: Export is in Progress

```
{
    "details": "Essbase Database Export",
    "status": -1,
    "items": null,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/essbase/export",
            "action": "POST",
            "rel": "self",
            "data": null
        },
        {
            "href": "https://<BASE-URL>/interop/rest/v2/status/jobs/<JOB_ID>",
            "action": "GET",
            "rel": "Job Status",
            "data": null
        }
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    ]
}
```

Example 2: Export Completes Successfully

```
{
    "details": null,
    "status": 0,
    "items": null,
    "links": [
        {
            "href": "https://<BASE-URL>/interop/rest/v2/status/jobs/<JOB_ID>",
            "action": "GET",
            "rel": "self",
            "data": null
        }
    ]
}
```

Sample cURL command

```
curl -X POST -s -u '<USERNAME>:<PASSWORD>' -o response.txt -D respHeader.txt -
H 'Content-Type: application/json' -d
'{"cubeName":"<CUBE-NAME>","fileName":"<FILE-NAME>","parameters":{"level":
"<LEVEL>" }}' 'https://<BASE-URL>/interop/rest/v2/essbase/export'
```

Essbase Block Analysis Report (v1)

Use this REST API to create an Oracle Essbase Block Analysis Report that helps you analyze Oracle Essbase data to support the tuning of Block Storage Option (BSO) cubes (generally, used for calculations) in your application. The Essbase Block Analysis report is helpful to resolve performance issues resulting from patterns of data; for example, repeated numbers in Essbase BSO cubes.

The Essbase Block Analysis report provides information in these areas:

- **Percentage of blocks with only Zero:** Shows the blocks that contain only zeros as a percentage of all the blocks contained in the export file.
- **Top 10 Repeated Numerical Cell Values By Percentage of Numerical Cells:** Shows the top 10 repeated values as a percentage of all the values in the export file.
- **Top 100 Dense Member Combinations with Repeated Values:** Shows the top 100 dense combinations with repeated values in the cube. The "Cell Value" column shows a value for each member, in the order it appears in the hierarchy, as a different column. For example, if Period is across the column, there will be a different column for January, February, and so on. Other dense dimension(s) appear in the rows. This should help you identify the locations of the repeated values.

Before executing this API, use the Export Essbase Data (v2) API to export the data from the cube for which you want to create the Block Analysis report to a zip file. You may export level0 or all data as needed. Execute this API to create the Block Analysis report for this zip file. The report is created in the outbox; you can use the Download API to download it to a local computer or the Send Email (v1) or Send Email (v2) API to email it.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Required Roles

Service Administrator

REST Resource

POST `/interop/rest/diag/v1/services/essbaseblockanalysisreport`

Request

Supported Media Types: `application/json`

Table 3-136 Parameters

Name	Description	Type	Required	Default
`exportDataFile`	Name of the zip file that contains the Essbase data that was previously exported from a BSO cube	Payload	Yes	None
`reportFile`	Name for the HTML formatted Block Analysis Report file	Payload	Yes	None

Sample Request Payload

```
{
  "exportDataFile": "EXPORT_DATA_FILE",
  "reportFile": "REPORT_FILE"
}
```

Response

Supported Media Types: `application/json`

Table 3-137 Parameters

Name	Description
`details`	Detailed status of the operation performed.
`status`	See Migration Status Codes
`links`	Detailed information about the link and HTTP call type
`items`	Detailed information about the API
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Possible values: `self` or `Job Status`. If the value is set to `Job Status`, you can use the href to get the status
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
  "details": null,
  "status": -1,
  "items": [
    {
      "status": "EssbaseBlockAnalysisReport' Job has been 'started"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    }
  ],
  "links": [
    {
      "href": "https://<BASE-URL>/interop/rest/diag/v1/services/
essbaseblockanalysisreport",
      "action": "POST",
      "rel": "self",
      "data": null
    },
    {
      "href": "https://<BASE-URL>/interop/rest/diag/v1/services/jobs/
<JOB_ID>",
      "action": "GET",
      "rel": "Job' 'Status",
      "data": null
    }
  ]
}
```

Sample cURL Command

```
curl -s -u <USERNAME>:<PASSWORD> -H 'Content-Type: application/json' --
request POST https://<BASE-URL>/interop/rest/diag/v1/services/
essbaseblockanalysisreport -d '{
  "exportDataFile": "EXPORT_DATA_FILE",
  "reportFile": "REPORT_FILE"
}'
```

Get Essbase Query Governor Execution Time (v2)

This API returns the Oracle Essbase Query Governor Execution Time (maximum number of seconds that a query can run before Essbase Server terminates it) of all the Essbase cubes.

Required Roles

Service Administrator

REST Resource

GET `/interop/rest/v2/config/services/essbaseqrygovexectime`

Request

Supported Media Types: `application/json`

Response

Supported Media Types: `application/json`

Table 3-138 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-138 (Cont.) Parameters

Parameters	Description
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Can be `self` and/or `Job Status`. If set to `Job Status`, you can use the `href` to get the status of the import operation
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
  "details": null,
  "status": 0,
  "items": [
    {
      "qryexectime": "<QUERY-GOVERNOR-EXECUTION-TIME>"
    }
  ],
  "links": [
    {
      "href": "https://<BASE-URL>/interop/rest/v2/config/services/
essbaseqrygovexectime",
      "action": "GET",
      "rel": "self",
      "data": null
    }
  ]
}
```

Sample cURL Command

```
curl -s -u <USERNAME>:<PASSWORD>-H 'Content-Type: application/json' --request
GET -G https://<BASE-URL>/interop/rest/v2/config/services/
essbaseqrygovexectime
```

Set Essbase Query Governor Execution Time (v2)

This API sets the Oracle Essbase Query Governor Execution Time (maximum number of seconds that a query can run before the Essbase Server terminates it) for all the Essbase cubes.

The governor value can be set to any value from 0 to 70000.

Required Roles

Service Administrator

Copyright © 2017, 2026, Oracle and/or its affiliates.

REST Resource

PUT `/interop/rest/{api_version}/config/services/essbaseqrygovexectime`

Request

Supported Media Types: `application/json`

Table 3-139 Parameters

Name	Description	Type	Required	Default
`qryexectime`	Query Governor Execution Time Value	Payload	Yes	None

Sample Request Payload

```
{
  "qryexectime": "<Query_Execution_Time>"
}
```

Response

Supported Media Types: `application/json`

Table 3-140 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Can be `self` and/or `Job Status`. If set to `Job Status`, you can use the `href` to get the status of the import operation
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
  "details": null,
  "status": 0,
  "items": null,
  "links": [
    {
      "href": "https://<BASE-URL>/interop/rest/v2/config/services/
essbaseqrygovexectime",
      "action": "PUT",
      "rel": "self",
      "data": null
    }
  ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Sample cURL Command

```
curl -s -u <USERNAME>:<PASSWORD>-H 'Content-Type: application/json' --request
PUT https://<BASE-URL>/interop/rest/v2/config/services/essbaseqrygovexectime -
d '{
  "qryexectime": "<Query_Execution_Time>"
}'
```

Connections

Use these APIs to connect environments.

With multiple environments, using REST APIs saves you time and effort by automating the process of logging in and configuring connections. For information about accessing environments, see Accessing Cloud EPM and or Cloud EDM Environments in the *Getting Started Guide for Administrators*.

Applies to: Enterprise Profitability and Cost Management, FreeForm, Financial Consolidation and Close, andPlanning.

In this section:

- View a Connection
- View All Connections
- Update a Connection

View a Connection

Use this REST API to view details for a connection that is saved in an application.

Required Roles

Service Administrator

This API is v1.

REST Resource

```
GET /HyperionPlanning/rest/epm/{api_version}/applications/{application}/
connections/{connectionRef}
```

Request

Supported Media Types: `application/json`

Parameters:

The following table summarizes the client request.

Table 3-141 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	The name of the application for which to view the connection	Path	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-141 (Cont.) Parameters

Name	Description	Type	Required	Default
`connectionRef`	The connection to view. The value can be either a connection name or ID.	Path	Yes	None

Response

Supported Media Types: `application/json`

Payload Parameters:

The following table summarizes the parameters.

Table 3-142 Parameters

Parameter	Description
`items`	Collection of information about the resource
`id`	Unique identifier for the connection, such as 1c89922d-92ba-46c1-850f-e2a8a416ddf2
`name`	Name of the connection, such as Connection29
`description`	Description of the connection, such as Planning
`url`	The URL of the connection, such as https://<*SERVICE_NAME*>-<*TENANT_NAME*>.<*SERVICE_TYPE*>.<*dcX*>.oraclecloud.com/HyperionPlanning
`username`	The username for the connection, such as admin
`domain`	The domain name for the connection
`modified`	The time stamp of the last modification to the connection details, such as 2021-01-18 12:23:49.0
`modifiedBy`	The last service administrator to modify the connection details, such as admin

Example Response

The identity domain information as shown as part of the response.

```
{
    "id": "f83b3da2-9505-415e-b7f7-3cf113cc94e4",
    "name": "Connection1",
    "description": "Test Connection",
    "url": "https://<BASE-URL>m/HyperionPlanning",
    "username": "admin",
    "domain": "<DOMAIN_NAME>",
    "modified": "2021-02-02 09:16:02.0",
    "modifiedBy": "admin",
    "links": [
        {
            "href": "https://<BASE-URL>/HyperionPlanning/rest/epm/v1/
applications/epbcs1/connections/f83b3da2-9505-415e-b7f7-3cf113cc94e4",
            "action": "GET",
            "rel": "self",
            "data": null
        }
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    ]
}
```

View All Connections

Use this REST API to view details for all of the connections saved in an application.

This API supports paging, so you can filter the number of connections you see in the output using the offset and limit parameters shown in the table.

Required Roles

Service Administrator

This API is v1.

REST Resource

`GET /HyperionPlanning/rest/epm/{api_version}/applications/{application}/connections`

Request

Supported Media Types: `application/json`

Parameters:

The following table summarizes the client request.

Table 3-143 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	The name of the application for which to view connections	Path	Yes	None
`offset`	For paging of jobs. Indicates the actual index from which the records are returned. It is 0 based.	Query	No	0
`limit`	For paging for jobs. Controls how many items to return. Defaults to 25 if not specified.	Query	No	25

Example URL

`https://<BASE-URL>/HyperionPlanning/rest/epm/v1/applications/epbcs1/connections?offset=2&limit=2`

Response

The following table summarizes the parameters.

Table 3-144 Parameters

Parameters	Description
`items`	Collection of information about the resource
`id`	Unique identifier for the connection, such as 1c89922d-92ba-46c1-850f-e2a8a416ddf2
`name`	Name of the connection, such as Connection29

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-144 (Cont.) Parameters

Parameters	Description
`description`	Description of the connection, such as Planning
`url`	The URL of the connection, such as https://<*BASE-URL*>/HyperionPlanning
`username`	The username for the connection, such as admin
`domain`	The domain name for the connection
`modified`	The time stamp of the last modification to the connection details, such as 2021-01-18 12:23:49.0
`modifiedBy`	The last service administrator to modify the connection details, such as admin

Example Response

The identity domain information as shown as part of the response.

```
{
    "links": [
        {
            "href": "https://<BASE-URL>/HyperionPlanning/rest/epm/v1/
applications/epbcs1/connections?offset=2&limit=2",
            "action": "GET",
            "rel": "self",
            "data": null
        },
        {
            "href": "https://<BASE-URL>/HyperionPlanning/rest/epm/v1/
applications/epbcs1/connections?offset=0&limit=2",
            "action": "GET",
            "rel": "prev",
            "data": null
        },
        {
            "href": "https://<BASE-URL>/HyperionPlanning/rest/epm/v1/
applications/epbcs1/connections?offset=4&limit=2",
            "action": "GET",
            "rel": "next",
            "data": null
        }
    ],
    "items": [
        {
            "id": "1c89922d-92ba-46c1-850f-e2a8a416ddf2",
            "name": "Connection20",
            "url": "https://<BASE-URL>/HyperionPlanning",
            "username": "admin",
            "modified": "2021-01-18 12:23:49.0",
            "modifiedBy": "admin",
            "links": [
                {
                    "href": "https://<BASE-URL>/HyperionPlanning/rest/epm/v1/
applications/epbcs1/connections/1c89922d-92ba-46c1-850f-e2a8a416ddf2",
                    "action": "GET",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
                    "rel": "Self",
                    "data": null
                }
            ]
        },
        {
            "id": "ec94a10e-717b-449a-89ce-0c16b1688caa",
            "name": "Connection29",
            "url": "https://<BASE-URL>/HyperionPlanning",
            "username": "admin",
            "domain": "<DOMAIN_NAME>",
            "modified": "2021-01-18 12:23:49.0",
            "modifiedBy": "admin",
            "links": [
                {
                    "href": "https://<BASE-URL>/HyperionPlanning/rest/epm/v1/
applications/epbcs1/connections/ec94a10e-717b-449a-89ce-0c16b1688caa",
                    "action": "GET",
                    "rel": "Self",
                    "data": null
                }
            ]
        }
    ],
    "type": null
}
```


Update a Connection

Use this REST API to update a specific connection that is saved in an application.

You can update the values using either a plain text password or encrypted password. The response returns the updated connection details.

Required Roles

Service Administrator

This API is v1.

REST Resource

```
POST /HyperionPlanning/rest/epm/{api_version}/applications/{application}/
connections/{connectionRef}
```

Request

Supported Media Types: `application/json`

Parameters:

The following table summarizes the client request.

Table 3-145 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-145 (Cont.) Parameters

Name	Description	Type	Required	Default
`application`	The name of the application for which to update a connection	Path	Yes	None
`connectionRef`	The connection to refer to. The value can be either a connection name or ID.	Path	Yes	None

Table 3-146 Parameters for Connection Information that Can Be Modified

Name	Description
`name`	Name of the connection, such as Connection29
`description`	Description of the connection, such as Planning
`url`	The URL of the connection, such as https://*<BASE-URL>*/HyperionPlanning
`username`	The username for the connection, such as admin
`password`	The password of the connection
`encryptedPassword`	The password of the connection in the encrypted format using the EPM Automate encrypt command. The encrypt command generates an epw file with an encrypted password. Provide the content of the epw file to this parameter as the payload. For more details see encrypt.

Example Body

Example 1:

```
{
    "name": "<NEW_CONNECTION_NAME>",
    "description": "<NEW_DESCRIPTION>",
    "url": "https://<BASE-URL>/HyperionPlanning",
    "username": "<NEW_USERNAME>",
    "password": "<NEW_PASSWORD>"
}
```

Example 2:

```
{
    "name": "<NEW_CONNECTION_NAME>",
    "description": "<NEW_DESCRIPTION>",
    "url": "https://<BASE-URL>/HyperionPlanning",
    "username": "<NEW_USERNAME>",
    "encryptedPassword": "<ENCRYPTED_PASSWORD>"
}
```

Response

Supported Media Type: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-147 Parameters

Parameters	Description
items	Collection of information about the resource
id	Unique identifier for the connection, such as 1c89922d-92ba-46c1-850f-e2a8a416ddf2
name	Name of the connection, such as Connection29
description	Description of the connection, such as Planning
url	The URL of the connection, such as https://<*BASE-URL*>/HyperionPlanning
domain	The domain name for the connection
username	The username for the connection, such as admin
modified	The time stamp of the last modification to the connection details, such as 2021-01-18 12:23:49.0
modifiedBy	The last service administrator to modify the connection details, such as admin

Example Response

The identity domain information as shown as part of the response.

```
{
    "id": "<ID>",
    "name": "<NEW_CONNECTION_NAME>",
    "description": "<NEW_DESCRIPTION>",
    "url": "https://<BASE-URL>/HyperionPlanning",
    "domain": "<DOMAIN_NAME>",
    "username": "<NEW_USERNAME>",
    "modified": "2021-02-02 09:16:02.0",
    "modifiedBy": "admin",
    "links": [
        {
            "href": "https://<BASE-URL>/HyperionPlanning/rest/epm/v1/
applications/epbcs1/connections/f83b3da2-9505-415e-b7f7-3cf113cc94e4",
            "action": "POST",
            "rel": "self",
            "data": null
        }
    ]
}
```

Data Integration and Data Management

Use these APIs to run data integrations tasks including import and export data mapping and data integration, manage pipelines, execute reports, and lock POVs.

> **Note**
>
> All REST APIs used for Data Integration can be used as REST APIs for Data Management.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-148 Data Integration and Data Management APIs

Data Integration and Data Management APIs		
Get Pipeline Details	Import Data Mapping	Import Data Integration
Export Data Mapping	Export Data Integration	Lock and Unlock POV
Run Integrations	Run a Pipeline	Run Data Rules in Data Management
Retrieve Job Status		

URL Structure for Data Integration and Data Management

URL Structure

Use the following URL structure to access the Data Integration REST resources:

`https://<BASE-URL>/aif/rest/{api_version}/{path}`

Where:

- *<BASE-URL>*: The first part of your service URL, before the context.

  For example, if your service URL is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com`. Similarly, if your service URL is `https://epm2-acme.epm.us6.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm2-acme.epm.us6.oraclecloud.com`.
- *api_version*: API version you are developing with. The current REST API version for Data Integration is V1.
- *path*: Identifies the resource.

> **Note**
>
> Oracle does not authorize or support the use of REST APIs with the path token "`/internal/`" in the URL.

Get API Versions for Data Integration and Data Management APIs

You can manage versions using the set of REST resources summarized in the following table.

Before using the REST resources, you must understand how to access the REST resources and other important concepts. See Cloud EPM REST APIs Best Practices. Using this REST API requires prerequisites. See Prerequisites.

Table 3-149 Manage Versions of Data Integration APIs

Task	Request	REST Resource
Get Information about a Specific API Version for Data Integration and Data Management APIs	GET	`/aif/rest/{apiVersion}`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Get Information about a Specific API Version for Data Integration and Data Management APIs

Returns details for a specific REST API version for Data Integration.

REST Resource

`GET /aif/rest/{api_version}`

Required Roles

Service Administrator, Power User, User, Viewer

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the parameters.

Table 3-150 Parameters

Name	Description
`api_version`	Version of the API you are developing with, such as V1

Response

Supported Media Types: `application/json`

Parameters

The following table summarizes the parameters.

Table 3-151 Parameters

Name	Description
`version`	The version, such as V1
`lifecycle`	Lifecycle of the resource, active or deprecated
`isLatest`	Whether this resource is the latest, true or false

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
"version": "V1"
"lifecycle": "active"
"isLatest": "true"
"links": [1]{
            "rel": "canonical"
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/aif/rest/V1"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "action": "GET"
            }
}
```

Get Pipeline Details

Returns pipeline details, variables, stages and jobs for a specified pipeline code.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.
Required Roles

Service Administrator, Power User

REST Resource

`GET/aif/rest/{api_version}/pipeline?pipelineName=<pipelineCode>`

> **Note**
>
> Use the pipeline code instead of the pipeline name when making the rest call.

The current REST API version for Data Integration must be **V1**.

Request

Supported Media Types: `application/json`

Parameters

This API requires the pipelineCode as a parameter. An example of the rest call is as follows:

`https://<BASE-URL>/aif/rest/V1/pipeline?pipelineName=ObjectStore`

Supported Media Types: `application/json`

Example of Response Body

The following is an example of the response body in JSON format that shows all details related to the pipeline. This example is for a simple pipeline with one stage and one job, but more complicated pipelines will return additional data.

```
{
    "status": 0,
    "details": null,
    "response": {
        "name": "ObjectStore",
        "displayName": "Object Store",
        "id": 1,
        "parallelJobs": 2,
        "partitionkey": null,
        "partName": null,
        "variables": [
            {
                "varName": "ATTACH_LOGS",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "varDisplayName": "Attach Logs",
            "varDefaultValue": "N",
            "varType": "LOOKUP",
            "varValObject": "YES_NO",
            "varSequence": 7,
            "varDefaultParam": "Y"
        },
        {
            "varName": "ENDPERIOD",
            "varDisplayName": "End Period",
            "varDefaultValue": null,
            "varType": "LIST",
            "varValObject": "Global Period Name LOV Query",
            "varSequence": 2,
            "varDefaultParam": "N"
        },
        {
            "varName": "EXPORTMODE",
            "varDisplayName": "Export Mode",
            "varDefaultValue": "Merge",
            "varType": "LIST",
            "varValObject": "Pipeline Export Mode LOV Query",
            "varSequence": 4,
            "varDefaultParam": "N"
        },
        {
            "varName": "IMPORTMODE",
            "varDisplayName": "Import Mode",
            "varDefaultValue": "REPLACE",
            "varType": "LOOKUP",
            "varValObject": "DATA_LOAD_IMPORT_MODES",
            "varSequence": 3,
            "varDefaultParam": "N"
        },
        {
            "varName": "SEND_MAIL",
            "varDisplayName": "Send Mail",
            "varDefaultValue": "NO",
            "varType": "LOOKUP",
            "varValObject": "MAIL_CONDITION",
            "varSequence": 5,
            "varDefaultParam": "Y"
        },
        {
            "varName": "SEND_TO",
            "varDisplayName": "Send To",
            "varDefaultValue": null,
            "varType": "TEXT",
            "varValObject": null,
            "varSequence": 6,
            "varDefaultParam": "N"
        },
        {
            "varName": "STARTPERIOD",
            "varDisplayName": "Start Period",
            "varDefaultValue": null,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "varType": "LIST",
            "varValObject": "Global Period Name LOV Query",
            "varSequence": 1,
            "varDefaultParam": "N"
        }
    ],
    "stages": [
        {
            "stageName": "Object Store",
            "stageDisplayName": "Stage",
            "stageID": 2,
            "stageSequence": 1,
            "stageParallel": "N",
            "plNextStageSuccess": "CONTINUE",
            "plNextStageFailure": "CONTINUE",
            "jobs": [
                {
                    "jobType": "copyFromObjectStore",
                    "jobName": "New Job",
                    "jobID": 3,
                    "jobSeq": 1,
                    "jobObject": " ",
                    "jobConnection": "LOCAL",
                    "status": "SUCCESS",
                    "endTime": "Sep 02, 2025 08:09:35 PM",
                    "logFile": "/u03/inbox/outbox/logs/63.log",
                    "processId": 63,
                    "parameters": [
                        {
                            "paramName": "bucket",
                            "paramValue": "Bucket123",
                            "paramLevel": "JOB"
                        },
                        {
                            "paramName": "namespace",
                            "paramValue": "myNameSpace",
                            "paramLevel": "JOB"
                        },
                        {
                            "paramName": "objectName",
                            "paramValue": "Sample_file.dat",
                            "paramLevel": "JOB"
                        },
                        {
                            "paramName": "objectStoreConnection",
                            "paramValue": "Object Store",
                            "paramLevel": "JOB"
                        },
                        {
                            "paramName": "subFolder",
                            "paramValue": null,
                            "paramLevel": "JOB"
                        },
                        {
                            "paramName": "targetLocation",
                            "paramValue": "inbox",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
                                "paramLevel": "JOB"
                            }
                        ]
                    }
                ]
            }
        ],
        "status": "SUCCESS",
        "processId": 62,
        "lastUpdatedDate": "Sep 02, 2025 08:09:35 PM",
        "proxyAdminUser": null
    }
}
```


Import Data Mapping

Member mappings are used to derive the target members for each dimension based on source value. Member mappings are referenced during the data load, enabling Data Integration to determine how to dimensionalize the data that is loaded to the target application. Member mappings define relationships between source members and target dimension members within a single dimension. You must create a member mapping for each target dimension.

You can import member mappings from a selected Excel, .CSV or .TXT file. You can also create new mappings in a text file and import them. Import member mappings support merge or replace modes, along with validate or no validate options for target members.

REST Resource

`POST /aif/rest/{api_version}/jobs`

Required Roles

Service Administrator, Power User

Request

Supported Media Types: `application/json`

The following table summarizes the client request.

Table 3-152 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are working with, such as V1	Path	Yes	None
`jobType`	The job type, `MAPPINGIMPORT`	Path	Yes	None
`jobName`	The dimension name for a specific dimension to import, such as `ACCOUNT`, or `ALL` to import all dimensions	Path	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-152 (Cont.) Parameters

Name	Description	Type	Required	Default
`fileName`	The file and path from which to import mappings. The file format can be .CSV, .TXT, .XLS, or .XLSX. The file must be uploaded prior to importing, either to the inbox or to a sub-directory of the inbox. Include the inbox in the file path, for example,`inbox/BESSAPPJan-06.csv`	Path	Yes	None
`importMode`	The import mode: `MERGE` to add new rules or replace existing rules, or `REPLACE` to clear prior mapping rules before import	Path	No	`MERGE`
`validationMode`	Whether to use validation mode, `true` or `false` An entry of `true` validates the target members against the target application; `false` loads the mapping file without any validations. Note that the validation process is resource intensive and takes longer than the validation mode of `false`; the option selected by most customers is `false`	Path	No	`false`
`locationName`	The Data Integration location where the mapping rules should be loaded; mapping rules are specific to a location in Data Integration.	Path	No	None

Example of Request Body

The following shows an example of the request body in JSON format.

```
{
"jobType":"MAPPINGIMPORT",
"jobName":"ACCOUNT"
"fileName":"inbox/BESSAPPJan-06.csv",
"importMode":"MERGE",
"validationMode":"false",
"locationName":"BESSAPP"
}
```

For sample code, see the code samples included in Run Data Rules in Data Management.

Response

The following table summarizes the response parameters.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-153 Parameters

Name	Description
`jobId`	The process ID generated in Data Management for the job, such as 1880
`jobStatus`	The job status, such as `RUNNING`
`logFileName`	Log file containing entries for this execution, such as `outbox/logs/BESSAPP-DB_1880.log`
`outputFileName`	Name of the output file generated, if any, or else `null`
`processType`	Type of process executed, `IMPORT_MAPPING`
`executedBy`	Login name of the user used to execute the rule, such as `admin`
`details`	Returns the exception stack trace in case of an application error, or `null`

Supported Media Types: `application/json`

Parameters

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
"links":
[
0]
"status":"-1"
"details":"null"
"jobId":"1880"
"jobStatus":"RUNNING",
"logFileName":"outbox/logs/BESSAPP-DB_1880.log",
"outputFileName":"null",
"processType":"IMPORT_MAPPING",
"executedBy":"admin"
}
```

For sample code, see the code samples included in Run Data Rules in Data Management.

Import Data Integration

The Import Data Integration API enables you to restore setup and staging data from one environment to another. The system clears the existing data in the target environment and then imports the data from the backup files without merging any operations.

REST Resource

`/aif/rest/V1/snapshots`

Required Roles

Service Administrator, Power User

Method

Copyright © 2017, 2026, Oracle and/or its affiliates.

`POST`

Request

Supported Media Types: `application/json`

Sample REST API Payload for Import Data Integration

```
{

    "action":"IMPORT",
    "fileName":"inbox/MyBackup.zip"
}
```

The following table summarizes the client request.

Table 3-154 Parameters

Name	Description	Type	Required	Default
`action`	IMPORT	Payload	Yes	None
`filename`	File name of the import snapshot (for example: `inbox/<filename>.zip`, or `inbox/mybackup/<filename>.zip`). If no path is specified, it is assumed that the file is in the Data Integration root folder. (Files to the Data Integration root folder can only be uploaded from the Data Integration user interface.)	Payload	Yes	None

Response

The following table summarizes the response parameters.

Table 3-155 Parameters

Name	Description
`action`	Always IMPORT
`jobId`	The process ID generated in Data Integration for an import Data Integration job is "0."
`links`	Describes links to other resources and actions applicable on the current resource.
`status`	Status of the job: -1 = in progress; 0 = success; 1 = error; 2 =cancel pending; 3 = cancelled; 4 = invalid parameter;Integer.MAX_VALUE = unknown

Supported Media Types: `application/json`

The following shows an example of the response in JSON format.

```
{
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "action": "IMPORT",
    "jobId": 0,
    "links": [
        {
            "rel": "self",
            "href": "https://<BASE-URL>/aif/rest/v1/jobs/jobID",
            "action": "GET"

        }

    ],

    "status": -1

}
```

Export Data Mapping

Member mappings are used to derive the target members for each dimension based on source value. Member mappings are referenced during the data load, enabling Data Integration to determine how to dimensionalize the data that is loaded to the target application. Member mappings define relationships between source members and target dimension members within a single dimension. You must create a member mapping for each target dimension.

You can export member mappings to a selected file of format .csv, .txt, .xls, or .xlsx.

REST Resource

`POST /aif/rest/{api_version}/jobs`

Required Roles

Service Administrator, Power User

Request

Supported Media Types: `application/json`

The following table summarizes the client request.

Table 3-156 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are working with, such as V1	Path	Yes	None
`jobType`	The job type, `MAPPINGEXPORT`	Path	Yes	None
`jobName`	The dimension name for a specific dimension to export, such as `ACCOUNT`, or `ALL` to export all dimensions	Path	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-156 (Cont.) Parameters

Name	Description	Type	Required	Default

`fileName`	The file and path from which to export mappings. The file format can be .CSV, .TXT, and .XLS. Include the outbox in the file path, for example, `outbox/BESSAPPJan-06.csv`
	An exported .TXT file contains mapping something similar to the following:
	
	`ACCOUNT,*,*,10,,`
	`ENTITY,*,*,10,,`
	`UD3,*,*,10,,`
		Path	Yes	None

`locationName`	The name of the location, such as `BESSAPP`	Path	Yes	None

Example of Request Body

The following shows an example of the request body in JSON format.

```
{
"jobType":"MAPPINGEXPORT",
"jobName":"ACCOUNT",
"fileName":"outbox/BESSAPPJan-06.csv",
"locationName":"BESSAPP"
}
```

For sample code, see the code samples included in Run Data Rules in Data Management.

Response

The following table summarizes the response parameters.

Table 3-157 Parameters

Name	Description
`jobId`	The process ID generated in Data Integration for the job, such as 1881
`jobStatus`	The job status, such as SUCCESS
`logFileName`	Log file containing entries for this execution, such as `outbox/logs/BESSAPP-DB_1881.log`
`outputFileName`	Name of the output file generated, such as`outbox/BESSAPPJan-06.csv`
`processType`	The type of process executed, `EXPORT_MAPPING`
`executedBy`	Log-in name of the user used to execute the rule, such as `admin`
`details`	Returns the exception stack trace in case of an application error, or else `null`

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
"links":
[
0]
"status":"0",
"details":"null",
"jobId":"1881",
"jobStatus":"SUCCESS",
"logFileName":"outbox/logs/BESSAPP-DB_1881.log",
"outputFileName":"outbox/BESSAPPJan-06.csv",
"processType":"EXPORT_MAPPING",
"executedBy":"admin"
}
```

For sample code, see the code samples included in Run Data Rules in Data Management.

Export Data Integration

The Export Data Integration API enables you to back up setup and staging data in Data Integration as a snapshot.

REST Resource

`/aif/rest/V1/snapshots`

Required Roles

Service Administrator, Power User

Method

`POST`

Request

Supported Media Types: `application/json`

Sample REST API Payload for Export Data Integration

```
{
    "action":"EXPORT",
    "snapshotType":"ALL",
    "fileName":"MyBackup.zip",
    "overwriteFile":true
}
```

The following table summarizes the client request.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-158 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are working with, such as V1.	Path	Yes	None
`action`	EXPORT	Payload	Yes	None
`snapshottype`	Snapshot type: ALL, ALL_INCREMENTAL, INCREMENTAL, SETUP • ALL—Include all setup and staging data. • ALL_INCREMENTAL—Include only new or changed staging data based on the POV since the last snapshot was exported and include SETUP and all POVs (old and new) in the output file. • INCREMENTAL—Include only new or changed staging data based on the POV since the last snapshot was exported and include only SETUP and new POVs in the output file. • SETUP—Include only setup data.	Payload	Yes	None
`fileName`	Name of the output file in ZIP format. This file is generated in the outbox as: `outbox/<filename>.zip`. If the file doesn't end with a ZIP extension, Data Management appends the ZIP file extension at the end of the file name.	Payload	Yes	None
`overwriteFile`	true/false—Boolean option to specify whether or not to replace the output file specified in the filename parameter. This parameter prevents a user from accidentally overwriting the output file if it already exists by throwing a HTTP 400 error.	Payload	No	false

Response

The following table summarizes the response parameters.

Table 3-159 Parameters

Name	Description
`action`	Always EXPORT
`snapshotType`	Name of the snapshot type
`jobId`	The process ID generated in Data Integration for the job, such as 1880

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-159 (Cont.) Parameters

Name	Description
`links`	Describes links to other resources and actions applicable on the current resource.
`status`	Status of the job: -1 = in progress; 0 = success; 1 = error; 2 =cancel pending; 3 = cancelled; 4 = invalid parameter;Integer.MAX_VALUE = unknown

Supported Media Types: `application/json`

The following shows an example of the response in JSON format.

```
{
    "action": "EXPORT",
    "snapshotType": "SETUP",
    "jobId": 423,
    "links": [
        {
            "rel": "self",
            "href": "https://<BASE-URL>/aif/rest/v1/jobs/jobID",
            "action": "GET"
        }
    ],
    "status": -1
}
```

Lock and Unlock POV

The lock REST API prevents data from being loaded to a selected POV by location or application associated with a current period and category.

When a location or application has been locked, you cannot import, validate, export, or rerun a validation.

You can also get the status of a single location or the status of all locactions for a period and category or a single application.

An unlock RESP API is available so that you can unlock a locked location or application.

Prerequisites:

You must have Service Administrator privileges to execute the lock and unlock REST APIs.

REST Resource

`/aif/rest/V1/POV`

Required Roles

Service Administrator, Power User

Method:

POST

Lock/Unlock by Location RESP API Request Parameters

Copyright © 2017, 2026, Oracle and/or its affiliates.

The following table summarizes the request parameters for locking by location:

Table 3-160 Parameters

Name	Description	Type	Required	Default
api_version	V1	Path	Yes	None
category	Specify the predefined Scenario value based on the POV Category from the integration (data rule) definition. The categories available are those that are created in the Data Integration set-up, such as "Actual."	JSON payload	Yes	None
period	Specify the period of the POV from the integration or data load rule defined in Data Integration.	JSON payload	Yes	None
location	Specify the name of the location to lock so that data cannot be loaded to it.	JSON payload	Yes	None
locktype	Specify **location** for the location lock type.	JSON payload	Yes	None
operation	For a lock operation, specify **lock**. For an unlock operation, specify **unlock**.	JSON payload	Yes	None

JSON Request Payload to Lock Location Example:

```
{
"category": "Actual",
"period": "Jan-17",
"location": "FCCSAPP1_LOC1A",
"locktype":"location",
"operation": "lock"
}
```

Response to Locking a Location Example:

```
{
"details":",
"status": 0,
"response": "Location:FCCSAPP1_LOC1A has been locked successfully."
}
```

JSON Request Payload to Unlock Location Example:

```
{
"category": "Actual",
"period": "Jan-17",
"location": "FCCSAPP1_LOC1A",
"locktype":"location",
"operation":"unlock"
}
```

Response to Unlocking a Location Example:

Copyright © 2017, 2026, Oracle and/or its affiliates.

The following is an example of unlocking a location REST API response.

```
{
"details":",
"status": 0,
"response":"Location:FCCSAPP1_LOC1A has been unlocked successfully."
}
```

Lock/Unlock by Application REST API Request Parameters

Name	Description	Type	Required	Default
`category`	Specify the predefined "Scenario" value based on the POV Category from the integration (data rule) definition. The categories available are those that were created in the Data Integration set-up, such as"Actual".	JSON payload	Yes	None
`period`	Specify the period of the POV from the integration or data load rule defined in Data Integration.	JSON payload	Yes	None
`application`	Specify the name of the application to lock so that data cannot be loaded to it.	JSON payload	Yes	None
`locktype`	Specify **application** for the application lock type.	JSON payload	Yes	None
`unlockbylocation`	true/false—Boolean option for whether to unlock by location when an application is locked. If the "unlockbylocation" flag is set to "true" when locking the target application, then the system locks all rules present in the location under target application and not the application level lock. If the "unlockbylocation" flag is set to "false" when locking the target application, then the system locks all rules present in the location under the target application and the application level lock. Rules present for locations in the application cannot be executed when the location is unlocked until the application level lock is removed. Furthermore, when you create a new location under the locked target application, rules can’t be executed in the new location until the application level lock is removed.	JSON payload	No	false
`operation`	For a lock operation, specify **lock**. For an unlock operation, specify **unlock**.	JSON payload	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

JSON Request Payload to Lock an Application Example:

```
{
"category": "Actual",
"period": "Jan-17",
"application": "FCCSAPP1",
"locktype":"application",
"operation": "lock"
}
```

Response to Locking an Application Example:

The following is an example of locking an application REST API response.

```
{
"details":null,
"status": 0,
"response":"Application: FCCSAPP1 has been locked successfully."
}
```

JSON Request Payload to Unlock a Location for a Locked Application Example:

```
{
"category": "Actual",
"period": "Jan-17",
"application": "FCCSAPP1",
"locktype":"application",
"unlockbylocation":"true",
"operation": "lock"
}
```

Response to Unlocking a Location for a Locked Application Example:

The following is an example of unlocking a location when locking an application REST API response.

```
{
"details":null,
"status": 0,
"response":"Application: FCCSAPP1 has been locked successfully."
}
```

Get Lock Status REST API Request

Get the status of a single location or the status of all locations for a period and category or a single application.

Method:

GET

Copyright © 2017, 2026, Oracle and/or its affiliates.

REST Resource

```
/aif/rest/V1/POV?
location=<locationname>&period=<periodname>&category=<catname>&application=<ap
plicationname>
```

REST Resource Example

```
/aif/rest/V1/POV?application=FCCSAPP1&period=Jan-17&category=Actual
```

Response

Supported Media Types: `application/json`

Example of Response Body


```
{
"details": null,
"status": 0,
"response": [
{
"period": "Jan-17",
"category": "Actual",
"status": "Locked",
"application": "FCCSAPP1",
"location": "FCCSAPP1"
},
{
"period": "Jan-17",
"category": "Actual",
"status": "Locked",
"application": "FCCSAPP1",
"location": "FCCSAPP1_LOC11"
},
{
"period": "Jan-17",
"category": "Actual",
"status": "Locked",
"application": "FCCSAPP1",
"location": "AD_ASO_PBCS_To_FCCS"
},
{
"period": "Jan-17",
"category": "Actual",
"status": "Locked",
"application": "FCCSAPP1",
"location": "AD_ASO_EPBCS_To_FCCS"
},
{
"period": "Jan-17",
"category": "Actual",
"status": "Locked",
"application": "FCCSAPP1",
"location": "ORCL_To_FCCS"
},
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
{
"period": "Jan-17",
"category": "Actual",
"status": "Locked",
"application": "FCCSAPP1",
"location": "SQL_To_FCCS"
},
{
"period": "Jan-17",
"category": "Actual",
"status": "Locked",
"application": "FCCSAPP1",
"location": "FCCSAPP1_LOC31"
},
{
"period": "Jan-17",
"category": "Actual",
"status": "Locked",
"application": "FCCSAPP1",
"location": "FCCSAPP1_LOC23"
},
{
"period": "Jan-17",
"category": "Actual",
"status": "Locked",
"application": "FCCSAPP1",
"location": "FCCSAPP1_LOC22"
},
{
"period": "Jan-17",
"category": "Actual",
"status": "Locked",
"application": "FCCSAPP1",
"location": "FCCSAPP1_LOC27"
},
{
"period": "Jan-17",
"category": "Actual",
"status": "Locked",
"application": "FCCSAPP1",
"location": "FCCSAPP1_LOC26"
},
{
"period": "Jan-17",
"category": "Actual",
"status": "Locked",
"application": "FCCSAPP1",
"location": "FCCSAPP1_LOC25"
},
{
"period": "Jan-17",
"category": "Actual",
"status": "Locked",
"application": "FCCSAPP1",
"location": "FCCSAPP1_LOC24"
},
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
{
"period": "Jan-17",
"category": "Actual",
"status": "Locked",
"application": "FCCSAPP1",
"location": "FCCSAPP1_LOC21"

}
}
]
}
```

Run Integrations

Running an integration entails using the INTEGRATION job type for the jobs REST API to execute an integration or data load rule based on how periods are processed and source filters.

The INTEGRATION job type is an enhanced version of DATARULE job type (see Run Data Rules in Data Management). It is recommended that you use the INTEGRATION job type for future integration jobs.

The INTEGRATION jobtype supports running integrations/data load rules based on:

- period names provided to Planning
- Global POVs
- Planning substitution variables
- source filters selected as runtime parameters
- target options selected as runtime parameters
- existing period ranges

It also supports overriding the source filters and target options at runtime without modifying the integration definition.

Prerequisites:

You must have the required privileges to execute a specific data rule/integration.

REST Resource

`/aif/rest/{api_version}/jobs`

Required Roles

Service Administrator, Power User

Request

Supported Media Types: `application/json`

Method:

POST

Payload:

```
{
            "jobType":"INTEGRATION",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
                "jobName":"GLDATA",
                "periodName":"{Mar-20}",
                "importMode":"Replace",
                "exportMode":"Merge",
                "fileName":"inbox/GLBALANCE.txt"
}
```

REST Payload Description

The following table summarizes the REST payload.

Table 3-161 Parameters

Name	Description	Type	Required	Default
api_version	V1	Path	Yes	None
jobType	INTEGRATION	JSON payload	Yes	None
jobName	The name of the integration defined in Data Integration. You should enclose the rule or name in quotation marks if it contains a space.	JSON payload	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-161 (Cont.) Parameters

Name	Description	Type	Required	Default
`periodname`	Name of the period(s)p enclosed in curly brackets ({}). `periodname` includes: • Single Period—Refers to the Data Integration period name for a single period. The parameter is whatever the period name is defined in Period mapping. • Multi-Period—Refers to a multi-period load. The parameter is {Month-Year} {Month-Year}. For example, {Jan-20} {Mar-20} refers to a multi-period load from Jan-20 to Mar-20. • Planning Period Name—Refers to a Planning period name. The parameter is {Month#Year}, for example, {Jan#FY20}{Mar#FY20}. Using this convention, the client executing the API does not need to know the Data Integration period names. Instead you specify the Planning member names for the Year and Scenario dimensions. This parameter is supported in the Planning,Tax Reporting, and Financial Consolidation and Close business processes. It is functional for both your service applications and cloud deployments derived from on-premises data sources. This parameter is useful if triggered from a Oracle Fusion Cloud Enterprise Performance Management Groovy script by capturing the Year and Period member names. The application period mapping or global period mapping must exist with the Year and Month in the target values of the period mapping. • Planning Substitution Variable—This is an extension of the previous Planning period name parameter whereby a substitution variable can be specified instead of the actual Year/ Month member names. The convention is {Month#&CurYr} {&FcstMonth#&CurYr}; for example, {Jan#&CurYr}{&FcstMonth#&CurYr}. A combination of both actual member names as well as substitution variables is supported. This parameter is supported in the Planning,Tax Reporting, and Financial Consolidation and Close business processes. It is functional for both	JSON payload	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-161 (Cont.) Parameters

Name	Description	Type	Required	Default
	your service applications and cloud deployments derived from on-premises data sources. The application period mapping or global period mapping must exist in the Data Integration of the instance where the API is executed, with the Year and Month in the target values of the period mapping. In this case, Year and Month refer to the current value of the substitution variable during execution. • GLOBAL POV—Executes the data load for the Global POV period. Use the format {GLOBAL_POV}. **Note** If you use any other period naming parameter other than the parameters described above, you get an "Invalid Input – HTTP 400 " error message.			
`importMode`	Determines how the data is imported into Data Integration. Acceptable values are: • Append—Add to the existing POV data in Data Integration. • Replace—Delete the POV data and replace it with the data from the file. • Map and Validate—Skip importing the data, but re-process the data with updated Mappings and Logic Accounts. • No Import—Skip data import into Data Integration staging table. • Direct—To use the direct load method to extract data from your on-premises data sources and then load the data directly to the Cloud EPM using the EPM Integration Agent, you need to pass an importMode of "Direct." Other modes are not applicable for the direct load.	JSON payload	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-161 (Cont.) Parameters

Name	Description	Type	Required	Default
`exportMode`	Determines how the data is exported into Data Integration. Acceptable values for Planning business processes are: • Merge—Merge the data in the Data Integration staging table with the existing Planning data. • Replace—Clear the POV data and replace it with data in the Data Integration staging table. The data is cleared for Scenario, Version, Year, Period, and Entity dimensions. • Accumulate—Add the data in the Data Integration staging table to Planning. • Subtract—Subtract the data in the Data Integration staging table from existing Data Integration data. • No Export—Skip data export from Data Integration to Planning. Acceptable values for Financial Consolidation and Close and Tax Reporting are: • Merge—Merge the data in the staging table with the data in the Financial Consolidation and Close and Tax Reporting application. If data already exists in the application, the system overwrites the existing data with the new data from the load file. If data does not exist, the new data is created. • Replace—Delete the POV data and replace it with the data from the file. • No Export—Skip the data export from Data Integration to Financial Consolidation and Close or Tax Reporting If you use a regular data load for the Numeric Data Only and Numeric Data and All Data Type load methods, note the export mode requirements based on the load method: • For a Numeric Data Only load method, Accumulate and Subtract are the applicable export modes. • For a Numeric Data and All Data Type load method, Merge, Replace, and No Export are the applicable export modes. If you use the direct data load to extract data from your on-premises data sources and then load the data directly to the Cloud EPM using the EPM Integration	JSON payload	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-161 (Cont.) Parameters

Name	Description	Type	Required	Default
	Agent, note the export mode requirements based on the load method: • For a Numeric Data Only load method, Merge, Accumulate, and Subtract are the applicable export modes. • For a Numeric Data and All Data Type load method, only Replace is the applicable export mode. • The No Export mode is not applicable for the Numeric Data Only and Numeric Data and All Data Type load methods. When running a Quick Mode load, valid export modes are: • Replace • Merge • Accumulate			
`fileName`	The `fileName` parameter is applicable only for native file-based data loads and ignored if specified for other loads. The file name is optional. If you do not specify a file name, this API imports the data contained in the file name specified in the load data rule. The data file must already reside in the Inbox prior to executing the data load rule, for example, . `inbox/GLBALANCES.txt`. You can also upload file to folders accessible from the `Applications-Inbox/Outbox Explorer` using a file name. Reference the files in this folder using this format:: `#epminbox/<filename>`.	JSON payload	No	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-161 (Cont.) Parameters

Name	Description	Type	Required	Default
`sourceFilters`	A parameter used to update the source filters defined for the data load rule or integration. File-based applications—You cannot use the sourceFilters parameter for file-based applications. If you use this parameter with a file-based application, you get the HTTP 400 error message: "EPMFDM-ERROR: Data Load Rule does not support sourceFilters for File based loads." Data Source based applications—Replaces the pre-defined source filter parameters at the rule level for a data load rule/integration or specifies them at runtime (if not pre-defined at application level when the data source is the type of source application. Each filter name and its value should be sent as a key/value pair in the nested JSON object. The parameter name and value should be the English display names as seen in the user interface. Do not specify internal codes for parameter names and values using LOV validation. LOV validation is done for parameters having a restricted list of parameter values. All filter names are not mandatory. Only filter names specified in the nested JSON object are replaced or set at runtime. The remaining filters are picked from the application/rule definition. Oracle Essbase/Planning/Oracle General Ledger-based applications—Replaces the already defined dimension source filters for a data load rule/integration at runtime when Essbase/Planning/Oracle General Ledger balance type are the source applications. Each dimension name and its value should be sent as a key/value pair in the nested JSON object. Replacing or setting the dimension filters at run time is only supported for dimensions already having a filter defined in the data load rule/integration definition. All filter names are not mandatory. Only dimension names specified in the nested JSON object will be replaced or set in runtime. The remaining filters are picked from data rule/integration definition. Dimension filters are supported for all dimensions including the "Scenario" dimension. The "Year" and "Period" dimensions are not supported as filters	JSON payload	No	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-161 (Cont.) Parameters

Name	Description	Type	Required	Default
	because they are driven by the POV range. All other source applications are not supported.			
`targetOptions`	A parameter used to update the target options defined for the data load rule or integration. Data Export based applications—Replaces the pre-defined target option parameters at the rule level for a data load rule/integration or specifies them at runtime (if not pre-defined at the rule level) when the Data Export is the type of target application. Each option name and its value should be sent as a key/value pair in the nested JSON object. The parameter name and value should be the English display names as seen in the user interface. Do not specify internal codes for parameter names and values using the LOV validation. LOV validation is done for parameters having a restricted list of parameter values. All option names are not required. Only option names specified in the nested JSON object are replaced or set at runtime. The remaining options are picked from the application/rule definition. Planning target application—Replaces the following options at runtime. • Refresh Database—Yes/No • Dimension Name—Specify a dimension name for a custom dimension load rule. In this way the same rule can be used to build multiple dimensions in runtime. • Purge Data File–Yes/No Other target applications are not supported.	JSON payload	No	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-161 (Cont.) Parameters

Name	Description	Type	Required	Default
executionMode	The executionMode parameter is applicable only for Quick Mode integrations. Available options: • SYNC—When executionMode is SYNC, then the REST API call submits and waits until the integration has completed (that is, reached either a successful, failed, or warning state) before returning a response. • ASYNC—When executionMode is ASYNC, then the REST API call returns a response immediately without waiting for the integration to complete. Usually the integration is in a running state when the REST API response is received. executionMode is a mandatory parameter and cannot be blank.	JSON payload	Yes	None

Sample REST Payloads

Below are sample payloads based on the source application type.

File Based Loads

In this example, the source is a text file running an integration through a native File adapter:

```
{
"jobType":"INTEGRATION",
"jobName":"ERPDATA",
"periodName":"{Jan-20}",
"importMode":"REPLACE",
"exportMode":"NONE",
"fileName":"inbox/TestData.txt"
}
```

Planning Applications

In these examples, the source is an Essbase/Planning based application. The supported applications include:

- Planning modules
- Reporting cubes (plan types) of Planning
- Financial Consolidation and Close
- Tax Reporting
- Profitability and Cost Management
- Oracle ERP Cloud - Oracle General Ledger Balances Cube

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example of Planning to Financial Consolidation and Close Data Synchronization

```
{
"jobType":"INTEGRATION",
"jobName":"PBCStoFCCS",
"periodName":"{Jan-20}",
"importMode":"REPLACE",
"exportMode":"NONE",
"sourceFilters":{
    "Account":"@RELATIVE(Acc1,0)",
    "Entity":" @CHILDREN(Europe)",
    "Scenario":"Actual"
}
}
```

Example of Planning to a Data Export to File

```
{
"jobType":"INTEGRATION",
"jobName":"PBCStoFCCS",
"periodName":"{Jan-20}",
"importMode":"REPLACE",
"exportMode":"NONE",
"sourceFilters":{
    "Account":"@RELATIVE(Acc1,0)",
    "Entity":" @CHILDREN(Europe)",
    "Scenario":"Actual"
},
"targetOptions":{
    "Download File Name":"PlanningToFile.csv",
    "Column Delimiter":",",
    "Include Header":"Yes"
}
}
```

Data Source Applications

Example of Incremental File adapter:

```
{
"jobType":"INTEGRATION",
"jobName":"MyIncrementalFileLoad",
"periodName":"{Jan-20}{Mar-20}",
"importMode":"REPLACE",
"exportMode":"NONE",
"sourceFilters":{"Source File":"File1.txt"}
}
```

Example of Netsuite adapter:

```
{
"jobType":"INTEGRATION",
"jobName":"NetsuiteLoad",
"periodName":"{Jan-20}{Mar-20}",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
"importMode":"REPLACE",
"exportMode":"NONE",
"sourceFilters":{
     "Postingperiod":"This Fiscal Quarter",
     "Mainline":"True"
}
}
```

Example of exporting Oracle NetSuite adapter toPlanning dimensions (metadata rule):

```
{
"jobType":"INTEGRATION",
"jobName":"NetsuiteMetadataLoad",
"periodName":"{Jan-20}{Mar-20}",
"importMode":"REPLACE",
"exportMode":"NONE",
"targetOptions":{
     "Refresh Database":"Yes",
     "Dimension Name":"Product"
}
}
```

Example of Oracle ERP Cloud (Payables Transactions):

```
{
"jobType":"INTEGRATION",
"jobName":"Payables1Load",
"periodName":"{Jan-20}",
"importMode":"REPLACE",
"exportMode":"NONE",
"sourceFilters":{
        "Invoice Type":"Credit Memo",
    "Cancelled Invoices Only ":"Yes"
}
}
```

Example of Quick Mode integration:

```
{
{
    "jobType":"INTEGRATION",
    "jobName":"QuickMode_LOC1_DL1",
    "periodName":"{Jan-17}",
    "importMode":"Direct",
    "exportMode":"Merge",
    "executionMode":"ASYNC"
}
```

Response

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Run a Pipeline

Executes a Pipeline based on job parameters and variables that you select.

The Pipeline jobtype supports running a Pipeline based on the variable list (depends on how many variables have been defined for the Pipeline in the Data Integration user interface.)

Prerequisites:

- You must have predefined the Pipeline to run it.
- You must have the required privileges to execute a Pipeline.

REST Resource

`/aif/rest/{api_version}/jobs`

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Method:

POST

Payload:

```
{
    "jobName": "DAILYLOAD",
    "jobType": "pipeline",
    "variables": {
                    "STARTPERIOD": "Jan-23",
                    "ENDPERIOD": "Jan-23",
                    "IMPORTMODE": "Replace",
                    "EXPORTMODE": "Merge",
                    "ATTACH_LOGS": "N",
                    "SEND_MAIL": "ALWAYS",
                    "SEND_TO": "user@company.com"
                }
}
```

REST Payload Description

The following table summarizes the REST payload.

Table 3-162 Parameters

Name	Description	Type	Required	Default
`api_version`	V1	Path	Yes	
`jobType`	PIPELINE	JSON payload	Yes	

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-162 (Cont.) Parameters

Name	Description	Type	Required	Default
`jobName`	The Pipeline code defined for the Pipeline in Data Integration. The code can contain up to 30 alphanumeric characters with a minimum of 3 characters and a maximum of 30 characters. This code cannot be updated after a Pipeline is created.	JSON payload	Yes	
`variables`	Name of the variable(s) used in the Pipeline. The list depends on how many variables have been defined in the Pipeline. The default out-of-box variables include: • STARTPERIOD • ENDPERIOD • IMPORTMODE • EXPORTMODE • ATTACH_LOGS • SEND_MAIL • SEND_TO Use of a substitution variable in the `&Mon#&Year` format is supported for integration jobs only when the target is a Oracle Fusion Cloud Enterprise Performance Management application (for example, Planning, Financial Consolidation and Close, FreeForm). Using a `&Mon#&Year` format is not supported in an integration job with a Data Export to File target application. Instead of using the `&Mon#&Year` format, you can define a variable, for example `&StPeriod` for the start period and set the value of the period name in Data Integration, such as "Jan-24." In this case, the Pipeline resolves the substitution variable and passes it as input to the integration job.	JSON payload	No	
`STARTPERIOD`	The first period for which data is to be loaded. This period name must be defined in Data Integration Period mapping. You can also specify a Planning substitution variable whereby a substitution variable can be specified instead of the actual Year/Month member names for the start period. The convention is {Month#&CurYr} {&FcstMonth#&CurYr}; for example, {Jan#&CurYr} {&FcstMonth#&CurYr}. A combination of both actual member names as well as substitution variables is supported. This parameter is supported in the Planning, Tax Reporting, and Financial Consolidation and Close business processes. It is functional for both your service applications and cloud deployments derived from on-premises data sources.		Yes	

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-162 (Cont.) Parameters

Name	Description	Type	Required	Default
ENDPERIOD	The last period for which data is to be loaded. This period name must be defined in Data Integration period mapping. You can also specify a Planning substitution variable whereby a substitution variable can be specified instead of the actual Year/Month member names for the start period. The convention is {Month#&CurYr} {&FcstMonth#&CurYr}; for example, {Jan#&CurYr} {&FcstMonth#&CurYr}. A combination of both actual member names as well as substitution variables is supported. This parameter is supported in the Planning, Tax Reporting, and Financial Consolidation and Close business processes. It is functional for both your service applications and cloud deployments derived from on-premises data sources.	JSON payload	Yes	
IMPORTMODE	Determines how the data is imported into Data Integration. Acceptable values are: • Append—Add to the existing POV data in Data Integration. • Replace—Delete the POV data and replace it with the data from the file. • Map and Validate—Skip importing the data, but re-process the data with updated Mappings and Logic Accounts. • No Import—Skip data import into Data Integration staging table.		Yes	

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-162 (Cont.) Parameters

Name	Description	Type	Required	Default
exportMode	Determines how the data is exported into Data Integration. Acceptable values for Planning business processes are: • Merge—Merge the data in the Data Integration staging table with the existing Planning data. • Replace—Clear the POV data and replace it with data in the Data Integration staging table. The data is cleared for Scenario, Version, Year, Period, and Entity dimensions. • Accumulate—Add the data in the Data Integration staging table to Planning. • No Export—Skip data export from Data Integration to Planning. Acceptable values for Financial Consolidation and Close and Tax Reporting are: • Merge—Merge the data in the staging table with the data in the Financial Consolidation and Close and Tax Reporting application. If data already exists in the application, the system overwrites the existing data with the new data from the load file. If data does not exist, the new data is created. • Replace—Delete the POV data and replace it with the data from the file. • No Export—Skip the data export from Data Integration to Financial Consolidation and Close or Tax Reporting		Yes	
ATTACH_LOGS	• Yes—Logs are zipped and included as an attachment to an email, which can then be download • No—Logs are not included as an attachment to an email.		No	
SEND_MAIL	Determines when an email is sent when a Pipeline is run. Options include: • Always • No—Default value • On Failure • On Success For variables, the default value is set in the Pipeline definition. Overriding individual variables is done by passing it in the JSON payload, for example, STARTPERIOD.			
SEND_TO	Determines the recipient email ID for the email notification. Email IDs are comma separated.		No	

Run Data Rules in Data Management

Executes a Data Management data load rule based on the start period and end period, and import or export options that you specify.

Prerequisites

Copyright © 2017, 2026, Oracle and/or its affiliates.

- Data Rules: Data load rules define how Integrations load data from a file. You must have predefined data load rules to load data.
- You must have the required privileges to execute a specific data rule.

REST Resource

```
POST /aif/rest/{api_version}/jobs
```

Required Roles

Service Administrator, Power User

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 3-163 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are working with, such as V1	Path	Yes	None
`jobType`	should be set to "DATARULE"		Yes	None
`jobName`	The name of a data load rule defined in Data Management. You should enclose the rule name in quotation marks if it contains a space.		Yes	None
`startPeriod`	The first period for which data is to be loaded. This period name must be defined in Data Management period mapping.		Yes	None
`endPeriod`	The last period for which data is to be loaded. This period name must be defined in Data Management period mapping.		Yes	None
`importMode`	Determines how the data is imported into Data Management. Acceptable values are: • APPEND to add to the existing POV data in Data Management • REPLACE to delete the POV data and replace it with the data from the file. • RECALCULATE to skip importing the data, but re-process the data with updated Mappings and Logic Accounts. • NONE to skip data import into Data Management staging table		Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-163 (Cont.) Parameters

Name	Description	Type	Required	Default
`exportMode`	Determines how the data is exported into Data Management. Acceptable values for Planning Modules and Planning are: • STORE_DATA to merge the data in the Data Management staging table with the existing Planning data • ADD_DATA to add the data in the Data Management staging table to Planning • SUBTRACT_DATA to subtract the data in the Data Management staging table from existing Planning data • REPLACE_DATA to clear the POV data and replace it with data in the Data Management staging table. The data is cleared for Scenario, Version, Year, Period, and Entity • NONE to skip data export from Data Management to Planning Acceptable values for Financial Consolidation and Close and Tax Reporting are: • REPLACE to delete the POV data and replace it with the data from the file • MERGE: By default, all data load is processed in the Merge mode. If data already existed in the application, the system overwrites the existing data with the new data from the load file. If data does not exist, the new data will be created. • NONE to skip the data export		Yes	None
`fileName`	An optional file name. If you do not specify a file name, this API imports the data contained in the file name specified in the load data rule. The data file must already reside in the Inbox prior to data rule execution. Import data files from the EPM INBOX accessible from the Applications-Inbox/Outbox Explorer using a file name. Reference the files in this folder using `#epminbox/<filename>`.		Yes	None

Example URL

```
https://<BASE-URL>/aif/rest/V1/jobs
```

Example of Request Body

```
{"jobType":"DATARULE",
"jobName":"aso to bso dr",
"startPeriod":"Dec-18",
"endPeriod":"Dec-18",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
"importMode":"REPLACE",
"exportMode":"NONE",
"fileName":"#epminbox/TestData.txt"
}
```

Response

Supported Media Types: `application/json`

Table 3-164 Parameters

Name	Description
`status`	Status of the job: -1 = in progress; 0 = success; 1 = error; 2 = cancel pending; 3 = cancelled; 4 = invalid parameter
`jobStatus`	A text representation of the job status, with one of the following values" RUNNING," "SUCCESS," and"FAILED".
`jobId`	The process ID generated in Data Management for the job
`logFileName`	Log File containing entries for this execution.
`outputFileName`	Name of the output file generated, if any.
`processType`	Type of the process executed. Will contain "COMM_LOAD_BALANCES" for all Data Rule executions
`executedBy`	Login name of the user used to execute the rule.
`details`	Returns the exception stack trace in case of an application error

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
    "jobStatus": "RUNNING",
"jobId": 2019,
"logFileName": "\outbox\logs\Account Reconciliation Manager_2019.log",
"outputFileName": null,
"processType": "COMM_LOAD_BALANCES",
"executedBy": "admin",
"status": -1,
"links": [1],
    0:  {
    "rel": "self",
    "href": "https://<BASE-URL>/aif/rest/V1/jobs/2019",
    "action": "GET",
}
"details": null

}
```

Run Batch Rules in Data Management

Executes a batch of jobs that have been defined in Data Management .

Prerequisites

Copyright © 2017, 2026, Oracle and/or its affiliates.

- The batch must be defined in Data Management before it can be executed using the REST API.
- You must have the required privileges to execute a specific batch.

REST Resource

`POST /aif/rest/{api_version}/jobs`

Required Roles

Service Administrator, Power User

Request

Supported Media Types: `application/json`

The following table summarizes the client request.

Table 3-165 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are working with, such as V1	Path	Yes	None
`jobType`	should be set to "BATCH"		Yes	None
`jobName`	The name of a batch defined in Data Management.		Yes	None

Example URL

`https://<BASE-URL>/aif/rest/V1/jobs`

Example of Request Body

```
{"jobType":"BATCH",
"jobName":"BatchDataLoad"
}
```

Response

The following table summarizes the response parameters.

Table 3-166 Parameters

Name	Description
`status`	Status of the job: -1 = in progress; 0 = success; 1 = error; 2 = cancel pending; 3 = cancelled; 4 = invalid parameter
jobStatus	A text representation of the job status, with one of the following values "RUNNING", "SUCCESS". "FAILED"
jobId	The process Id generated in Data Management for the job
logFileName	Log File containing entries for this execution.
outputFileName	Name of the output file generated, if any.
processType	Type of the process executed. Will contain "COMM_BATCH" for all Data Rule executions
executedBy	Login name of the user used to execute the rule.
details	Returns the exception stack trace in case of an application error

Copyright © 2017, 2026, Oracle and/or its affiliates.

Supported Media Types: `application/json`

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
    "jobStatus": "SUCCESS",
"jobId": 2024,
"logFileName": "\outbox\logs\BATCH1_7595.log",
"outputFileName": null,
"processType": "COMM_BATCH",
"executedBy": "admin",
"status": -1,
"links": [1],
    0:  {
    "rel": "self",
    "href": "https://<BASE-URL>/aif/rest/V1/jobs/2016",
    "action": "GET",
}
"details": null
}
```

For sample code, see the code samples included in Run Data Rules in Data Management.

Retrieve Job Status

Polls the environment to get the processing state for a job with a specified ID.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Required Roles

Service Administrator, Power User

REST Resource

`GET/aif/rest/{api_version}/jobs/{jobIdentifier}`

The current REST API version for Data Integration must be **V1**.

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 3-167 Parameters

Name	Description
`status`	Status of the job: -1 = in progress; 0 = success; 1 = error; 2 = cancel pending; 3 = cancelled; 4 = invalid parameter; Integer.MAX_VALUE = unknown
`details`	Details about the job status, such as "SUCCESS" when member mappings have been processed successfully.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-167 (Cont.) Parameters

Name	Description
jobId	The ID of the job, such as 228
jobName	The name of the job, such as BESSAPP
descriptiveStatus	The status of the job, such as Completed or Error

Supported Media Types: application/json

Example of Response Body

The following is an example of the response body in JSON format that shows the job status when member mappings are exported.

```
{
"links":
[
0]
"status":"0",
"details":"null",
"jobId":"1881",
"jobStatus":"SUCCESS",
"logFileName":"outbox/logs/BESSAPP-DB_1881.log",
"outputFileName":"outbox/BESSAPPJan-06.csv",
"processType":"EXPORT_MAPPING",
"executedBy":"admin"
}
```

Update Connection in Data Integration

Use this REST API to update a specific connection that is saved in an application.

Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs

> **Note**
>
> If optionName is password, consumerSecret, or tokenSecret, then optionValue must be an encrypted value. Plain (unencrypted) values are not accepted.

REST Resource

/aif/rest/{api_version}/jobs

Required Roles

Service Administrator, Power User

Request

Supported Media Types: application/json

Method:

Copyright © 2017, 2026, Oracle and/or its affiliates.

PUT

Parameters:

The following table summarizes the client request.

Table 3-168 Parameters

Name	Description	Type	Required	Default
`sourceSystemID`	Identifier of the source system connection to update.	Payload	Yes	None
`sourceSystemName`	The name of the source system connection.	Payload	Yes	None
`sourceSystemType`	Type of the source system (for example, Oracle HCM Cloud).	Payload	Yes	None
`sourceSystemOptions`	List of options to configure the connection. If `optionName` is `password`, `consumerSecret`, or `tokenSecret`, then `optionValue` must be an encrypted value. Plain (unencrypted) values are not accepted.	Payload	Yes	None
`username`	A username with Service Administrator application role.	Payload	Yes	None
`password`	The encrypted password for the user For security reasons, only an encrypted password is allowed. Use the EPM Automate encrypt command to generate the encrypted password. See encrypt .	Payload	Yes	None
`serviceURL`	The base URL of the target source system.	Payload	Yes	None
`consumerSecret`	Specify the consumer secret that authorizes the client making the request. For security reasons, `consumerSecret` parameter must be encrypted.	Payload	Yes	None
`tokenSecret`	The token secret that generates the signature for the request. For security reasons, `tokenSecret` parameter must be encrypted.	Payload	Yes	None

Example URL

`https://<BASE-URL>/aif/rest/V1/objects/connections/`

Example of Request Body

```
{
  "sourceSystemId": 10,
  "sourceSystemName": "<SOURCE_SYSTEM_NAME>",
  "sourceSystemType": "<SOURCE_SYSTEM_TYPE>",
  "sourceSystemOptions": [
    {
      "optionValue": "<USERNAME>",
      "optionName": "userName"
    },
    {
      "optionValue": "https://<SERVICE_URL>",
      "optionName": "serviceURL"
    },
    {
      "optionValue": "<******>",
      "optionName": "password"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    }
  ]
}
```

Response

Supported Media Type: `application/json`

Table 3-169 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string.

Example of Response Body

```
{
"status": 0,
"details": null,
"response": "Updated source connection object Test6 successfully"
}
```

Reporting

Use the topics in this chapter to run reports with REST APIs for Account Reconciliation, Financial Consolidation and Close, Tax Reporting, and Data Management.

For reports on users with REST APIs, see User Access Report (v1) and User Access Report (v2).

In this section:

- Generate Report for Financial Consolidation and Close, Tax Reporting, Enterprise Profitability and Cost Management and Planning
- Generate User Details Report for Financial Consolidation and Close and Tax Reporting
- Retrieve Job Status for a Report
- Execute Reports for Data Management

Generate Report for Financial Consolidation and Close, Tax Reporting, Enterprise Profitability and Cost Management and Planning

Generates a report for Financial Consolidation and Close (Task Manager, Supplemental Data, and Enterprise Journal), Tax Reporting (Task Manager and Supplemental Data), Enterprise Profitability and Cost Management (Task Manager) and Planning (when Task Manager is enabled).

> **Note**
>
> All parameters must be specified for a report.

Copyright © 2017, 2026, Oracle and/or its affiliates.

REST Resource

```
POST  /HyperionPlanning/rest/fcmapi/{api_version}/report
```

Required Roles

Service Administrator, Power User, User, Viewer

Request

Supported Media Types: `application/json`

The following table summarizes the client request.

Table 3-170 Report Parameters

Name	Description	Path	Required
`groupName`	The name of the group the report is associated with.	No	Yes
`reportName`	The name of the report to be generated.	No	Yes
`generatedReportFileName`	Specify the name of the generated report, including the file extension that matches the selected report format. If you omit this parameter, the system will use the value from the `reportName` parameter defined in the table below. This process overwrites existing files of the same name on the server.	No	No
`parameters`	Each report may have different parameters. Types of parameters: • Numerical - should be in BigDecimal format. • Text - standard string • Date - can be in format `yyyy-MM-dd` for example `2020-10-01` • Date/Time: can be in format `yyyy-MM-dd HH:mm:ss` or `yyyy-MM-dd'T'HH:mm:ss` for example `2020-10-01 13:01:00, 2020-10-01T13:01:00` • Boolean • Users - user login ID • List of choices - case insensitive values	No	No
`format`	The format of the report (HTML, PDF, XLSX, or CSV).	No	No (Default is PDF)
`module`	Module for which the report is created. For Supplemental Data, use SDM. For Task Manager, use FCM.	No	No
`emails`	Comma separated list of email addresses that will receive the report. Ensure the generated report size does not exceed 60 MB when the `emails` parameter is specified.	No	No
`runAsync`	Generation of report runs asynchronously (true) or synchronously (false). Oracle recommends setting this value to true (async) for larger reports. An example of request body and output is shown.	No	No (Default is false)

For details about `reportName` or `parameters`, see these topics in *Administering Financial Consolidation and Close*:

- Task Manager: Using Reports

Copyright © 2017, 2026, Oracle and/or its affiliates.

- Supplemental Data Manager: Using Reports

For details about **Output Format**, see Generating the Report.

For details about retrieving job status while running reports, see Retrieve Job Status for a Report.

Example of request body (to be run synchronously)

```
{
"groupName":"Task Manager",
"reportName":"Late Tasks",
"generatedReportFileName":"myReport.pdf",
 "parameters":{"Schedule" : "Qtr 2 Close", "Period":"Jun" },
"format":"PDF",
"module":"FCM",
"emails":"user1@oracle.com,user2@oracle.com",
"runAsync":false
}
```

Example of request body (to be run asynchronously for larger reports)

```
{
"groupName":"Task Manager",
"reportName":"Late Tasks",
"generatedReportFileName":"myReport.pdf",
 "parameters":{"Schedule" : "Qtr 2 Close", "Period":"Jun" },
"format":"PDF",
"module":"FCM",
"emails":"user1@oracle.com,user2@oracle.com",
"runAsync":true
}
```

Response

Supported Media Types: `application/json`

Parameters:

Table 3-171 Parameters

Name	Description
`type`	Type of report: SDM (Supplemental Data Management) or FCCS {Task Manager).
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to the API call
`action`	The HTTP call type
`rel`	Relationship type (`self`, `Job Status`). If set to `Job Status`, you can use the `href` to get the status of the operation.
`data`	Parameters as key value pairs passed in the request

Examples of Response Body

Copyright © 2017, 2026, Oracle and/or its affiliates.

The following is an example of the response body in JSON format for a Financial Consolidation and Close report called MyReport in pdf format that was run successfully synchronously (runAsync=false):

```
{
     "links": [
         {
             "rel": "self",
             "href":
"https://<BASE-URL>/HyperionPlanning/rest/fcmapi/v1/myReport.pdf",
             "action": "POST"
         },
         {
             "rel": "report-content",
             "href":
"https://<BASE-URL>/HyperionPlanning/rest/fcmapi/v1/myReport.pdf",
             "action": "POST"
 "GET"
         }
     ],
     "details": "MyReport.pdf",
     "type": "FCCS",
     "status": 0,
     "link": null,
     "error": null,
     "items": null
}
```

The following is an example of the response body in JSON format for a Financial Consolidate and Close report generated asynchronously (runAsync=true) where the report is "In Process" and you can use the Job ID generated to retrieve the job status. See Retrieve Job Status for a Report:

```
{
 "links":[
{
 "rel":"self",
 "href": "https://<SERVICE_NAME>-<TENANT_NAME>.<dcX>.oraclecloud.com/
HyperionPlanning/rest/fcmapi/v1/report",
"action": "POST"
},
{
"rel":"Job Status",
 "href":  "https://<SERVICE_NAME>-<TENANT_NAME>.<dcX>.oraclecloud.com/
HyperionPlanning/rest/fcmapi/v1/report/job/FCCS/100000001001009",
 "action": "GET"
}
],
"details":"In Process",
"status":-1,
"type":"FCCS",
"link":null,
"error":null
"items":null
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Generate User Details Report for Financial Consolidation and Close and Tax Reporting


Generates a User Details report (for Task Manager, Supplemental Data, and Enterprise Journal user assignments) in Financial Consolidation and Close and (for Task Manager and Supplemental Data user assignments) in Tax Reporting. The **User Details** report contains information on the users who have application roles in the environment and lists attributes of each user (such as name and email) as well as their status, teams, application roles, workflow roles, organizations, groups, and last login timestamps.

You can use the **Download** REST API to download the report after generating it.

REST Resource

```
POST  /HyperionPlanning/rest/fcmapi/v1/fcm/export/users
```

A sample User Details Report:

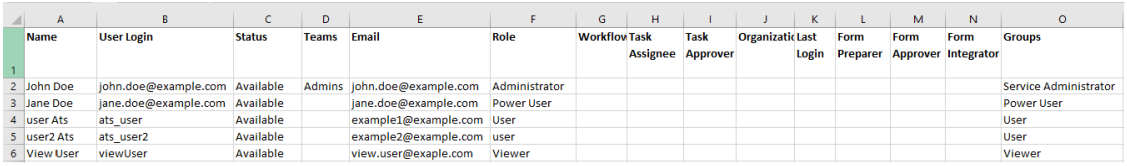

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
1	Name	User Login	Status	Teams	Email	Role	Workflow	Task Assignee	Task Approver	Organizatic	Last Login	Form Preparer	Form Approver	Form Integrator	Groups
2	John Doe	john.doe@example.com	Available	Admins	john.doe@example.com	Administrator									Service Administrator
3	Jane Doe	jane.doe@example.com	Available		jane.doe@example.com	Power User									Power User
4	user Ats	ats_user	Available		example1@example.com	User									User
5	user2 Ats	ats_user2	Available		example2@example.com	user									User
6	View User	viewUser	Available		view.user@exaple.com	Viewer									Viewer

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters

Table 3-172 REPORT

Name	Description	Path	Required
`fileName`	The name of the report to be generated.	No	Yes
`format`	The format of the report (CSV or XLS).	No	No (default = CSV)

> **Note**
>
> For details about retrieving job status while running reports, see Retrieve Job Status for a Report.

Examples of request body

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example 1

```
{
    "fileName":"UserDetails.csv",
    "format":"CSV"
}
```

Example 2

```
{
    "fileName":"UserDetails.csv"
}
```

Example 3

```
{
    "fileName":"UserDetails.xls",
    "format":"xls"
}
```

Response

Supported Media Types: `application/json`

Parameters:

Table 3-173 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to the API call
`action`	The HTTP call type
`rel`	Relationship type can be (`self`, or `Job Status`). If set to `Job Status`, you can use the `href` to get the status of the operation

Example of Response Body

Job Response

```
{
    "links": [
        {
            "rel": "self",
            "href": "https:<BASE-URL>/HyperionPlanning/rest/fcmapi/v1/fcm/
export/users",
            "action": "POST"
        },
        {
            "rel": "Job Status",
            "href": "https:<BASE-URL>/HyperionPlanning/rest/fcmapi/v1/fcm/job/
39068",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "action": "GET"
        }
    ],
    "details": "In Process",
    "status": -1,
    "type": "fcm",
    "link": {},
    "error": null,
    "items": []
}
```

Job Status Response

```
{
    "links": [
        {
            "rel": "self",
            "href": "https:<BASE-URL>/HyperionPlanning/rest/fcmapi/v1/fcm/job/
39068",
            "action": "GET"
        },
        {
            "rel": "report-content",
            "href": "https:<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots/userDetail.xls/contents",
            "action": "GET"
        }
    ],
    "details": "File userDetail.xls generated successfully.",
    "status": 0,
    "type": "fcm",
    "link": null,
    "error": null,
    "items": null
}
```

Retrieve Job Status for a Report

Use this REST API to get the processing state for a report job with a specified ID. Using this REST API requires prerequisites, such as understanding how to use jobs. See Prerequisites. Be sure that you understand how to use jobs as described in Managing Jobs.

Required Roles

Service Administrator, Power User, User, Viewer

`GET /arm/rest/fcmapi/v1/job/{module}/{jobIdentifier}`

REST Resource

Request

Supported Media Types: `application/json`

Parameters

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-174 Parameters

Name	Description	Type	Required	Default
module	Module for Account Reconciliation Report (valid values are RC or TM) Valid values for Financial Close & Consolidation or Tax Reporting are SDM or FCCS (Task Manager)	Path	Yes	Yes
jobIdentifier	The ID of the job	Path	Yes	None

Parameters

Parameters

Table 3-175 Parameters

Name	Description
status	Status of the job: -1 = in process; 0 = completed (success); 1 = error
details	Details about the job status, such as "Big Report 10.csv" for generation of a report in csv format named Big Report 10
jobID	The ID of the job, such as 224
type	The type of report: RC (Reconciliation Compliance); TM (Transaction Matching); FCCS (Task Manager) or SDM (Supplemental Data Manager)

Supported Media Types: application/json

Examples of Response Body

```
{
"links": [
{
        "rel": "self",
        "href": "https:<BASE-URL>/arm/rest/fcmapi/v1/report",
        "action": "POST"
    },
}
            "rel": "report-content",
        "href": "https:<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots/Big+Report+10.csv/contents",
        "action": "GET"
}
],
    "details": "Big Report 10.csv".
    "status": 0,
     "type": "RC",
    "link": null,
    "error": null,
    "items": null
    }
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

The following shows an example of the response body for an error occurring during report generation:

```
{
"links": [
{
        "rel": "self",
        "href": "https:<BASE-URL>/arm/rest/fcmapi/v1/report/job/TM/1145",
        "action": "GET"
    },
]
    "details": "Invalid query attached to the report".
    "status": 1,
     "type": "RC",
    "link": null,
    "error": null,
    "items": null
    }
```

The following shows an example of the response body for a report generation that is in process:

```
{
"links": [
{
        "rel": "self",
        "href": "https:<BASE-URL>/arm/rest/fcmapi/v1/report/job/TM/1124",
        "action": "GET"
    },
]
    "details": "In Process".
    "status": -1,
     "type": "RC",
    "link": null,
    "error": null,
    "items": null
    }
```

Execute Reports for Data Management

The Data Management reporting framework represents a unified solution that incorporates source and target data, templates, and user-defined SQL queries. Templates, created in Oracle Business Intelligence Publisher, consume data in XML format and generate reports dynamically. You can add SQL queries to extract data from tables, or couple them with the report parameters to extend the definition of a standard report. Data Management reports can be generated as PDF, Excel, Word, or HTML output.

Required Roles

Service Administrator, Power User

REST Resource

`POST /aif/rest/{api_version}/jobs`

Request

Copyright © 2017, 2026, Oracle and/or its affiliates.

Supported Media Types: `application/json`

Table 3-176 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are working with, such as V1	Path	Yes	None
`jobType`	The job type, `REPORT`	Path	Yes	None
`jobName`	The name of the report to be executed, such as `Dimension Map For POV (Dimension, Cat, Per)`	Path	Yes	None
`reportFormatType`	The file format of the report, `pdf`, `xlsx`, `html`, or `excel`	Path	Yes	`pdf`
`parameters`	Can vary in count and values based on the report	Path	Yes	None
`Location`	The location of the report, such as `Comma_Vision`	Path	Yes	None

Example of Request Body

The following shows an example of the request body in JSON format.

```
{
"jobType":"REPORT",
"jobName":"Dimension Map For POV (Dimension, Cat, Per)",
"reportFormatType":"PDF",
"parameters":{
       "Dimension Name":"ENTITY",
       "Category":"Actual",
        "Period":"Jan15",
       "Location":"Comma_Vision"
    }
}
```

For sample code, see the code samples included in Run Data Rules in Data Management.

Response

The following table summarizes the response parameters.

Table 3-177 Parameters

Name	Description
`jobId`	The process ID generated in Data Management for the job, such as `1885`
`status`	The job status, such as `RUNNING`
`logFileName`	Log file containing entries for this execution, such as `outbox\logs\BESSAPP-DB_1885.log`
`outputFileName`	Name of the output file generated; you can use this name to download the report
`processType`	Type of process executed, `EXECUTE_REPORT`
`executedBy`	Login name of the user used to execute the rule, such as `admin`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-177 (Cont.) Parameters

Name	Description
`details`	Returns the exception stack trace in case of an application error, or `null`

Supported Media Types: `application/json`

Parameters

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
"links":
[
0]
"status":"-1",
"details":"null",
"jobId":"1885",
"jobStatus":"RUNNING",
"logFileName":"outbox/logs/1885.log",
"outputFileName":"outbox/reports",
"processType":"EXECUTE_REPORT",
"executedBy":"admin"
}
```

For sample code, see the code samples included in Run Data Rules in Data Management.

Platform Extensions

Use these APIs to monitor Enterprise Journals for Financial Consolidation and Close, execute Enterprise Journal jobs, retrieve Enterprise Journals and journal content (including by year and period), update Enterprise Journal posting status, import supplemental collection data for Financial Consolidation and Close, deploy form and Task Manager templates, update task status for event monitoring, and manage Oracle Integration Cloud connections.

Table 3-178 test

REST APIs for Enterprise Journals, Supplemental Data Manager, and Task Manager		
Enterprise Journal REST APIs	Supplemental Data Manager REST APIs	Task Manager REST APIs

Enterprise Journal REST APIs

Use the Enterprise Journal REST APIs to:

- Monitor Enterprise Journals for Financial Consolidation and Close
- Execute an Enterprise Journal job
- Retrieve Enterprise Journals for Financial Consolidation and Close

Copyright © 2017, 2026, Oracle and/or its affiliates.

- Retrieve Enterprise Journal Content for Financial Consolidation and Close
- Retrieve Enterprise Journal Content by Year and Period for Financial Consolidation and Close
- Update Enterprise Journal Posting Status for Financial Consolidation and Close

Table 3-179 Enterprise Journal REST APIs

Enterprise Journal REST APIs		
Get API Versions for Enterprise Journal APIs Monitor Enterprise Journals for Financial Consolidation and Close Execute an Enterprise Journals Job	Retrieve Enterprise Journals for Financial Consolidation and Close Retrieve Enterprise Journal Content for Financial Consolidation and Close Retrieve Enterprise Journal Content by Year and Period for Financial Consolidation and Close	Update Enterprise Journal Posting Status for Financial Consolidation and Close Update Validation Status of Enterprise Journals for Financial Consolidation and Close

URL Structure for Enterprise Journal REST APIs

This topic shows the general URL structure for Enterprise Journal REST APIs.

Use the following URL structure to access the Enterprise Journal REST resources:

`https://<BASE-URL>/HyperionPlanning/rest/ej/{api_version}/{path}`

Where:

- *<BASE-URL>*: The first part of your service URL, before the context.

  For example, if your service URL is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com`. Similarly, if your service URL is `https://epm2-acme.epm.us6.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm2-acme.epm.us6.oraclecloud.com`.
- *api_version*: API version you are developing with. The current REST API version for Enterprise Journal is v1.
- *path*: Identifies the resource.

> **Note**
>
> Oracle does not authorize or support the use of REST APIs with the path token "`/internal/`" in the URL.

Get API Versions for Enterprise Journal APIs

You can get information on REST API versions using REST resources. See Getting API Versions for Planning. The Enterprise Journal REST APIs use the same version numbers as Planning.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-180 Enterprise Journal REST APIs

API Name	Versions
Execute an Enterprise Journals Job	v1
Monitor Enterprise Journals for Financial Consolidation and Close	v1
Retrieve Enterprise Journals for Financial Consolidation and Close	v1
Retrieve Enterprise Journal Content for Financial Consolidation and Close	v1
Retrieve Enterprise Journal Content by Year and Period for Financial Consolidation and Close	v1
Update Enterprise Journal Posting Status for Financial Consolidation and Close	v1
Update Validation Status of Enterprise Journals for Financial Consolidation and Close	v1

Monitor Enterprise Journals for Financial Consolidation and Close

Returns the status of Journals for the given parameters.

> **Note**
>
> - If all journals for given parameters are closed, then the output status would be '0' and detail text specifies that all journals are closed.
> - If any journal for the given parameters is in Open status (Pending, Open with Preparer, Open with Approver etc.), then the output status would be '-1'.
> - In case of error, a positive number will be returned in status.

REST Resource

```
POST      /rest/ej/{api_version}/jobs/
```

Required Roles

Service Administrator and Power User

Request

Supported Media Types: `application/json`

The following table summarizes the client request.

Table 3-181 Parameters

Name	Description	Path	Required
`api_version`	Version of the API you are working with, such as v1.	Yes	Yes
`jobType`	The name of the job `EJ_MONITOR_JOURNALS`.	No	Yes

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-181 (Cont.) Parameters

Name	Description	Path	Required
`year`	The name of the year, such as 2021, 2022 etc.	No	No
`period`	The name of the period, such as Jan, Feb etc.	No	No
`filterName`	The name of the filter. For example, `Journal status filter`.	No	Yes

> **Note**
>
> Either the combination of Year and Period or the Filter Name must be passed. If Year and Period can be part of filter, then Filter Name is sufficient in the parameters.

Example of request body

```
{

    "jobType": "EJ_MONITOR_JOURNALS",

    "parameters": {

        "year": "2022",

        "period": "Jan",

        "filterName": "Jan22_ERPDirectJournals"

    }

}
```

Response

Supported Media Types: `application/json`

Parameters:

Table 3-182 Parameters

Name	Description
`details`	Journal Name and Status. First 100 journals only. Shows Open journals first. In case of errors, details are published with the error string.
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to the API call
`action`	The HTTP call type
`rel`	Relationship type (`self`, `Job Status`). if set to `Job Status`, you can use the `href` to get the status of the operation

Copyright © 2017, 2026, Oracle and/or its affiliates.

Examples of Response Body

The following is an example of the response body in JSON format when all journals are closed:

```
{
    "status": 0,
    "details": "All journals for the given filter are closed.",
    "links": [
        {
            "rel": "self",
     "href": "https://<SERVICE_NAME>-<TENANT_NAME>.<SERVICE_TYPE>.<dcX>/
HyperionPlanning/rest/ej/{api_version}/jobs/rest/ej/v1/jobs/monitorJournals?
year=2022&period=Jan&filterName=ERP_Direct",
     "action": "GET"
        }
    ],
    "type": "EPM",
}
```

The following is an example of the response body in JSON format when any journal status is open:

```
{
    "status": -1,
    "details": "Journal_NonDirect1|2022|Jan|1000000001, Status:Open with
Preparer; \n
  Journal_NonDirect1|2022|Jan|1000000002, Status:Closed",
    "links": [
        {
            "rel": "self",
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com
HyperionPlanning/rest/ej/{api_version}/jobs/monitorJournals?
year=2022&period=Jan&filterName=EJ_NonDirect ",
            "action": "GET"
        }
    ],
    "type": "EPM",
}
```

Execute an Enterprise Journals Job

This API will execute the job based on the job type provided as a JSON parameter. It is an asynchronous API. This API will respond with a callback API to get the Job status.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-183 Enterprise Journals Supported Job Types

Job Type	Description
`exportEJJournals`	This job exports the data of "Ready To Validate" or "Ready to Post" journals based on the operation defined. It creates one CSV file per journal based on the target definition and mappings defined in Enterprise Journals and copies it to an EPM Automate-designated directory. The resulting file follows the naming pattern: `<Year>_<Period>_<Journal_ID>.csv`. After creating the export file, it updates the journal Post status to "Post in Progress" if operation is "posting" or updated the validation status to "Validation In Progress" if operation is "validation".
`setEJJournalStatus`	This job updates the Post status or Validation status of a journal after importing the journal to the ERP system. **If operation = posting:** A CSV file containing the results of the journal posting is provided. The file contains these columns: Year, Period, Journal ID, Posting Status (Posted/Failed), Message, Error Code, Error Message. The Message, Error Code and Error Message columns are optional. Posting status of the journals is updated based on the status provided in the file. Only journals with a Posting status of "Post in Progress" will be updated. **If operation = validation:** A CSV file containing the results of the journal validation is provided. The file contains these columns: Year, Period, Journal ID, Validation Status (Valid/Failed), Message, Error Code, Error Message. The Message, Error Code and Error Message columns are optional. Validation status of the journals is updated based on the status provided in the file. Only journals with a Validation status of "Validation In Progress" will be updated.
`deployEJTemplates`	This job is used to deploy finalized journal templates to new journal periods to create journals for year-period combinations, ensuring a consistent and repeatable journal collection process.
`EJ_IMPORT_DIM_MEMBERS`	This job automates the bulk update of dimension members on your preferred schedule.

REST Resource

POST `/HyperionPlanning/rest/ej/{api_version}/jobs`

Required Roles

Job Type	Role
`exportEJJournals`	Service Administrator
`setEJJournalStatus`	Service Administrator
`deployEJTemplates`	Service Administrator, Power User

Copyright © 2017, 2026, Oracle and/or its affiliates.

Job Type	Role
EJ_IMPORT_DIM_MEMBERS	Service Administrator, Power User

Request

Supported Media Types: `application/json`

Parameters

This table summarizes the request parameters that are generic to all jobs. The following tables describe parameters specific to individual rules.

Table 3-184 Parameters

Name	Description	Type	Required	Default
api_version	Version of the API you are developing with	Path	Yes	None

Table 3-185 `exportEJJournals` Parameters

Name	Description	Type	Required	Default
jobType	Type of the Job. Value for this job is exportEJJournals.	String	Yes	None
filename	The name of the zip file to which each individual journal file is added	String	Yes	None
year	The year for which the journal is used for data collection	String	No	None
period	The period for which the journal is used for data collection	String	No	None
operation	Specifies the operation - posting or validation	String	No	posting

Table 3-186 `setEJJournalStatus` Parameters

Name	Description	Type	Required	Default
jobType	Type of the Job. Value for this job is setEJJournalStatus.	String	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-186 (Cont.) `setEJJournalStatus` Parameters

Name	Description	Type	Required	Default
`filename`	Filename is the file in CSV format that contains the following information regarding the posting process: • Year: Year of the Journal posted • Period: Period of the Journal posted • JournalID: Journal Identifier of Journal posted • Posting Status: Valid values are Posted or Failed. (if operation = posting) • Validation Status: Valid values are Valid or Failed. (if operation = validation) Failed status has a message and attached error list returned from ERP • Message: Optional. Can be used for error messages from ERP in case there is a posting failure Note: Multiple Journal Posting statuses may be included as records in the CSV file.	String	Yes	None
`operation`	Specifies the operation. posting or validation	String	No	posting

Table 3-187 `deployEJTemplates` Parameters

Name	Description	Type	Required	Default
`jobType`	Type of the Job. Value for this job is `EJ_DEPLOY_TEMPLATES`	String	Yes	None
`year`	The year used for the journal	String	Yes	None
`period`	The period for the journal	String	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-187 (Cont.) `deployEJTemplates` Parameters

Name	Description	Type	Required	Default
`Template`	Names of journal templates that need to be deployed. You can specify multiple parameters with the same key as "TEMPLATE" in the command, and it will be converted into JSON array and passed as a single parameter in JSON string. If you only specify one template name, it is still passed as JSON array. This parameter is optional. If no value is specified in the command for the TEMPLATE key, then this parameter would still be present as an empty JSON array in JSON string, and all templates for the specified year and period will be deployed.	JSON Array	No	None
`ResetJournals`	Value values: True or False. Optional. Indicates whether or not all journals need to be reset to the first stage after re-deployment. This parameter is also derived by the system based on changes to the template. The system-derived value can override the user-specified value.	Boolean	No	False

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-188 `EJ_IMPORT_DIM_MEMBERS` Parameters

Name	Description	Type	Required	Default
`jobType`	Type of the Job. Value for this job is `EJ_IMPORT_DIM_MEMBERS`.	String	Yes	None
`DimensionName`	Name of the dimension for which the members need to be imported	String	Yes	None
`FileName`	Name of the CSV file which contains the dimension member information	String	Yes	None
`importMode`	Mode of the dimension member import. Values are Replace or Update	String	No	Replace
`delimiter`	Delimiter character to parse the CSV data.	String	No	Comma (,)
`dateFormat`	Date format to convert the date or date time value in the CSV file (if any)	String	No	MM-dd-yyyy

Examples of Request Body

Example for Job Type: exportEJJournals

Example 1:

```
{
 "jobType" : "exportEJJournals",
 "parameters": {
                              "Filename":"export.zip",
                              "Year":"2020"
                              "Period":"Jan"
                              "Operation":"validation"
                              }
}
```

Example 2:

```
{
 "jobType" : "exportEJJournals",
 "parameters": {
                              "Filename":"export.zip",
                              }
}
```

Example for Job Type: setEJJournalStatus

```
{
 "jobType" : "setEJJournalStatus",
 "parameters": {
                              "Filename":"JournalsStatus.csv",
                              "Operation":"validation"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
                                }
}
```

Examples for Job Type: deployEJTemplates

Example 1:

```
{
 "jobType" : "EJ_DEPLOY_TEMPLATES",
 "parameters": {
                                "Year":"2020"
                                "Period":"July"
                                "Template": ["Template 1","Template 2"],
                                "ResetJournals":"true"
                                }
}
```

Example 2:

```
{
 "jobType" : "EJ_DEPLOY_TEMPLATES",
 "parameters": {
                                "Year":"2020"
                                "Period":"July"
                                "Template": ["Template 3"],
                                }
}
```

Example 3:

```
{
 "jobType" : "EJ_DEPLOY_TEMPLATES",
 "parameters": {
                                "Year":"2020"
                                "Period":"July"
                                "Template": ["Template 5","Template 6",
"Template 7", "Template 8"],
                                }
}
```

Example 4:

```
{
 "jobType" : "EJ_DEPLOY_TEMPLATES",
 "parameters": {
                                "Year":"2020"
                                "Period":"July"
                                "Template": [ ]
                                }
}
```

Example for Job Type: EJ_IMPORT_DIM_MEMBERS

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example 1:

```
{
    "jobType": "EJ_IMPORT_DIM_MEMBERS",
    "parameters": {
        "DimensionName": "Control",
        "FileName": "Control_Error.csv"
    }
}
```

Example 2:

```
{
    "jobType": "EJ_IMPORT_DIM_MEMBERS",
    "parameters": {
        "DimensionName": "Control",
        "FileName": "Control_Error.csv",
     "importMode": "Update"",
        "delimiter": ",",
        "dateFormat": "MM-dd-yyyy"
    }
}
```

Response

Supported Media Types: `application/json`

Table 3-189 Parameters

Name	Description
`jobId`	Enterprise Journals job identifier
`descriptiveStatus`	Additional details about the status
`details`	Message to the user. In cases where there are errors, the error details are published.
`status`	• -1: In Progress • 0: Success • 1: Failed
`items`	Not applicable for this job type
`links`	Detailed information about the link
`rel`	Valid value: self
`href`	Links to API call
`action`	The HTTP call type

Example of Response Body

The following is an example of the response body in JSON format.

```
{
  "jobId":14013,
  "details": "In Process",
  "status": -1,
  "links": [
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    {
      "rel": "self",
      "href": "https://<BASE-URL>/HyperionPlanning/rest/ej/v1/jobs/14013",
     "action": "GET"
    }
  "error": null,
  "items": [ ],
  "type": EPM
}
```

Retrieve Enterprise Journals for Financial Consolidation and Close

Returns the list of journals ready to validate or ready to post based on the parameter sent.

This API works only for Financial Consolidation and Close.

REST Resource

```
GET       /HyperionPlanning/rest/ej/{api_version}/ejjournals
```

Required Roles

Service Administrator

Request URL with Optional Parameters

```
GET       /HyperionPlanning/rest/ej/{api_version}/ejjournals?
Year=2018&Period=Jan&PostingStatus=ReadyToPost&ValidationStatus=ReadyToValidat
e
```

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

"Year", "Period", "PostStatus" and "ValidationStatus" are optional. If "Year" and "Period" are not passed, journals from all year and period are listed.

By default, only ReadyToPost journals are listed, however you can provide any valid value for the PostingStatus parameter to get corresponding journals.
If a valid value is provided for "ValidationStatus", journals are listed based on the provided value.

Table 3-190 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with: v1	Path	Yes	None
`Year`	Year for which to list journals, for example, Year=2018. If you do not specify a Year and Period, journals from all Years and Periods are listed.	Query	No	All Years

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-190 (Cont.) Parameters

Name	Description	Type	Required	Default
`Period`	Period for the journal, for example: Period=Jan. If you do not specify a Year and Period, journals from all Years and Periods are listed. If you specify only Year or only Period, journals from all Years and Periods are listed.	Query	No	All Periods
`Postingstatus`	Posting status for the journal, for example: `PostingStatus=ReadyToPost` Valid values are `NotPosted`, `ReadyToPost`, `PostInProgress`, `Failed`, `Posted`	Query	No	ReadyToPost
`ValidationStatus`	Validation status for the journal. Valid Values are `NotValidated`, `ReadyToValidate`, `ValidationInProgress`, `Failed`, `Valid`	Query	No	None

Response

Supported Media Types: `application/json`

Example of Response Body

The following shows an example of the response body.

```
{
  "items": [
    {
  "year": 2020
  "period": "Jan",
  "journalId": "100000001",
  "instanceId": "100000000008821",
  "link": {
      "rel": "content",
      ""https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/HyperionPlanning/
rest/ej/v1/ejjournals/100000000008821",
      "action": "GET"
  }
  }
{
  "year": 2020
  "period": "Jan",
  "journalId": "100000002",
  "instanceId": "100000000008822",
  "link": {
      "rel": "content",
      "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/HyperionPlanning/
rest/ej/v1/ejjournals/100000000008822",
      "action": "GET"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
  }
  }
],
  "link": {
      "rel": "self",
      "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/HyperionPlanning/
rest/ej/v1/ejjournals",
      "action": "GET"
}
"error": null,{
"type": "EPM"
}
```

Retrieve Enterprise Journal Content for Financial Consolidation and Close

Returns journal content for the instance identifier provided as Path parameter. Each item in the items list represents a line item of the journal.

This API works only for Financial Consolidation and Close.

REST Resource

```
GET       /HyperionPlanning/rest/ej/{api_version}/ejjournals/{instanceId}
```

Required Roles

Service Administrator

Example of Request URL

```
GET       /HyperionPlanning/rest/ej/v1/ejjournals/100000000008821
```

Supported Media Types: `application/json`

Table 3-191 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`instanceId`	Identifier for the journal for which you want to retrieve journal content	Path	Yes	None

Example of Response Body

The following shows an example of the response body.

```
{
  "year": 2018
  "period": "Jan",
  "journalId": "100000001",
  "instanceId": "100000000008821",
  "items": [
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
{
      "Status Code": "NEW",
      "Ledger ID": "LNR 12000",
      "Journal Source": "EPM_EJ",
      "Journal Category": "Adjustment",
      "Currency Code": "EUR",
      "Segment 1": "100091",
      "Entered Debit Amount": "19800.00",
      "Entered Credit Amount": "0.00"
},
{
      "Status Code": "NEW",
      "Ledger ID": "LNR 12000",
      "Journal Source": "EPM_EJ",
      "Journal Category": "Adjustment",
      "Currency Code": "EUR",
      "Segment 1": "100092",
      "Entered Debit Amount": "0.00",
      "Entered Credit Amount": "19800.00"
},
{
      "Status Code": "NEW",
      "Ledger ID": "LNR 12000",
      "Journal Source": "EPM_EJ",
      "Journal Category": "Adjustment",
      "Currency Code": "EUR",
      "Segment 1": "100093",
      "Entered Debit Amount": "34900.00",
      "Entered Credit Amount": "0.00"
},
{
      "Status Code": "NEW",
      "Ledger ID": "LNR 12000",
      "Journal Source": "EPM_EJ",
      "Journal Category": "Adjustment",
      "Currency Code": "EUR",
      "Segment 1": "1000943",
      "Entered Debit Amount": "0.00",
      "Entered Credit Amount": "34900.00"
  }
],
  "links": [
{
      "rel": "self",
      "href": "https://<BASE-URL>/HyperionPlanning/rest/ej/v1/ejjournals/
100000000008821",
      "action": "GET"
},
{
      "rel": "update_posting_status",
      "href": "https://<BASE-URL>/HyperionPlanning/rest/ej/v1/ejjournals/
100000000008821
/poststatus",
      "action": "POST"
}
{
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "rel": "update_validation_status",
    "href": "https://<BASE-URL>/HyperionPlanning/rest/ej/v1/ejjournals/
100000000008821/validationstatus",
    "action": "POST"
}

],
"error": null,
"type": "EPM"
}
```

Retrieve Enterprise Journal Content by Year and Period for Financial Consolidation and Close

Returns Enterprise journal content for the provided Year, Period, and Journal ID. This API can be used if a user wants to query an Enterprise Journal without knowing the journal identifier.

This API works only for Financial Consolidation and Close.

REST Resource

```
GET       /HyperionPlanning/rest/ej/{api_version}/ejjournalcontent?
Year={year}&Period={period}&JournalId={journalId}
```

Required Roles

Service Administrator

Example of Request URL

```
GET       /HyperionPlanning/rest/ej/v1/ejjournalcontent?
Year=2018&Period=Jan&JournalId=100000001
```

Supported Media Types: `application/json`

Table 3-192 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`Year`	Year for which to list journal, for example, Year=2018	Query	Yes	None
`Period`	Period for the journal, for example: Period=Jan	Query	Yes	None
`JournalId`	Identifier for the journal for which you want to retrieve journal content	Query	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example of Response Body

The following shows an example of the response body.

```
{
  "year": 2018
  "period": "Jan",
  "journalId": "100000001",
  "instanceId": "100000000008821",
  "items": [
{
      "Status Code": "NEW",
      "Ledger ID": "LNR 12000",
      "Journal Source": "EPM_EJ",
      "Journal Category": "Adjustment",
      "Currency Code": "EUR",
      "Segment 1": "100091",
      "Entered Debit Amount": "19800.00",
      "Entered Credit Amount": "0.00"
},
{
      "Status Code": "NEW",
      "Ledger ID": "LNR 12000",
      "Journal Source": "EPM_EJ",
      "Journal Category": "Adjustment",
      "Currency Code": "EUR",
      "Segment 1": "100092",
      "Entered Debit Amount": "0.00",
      "Entered Credit Amount": "19800.00"
},
{
      "Status Code": "NEW",
      "Ledger ID": "LNR 12000",
      "Journal Source": "EPM_EJ",
      "Journal Category": "Adjustment",
      "Currency Code": "EUR",
      "Segment 1": "100093",
      "Entered Debit Amount": "34900.00",
      "Entered Credit Amount": "0.00"
},
{
      "Status Code": "NEW",
      "Ledger ID": "LNR 12000",
      "Journal Source": "EPM_EJ",
      "Journal Category": "Adjustment",
      "Currency Code": "EUR",
      "Segment 1": "1000943",
      "Entered Debit Amount": "0.00",
      "Entered Credit Amount": "34900.00"
  }
],
  "links": [
{
      "rel": "self",
      "https://<BASE-URL>/HyperionPlanning/rest/ej/v1/ejjournals/
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
100000000008821",
      "action": "GET"
},
{
      "rel": "update_posting_status",
      ""https://<BASE-URL>/HyperionPlanning/rest/ej/v1/ejjournals/
100000000008821
/poststatus",
      "action": "POST"
}
],
"error": null,
"type": "EPM"
}
```

Update Enterprise Journal Posting Status for Financial Consolidation and Close

Updates the Enterprise Journal Posting status. After journal content has been read and the import to ERP begins, this API must be invoked to update the status to PostInProgress, and after completion of posting, the status should be updated with either Posted or Failed. Error items are read-only if the Posting status is Failed.

This API works only for Financial Consolidation and Close.

REST Resource

```
POST       /HyperionPlanning/rest/ej/{api_version}/ejjournals/{instanceId}/
poststatus
```

Required Roles

Service Administrator

Example of Request URL

```
POST       /HyperionPlanning/rest/ej/v1/ejjournals/100000000008821/Posted
```

Supported Media Types: `application/json`

Table 3-193 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with: v1	Path	Yes	None
`instanceId`	The ID of the journal for which you want to update Posting status.	Path	Yes	None
`year`	Year value of journal period	String	No	None
`period`	Period of journal	String	No	None
`journalId`	Journal ID value	String	No	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-193 (Cont.) Parameters

Name	Description	Type	Required	Default
`status`	Journal Post Status **Note** Only "PostInProgress", "Failed" and "Posted" are supported for status value.	String	Yes	None
`message`	Posting message to be set to the journal	String	No	None
`journalBatch`	Journal Batch represents the identifier from target ERP system for the current batch of posting.	String	No	None
`errorItems`	List of errors if any	Array	No	None
`errorCode`	Identifier for the individual error	String	No	None
`errorMessage`	Detailed message of the error	String	No	None
`entryId`	Journal entry identifier, for which error has occurred	String	No	None

Example of Post In Progress:

```
{
"year": "2019",
"period": "Jan",
"journalId": "10000000012",
"status": "PostInProgress"
}
```

Example of an Error:

```
{
"year": "2019",
"period": "Jan",
"journalId": "100000001",
"status": "Failed",
"errorItems": [
{
     "errorCode": "EF04",
     "errorMessage": "The account combination is invalid.",
     "entryId": "Journal Ent 1"
},
{
     "errorCode": "EU07",
     "errorMessage": "Accounting period is not open for the ledger.",
     "entryId": "Journal Ent 2"
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
]
}
```

Example When Posted:

```
{
"year": "2021",
"period": "Jan",
"journalId": "10000000003",
"status": "Posted",
"journalBatch": "111720201001-LNR11432"
}
```

Response

```
{
"detail": "Journal 2021 Jan 10000000001 is not in 'Post In Progress' or
'Ready to Post' status.",
"status": 400,
"message": "oracle.apps.epm.sdm.model.common.SDMModelException: Journal 2021
Jan 10000000001 is not in 'Post In Progress' or 'Ready to Post' status.",
"localizedMessage": "oracle.apps.epm.sdm.model.common.SDMModelException:
Journal 2021 Jan 10000000001 is not in 'Post In Progress' or 'Ready to Post'
status.",
"suppressed": []
}
```

> **Note**
>
> The maximum character limit of the following fields are:
>
> - journalBatch – 255 characters
> - errorMessage – 255 characters
> - errorCode – 20 characters
> - entryId – 500 characters

Update Validation Status of Enterprise Journals for Financial Consolidation and Close

Updates the journal validation status. Once journal content has been read, you can invoke this API to update the status to "ValidationInProgress". After completion of validation, the status must be updated as either "Valid" or "Failed". Error items are read only if validation status is "Failed".

REST Resource

```
POST  /HyperionPlanning/rest/ej/{api_version}/ejjournals/{identifier}/
validationstatus
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Required Roles

Service Administrator

Example of Request URL

```
POST https://<BASE-URL>/HyperionPlanning/rest/ej/v1/ejjournals/
100000000008821/validationstatus
```

Supported Media Types: `application/json`

Table 3-194 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with, for example, v1	Path	Yes	None
`instanceId`	Identifier for the journal for which you want to update the validation status.	Path	Yes	None
`status`	Validation status to be updated for the journal **Note** Only "ValidationInProgress", "Failed" and "Valid" are supported for status value.	String	Yes	None
`message`	Validation message to be set to the journal	String	No	None
`errorItems`	List of errors if any **Note** Errors are updated only if status is "Failed".	Array	No	None
`errorCode`	Identifier for the individual error	String	No	None
`errorMessage`	Detailed message of the error	String	No	None
`entryId`	Journal entry identifier, for which error has occurred	String	No	None

Example of Validation in Progress:

```
{
    "status": "ValidationInProgress",
    "message":"Validation initiated"
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example of an Error:

```
{
    "status": "Failed",
    "message":"Validation failed"
    "errorItems": [
        {
            "errorCode": "EF04",
            "errorMessage": "The account combination is invalid.",
            "entryId": "Journal Ent 1"
        },
        {
            "errorCode ": "EU07",
            "errorMessage ": "Accounting period is not open for the ledger.",
            "entryId ": "Journal Ent 2"
        }
    ]
}
```

Example of Response Body:

```
{
      "items": [
                        "Journal validation status updated successfully."
                 ],
      "links": [
                        {
                             "rel": "self",
                             "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/HyperionPlanning/
rest/ej/v1/ejjournals/100000000006929/validationstatus",
                             "action": "POST"
                         }
                ]
}
```

Supplemental Data Manager REST APIs

Use the Supplemental Data Manager REST APIs to import supplemental collection data for Financial Consolidation and Close and deploy form templates.

Table 3-195 Supplemental Data Manager REST APIs

Supplemental Data Manager REST APIs	
Get API Versions for Supplemental Data Manager APIs	Deploy Form Templates
Import Supplemental Collection Data for Financial Consolidation and Close	Execute Supplemental Data Manager Job

Copyright © 2017, 2026, Oracle and/or its affiliates.

URL Structure for Supplemental Data Manager

This topic shows the general URL structure for Supplemental Data Manager REST APIs.

Use the following URL structure to access the Supplemental Data Manager REST resources:

`https://<BASE-URL>/HyperionPlanning/rest/sdm/{api_version}/{path}`

Where:

- *<BASE-URL>*: The first part of your service URL, before the context.

  For example, if your service URL is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com`. Similarly, if your service URL is `https://epm2-acme.epm.us6.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm2-acme.epm.us6.oraclecloud.com`.
- *api_version*: API version you are developing with. The current REST API version for Supplemental Data Manager is v3.
- *path*: Identifies the resource.

> **Note**
>
> Oracle does not authorize or support the use of REST APIs with the path token "`/internal/`" in the URL.

Get API Versions for Supplemental Data Manager APIs

You can get information on REST API versions using REST resources. See Getting API Versions for Planning. Supplemental Data Manager REST APIs use the same version numbers as Planning.

Table 3-196 Supplemental Data Manager REST APIs

API Name	Versions
Import Supplemental Collection Data for Financial Consolidation and Close	v3
Deploy Form Templates	v3

Import Supplemental Collection Data for Financial Consolidation and Close

Imports supplemental data to a collection for the frequency dimensions defined in the collection interval of the collection. Returns the success or failure status.

REST Resource

```
POST      /HyperionPlanning/rest/{api_version}/applications/{application}/
fcmjobs
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters

Table 3-197 IMPORT_SUPPLEMENTAL_COLLECTION_DATA

Name	Description	Type	Required	Default
`api_version`	Version of the API you are working with: v3	Path	Yes	None
`application`	The name of the application Get the application name by using the Get Applications API, for example, FCCS or TRCS. See Get Applications.	Path	Yes	None
`jobName`	Name of the job	String	No	None
`jobType`	Type of the Job. Supported value for this Job IMPORT_SUPPLEMENTAL_COLLECTION_DATA	String	Yes	None
`fileName`	File name to be imported, for example, dataset.csv	String	Yes	None
`collection`	Collection or sub-collection name	String	Yes	None
`year`	The year for which the collection is deployed	String	Yes	None
`period`	Period name for which the collection is deployed	String	Yes	None
`parameter`	Runtime parameter. This is the frequency dimension used for the Collection.	String	No	None
`value`	Runtime parameter value. This is the member value for the dimension specified in the parameter.	String	No	None

Table 3-198 Examples of runtime parameters

Parameter	Value
Product	Oracle EPM
Consolidation	Entity Input
Movement	Actual

Copyright © 2017, 2026, Oracle and/or its affiliates.

Examples of request body

Example 1

```
{
 "jobType" : "IMPORT_SUPPLEMENTAL_COLLECTION_DATA",
 "parameters": {
                              "fileName":"import_sdm_data.csv",
                              "collection":"Investment Detail Collection",
                              "year":"2019",
                              "period":"Dec",
                              "product:"Oracle EPM",
                              "consolidation":"Entity Input",
                               }
}
```

Example 2

```
{
 "jobType" : "IMPORT_SUPPLEMENTAL_COLLECTION_DATA",
 "parameters": {
                              "fileName":"import_sdm_data.csv",
                              "collection":"Investment Detail Collection",
                              "year":"2020",
                              "period":"January",
                              "category":"Oracle EPM",
                              "movement":"Actual",
                               }
}
```

Example 3

```
{
 "jobType" : "IMPORT_SUPPLEMENTAL_COLLECTION_DATA",
 "parameters": {
                              "fileName":"import_sdm_data.csv",
                              "collection":"Investment Detail Collection",
                              "year":"2019",
                              "period":"December",
                              "Scenario":"Actual",
                               }
}
```

> **Note**
>
> Parameter names are case-sensitive except Year and Period. The frequency dimension name as part of the parameter is case-sensitive.

Response

Supported Media Types: `application/json`

Parameters:

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-199 Parameters

Name	Description
`type`	FCCS Application type, for example, FCCS
`status`	-1 - In Progress; 0 - Success; 1 - Fail
`details`	In case of errors, details are published with the error string
`descriptiveStatus`	The status of the job, such as Completed or Error
`items`	Collection of Notification categories
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Relationship type. Possible values: self

Example of Response Body

The following is an example of the response body in JSON format.

```
{
  "jobId":100000000114040,
  "descriptiveStatus":"In Progress",
  "details": "In Progress",
  "status": -1,
  "items": [],
  "links": [
    {
      "rel": "self",
      "href": "https://<SERVICE_NAME-
<TENANT_NAME.<SERVICE_TYPE.<dcX>.oraclecloud.com/HyperionPlanning/rest/v3/
applications/FCCS/fcmjobs/100000000114040"
    }, {",
      "action":"GET"
    }
  ],
}
```

Deploy Form Templates

Enables you to deploy form templates that have been created in Financial Consolidation and Close.

For details on Using Deploying a Form Template to a Data Collection Period.

This REST API returns the job id after starting the job.

REST Resource

POST `/HyperionPlanning/rest/{api_version}/applications/{application}/fcmjobs`

Required Roles

Service Administrator, Power User

Copyright © 2017, 2026, Oracle and/or its affiliates.

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job.

Table 3-200 Deploy Form Template

Name	Description	Type	Required	Default
`api_version`	Version of the API you are working with: v3	Path	Yes	None
`application`	The name of the application Get the application name by using the Get Applications API, for example, FCCS. See Get Applications.	Path	Yes	None
`jobName`	Name of the job that has been defined in Financial Consolidation and Close or no value for the job	String	No	None
`jobType`	Type of Job. Supported value: `DEPLOY_FORM_TEMPLATES`	String	Yes	None
`CollectionIntervalName`	The name of the collection interval to which the template should be deployed	String	Yes	None
Parameter for frequency dimension 1	Dimension and member name of interval frequency dimension, to which the template should be deployed. This optional key value parameter depends on the number of frequency dimensions in the interval. The key should be dimension name and the value should be member name.	String	No	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-200 (Cont.) Deploy Form Template

Name	Description	Type	Required	Default
Parameter for frequency dimension 2	Dimension and member name of interval frequency dimension, to which the template should be deployed. This optional key value parameter depends on the number of frequency dimensions in the interval. The key should be dimension name and the value should be member name.	String	No	None
Parameter for frequency dimension 3	Dimension and member name of interval frequency dimension, to which the template should be deployed. This optional key value parameter depends on the number of frequency dimensions in the interval. The key should be dimension name and the value should be member name.	String	No	None
Parameter for frequency dimension 4	Dimension and member name of interval frequency dimension, to which the template should be deployed. This optional key value parameter depends on the number of frequency dimensions in the interval. The key should be dimension name and the value should be member name.	String	No	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-200 (Cont.) Deploy Form Template

Name	Description	Type	Required	Default
Template	Names of the form templates to deploy. You can provide multiple parameters with the same key as "TEMPLATE" and this will be converted to a JSON array and passed as a single parameter in the JSON string. This is an optional parameter. However, if nothing is specified for the TEMPLATE key, this parameter is still present as an empty JSON Array in the JSON string, and all templates for the given interval will be deployed. Even if you give only one template name, this should still be passed as a JSON array.	JSON Array	No	None
ResetWorkflows	Either true or false. Optional parameter indicating whether all forms should be reset back to the first stage after redeploying. This parameter is also derived by the system based on changes to the template and collection, so the system-derived value can override the user specified value.	Boolean	No	false

Examples of request body

Example 1:

```
{
    "jobType" : "DEPLOY_FORM_TEMPLATES",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "parameters":
                {
                    "CollectionIntervalName" : "Journal Collection Interval",
                    "Year" : "2020",
                    "Period" : "July",
                    "Product" : "Oracle EPM",
                    "Consolidation" : "Entity Input",
                    "Template" : [ "Template,1","Template 2" ],
                     "ResetWorkflows" : "true"
                }
}
```

Example 2:

```
{
    "jobType" : "DEPLOY_FORM_TEMPLATES",
    "parameters":
                {
                    "CollectionIntervalName" : "Loan Collection Interval",
                    "Year" : "2020",
                    "Period" : "July",
                    "Category" : "Oracle EPM",
                    "Movement" : "Actual",
                    "Template" : ["Template 3"]
                }
}
```

Example 3:

```
{
    "jobType" : "DEPLOY_FORM_TEMPLATES",
    "parameters":
                {
                    "CollectionIntervalName" : "Default",
                    "Year" : "2020",
                    "Period" : "July",
                    "Scenario" : "Actual",
                    "Template" : ["Template 5","Template 6"],
                     "ResetWorkflows" : "false",
                }
}
```

Example 4:

```
{
    "jobType" : "DEPLOY_FORM_TEMPLATES",
    "parameters":
                {
                    "CollectionIntervalName" : "Custom Interval",
                    "Year" : "2020",
                    "Period" : "July",
                    "Template" : ["Template 5","Template 6","Template
7","Template 8"]
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
                }
}
```

Response

Table 3-201 Parameters

Name	Description
jobId	Financial Consolidation and Close job ID
descriptiveStatus	
details	Any additional details
Status	-1 = In progress; 0 = Success; 1 = Fail
items	Not applicable for this job type
links	Detailed information about the link
href	Links to API call
action	The HTTP call type
rel	Possible values: self

Supported Media Types: `application/json`

JSON Output

The following is an example of the response body in JSON format.

```
{
   "jobId":100000000114040,
   "descriptiveStatus":",
   "detail":"In Progress",
   "status":-1,
   "items":null,
   "links":[
      {
         "rel":"self",
         "href":"https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/HyperionPlanning/rest/v3/
applications/FCCS/fcmjobs/100000000114040",
         "action":"GET"
      }
   ]
}
```

Execute Supplemental Data Manager Job

This API will execute the job based on the job type provided as a JSON parameter. It is an asynchronous API. This API will respond with a callback API to get the Job status.

Table 3-202 Supplemental Data Manager Supported Job Types

Job Type	Description
SDM_IMPORT_DIM_MEMBERS	This job automates the bulk update of dimension members on your preferred schedule.

Copyright © 2017, 2026, Oracle and/or its affiliates.

REST Resource

POST `/HyperionPlanning/rest/sdm/{api_version}/jobs`

Required Roles

Job Type	Role
`SDM_IMPORT_DIM_MEMBERS`	Service Administrator, Power User

Request

Supported Media Types: `application/json`

Parameters

This table summarizes the request parameters that are generic to all jobs. The following tables describe parameters specific to individual rules.

Table 3-203 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None

Table 3-204 `SDM_IMPORT_DIM_MEMBERS` Parameters

Name	Description	Type	Required	Default
`jobType`	Type of the Job. Value for this job is `SDM_IMPORT_DIM_MEMBERS`.	String	Yes	None
`DimensionName`	Name of the dimension for which the members need to be imported	String	Yes	None
`FileName`	Name of the CSV file which contains the dimension member information	String	Yes	None
`importMode`	Mode of the dimension member import. Values are Replace or Update	String	No	Replace
`delimiter`	Delimiter character to parse the CSV data.	String	No	Comma (,)
`dateFormat`	Date format to convert the date or date time value in the CSV file (if any)	String	No	MM-dd-yyyy

Examples of Request Body

Example for Job Type: SDM_IMPORT_DIM_MEMBERS

Example 1:

```
{
    "jobType": "SDM_IMPORT_DIM_MEMBERS",
    "parameters": {
        "DimensionName": "Control",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        "FileName": "Control_Error.csv"
    }
}
```

Example 2:

```
{
    "jobType": "SDM_IMPORT_DIM_MEMBERS",
    "parameters": {
        "DimensionName": "Control",
        "FileName": "Control_Error.csv",
     "importMode": "Update",
        "delimiter": ",",
        "dateFormat": "MM-dd-yyyy"
     }
}
```

Response

Supported Media Types: `application/json`

Table 3-205 Parameters

Name	Description
`jobId`	Supplemental Data job identifier
`descriptiveStatus`	Additional details about the status
`details`	Message to the user. In cases where there are errors, the error details are published.
`status`	• -1: In Progress • 0: Success • 1: Failed
`items`	Not applicable for this job type
`links`	Detailed information about the link
`rel`	Valid value: self
`href`	Links to API call
`action`	The HTTP call type

Example of Response Body

The following is an example of the response body in JSON format.

```
{
  "jobId":15016,
  "details": "In Process",
  "status": -1,
  "links": [
    {
      "rel": "self",
      "href": "https://<BASE-URL>/HyperionPlanning/rest/sdm/v1/jobs/15016",
     "action": "GET"
    }
  "error": null,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
  "items": [ ],
  "type": EPM
}
```

Task Manager REST APIs

Use the Task Manager REST APIs to deploy task manager templates, update the task status for event monitoring, and manage Oracle Integration Cloud connections.

Table 3-206 Task Manager REST APIs

Task Manager REST APIs	
Get API Versions for Task Manager APIs	Update Task Status for Event Monitoring
Deploy Task Manager Templates	Manage Connections in Task Manager

URL Structure for Task Manager

This topic shows the general URL structure for Task Manager REST APIs.

Use the following URL structure to access the Task Manager REST resources:

`https://<BASE-URL>/HyperionPlanning/rest/cmapi/{api_version}/{path}`

Where:

- *<BASE-URL>*: The first part of your service URL, before the context.

  For example, if your service URL is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com`. Similarly, if your service URL is `https://epm2-acme.epm.us6.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm2-acme.epm.us6.oraclecloud.com`.
- *api_version*: API version you are developing with. The current REST API version for Task Manager is v1.
- *path*: Identifies the resource.

> **Note**
>
> Oracle does not authorize or support the use of REST APIs with the path token "/internal/" in the URL.

Get API Versions for Task Manager APIs

You can get information on REST API versions using REST resources. See Getting API Versions for Planning. Task Manager REST APIs use the same version numbers as Planning.

Table 3-207 Task Manager REST APIs

API Name	Versions
Deploy Task Manager Templates	v1

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-207 (Cont.) Task Manager REST APIs

API Name	Versions
Update Task Status for Event Monitoring	v1

Deploy Task Manager Templates

Deploys a Task Manager template to provided year and period to create a new schedule.

This API executes the job based on the job type (TM_DEPLOY_TEMPLATE) provided as a JSON parameter. This is an asynchronous API and responds with a callback API to get the job status.

Parameters

The following table summarizes the client request:

Table 3-208 TM_DEPLOY_TEMPLATES Parameters

Name	Description	Type	Required	Default
`jobType`	Type of the Job, value for this Job is TM_DEPLOY_TEMPLATE	String	Yes	None
`templateName`	The name of the task manager template to be deployed	String	Yes	None
`scheduleName`	The name of the new schedule that will be created from the template	String	Yes	None
`year`	The member of the Year dimension where the template will be deployed	String	Yes	None
`period`	The member of the Period dimension where the template will be deployed	String	Yes	None
`dayZeroDate`	The Day Zero date used in creating the Schedule in a valid format	String	Yes	None
`dateFormat`	The date format for the Day Zero Date	String	No	YYY-MM-DD
`orgUnit`	The Organization Unit name	String	No	None

REST Resource

POST `/HyperionPlanning/rest/cmapi/{api_version}/jobs`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job.

Table 3-209 Parameters

Name	Description	Type	Required	Default
`api_version`	It is a path parameter. Version of the API you are developing with for example, v1	String	Yes	None

Examples of Request Body

Example for Job Type: TM_DEPLOY_TEMPLATE

Example 1:

```
{
    "jobType":"TM_DEPLOY_TEMPLATE",
    "parameters":{
        "templateName":"Template1",
        "scheduleName": "scheduleA",
        "year":"2021",
        "period":"Jan",
        "dayZeroDate":"2021-01-01"
    }
}
```

Example 2:

```
{
    "jobType":"TM_DEPLOY_TEMPLATE",
    "parameters":{
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        "templateName":"Template1",

        "scheduleName": "scheduleA",

        "year":"2021",

        "period":"Jan",

        "dayZeroDate":"2021-01-01",

         "orgUnit":"JPAC"

    }

}
```

Response

Supported Media Types: `application/json`

Table 3-210 Parameters

Name	Description
`jobId`	Job ID
`descriptiveStatus`	Any additional details
`details`	Message to the end user. In case of errors, details are published.
`status`	-1 – In Progress; 0 – Success; 1 – Fail
`items`	Not applicable for this job type
`links`	Detailed information about the link
`rel`	Possible values: self
`href`	Links to API call
`action`	The HTTP call type

JSON Output

The following is an example of the response body in JSON format.

```
{

    "links": [

        {

            "rel": "self",

            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/HyperionPlanning/rest/
cmapi/v1/jobs",

            "action": "POST"

        },
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        {

            "rel": "Job Status",

            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/HyperionPlanning/rest/
cmapi/v1/jobs/14008",

            "action": "GET"

        }

    ],

    "details": "In Process",

    "status": -1,

    "type": "TM",

    "link": {},

    "error": null,

    "items": []

}
```


Update Task Status for Event Monitoring

This API is used to update the task status to "completed" based on an event monitoring integration type. For information on setting up integration type for Event Monitoring, see Creating Custom Event Monitoring Integrations in *Administering Financial Consolidation and Close*.

REST Resource

POST `/HyperionPlanning/rest/cmapi/{api_version}/updateTasksForEventMonitoring`

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-211 Parameters

Name	Description	Type	Required	Default Value
`api_version`	Version of the API you are developing with	Path	Yes	v1
`eventName`	Event name as specified in the custom event monitoring integration type.	JSON (String)	Yes	None
`integrationName`	Integration Code of the custom event monitoring integration type.	JSON (String)	Yes	None
`integrationConnectionName`	Connection name which the event monitoring integration belongs to.	JSON (String)	Yes	None
`parameters`	Parameter values as per the custom event monitoring integration type. The format is: `[ {"name" :"param1", "value":"value1" , {"name" :"param2", "value":"value2" }]`	JSON	Yes	None
`message`	A message needs to be added while closing the task. This information is displayed on the task dialog.	JSON (String)	No	None
`logLocation`	Any location which needs to be added which refers to a log. This information is displayed on the task dialog.	JSON (String)	No	None
`reportLocations`	One or more URLs to add while closing the task. The format is: `["Example_URL1", "Example_URL2"]` This information will be displayed on the Task dialog box.	JSON (List of Strings)	No	None

Example URL

```
https://<BASE-URL>/HyperionPlanning/rest/cmapi/v1/
updateTasksForEventMonitoring
```

Payload

Example 1

If the custom event monitoring integration has the following properties:

- Integration Connection Name: customAppConn
- Integration Code: customPeriodClose
- Event Name: custom.CloseProcess.period.close

Copyright © 2017, 2026, Oracle and/or its affiliates.

- Parameter Code: periodName and ledgerID

And the task is set up with following parameters:

- periodName: FY18
- ledgerID: 123

The following payload should be sent to close the task:

```
{
       "eventName" : "custom.CloseProcess.period.close",
       "integrationName" : "customPeriodClose",
       "integrationConnectionName" : "customAppConn",
    "parameters": [{
        "name": "periodName",
        "value": "FY18"
    }, {
        "name": "ledgerID",
        "value": "123"
    }]
}
```

> **Note**
>
> The API expects integration code to be passed for the parameter `integrationName`.

Example 2

```
{
    "eventName": "custom.CloseProcess.period.close",
    "integrationName": "customPeriodClose",
    "integrationConnectionName": "customAppConn",
    "parameters": [
        {
            "name": "periodName",
            "value": "FY18"
        },
        {
            "name": "ledgerID",
            "value": "123"
        }
    ],
    "message": "Close period",
    "logLocation": "/logs/closeperiod.txt",
    "reportLocations": [
        "http://oracle.com/reportLocation.html"
    ]
}
```

Response

Supported Media Types: `application/json`

Example of a Successful Response

Copyright © 2017, 2026, Oracle and/or its affiliates.

```
Http status code: 200

{
    "type": "RC",
    "items": null,
    "error": null,
    "link": null,
    "status": null,
    "details": "2 task(s) updated.",
    "links": [
        {
            "rel": "self",
            "href": "https://<BASE-URL>/HyperionPlanning/rest/cmapi/v1/
updateTasksForEventMonitoring",
            "action": "POST"
        }
    ]
}
```

Example of an Error Response

```
Http status: 500
```

Manage Connections in Task Manager

Use these REST APIs to work with Oracle Integration Cloud connection in Task Manager.

Custom Process Automation and Event Monitoring Integration tasks use Oracle Integration Cloud.

With multiple environments, using REST APIs saves you time and effort by automating the process of logging in and configuring connections. For information about accessing environments, see Accessing the EPM Cloud or EDM Cloud Environment.

Applies to: Enterprise Profitability and Cost Management, Financial Consolidation and Close, and Planning.

Task	Request	REST Resource
Create a Connection	POST	/HyperionPlanning/rest/fcmapi/{api_version}/{module}/connections
View All Connections	GET	/HyperionPlanning/rest/fcmapi/{api_version}/{module}/connections
Update a Connection	PUT	/HyperionPlanning/rest/fcmapi/{api_version}/{module}/connections/{id}
Delete a Connection	DELETE	/HyperionPlanning/rest/fcmapi/{api_version}/{module}/connections/{id}

Create a Connection

Use this REST API to create a connection to Oracle Integration Cloud using Task Manager.

REST Resource

```
POST /HyperionPlanning/rest/fcmapi/{api_version}/{module}/connections
```

Required Roles

Copyright © 2017, 2026, Oracle and/or its affiliates.

Service Administrator

Request

Supported Media Types: `application/json`

Parameters:

The following table summarizes the client request parameters for Basic authentication and OAuth 2.0 authentication.

> **Note**
>
> Oracle recommends using OAuth 2.0 instead of Basic Authentication because OAuth 2.0 is more secure.

Table 3-212 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you're developing with (must be v1)	Path	Yes	None
`module`	The name of the module for which to create a connection. Set this value to FCM.	Path	Yes	None
`url`	The URL of the Integration Cloud environment. **Note** The URL must be provided only till the server name, which is oraclecloud.com.	Payload	Yes	None
`authType`	Type of authentication: • Basic • OAuth **Note** The parameter is applicable only for OAuth 2.0 authentication type.	Payload	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-212 (Cont.) Parameters

Name	Description	Type	Required	Default
`oauthProperties`	Specify the access token, client ID, and scope of the URL for OAuth 2.0 authentication. **Note** The parameter is applicable only for OAuth 2.0 authentication type.	Payload	Payload	None
`username`	A username with the Service Administrator application role. **Note** This parameter is applicable only for basic authentication type.	Payload	Yes	None
`password`	The encrypted password for the user. For security reasons, only an encrypted password is allowed. Use the EPM Automate encrypt command to generate the encrypted password. See encrypt . **Note** This parameter is applicable only for basic authentication type.	Payload	Yes	None
`type`	The type of connection. For Oracle Integration Cloud, set this value to ICS.	Payload	Yes	None

Example of Request Body- Basic Authentication

```
{
    "url": "<URL of Oracle Integration Cloud>",
    "username": "<NEW_USERNAME>",
    "password": "<NEW_PASSWORD>",
    "type" : "ICS"
    "authType": "BASIC"
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example of Request Body- OAuth 2.0 Authentication

```
{
     "url": "<URL of Oracle Integration Cloud>",
      "type": "ICS",
      "authType": "OAUTH2",
      "oauthProperties": {
                "accessTokenUrl": "<Access token URL>",
                "clientId": "<Client ID>",
                "scope": "<Scope URL>",
                "clientSecret": "<EPMAUTOMATE Encrypted password>"
           }
}
```

Response

Supported Media Type: `application/json`

Table 3-213 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string.

Example of Response Body

```
{
  "details": "Connection created successfully."
}
```

View All Connections

Use this REST API to view all the connections to Oracle Integration Cloud using Task Manager.

Required Roles

Service Administrator

REST Resource

`GET /HyperionPlanning/rest/fcmapi/{api_version}/{module}/connections`

Request

Parameters:

The following table summarizes the client request.

Table 3-214 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with (must be v1)	Path	Yes	None
`module`	The name of the module for which you want to view the connections. Set this value to FCM.	Path	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Response

Supported Media Types: `application/json`

The following table summarizes the parameters.

Table 3-215 Parameters

Parameters	Description
`items`	Collection of information about the resource
`id`	Unique identifier for the connection
`type`	The type of connection. For Oracle Integration Cloud, set this value to ICS.
`url`	The URL of the Integration Cloud environment. **Note** The URL must be provided only till the server name, which is oraclecloud.com.
`authType`	Type of authentication: • Basic • OAuth
`oauthProperties`	Provides the access token, client ID, and scope of the URL for OAuth 2.0 authentication.
`details`	In case of errors, details are published with the error string

Example Response - Basic Authentication

```
{
    "links": [
        {
            "rel": "self",
            "href": "<URL of Oracle Integration Cloud>",
            "action": "GET"
        }
    ],
    "details": null,
    "items": [
        {
            "username": "ats_admin2",
            "password": null,
            "url": "<URL of Oracle Integration Cloud>",
            "id": 100000000558008,
            "type": "ICS"
            "authType": "BASIC"
        }
    ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example Response - OAuth 2.0 Authentication

```
{
    "details": null,
    "items": [
        {
            "id": 100000000037009,
            "url": "<URL of Oracle Integration Cloud>",
            "type": "ICS",
            "authType": "OAUTH2",
            "oauthProperties": {
                "accessTokenUrl": "<Access token URL>",
                "clientId": "<Client ID>",
                "scope": "<Scope URL>"
            }
        }
    ],
    "links": [
        {
            "rel": "self",
            "href": "<URL of Oracle Integration Cloud>",
            "action": "GET"
        }
    ]
}
```

Update a Connection

Use this REST API to update a specific connection to Oracle Integration Cloud using Task Manager.

REST Resource

`PUT /HyperionPlanning/rest/fcmapi/{api_version}/{module}/connections/{id}`

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters:

The following table summarizes the client request.

Table 3-216 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with (must be v1)	Path	Yes	None
`module`	The name of the module for which to update a connection. Set this value to FCM.	Path	Yes	None
`id`	The identifier of the connection that must be updated	Path	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-216 (Cont.) Parameters

Name	Description	Type	Required	Default
`url`	The URL of the Integration Cloud environment. **Note** The URL must be provided only till the server name, which is oraclecloud.com.	Payload	Yes	None
`authType`	Type of authentication: • Basic • OAuth **Note** The parameter is applicable only for OAuth 2.0 authentication type.			
`oauthProperties`	Specify the access token, client ID, and scope of the URL for OAuth 2.0 authentication. **Note** The parameter is applicable only for OAuth 2.0 authentication type.			
`username`	A username with Service Administrator application role. **Note** This parameter is applicable only for basic authentication type.	Payload	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-216 (Cont.) Parameters

Name	Description	Type	Required	Default
`password`	The encrypted password for the user. For security reasons, only an encrypted password is allowed. Use the EPM Automate encrypt command to generate the encrypted password. See encrypt . **Note** This parameter is applicable only for basic authentication type.	Payload	Yes	None
`type`	The type of connection. For Oracle Integration Cloud, set this value to ICS.	Payload	Yes	None

Note

Oracle recommends using OAuth 2.0 instead of Basic Authentication because OAuth 2.0 is more secure.

Example of Request Body - Basic Authentication

```
{
    "url": "<URL of Oracle Integration Cloud>",
    "username": "<NEW_USERNAME>",
    "password": "<NEW_PASSWORD>"
    "authType": "BASIC"
}
```

Example of Request Body – OAuth 2.0 Authentication

```
  {
     "url": "<URL of Oracle Integration Cloud>",
      "type": "ICS",
      "authType": "OAUTH2",
      "oauthProperties": {
                "accessTokenUrl": "<Access token URL>",
                "clientId": "<Client ID>",
                "scope": "<Scope URL>",
                "clientSecret": "<EPMAUTOMATE Encrypted password>"
           }
}
```

Response

Supported Media Type: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-217 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string.

Example of Response Body

Example 1:

```
{
  "details": "Connection updated successfully."
}
```

Example 2:

```
{
  "details": "Invalid parameters. Test Connection is failed"
}
```

Delete a Connection

Use this REST API to delete a specific connection to Oracle Integration Cloud using Task Manager.

Required Roles

Service Administrator

REST Resource

```
DELETE /HyperionPlanning/rest/fcmapi/{api_version}/{module}/connections/{id}
```

Request

Parameters:

The following table summarizes the client request.

Table 3-218 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with (must be v1)	Path	Yes	None
`module`	The name of the module for which to delete a connection. Set this value to FCM.	Path	Yes	None
`id`	The identifier of the connection that must be deleted	Path	Yes	None

Response

Supported Media Type: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 3-219 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string.

Example of Response Body

```
{
  "details": "Connection deleted successfully."
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

4

Account Reconciliation REST APIs

Use the Account Reconciliation REST APIs to get the REST API version, create reconciliations, change period status, import pre-mapped transactions, import profiles, import currency rates, import balances, import pre-mapped balances, monitor reconciliations, and retrieve job status. In Transaction Matching, you can use REST APIs to import pre-mapped transactions, or run auto match.

Table 4-1 Account Reconciliation REST APIs

Account Reconciliation REST APIs			
Get API Versions Archive Matched Transactions (Transaction Matching) Change Period Status (Reconciliation Compliance) Create Reconciliation (Reconciliation Compliance) Delete Profile Execute an Account Reconciliation Job Export Application Properties Export Background Image Export Logo Image Generate Balance Summary Report for Account Reconciliation Generate Balance Report Transactions for Account Reconciliation Generate Cosmetic Changes Report for Account Reconciliation	Generate Report for Account Reconciliation Generate User Details Report for Account Reconciliation Import Application Properties Import Attribute Values Import Background Image Import Balances (Reconciliation Compliance) Import Logo Image Import Pre-Mapped Balances (Reconciliation Compliance) Import Pre-Mapped Transactions (Reconciliation Compliance) Import Profiles (Reconciliation Compliance) Import Rates (Reconciliation Compliance) Import Pre-Mapped Transactions (Transaction Matching)	Import Reconciliation Attributes (Reconciliation Compliance) Monitor Reconciliations (Reconciliation Compliance) Predict Predicted Attribute (Reconciliation Compliance) Purge Transactions (Transaction Matching) Purge Archived Transactions (Transaction Matching) Retrieve Periods with a Specific Status Run Auto Match (Transaction Matching) Retrieve Job Status (Reconciliation Compliance) Retrieve Job Status (Transaction Matching) Retrieve Application Access Level Run Auto Alert (Transaction Matching) Run Train Match Prediction (Transaction Matching)	Run Profile Rule Run Reconciliation Rule Set Application Access Level Train Predicted Attribute (Reconciliation Compliance) Unmatch Matched Transactions (Transaction Matching) Unmatch Transactions Matched by Auto Match (Transaction Matching) Update Unmatched Transactions (Transaction Matching) Unmatch Transactions Matched by Auto Match (Transaction Matching) Update Unmatched Transactions (Transaction Matching) View Reconciliation Comments Manage Connections in Account Reconciliation

Copyright © 2017, 2026, Oracle and/or its affiliates.

URL Structure for Account Reconciliation

This topic shows the general URL structure for Account Reconciliation REST APIs.

Use the following URL structure to access the Account Reconciliation REST resources:

`https://<BASE-URL>/armARCS/rest/{api_version}/{path}`

Where:

- *<BASE-URL>*: The first part of your service URL, before the context.

  For example, if your service URL is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com`. Similarly, if your service URL is `https://epm2-acme.epm.us6.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm2-acme.epm.us6.oraclecloud.com`.
- *api_version*: API version you are developing with. The current REST API version for Account Reconciliation is V1.
- *path*: Identifies the resource.

> **Note**
>
> Oracle does not authorize or support the use of REST APIs with the path token "`/internal/`" in the URL.

Get API Versions

You can manage versions using the set of REST resources summarized in the following table.

Before using the REST resources, you must understand how to access the REST resources and other important concepts. See Cloud EPM REST APIs Best Practices. Using this REST API requires prerequisites. See Prerequisites.

Table 4-2 Manage Versions of Account Reconciliation APIs

Task	Request	REST Resource
Get API Versions for Account Reconciliation REST APIs	GET	`/armARCS/rest/`
Get Information about a Specific API Version for Account Reconciliation REST APIs	GET	`/armARCS/rest/{apiVersion}`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Get API Versions for Account Reconciliation REST APIs

Returns information about which versions are available and supported. Multiple versions might be supported simultaneously.

> **Note**
>
> An API version is always supported even when deprecated.

Required Roles

Service Administrator, Power User, User, Viewer

REST Resource

```
GET /armARCS/rest/
```

Request

Supported Media Types: `application/json`

Response

Supported Media Types: `application/json`

Parameters

The following table summarizes the parameters.

Table 4-3 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`items`	Version of the API you are developing with
`version`	The version, such as v1
`lifecycle`	Possible values: active, deprecated
`isLatest`	Whether this resource is the latest, true or false
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Can be self or Job Status. If set to Job Status, you can use the href to get the status of the import operation
`data`	The parameters as key value pairs passed in the request

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
    "items": [{
        "isLatest": false,
        "lifecycle": "deprecated",
        "version": "v1",
        "links": [{
             "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1",
            "rel": "canonical"
        }, {
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1",
            "rel": "successor-version"
        }]
    }, {
        "isLatest": true,
        "lifecycle": "active",
        "version": "v1",
        "links": [{
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1",
            "rel": "canonical"
        }, {
            "href":"https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1",
            "rel": "predecessor-version"
        }]
    }],
    "links": [{
        "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1",
        "rel": "canonical"
    }, {
        "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1",
        "rel": "current"
    }]
}
```

Get Information about a Specific API Version for Account Reconciliation REST APIs

Returns details for a specific REST API version for Account Reconciliation.

REST Resource

```
GET /armARCS/rest/{api_version}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Required Roles

Service Administrator, Power User, User, Viewer

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the parameters.

Table 4-4 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with, such as V1	Path	Yes	None

Response

Supported Media Types: `application/json`

Parameters

The following table summarizes the parameters.

Table 4-5 Parameters

Name	Description
`version`	The version, such as v1
`lifecycle`	Possible values: active, deprecated
`isLatest`	Whether this resource is the latest, true or false
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Relationship type
`data`	The parameters as key value pairs passed in the request

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
"version": "v1",
"lifecycle": "active",
"isLatest": true,
"links": [{
"rel": "canonical",
"href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1",
}, {
"rel": "predecessor-version",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
"href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1",
}]
}
```

Archive Matched Transactions (Transaction Matching)

Archives matched transactions, including support and adjustment details, that are equal to or older than a specified age. The matched transactions are stored in an archive file.

REST Resource

```
POST       /arm/rest/{api_version}/jobs
```

Required Roles

Service Administrator or Profiles and Reconciliations - Manage

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request specific to this job.

Table 4-6 ARCHIVE MATCHED TRANSACTIONS

Name	Description	Type	Required
`api_version`	Version of the API you are working with: v1	Path	Yes
`jobName`	The name of a job, archivetransactions	Payload	Yes
`matchTypeId`	The Text ID of the match type (previously known as Reconciliation Type, both parameter names continue to work) from which matched transactions must be archived	Payload	Yes
`age`	Matched transactions older than or equal to this value will be archived	Payload	Yes
`filterOperator`	Filter to identify the accounts Valid values are EQUALS, NOT_EQUALS, STARTS_WITH, ENDS_WITH, CONTAINS, NOT_CONTAINS	Payload	No
`filterValue`	The Account IDs for the filter operation	Payload	No
`logFileName`	The name of the log file If a file name is not provided, the log file is named `Archive_Transactions_<reconTypeId>_<Job_id>.log`.	Payload	No

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-6 (Cont.) ARCHIVE MATCHED TRANSACTIONS

Name	Description	Type	Required
`fileName`	The name of the archive zip file If a file name is not provided, the archive file is named `Archive_Transactions_<reconTypeId>_<Job_id>.zip`.	Payload	No

Example of request body

```
{
 "jobName": "archivetransactions",
 "parameters": {
   "matchTypeId": "Pos2Processor",
   "age": 120,
   "logFileName" : "Archive_Transactions_IC120XXXX.log",
   "fileName" : "Archived_Transactions_IC120XXXX.zip",
   "filterOperator": "EQUALS",
   "filterValue": [
     "201-1234",
     "202-1234"
     ]
  }
}
```

Response

Supported Media Types: `application/json`

Example of Response Body

The following is an example of the response body in JSON format.

```
{
    "type": "TM",
    "items": null,
    "error": null,
    "link": null,
    "status": -1,
    "details": null,
    "links": [
        {
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/arm/rest/v1/jobs/
100000003846005",
            "action": "GET",
            "rel": "self",
            "data": null
        }
    ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

To get the status of the archive matched transactions job and view its details, see Retrieve Job Status (Transaction Matching).

Change Period Status (Reconciliation Compliance)

Changes the status of a period (open, closed, pending, locked) and returns the success or failure status.

When a period's status is changed to Open, the returned job corresponds to the opening of reconciliations for the specified period. The job's success or failure does not impact the period's status because this change is made immediately. Even if there are failures while reopening reconciliations, the period status still remains Open.

If a period's status is set to Closed or Locked, no job is returned.

REST Resource

```
POST       /armARCS/rest/{api_version}/jobs
```

Required Roles

Service Administrator or Periods - Manage

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job.

Table 4-7 SET PERIOD STATUS

Name	Description	Required
`api_version`	Version of the API you are working with, such as v1	Yes
`jobName`	The name of a job, SET_PERIOD_STATUS	Yes
`period`	The name of the period, such as July2016	Yes
`status`	Status to be changed; supported values: pending, open, closed, locked	Yes

Example of request body

```
{
 "jobName" : "SET_PERIOD_STATUS",
 "parameters": {
                                "period":"July2016",
                                "status":"closed"
                                }
}
```

Response

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Parameters:

Table 4-8 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes. When the period's status is changed to Open, the status of the job that opens reconciliations for the specified period is sent as additional information. Use this additional information to check the status of the open reconciliations job.
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Relationship type
`data`	Parameters as key value pairs passed in the request

Example of Response Body

The following is an example of the response body in JSON format.

```
{
  "type": "ARCS",
  "status": -1,
  "details": "In Process",
  "links": [
    {
      "rel": "self",
      "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1/jobs/2141",
      "action": "GET"
    }
  ]
}
```

Create Reconciliation (Reconciliation Compliance)

Copies all selected profiles to a period and returns success or failure status.

REST Resource

```
POST       /armARCS/rest/{api_version}/jobs
```

Required Roles

Service Administrator, Power User, or Profiles and Reconciliations - Manage

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job. For additional parameters that are common to all jobs, see Execute a Job.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-9 RULES

Name	Description	Required	Default
api_version	Version of the API you are working with, such as v1.	Yes	None
jobName	The name of a job, CREATE_RECONCILIATIONS.	Yes	None
period	The name of the period, such as July2016	Yes	None
filter	The name of filter, such as MyFilter	No	None

Example of request body

```
{
 "jobName" : "CREATE_RECONCILIATIONS",
 "parameters": {
                                "period":"July2016",
                                 "filter":"MyFilter"
                                 }
}
```

Response

Parameters:

Table 4-10 Parameters

Name	Description
details	In case of errors, details are published with the error string
status	See Migration Status Codes
links	Detailed information about the link
href	Links to API call or status API
action	The HTTP call type
rel	Relationship type
data	Parameters as key value pairs passed in the request

Example of Response Body

The following is an example of the response body in JSON format.

```
{
  "type": "ARCS",
  "status": -1,
  "details": "In Process",
  "links": [
    {
      "rel": "self",
      "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1/jobs/2141",
      "action": "GET"
    }
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
  ]
}
```

Delete Profile

Deletes an Account Reconciliation profile.

REST Resource

POST `/armARCS/rest/{api_version}/jobs`

Required Roles

Service Administrator, Power User, or Profiles and Reconciliations - Manage

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job.

Table 4-11 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with: v1	Path	Yes	None
`jobname`	The name of the job, `DELETE_PROFILE`	Payload	Yes	None
`accountId`	The name of the profile that must be deleted.	Payload	Yes	None

Example of Request Body

```
{
    "jobName": "DELETE_PROFILE",
    "parameters": {
        "accountId": "101-1234-5678",
    }
}
```

Response

Parameters

The following table summarizes the response parameters.

Table 4-12 Parameters

Name	Description
`type`	The value is "RC".
`details`	In case of errors, details are published with the error string
`status`	Migration status code
`links`	Detailed information about the link

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-12 (Cont.) Parameters

Name	Description
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Relationship type
`data`	Parameters as key value pairs passed in the request

Supported Media Types: `application/json`

Example of Response Body

```
{
    "type": "RC",
    "status": -1,
    "details": "In Process",
    "links": [
            {
            "rel": "self",
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1/jobs/2141",
            "action": "GET"
            }
        ]
}
```

Execute an Account Reconciliation Job

Use this resource to execute a job by providing the job name and type.

The job is expected to be defined in Account Reconciliation with all the required parameters saved with the job definition. For some job types, the parameters can be either provided or overwritten at runtime.

Reconciliation Compliance Supported Job Types:

- CREATE_RECONCILIATIONS
- SET_PERIOD_STATUS
- IMPORT_PREMAPPED_TRANSACTIONS
- IMPORT_PREMAPPED_PROFILES
- IMPORT_RATES
- IMPORT_BALANCES
- MONITOR_RECONCILIATIONS
- IMPORT_PREMAPPED_BALANCES

Transaction Matching Supported Job Types:

- IMPORTTMPREMAPPEDTRANSACTIONS
- RUNAUTOMATCH

Copyright © 2017, 2026, Oracle and/or its affiliates.

This topic describes general information for executing a job. Details for each job type are described in separate topics for individual jobs.

REST Resource

POST `/armARCS/rest/{api_version}/jobs`

Required Roles

Service Administrator, Power User, User, Viewer

Users with Power User, User, and Viewer application roles may require additional granular roles.

Request

Supported Media Types: `application/json`

Parameters

This table summarizes thef request parameters that are generic to all jobs. The following tables describe parameters specific to individual rules.

Table 4-13 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None

Example URL

`https://<BASE-URL>/armARCS/rest/v1/jobs`

Response

Supported Media Types: `application/json`

Parameters

This table summarizes the response parameters that are generic to all jobs. The following tables describe parameters specific to individual rules.

Table 4-14 Parameters

Name	Description
`jobName`	The name of the job, such as Create Reconciliations
`period`	The name of period, such as `July2016`

> **Note**
>
> For monitor_reconciliations, the parameter is `periodName`.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-14 (Cont.) Parameters

Name	Description
`filter`	The name of filter, such as `MyFilter`

> **Note**
>
> For monitor_reconciliations, the parameter is `filterName`.

Export Application Properties

Exports Account Reconciliation application settings (related to Redwood Experience, theme, email notification on/off setting, and business process name), background image, and logo image to a JSON file so that you can import them into the same or another environment.

This command is useful when you import an application from prod to test environments. If your application settings are different in prod and test environments, you can export them from the test environment before importing the application from the prod environment, and then import the settings in to the test environment to maintain the original settings.

You can download the export file using the Download REST API. This is a synchronous API.

REST Resource

```
POST       /arm/rest/fcmapi/{api_version}/rc/export/applicationproperties
```

Required Roles

Administrator, or any application role and the Migrations - Administer granular role

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-15 EXPORT APPLICATION PROPERTIES

Name	Description	Required	Default
`fileName`	The name of the JSON file that stores the exported property values. Use the Upload API to upload the file to the target environment and then restore these settings in the target environment, as described in Import Application Properties.	Yes	None
`properties`	The comma-separated list of properties to be exported. Valid values include the following: • `Theme` exports the display theme used in the environment • `EmailNotification` exports the email notification on/off setting defined in the environment • `DisplayBusinessProcessName` exports whether to display the business process name on the page in the environment • `RedwoodExperience` exports the Redwood Experience setting of the environment • `BackgroundImage` exports the backgound image used in the environment • `LogoImage` exports the logo image used in the environment	No	All valid properties are exported.

Examples of request body

Example 1: Exporting all exportable application properties

```
{
 "fileName": "ApplicationProperties.json"
}
```

Example 2: Exporting specific application properties

```
{
 "fileName": "ApplicationProperties.json",
 "properties":["Theme", "EmailNotification", "DisplayBusinessProcessName",
"RedwoodExperience"]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Response

Supported Media Types: `application/json`

Parameters:

Table 4-16 Parameters

Name	Description
`details`	In case of errors, details are published with the error string.
`status`	Status of the job: • -1 = In Progress • 0 = Success • 1 = Fail
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Relationship type. It can be `self` or `export-content`. If the export succeeds, you can use the `href` to download the exported file.

Example of Response Body

The following is an example of the response body in JSON format.

```
{
    "details": "Application properties exported successfully",
    "links": [
        {
            "rel": "self",
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/arm/rest/fcmapi/v1/rc/
export/applicationproperties",
            "action": "POST"
        },
        {
            "rel": "export-content",
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1/
ApplicationProperties.json/contents",
            "action": "GET"
        }
    ],
    "status": 0,
    "type": "RC",
    "link": {},
    "error": null,
    "items": []
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Export Background Image

Exports the background image used in an Account Reconciliation environment to a JPG file so that you can import it into another environment.

You can download the image file using the Download REST API. This is a synchronous API.

REST Resource

```
POST       /arm/rest/fcmapi/{api_version}/rc/export/backgroundImage
```

Required Roles

Administrator, or any application role and the Migrations - Administer granular role

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job.

Table 4-17 EXPORT BACKGROUND IMAGE

Name	Description	Required	Default
`api_version`	The current REST API version for the API. For example, v1 for this API.	Yes	v1
`fileName`	The name for the background image file in JPG, JPEG, GIF, or PNG format. Use the Upload API to upload the background image file to the target environment and then import it into the target environment, as described in Import Background Image.	Yes	None

Example of request body

```
{
    "fileName":"backgroundImage.jpg"
}
```

Response

Supported Media Types: `application/json`

Parameters:

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-18 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	Status of the job: • -1 = In Progress • 0 = Success • 1 = Fail
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Relationship type. It can be `self` or `export-content`. If the export succeeds, you can use the `href` to download the exported file.

Example of Response Body

The following is an example of the response body in JSON format.

```
{
    "details": "Background Image exported successfully",
    "links": [
        {
            "rel": "self",
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/arm/rest/fcmapi/v1/rc/
export/backgroundImage",
            "action": "POST"
        },
        {
            "rel": "export-content",
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/interop/rest/11.1.2.3.600/
applicationsnapshots/bgImage.jpg/contents",
            "action": "GET"
        }
    ],
    "status": 0,
    "type": "RC",
    "link": {},
    "error": null,
    "items": []
}
```

Export Logo Image

Exports the corporate logo used in an Account Reconciliation business process to a JPG file so that you can import it into another environment.

The exported file can be download using the Download REST API. This is an asynchronous API.

Copyright © 2017, 2026, Oracle and/or its affiliates.

REST Resource

```
POST       /arm/rest/fcmapi/{api_version}/rc/export/logo
```

Required Roles

Administrator, or any application role and the Migrations - Administer granular role

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job.

Table 4-19 EXPORT LOGO IMAGE

Name	Description	Required	Default
`api_version`	The current REST API version for the API. For example, v1 for this API.	Yes	v1
`fileName`	The name of the logo image file in JPG, JPEG, GIF, or PNG format. Use the Upload API to upload the background image file to the target environment and then import it into the target environment, as described in Import Logo Image.	Yes	None

Example of request body

```
{
    "fileName":"logo.jpg"
}
```

Response

Supported Media Types: `application/json`

Parameters:

Table 4-20 Parameters

Name	Description
`details`	In case of errors, details are published with the error string.
`status`	Status of the job: • -1 = In Progress • 0 = Success • 1 = Fail
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-20 (Cont.) Parameters

Name	Description
`rel`	Relationship type. It can be `self` or `export-content`. If the export succeeds, you can use the `href` to get the status of the import operation.

Example of Response Body

The following is an example of the response body in JSON format.

```
{
    "links": [
        {
            "rel": "self",
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/arm/rest/fcmapi/v1/RC/
export/logo",
            "action": "POST"
        },
        {
            "rel": "export-content",
            "href": "<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/interop/rest/11.1.2.3.600/
applicationsnapshots/logo.jpg/contents",
            "action": "GET"
        }
    ],
    "details": "Logo image exported successfully.",
    "type": "RC",
    "status": 0,
    "link": {},
    "error": null,
    "items": []
}
```

Generate Balance Summary Report for Account Reconciliation

Generates the balance summary report which provides a reconciliation snapshot.

REST Resource

```
POST  /arm/rest/{api_version}/jobs
```

Required Roles

Service Administrator, Power User, or Profiles and Reconciliations - View

Request

Supported Media Types: `application/json`

Parameters

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-21 REPORT

Name	Description	Required
jobName	The name of a job, balancereportsummary.	Yes
accountID	The Account ID of the reconciliation for which the report must be generated.	Yes
accountingDate	The Accounting Date. This date must be associated with a valid period. The default format is yyyy-mm-dd.	Yes

Example of request body

```
{
 "jobName": "balancereportsummary",
 "parameters": {
   "accountId": "203-18100 29100 120 IC",
   "accountingDate":"2023-02-25"
  }
}
```

Response

Supported Media Types: application/json

Parameters:

Table 4-22 Parameters

Name	Description
details	In case of errors, details are published with the error string.
status	See Migration Status Codes
links	Detailed information about the link
href	Links to the API call
action	The HTTP call type
rel	Relationship type
data	Parameters as key value pairs passed in the request

Examples of Response Body

```
{
    "type": "TM",
    "items": null,
    "error": null,
    "link": null,
    "status": -1,
    "details": null,
    "links": [
        {
            "rel": "self",
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/arm/rest/v1/jobs/
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
100000005574018",
            "action": "GET",
            "data": null
        }
    ]
}
```

Generate Balance Report Transactions for Account Reconciliation

Generates a zip file that contains details of transactions in the Balancing panel or Balance Summary.

REST Resource

```
POST  /arm/rest/{api_version}/jobs
```

Required Roles

Service Administrator, Power User, or Profiles and Reconciliations - View

Request

Supported Media Types: `application/json`

Parameters

Table 4-23 REPORT

Name	Description	Required
`jobName`	The name of a job, `balancereporttransactions`.	Yes
`accountID`	The Account ID of the reconciliation for which the report must be generated.	Yes
`accountingDate`	The Accounting Date. This date must be associated with a valid period. The default format is yyyy-mm-dd.	Yes

Example of request body

```
{
 "jobName": "balancereporttransactions",
 "parameters": {
   "accountId": "203-18100 29100 120 IC",
   "accountingDate":"2023-02-25"
  }
}
```

Response

Supported Media Types: `application/json`

Parameters:

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-24 Parameters

Name	Description
details	In case of errors, details are published with the error string
status	See Migration Status Codes
links	Detailed information about the link
href	Links to the API call
action	The HTTP call type
rel	Relationship type
data	Parameters as key value pairs passed in the request

Examples of Response Body

```
{
    "type": "TM",
    "items": null,
    "error": null,
    "link": null,
    "status": -1,
    "details": null,
    "links": [
        {
            "rel": "self",
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/arm/rest/v1/jobs/
100000005574020",
            "action": "GET",
            "data": null
        }
    ]
}
```

Generate Cosmetic Changes Report for Account Reconciliation

Generates a report containing all cosmetic changes made to a reconciliation during a specific period.

REST Resource

```
POST  /arm/rest/{api_version}/jobs
```

Required Roles

Service Administrator, Power User, or Profiles and Reconciliations - View

Request

Supported Media Types: `application/json`

Parameters

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-25 REPORT

Name	Description	Required
jobName	The name of a job, cosmeticchangesreport.	Yes
accountID	The Account ID of the reconciliation for which the report must be generated.	Yes
accountingDate	The Accounting Date. This date must be associated with a valid period. The default format is yyyy-mm-dd.	Yes

Example of request body

```
{
 "jobName": "cosmeticchangesreport",
 "parameters": {
   "accountId": "203-18100 29100 120 IC",
   "accountingDate":"2023-02-25"
  }
}
```

Response

Supported Media Types: application/json

Parameters:

Table 4-26 Parameters

Name	Description
details	In case of errors, details are published with the error string.
status	See Migration Status Codes
links	Detailed information about the link
href	Links to the API call
action	The HTTP call type
rel	Relationship type
data	Parameters as key value pairs passed in the request

Examples of Response Body

```
{
    "type": "TM",
    "items": null,
    "error": null,
    "link": null,
    "status": -1,
    "details": null,
    "links": [
        {
            "rel": "self",
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/arm/rest/v1/jobs/
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
100000005574021",
            "action": "GET",
            "data": null
        }
    ]
}
```

Generate Report for Account Reconciliation

Generates either a single predefined Reconciliation Compliance report, predefined Transaction Matching report or a custom report.

> **Note**
>
> All parameters must be specified for a report.

REST Resource

```
POST  /arm/rest/fcmapi/{api_version}/report
```

Required Roles

Service Administrator, Power User, User, Viewer

Users with Power User, User, and Viewer application roles may require additional granular roles.

Request

Supported Media Types: `application/json`

Parameters

Table 4-27 REPORT

Name	Description	Path	Required
`groupName`	The name of the group the report is associated with.	No	Yes
`reportName`	The name of the report to be generated.	No	Yes
`generatedReportFileName`	Specify the name of the generated report, including the file extension that matches the selected report format. If you omit this parameter, the system will use the value from the `reportName` parameter defined in the table below. This process overwrites existing files of the same name on the server.	No	No

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-27 (Cont.) REPORT

Name	Description	Path	Required
`parameters`	Each report may have different parameters. Types of parameters: • Numerical - should be in BigDecimal format. • Text - standard string • Date - can be in format `yyyy-MM-dd` for example `2020-10-01`. To use the current date, use the value "CURRENT_DATE". • Date/Time - can be in format `yyyy-MM-dd HH:mm:ss` or `yyyy-MM-dd'T'HH:mm:ss` for example `2020-10-01 13:01:00`, `2020-10-01T13:01:00`. To use the current date and time, use the value "CURRENT_DATE_TIME". • Boolean • Users - user login ID • List of choices - case insensitive values	No	No
`format`	The format of the report (HTML, PDF, XLSX, CSV or CSV2).	No	No (default is PDF)
`module`	The module within Account Reconciliation: RC (Reconciliation Compliance) or TM (Transaction Matching.	No	No (default is RC)
`emails`	Comma separated list of email addresses that will receive the report once it's generated. Ensure the generated report size does not exceed 60 MB when the `emails` parameter is specified.	No	No
`runAsync`	Generation of report runs asynchronously (true) or synchronously (false). Oracle recommends setting this value to true (async) for larger reports. An example of request body and output is shown.	No	No (default is false)

Copyright © 2017, 2026, Oracle and/or its affiliates.

> **Note**
>
> If the required parameters, `groupName` or `reportName` are not specified, you receive an error.
>
> For details about `reportName` or `parameters`, see Working with Predefined Reports in Reconciliation Compliance or Working with Predefined Reports in Transaction Matching in *Administering Account Reconciliation*.
>
> For details about **Output Format**, see Generating the Report in *Administering Account Reconciliation*.
>
> For details about retrieving job status while running reports, see Retrieve Job Status for a Report.

.

Example of request body (to be run synchronously)

```
{
"groupName":"Reconciliation Manager",
"reportName":"Balance by Account Type",
"generatedReportFileName":"myReport.pdf",
 "parameters":{"Period":"June 2018","Currency Bucket": "Entered", "Rate
Type": "Accounting"},
"format":"PDF",
"module":"RC",
"emails":"user1@oracle.com,user2@oracle.com",
"runAsync":false
}
```

Example of request body (to be run asynchronously for larger reports)

```
{
"groupName":"Reconciliation Manager",
"reportName":"Balance by Account Type",
"generatedReportFileName":"myReport.pdf",
 "parameters":{"Period":"June 2018","Currency Bucket": "Entered", "Rate
Type": "Accounting"},
"format":"PDF",
"module":"RC",
"emails":"user1@oracle.com,user2@oracle.com",
"runAsync":true
}
```

Response

Supported Media Types: `application/json`

Parameters:

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-28 Parameters

Name	Description
`type`	The module within Account Reconciliation: RC (Reconciliation Compliance) or TM (Transaction Matching.
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to the API call
`action`	The HTTP call type
`rel`	Relationship type (`self`, `Job Status`). if set to `Job Status`, you can use the `href` to get the status of the operation
`data`	Parameters as key value pairs passed in the request

Examples of Response Body

The following is an example of the response body in JSON format for a Reconciliation Compliance successfully completed report called My Report in pdf format generated synchronously (runAsync=false):

```
{
"type":"RC",
"status":0,
 "details": "myReport.pdf",
 "links" [{
 "action": "POST",
  "href":  "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/fcm/rest/fcmapi/v1/report",
  "rel":  "self"
  },
       {
            "rel": "report-content",
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/interop/rest/v1/
applicationsnapshots/myReport.pdf",
            "action": "GET"
}
]
}
```

The following is an example of the response body in JSON format for a Reconciliation Compliance report generated asynchronously (runAsync=true) where the report is "In Process" and you can use the Job ID generated to retrieve the job status. See Retrieve Job Status for a Report:

```
{
 "links":[
{
 "rel":"self",
 "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/arm/rest/fcmapi/v1/report",
"action": "POST"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
},
{
"rel":"Job Status",
 "href":  "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/arm/rest/fcmapi/v1/
report/job/TM/100000001001009",
 "action": "GET"
}
],
"details":"In Process",
"status":-1,
}
```

Generate User Details Report for Account Reconciliation

Generates a User Details report for **Account Reconciliation**. The **User Details** report contains information on the users who have application roles in the environment and lists attributes of each user (such as name and email), their status, teams, application roles, workflow roles, organizations, groups, and last login timestamps.

You can use the **Download** REST API to download the report after generating it.

REST Resource

```
POST  /arm/rest/fcmapi/{api_version}/rc/export/users
```

A sample Account Reconciliation Access Control report:

	A	B	C	D	E	F	G	H	I	J	K	L
1	Name	User Login	Status	Teams	Email	Role	Workflow F	Preparer	Reviewer	Organizations	Power User	Last Login
2	John Doe	jdoe	Available	Admins	john.doe@example.com	Administrator		No	No			
3	Jane Doe	janedoe	Available		jane.doe@example.com	Power User		No	No			
4	App User1	app1	Available	Team A	app.user1@example.com	User		No	No			

Required Roles

Service Administrator, Access Control - Manage, or Access Control - View

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 4-29 REPORT

Name	Description	Path	Required
`fileName`	The name of the report to be generated.	No	Yes
`format`	The format of the report (CSV or XLS).	No	No (default = CSV)

Copyright © 2017, 2026, Oracle and/or its affiliates.

> **Note**
>
> For details about retrieving job status while running reports, see Retrieve Job Status for a Report.

Examples of request body

Example 1

```
{
    "fileName":"UserDetails.csv",
    "format":"CSV"
}
```

Example 2

```
{
    "fileName":"UserDetails.csv"
}
```

Example 3

```
{
    "fileName":"UserDetails.xls",
    "format":"xls"
}
```

Response

Supported Media Types: `application/json`

Parameters:

Table 4-30 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to the API call
`action`	The HTTP call type
`rel`	Relationship type can be (`self`, or `Job Status`). If set to `Job Status`, you can use the `href` to get the status of the operation

Examples of Response Body

```
{
    "links": [
        {
            "rel": "self",
            "href": "https:<BASE-URL>/arm/rest/fcmapi/v1/rc/export/users",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "action": "POST"
        },
        {
            "rel": "Job Status",
            "href": "https:<BASE-URL>/arm/rest/fcmapi/v1/rc/job/42233",
            "action": "GET"
        }
    ],
    "details": "In Process",
    "status": -1,
    "type": "rc",
    "link": {},
    "error": null,
    "items": []
}
```

Job Status Response

```
{
    "links": [
        {
            "rel": "self",
            "href": "https:<BASE-URL>/arm/rest/fcmapi/v1/rc/job/42233",
            "action": "GET"
        },
        {
            "rel": "report-content",
            "href": "https:<BASE-URL>/interop/rest/11.1.2.3.600/
applicationsnapshots/UserDetails.csv/contents",
            "action": "GET"
        }
    ],
    "details": "File UserDetails.csv generated successfully.",
    "status": 0,
    "type": "rc",
    "link": null,
    "error": null,
    "items": null
}
```

Import Application Properties

Imports Account Reconciliation application settings (related to Redwood Experience, theme, email notification on/off setting, and business process name), background image, and logo image from an export file into an Account Reconciliation environment.

The export file is available for import after the file is uploaded using the Upload REST API. This a synchronous API.

REST Resource

```
POST       /arm/rest/fcmapi/{api_version}/rc/import/applicationproperties
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Required Roles

Administrator, or any application role and the Migrations - Administer granular role

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job.

Table 4-31 IMPORT APPLICATION PROPERTIES

Name	Description	Required	Default
`api_version`	The REST API version for the API. This release is v1.	Yes	v1
`fileName`	The name of the JSON file that contains exported property values from another environment. This file, exported from another environment as described in Export Application Properties, must be available in the environment where you are restoring application settings.	Yes	None

Example of request body

```
{
    "fileName":"applicationProperties.json"
}
```

Response

Supported Media Types: `application/json`

Parameters:

Table 4-32 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	Status of the job: • -1 = In Progress • 0 = Success • 1 = Fail
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Relationship type. Possible values: `self`.

Example of Response Body

Copyright © 2017, 2026, Oracle and/or its affiliates.

The following is an example of the response body in JSON format.

```
{
    "details": "Application properties imported successfully",
    "links": [
        {
            "rel": "self",
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/arm/rest/fcmapi/v1/rc/
import/applicationproperties",
            "action": "POST"
    ],
    "status": 0,
    "type": "RC",
    "link": {},
    "error": null,
    "items": []
}
```

Import Attribute Values

Imports attribute values into an existing list attribute or group attribute. In Transaction Matching, you can only import group attributes.

REST Resource

POST `/armARCS/rest/{api_version}/jobs`

Required Roles

Service Administrator, Power User, or Profiles and Reconciliations – Manage

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 4-33 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with: v1	Path	Yes	None
`jobname`	The name of the job, `IMPORT_ATTRIBUTE_VALUES`	Payload	Yes	None
`importType`	The import type. Supported values are `Replace`, `Replace All`, and `Update`.	Payload	No	Replace
`fileLocation`	The file name containing the values to be imported; example: `StoreData.csv`	Payload	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-33 (Cont.) Parameters

Name	Description	Type	Required	Default
dateFormat	Format of date fields in the import file. Supported date formats are as follows: • d MMM, yyyy • MMM d, yyyy • MM/dd/yyyy • dd/MM/yyyy • MM-dd-yyyy • d-M-yyyy • dd-MMM-yy • dd-MMM-yyyy	Payload	No	dd-MMM-yyyy
attribute	The name of the list attribute or group attribute into which values must be imported.	Payload	Yes	None
module	The name of the module. Supported values are: RC for Reconciliation Compliance and TM for Transaction Matching.	Payload	Yes	None

Example of Request Body

```
{
"jobName" : "IMPORT_ATTRIBUTE_VALUES",
"parameters": {
"attribute":"Store",
"importType":"Replace",
"fileLocation":"StoreData.csv",
"dateFormat": "MMM d,yyyy",
"module": "RC"}
}
```

Response

Parameters

The following table summarizes the response parameters.

Table 4-34 Parameters

Name	Description
type	The application type
details	In case of errors, details are published with the error string
status	See Migration Status Codes
links	Detailed information about the link
href	Links to API call or status API
action	The HTTP call type
rel	Relationship type

Supported Media Types: application/json

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example of Response Body

```
{
"type": "ARCS",
"status": -1,
"details": "In Process",
"links": [
{
"rel": "self",
"href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/oraclecloud.com/arm/rest/
fcmapi/v1/RC/job/2141",
"action": "GET"
}
]
}
```

Import Background Image

Imports the background image from an export file into an Account Reconciliation environment and then sets it as the current background image.

The image will be available for import after you upload the file using the Upload REST API. This is a synchronous API.

REST Resource

```
POST       /arm/rest/fcmapi/{api_version}/rc/import/backgroundImage
```

Required Roles

Administrator, or any application role and the Migrations - Administer granular role

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job.

Table 4-35 IMPORT BACKGROUND IMAGE

Name	Description	Required	Default
`api_version`	The current REST API version for the API. For example, v1 for this API.	Yes	v1
`fileName`	The name of the background image file that was exported from another environment. Supported formats include JPG, JPEG, GIF, and PNG.	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example of request body

```
{
    "fileName":"backgroundImage.jpg"
}
```

Response

Supported Media Types: `application/json`

Parameters:

Table 4-36 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	Status of the job: • -1 = In Progress • 0 = Success • 1 = Fail
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Relationship type. Possible values: `self`.

Example of Response Body

The following is an example of the response body in JSON format.

```
{
    "details": "Background image imported successfully.",
    "links": [
        {
            "rel": "self",
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/arm/rest/fcmapi/v1/rc/
import/backgroundImage",
            "action": "POST"
        }
    ],
    "status": 0,
    "type": "RC",
    "link": {},
    "error": null,
    "items": []
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Import Balances (Reconciliation Compliance)

Imports balances data using Data Management from a previously created Data Load definition, and returns success or failure status.

When using Data Management, if a data load rule fails, the Account Reconciliation log file includes a message such as the following:

```
Dataload process failed for process {JOB_ID}. Check the Data Management log
for more details.
Data Management log file name: {LOG_FILE_NAME}
Detailed error from Data Management process: {DETAILS}
```

Refer to the Data Management log file to understand the reason for the job failure. If multiple data load rules fail, a separate log is created for each data load rule.

REST Resource

```
POST       /armARCS/rest/{api_version}/jobs/
```

Required Roles

Service Administrator or Periods - Manage

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 4-37 IMPORT_BALANCES

Name	Description	Path	Required
`api_version`	Version of the API you are working with, such as v1	Yes	Yes
`jobName`	The name of the job, `IMPORT_BALANCES`	No	Yes
`period`	The name of the period, such as April 2016	No	Yes
`dl_Definition`	The name of a previously saved data load using the format `DL_`*`name`*.	No	Yes

Example of request body

```
{
  "jobName" : "IMPORT_BALANCES",
              "parameters": {
                             "period":"April 2016",
                             "dl_Definition":"DL_test"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
                                    }
}
```

Response

Supported Media Types: `application/json`

Parameters:

Table 4-38 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to the API call
`action`	The HTTP call type
`rel`	Relationship type (`self`, `Job Status`). if set to `Job Status`, you can use the `href` to get the status of the operation
`data`	Parameters as key value pairs passed in the request

Example of Response Body

The following is an example of the response body in JSON format.

```
{
"type": "ARCS",
"status": -1,
"details": "In Process",
"links": [
{
"rel": "self",
"href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1/jobs/2141
"action": "GET"
}
]
}
```

Import Logo Image

Imports the corporate logo used in an Account Reconciliation environment from an export file into another environment.

The logo is available for import after you upload the image file using the Upload REST API. This is an asynchronous API.

REST Resource

```
POST       /arm/rest/fcmapi/{api_version}/rc/import/logo
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Required Roles

Administrator, or any application role and the Migrations - Administer granular role

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job.

Table 4-39 IMPORT LOG IMAGE

Name	Description	Required	Default
`api_version`	The current REST API version for the API. For example, v1 for this API.	Yes	v1
`fileName`	The name of the logo image file that contains the image to be imported. Supported formats include JPG, JPEG, GIF, and PNG.	Yes	None

Example of request body

```
{
    "fileName":"logo.jpg"
}
```

Response

Supported Media Types: `application/json`

Parameters:

Table 4-40 Parameters

Name	Description
`details`	In case of errors, details are published with the error string.
`status`	Status of the job: • -1 = In Progress • 0 = Success • 1 = Fail
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Relationship type. Possible values: `self`.

Example of Response Body

Copyright © 2017, 2026, Oracle and/or its affiliates.

The following is an example of the response body in JSON format.

```
{
    "links": [
        {
            "rel": "self",
            "href": "<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/arm/rest/fcmapi/v1/RC/
import/logo",
            "action": "POST"
        }
    ],
    "details": "Logo image imported successfully.",
    "type": "RC",
    "status": 0,
    "link": {},
    "error": null,
    "items": []
}
```

Import Pre-Mapped Balances (Reconciliation Compliance)

Imports pre-mapped balances and returns the success or failure status.

REST Resource

```
POST       /armARCS/rest/{api_version}/jobs
```

Required Roles

Service Administrator or Periods - Manage

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job.

Table 4-41 IMPORT_PREMAPPED_BALANCES

Name	Description	Required
`api_version`	Version of the API you are working with, such as v1	Yes
`jobName`	The name of a job, `IMPORT_PREMAPPED_BALANCES`	Yes
`period`	The name of the period, such as July2016	Yes
`balanceType`	Supported balance types are SRC for source system balance, and SUB for subsystem balance	Yes
`currencyBucket`	Currency bucket such as `Functional`	Yes
`file`	Name of the import file, such as `balances.csv`	Yes

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example of request body

```
{
 "jobName" : "IMPORT_PREMAPPED_BALANCES",
 "parameters": {
                              "period":"July2016",
                              "balanceType":"SRC",
                              "file":"balances.csv",
                              "currencyBucket":"Functional"
                               }
}
```

Response

Supported Media Types: `application/json`

Parameters:

Table 4-42 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Relationship type
`data`	Parameters as key value pairs passed in the request

Example of Response Body

The following is an example of the response body in JSON format.

```
{
  "type": "ARCS",
  "status": -1,
  "details": "In Process",
  "links": [
    {
      "rel": "self",
      "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1/jobs/2141",
      "action":"GET"
    }
  ]
}
```

Import Pre-Mapped Transactions (Reconciliation Compliance)

Imports pre-mapped transactions for a particular period and returns the success or failure status.

Copyright © 2017, 2026, Oracle and/or its affiliates.

REST Resource

```
POST       /armARCS/rest/{api_version}/jobs
```

Required Roles

Service Administrator, Power User, or Profiles - Manage

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job.

Table 4-43 IMPORT_PREMAPPED_TRANSACTIONS

Name	Description	Required
`api_version`	Version of the API you are working with, such as v1	Yes
`jobName`	The name of a job, IMPORT_PREMAPPED_TRANSACTIONS	Yes
`transactionType`	Transaction Type is one of the following: • BEX for loading Balance Explanations • SRC for loading Source System Adjustments • SUB for loading Subsystem Adjustments • VEX for loading Variance Explanations	Yes
`file`	The file name, such as transactions.csv	
`dateFormat`	Date Format, such as DD/MM/YYYY, MMM d, yyyy, or All	Yes

Example of request body

```
{
 "jobName" : "IMPORT_PREMAPPED_TRANSACTIONS",
 "parameters": {
                                "period":"July2016",
                                "transactionType":"SRC",
                                "file":"transactions.csv",
                                "dateFormat": "MMM d,yyyy"
                                }
}
```

Response

Supported Media Types: `application/json`

Parameters:

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-44 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Relationship type
`data`	Parameters as key value pairs passed in the request

Example of Response Body

The following is an example of the response body in JSON format.

```
{
  "type": "ARCS",
  "status": -1,
  "details": "In Process",
  "links": [
    {
      "rel": "self",
      "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1/jobs/2141",
      "action": "GET"
    }
  ]
}
```

Import Profiles (Reconciliation Compliance)

Imports profiles and returns the success or failure status.

REST Resource

```
POST       /armARCS/rest/{api_version}/jobs
```

Required Roles

Service Administrator, Power User, or Profiles - Manage

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-45 IMPORT_PROFILES

Name	Description	Required
api_version	Version of the API you are working with, such as v1	Yes
jobName	The name of a job, IMPORT_PROFILES	Yes
importType	The import type; supported values are Replace and Update	Yes
period	The period for which to import, such as July2016	
profileType	The profile type; supported values are Profiles and Children	Yes
fileLocation	The file name, such as profiles.csv	Yes
dateFormat	Date Format, such as DD/MM/YYYY, MMM d, yyyy, or All	Yes

Example of request body

```
{
"jobName" : "IMPORT_PROFILES",
             "parameters": {
                              "period":"July2016",
                                    "importType":"Replace",
                                    "fileLocation":"profiles.csv",
                                    "dateFormat": "MMM d,yyyy"
                                     }
}
```

Response

Supported Media Types: application/json

Parameters:

Table 4-46 Parameters

Name	Description
details	In case of errors, details are published with the error string
status	See Migration Status Codes
links	Detailed information about the link
href	Links to API call or status API
action	The HTTP call type
rel	Relationship type
data	Parameters as key value pairs passed in the request

Example of Response Body

The following is an example of the response body in JSON format.

```
{
  "type": "ARCS",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
  "status": -1,
  "details": "In Process",
  "links": [
    {
      "rel": "self",
      "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1/jobs/2141",
      "action": "GET"
    }
  ]
}
```

Import Rates (Reconciliation Compliance)

Imports rates for a particular period and rate type, and returns the success or failure status.

REST Resource

```
POST       /armARCS/rest/{api_version}/jobs
```

Required Roles

Service Administrator or Periods – Manage

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job.

Table 4-47 IMPORT_RATES

Name	Description	Required
`api_version`	Version of the API you are working with, such as v1	Yes
`jobName`	The name of a job, `IMPORT_RATES`	Yes
`period`	The name of the period, such as `July2016`	Yes
`rateType`	The rate type, such as `Accounting`	Yes
`file`	Name of the import file, such as `rates.csv`	Yes
`importType`	Supported import types are `Replace` and `ReplaceAll`	Yes

Example of request body

```
{
 "jobName" : "IMPORT_RATES",
 "parameters": {
                                "period":"July2016",
                                 "rateType":"Accounting",
                                  "file":"rates.csv",
                                  "importType":"ReplaceAll"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
                                    }
}
```

Response

Supported Media Types: `application/json`

Parameters:

Table 4-48 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Relationship type
`data`	Parameters as key value pairs passed in the request

Example of Response Body

The following is an example of the response body in JSON format.

```
{
  "type": "ARCS",
  "status": -1,
  "details": "In Process",
  "links": [
    {
      "rel": "self",
      "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1/jobs/2141",
      "action": "GET"
    }
  ]
}
```

Import Pre-Mapped Transactions (Transaction Matching)

Imports a file of pre-mapped transactions into Transaction Matching, and returns the success or failure status.

REST Resource

```
POST       /arm/rest/{api_version}/jobs
```

Required Roles

Service Administrator, Power User, or Profiles and Reconciliations - Manage

Copyright © 2017, 2026, Oracle and/or its affiliates.

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job.

Table 4-49 IMPORTTMPREMAPPEDTRANSACTIONS

Name	Description	Required
`api_version`	Version of the API you are working with, such as v1	Yes
`jobName`	The name of a job, `importtmpremappedtransactions`	Yes
`dataSource`	Text ID of the data source where the transaction will be imported to	
`file`	The file name, such as `transactions.csv`	
`matchTypeId`	The Text ID of the match type (previously known as Reconciliation Type, both parameter names continue to work) where the transaction file will be imported to	Yes
`dateFormat`	Date Format is a parameter that includes the format of the date fields in the transactions import file. The default is `dd-MMM-yy`. Other supported date formats are `MM/dd/yyyy`, `dd/MM/yyyy`, `MM-dd-yyyy`, `d-M-yyyy`, and `MMM d,yyyy`.	Yes

Example of request body

```
{
 "jobName" : "importtmpremappedtransactions",
 "parameters": {
                                "dataSource":"CLEARING",
                                "matchTypeId":"CLEARING",
                                "file":"clearingTransaction.csv",
                                "dateFormat": "MM-dd-yyyy"
                                }
}
```

Response

Supported Media Types: `application/json`

Parameters:

Table 4-50 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-50 (Cont.) Parameters

Name	Description
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Relationship type
`data`	Parameters as key value pairs passed in the request

Example of Response Body

The following is an example of the response body in JSON format.

```
{
  "type": "TM",
  "status": -1,
  "details": "In Process",
  "links": [
    {
      "rel": "self",
      "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1/jobs/2141",
      "action": "GET"
    }
  ]
}
```

Import Reconciliation Attributes (Reconciliation Compliance)

Performs flat file loads of attribute values into existing reconciliations.

REST Resource

```
POST       /armARCS/rest/{api_version}/jobs
```

Required Roles

Service Administrator, Power User, or Profiles and Reconciliations – Manage

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job.

Table 4-51 Import Reconciliation Attributes

Name	Description	Required
`api_version`	Version of the API you are working with, such as v1	Yes

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-51 (Cont.) Import Reconciliation Attributes

Name	Description	Required
jobName	The name of a job, IMPORT_RECONCILIATION_ATTRIBUTES	Yes
fileName	The name of the upload import file	Yes
period	The name of the period, such as July2020	Yes
rules	The rules to run upon completion. Allowed values are: • ALL • SET_ATTR_VAL(Set Attribute Value) • CRT_ALT (Create Alert) • AUTO_APP(Auto Approve Reconciliation) • AUTO_SUB(Auto Submit Reconciliation) You can send multiple values separated by comma. Default is None.	No
reopen	Indicates whether to reopen changed reconciliations upon completion. Values is either true or false (default).	No
dateFormat	List of valid date formats, such asDD/MM/YYYY. You can send multiple values separated by semi-colon.	No

Here are some examples of the request body:

Example 1

```
{
    "jobName" : "IMPORT_RECONCILIATION_ATTRIBUTES",
    "parameters":
        {
         "fileName":"import_recon.csv",
         "period":"January 2010",
         "rules":"AUTO_APP,AUTO_SUB",
         "reopen":"true",
         "dateformat":"MM-dd-yyyy;MMM d, yyyy"
        }
}
```

Example 2

```
{
    "jobName" : "IMPORT_RECONCILIATION_ATTRIBUTES",
    "parameters":
        {
         "fileName":"Reconciliations.csv",
         "period":"June 2019",
         "rules":"AUTO_APP,AUTO_SUB",
         "reopen":"true"
        }
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example 3

```
{
    "jobName" : "IMPORT_RECONCILIATION_ATTRIBUTES",
    "parameters":
        {
         "fileName":"import_recon.csv",
         "period":"January 2010",
         "rules":"ALL",
         "reopen":"true"
        }
}
```

Example 4

```
{
    "jobName" : "IMPORT_RECONCILIATION_ATTRIBUTES",
    "parameters":
        {
         "fileName":"Reconciliations.csv",
         "period":"June 2019"
        }
}
```

Response

Supported Media Types: `application/json`

Parameters:

Table 4-52 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	• -1 = In Progress • 0 = Success • 1 = Fail
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Relationship type. Can be self and/or Job Status. If set to Job Status, you can use the href to get the status of the import operation.

Example of Response Body

The following is an example of the response body in JSON format.

```
{
    "type": "ARCS",
    "links": [
        {
            "rel": "self",
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1/jobs/
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
100000001155018",
            "action": "GET"
        }
    ],
    "details": "In Process",
    "status": -1
}
```

Monitor Reconciliations (Reconciliation Compliance)

Returns the list of reconciliations for a given period name and filter name.

> **Note**
>
> - If the Reconciliation status for all the Reconciliations in the given Period Name and Filter Name were closed, then the output status would be ‘0’.
> - If the Reconciliations status for any one of the Reconciliations in the given Period Name and Filter Name is open, then the output status would be ‘-1’.

REST Resource

```
POST       /armARCS/rest/{api_version}/jobs/
```

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 4-53 MONITOR_RECONCILIATIONS

Name	Description	Path	Required
`api_version`	Version of the API you are working with, such as v1	Yes	Yes
`jobName`	The name of the job, `MONITOR_RECONCILIATIONS`	No	Yes
`periodName`	The name of the period, such as September 2017	No	Yes
`filterName`	The name of the filter. For example, `Recon status filter`.	No	Yes

Example of request body

```
{
 "parameters":
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
{"periodName":"September 2017","filterName":"DemoFilter"},
"jobName":"MONITOR_RECONCILIATIONS"
}
```

Response

Supported Media Types: `application/json`

Parameters:

Table 4-54 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to the API call
`action`	The HTTP call type
`rel`	Relationship type (`self`, `Job Status`). if set to `Job Status`, you can use the `href` to get the status of the operation
`data`	Parameters as key value pairs passed in the request

Examples of Response Body

The following is an example of the response body in JSON format when all reconciliations are closed:

```
{
"error":null,
"details":"Account ID : 100-1210, Name : Accounts Receivable, Status :
Closed",
"items":null,
"status":0,
"link":null,
"links":[{"action":"GET","rel":"self","href":"https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1/jobs/
monitorReconciliations/September%202017/DemoFilter"}],
"type":"ARCS"
}
```

The following is an example of the response body in JSON format when any reconciliation status is open:

```
{
"error":null,
"details":"Account ID : 100-1210, Name : Accounts Receivable, Status : Open",
"items":null,
"status":-1,
"link":null,
"links":[{"action":"GET","rel":"self","href":"https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1/jobs/
monitorReconciliations/September%202017/DemoFilter"}],
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
"type":"ARCS"
}
```

Predict Predicted Attribute (Reconciliation Compliance)

Runs the Predict Predicted Attribute job that predicts the values of the specified predicted attribute. Before a prediction is run, the predicted attribute must be trained using the Train Predicted Attribute job.

REST Resource

```
POST       /armARCS/rest/{api_version}/jobs
```

Required Roles

Service Administrator or Profiles and Reconciliations - Manage

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job.

Table 4-55 PREDICT_ATTRIBUTE

Name	Description	Required
`api_version`	Version of the API you are working with: v1	Yes
`jobName`	The name of the job, `PREDICT_ATTRIBUTE`	Yes
`period`	The period for which the values for the specified predicted attribute must be predicted	Yes
`attributeName`	The name of the predicted attribute whose values must be predicted	Yes

Example of request body

```
{
 "jobName" : "PREDICT_ATTRIBUTE",
 "parameters": {
    "period": "May-2024",
    "attribute": "Predicted Risk"
     }
}
```

Response

Supported Media Types: `application/json`

Parameters:

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-56 Parameters

Name	Description
details	In case of errors, details are published with the error string
status	See Migration Status Codes
links	Detailed information about the link
href	Links to API call or status API
action	The HTTP call type
rel	Relationship type
data	Parameters as key value pairs passed in the request

Example of Response Body

The following is an example of the response body in JSON format.

```
Sample Response body:

{
    "type": "ARCS",
    "status": -1,
    "details": "In Process",
    "links": [
        {
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1/jobs/
100000103240043",
            "action": "GET",
            "rel": "self"
        }
    ]
}
```

Purge Transactions (Transaction Matching)

Removes matched transactions for Account Reconciliation using the provided parameters.

You can specify `filterOperator` and `filterValue` to further filter the matched transactions. Otherwise, all matched transactions older than or equal to the age from all accounts for the specified `matchType` are purged.

REST Resource

```
POST       /arm/rest/{api_version}/jobs
```

Required Roles

Service Administrator or Profiles and Reconciliations - Manage

Request

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Parameters

The following table summarizes the client request parameters specific to this job.

Table 4-57 Parameters

Name	Description	Type	Required	Values
`api_version`	Version of the API you are working with: v1	Path	Yes	v1
`jobName`	The name of a job	Payload	Yes	`purgetransactions`
`matchTypeId`	The Text ID of the match type (previously known as Reconciliation Type, both parameter names continue to work) from which matched transactions should be deleted	Payload	Yes	Example: `CLEARING`
`matchedStatus`	The status of the transactions to be deleted. The only value currently supported is `matched`.	Payload	No	Default value: `matched`
`age`	Identifies the number of days since the transaction was matched. Matched transactions older than or equal to this value will be deleted.	Payload	Yes	Example: 180

`filterOperator`	Optionally, use one of the following filter conditions to identify the accounts containing matched transactions for deletion. This value is combined with the `filterValue` to identify the accounts from which matched transactions should be purged:
	• `EQUALS`
	• `NOT_EQUALS`
	• `STARTS_WITH`
	• `ENDS_WITH`
	• `CONTAINS`
	• `NOT_CONTAINS`
		Payload	No	Examples:
				`EQUALS`
				`Starts_With`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-57 (Cont.) Parameters

Name	Description	Type	Required	Values

`filterValue`	Optionally use one or more filter values to identify the transactions to purge. Use a space-separated list to specify multiple values as shown in the examples. If multiple values are specified, transactions from accounts matching any filter operator and filter value combination are selected for purging.
	`EQUALS` and `NOT_EQUALS` support multiple values.
	`STARTS_WITH`, `ENDS_WITH`, `CONTAINS`, and `NOT_CONTAINS` only support a single value.
		Payload	No	Examples:
				`["101-1234","102-1234"]`
				`["102"]`

`logFileName`	Optionally, enter the name of a log file to record information about the API activity.	Payload	No	If a file name is not specified, a log file named `PurgeTransactions_Job_ID` is automatically generated. The file is located in the Outbox.

Example of request body

Example of purging matched transactions 120 days or older for `CLEARING` match type and accounts equal to 101-1234 and 102-1234:

```
{
    "jobName" : "purgetransactions",
    "parameters":
                {
                   "matchTypeId" : "CLEARING",
                   "age" : 120,
                      "filterOperator":"EQUALS",
                              "filterValue" : ["101-1234","102-1234"],
                              "logFileName" : "purge-clearing"
                }
}
```

Example of purging matched transactions 120 days or older for `CLEARING` match type and accounts start with 101:

```
{
    "jobName" : "purgetransactions",
    "parameters":
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
                {
                   "matchTypeId" : "CLEARING",
                   "age" : 120,
                      "filterOperator":"STARTS_WITH",
                              "filterValue" : ["101"],
                              "logFileName" : "purge-clearing"
                }
}
```

Response

Supported Media Types: `application/json`

Parameters:

Table 4-58 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Relationship type
`data`	Parameters as key value pairs passed in the request

Example of Response Body

The following is an example of the response body in JSON format.

```
{
  "type": "TM",
  "status": -1,
  "details": "In Process",
  "links": [
    {
      "rel": "self",
"href":"https://
<SERVICE_NAME><TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/arm/rest/v1/
jobs/2141",
      "action": "GET"
    }
  ],
  "error": null,
  "items": null,
  "link": null
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Purge Archived Transactions (Transaction Matching)

Purges matched transactions that are already archived in Transaction Matching.

REST Resource

```
POST       /arm/rest/{api_version}/jobs
```

Required Roles

Service Administrator or Profiles and Reconciliations - Manage

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request specific to this job.

Table 4-59 PURGE ARCHIVED TRANSACTIONS

Name	Description	Type	Required
`api_version`	Version of the API you are working with: v1	Path	Yes
`jobName`	The name of a job, purgearchivetransactions	Payload	Yes
`jobId`	Job Id of the Archive job which needs to be purged	Payload	Yes
`logFileName`	The name of the log file If a file name is not provided, the log file is named `Purge_Transactions_<reconTypeId>_<Job_id>.log`.	Payload	No

Example of request body

```
{
 "jobName": "purgearchivetransactions",
 "parameters": {
     "jobId": "100000003801002"
     "logFileName" : "Purge_Archive_Transactions_IC120XXXX.log"
}
}
```

Response

Supported Media Types: `application/json`

Example of Response Body

Copyright © 2017, 2026, Oracle and/or its affiliates.

The following is an example of the response body in JSON format.

```
{
    "type": "TM",
    "items": null,
    "error": null,
    "link": null,
    "status": -1,
    "details": null,
    "links": [
        {
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/arm/rest/v1/jobs/
100000003801002",
            "action": "GET",
            "rel": "self",
            "data": null
        }
    ]
}
```

To get the status of the purge archived transactions job and view its details, see Retrieve Job Status (Transaction Matching).

Retrieve Periods with a Specific Status

Retrieves a list of periods based on the specified status.

REST Resource

```
GET       /armARCS/rest/periods?status={status}
```

Required Roles

Service Administrator, Power User, or Viewer

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this API.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-60 GET PERIODS

Name	Description	Required	Type
`status`	Status of the periods to be retrieved. The value can be one of the following: • OPEN - All open periods • CLOSED - All closed periods • LOCKED - All locked periods • PENDING - All pending periods • OPEN_PENDING - All open or pending periods • ALL - All periods	Yes	Query

Example URLs

```
https://<BASE-URL>oraclecloud.com/armARCS/rest/periods?status=ALL
```

```
https://<BASE-URL>/armARCS/rest/periods?status=OPEN_PENDING
```

Response

Supported Media Types: `application/json`

Parameters:

Table 4-61 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	Status of the request. See Migration Status Codes.
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type

`items`	List of periods with the specified status. The format is:
	`{`
	`"Status": <status code>,`
	`"Id": <internal period ID>,`
	`"Name": <name of the period>`
	`}`
	The status code can be one of the following:
	• 51 - PENDING
	• 52 - OPEN
	• 53 - CLOSED
	• 54 - LOCKED

Example of Response Body

Copyright © 2017, 2026, Oracle and/or its affiliates.

The following is an example of the response body, in JSON format.

```
{
  "type": "ARCS",
  "items": [
    {
      "Status": "53",
      "Id": "100000000135004",
      "Name": "January 2022"
    },
    {
      "Status": "53",
      "Id": "100000000135007",
      "Name": "February 2022"
    },
    {
      "Status": "53",
      "Id": "100000000135009",
      "Name": "March 2022"
    },
    {
      "Status": "53",
      "Id": "100000000135011",
      "Name": "April 2022"
    }
  ],
  "status": 0,
  "links": [
    {
      "rel": "self",
      "href": "https://<BASE-URL>/armARCS/rest/periods",
      "action": "GET"
    }
  ]
}
```

Run Auto Match (Transaction Matching)

Runs the auto match process in Transaction Matching.

REST Resource

```
POST       /arm/rest/{api_version}/jobs
```

Required Roles

Service Administrator, Power User, or Profiles and Reconciliations - Manage

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-62 runautomatch

Name	Description	Required
api_version	Version of the API you are working with: v1	Yes
jobName	The name of a job, runautomatch	Yes
matchTypeId	The Text ID of the match type (previously known as Reconciliation Type, both parameter names continue to work) to be auto matched	Yes

Example of request body

```
{"jobName":"runautomatch",
"parameters":{"matchTypeId":"INTERCO"}}
```

Response

Supported Media Types: application/json

Parameters:

Table 4-63 Parameters

Name	Description
details	In case of errors, details are published with the error string
status	See Migration Status Codes
links	Detailed information about the link
href	Links to API call or status API
action	The HTTP call type
rel	Relationship type
data	Parameters as key value pairs passed in the request

Example of Response Body

The following is an example of the response body in JSON format.

```
{
  "type": "TM",
  "status": -1,
  "details": "In Process",
  "links": [
    {
      "rel": "self",
      "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/arm/rest/v1/jobs/2141",
      "action": "GET"
    }
  ],
  "error": null,
  "items": null,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
  "link": null
}
```

Retrieve Job Status (Reconciliation Compliance)

Returns the status of a job for Reconciliation Compliance, indicating if the job is in process, or if it is successfully executed or completed with errors.

REST Resource

GET `/armARCS/rest/{api_version}/jobs/{job_id}`

Required Roles

Service Administrator, Power User, or Jobs - View

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 4-64 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with: v1	Path	Yes	None
`jobIdentifier`	The ID of the job	Path	Yes	None

Response

Parameters

The following table summarizes the response parameters.

Table 4-65 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Relationship type
`data`	Parameters as key value pairs passed in the request

Supported Media Types: `application/json`

Example of Response Body

```
{
  "type": "ARCS",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
  "status": 0,
  "details": "Total to copy : 3\nSuccessfully copied : 2\nUnsuccessfully
copied : 1\n",
  "links": [
    {
      "rel": "self",
      "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1/jobs/91",
      "action": "GET"
    }
  ],
  "error": null,
  "items": null,
  "link": null
}
```

Retrieve Job Status (Transaction Matching)

Returns the status of a job for Transaction Matching, indicating if the job is in process, or if it is successfully executed or completed with errors.

REST Resource

GET `/arm/rest/{api_version}/jobs/{job_id}`

Required Roles

Service Administrator, Power User, or Jobs - View

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 4-66 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with: v1	Path	Yes	None
`jobIdentifier`	The ID of the job	Path	Yes	None

Response

Parameters

The following table summarizes the response parameters.

Table 4-67 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-67 (Cont.) Parameters

Name	Description
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Relationship type
`data`	Parameters as key value pairs passed in the request
`log-content`	Link to the log file location. This is applicable to Archive Matched Transactions, Purge Archived Transactions, Purge Transactions (Transaction Matching), Import Pre-Mapped Transactions (Transaction Matching), and Unmatch Matched Transaction (Transaction Matching) jobs.
`file-content`	Link to the location of the archive file, for Archive Matched Transactions jobs.

Supported Media Types: `application/json`

Example of Response Body

Example 1: Retrieve job status for an Auto Match job

```
{
    "type": "TM",
    "items": [
        0
    ],
    "error": null,
    "link": null,
    "status": 0,
    "details": "Job Completed. Job ID: 100000003918002",
    "links": [
        {
            "rel": "self",
            "href": https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/arm/rest//v1/jobs/
100000003918002,
            "action": "GET",
            "data": null
        }
    ]
}
```

Example 2: Retrieve job status for Archive Matched Transactions (Transaction Matching) job

```
{
    "type": "TM",
    "items": [
        0
    ],
    "error": null,
    "link": null,
    "status": 0,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "details": "Job Completed. Job ID: 100000003846005 Log file:
Archive_Transactions_Pos2Processor.log\nRe Archive for the Archive Job ID ::
100000003810002\r\nArchive Transactions for Match Type ::
Pos2Processor\nArchive Transactions on or before :: 2022-02-18 23:59:59
UTC\nArchive Transactions age :: 330\nAccount ID : Equals  'XX-XX-
YYYY'\nAccounts considered for Archive : XX-XX-YYYY\n\n Total Number of
Matches present in this archive :: 1479730\nTotal Number of Transactions
Present in this Archive for DataSource - Delivery Partner :: 1490233\nTotal
Number of Transactions Present in this Archive for DataSource - POS ::
1515718\nTotal Number of Adjustments Present in this Archive ::
104709\n\nTotal Number of Transactions Present in this Archive ::
3110660\nTime taken 22 Minute(s) and 02 Second(s) to Archive
Transactions.\r\n",
    "links": [
        {
            "rel": "self",
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/arm/rest/v1/jobs/
100000003846005",
            "action": "GET",
            "data": null
        },
        {
            "rel": "log-content",
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/rest/applicationsnapshots/
Archive_Transactions_Pos2Processor.log/contents",
            "action": "GET",
            "data": null
        },
        {
            "rel": "file-content",
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/rest/applicationsnapshots/
Archived_Transactions_Pos2Processor_100000003846005.zip/contents",
            "action": "GET",
            "data": null
        }
    ]
}
```


Example 3: Retrieve job status for Purge Archived Transactions (Transaction Matching) job


```
{
    "type": "TM",
    "items": [
        0
    ],
    "error": null,
    "link": null,
    "status": 0,
    "details": "Job Completed. Job ID: 100000003801002 Log file:
PurgeTransactions_100000003801002.log\nMatch Type: Pos2Processor, Purge for
Archive Job ID: 100000003798009\n\n\nTotal adjustments purged: 0\nTotal
transactions purged from all sources: 0\nTotal matches purged: 0\n\nStatus:
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
No transactions found for the Archive Transactions job ID. Purge Transactions
might be already run for this Archive job ID.\n\nTotal time taken: 00
Minute(s) and 00 Second(s)\n",
    "links": [
        {
            "rel": "self",
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/arm/rest//v1/jobs/
100000003801002",
            "action": "GET",
            "data": null
        },
        {
            "rel": "log-content",
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/rest/applicationsnapshots/
PurgeTransactions_100000003801002.log/contents",
            "action": "GET",
            "data": null
        }
    ]
}
```

Example 5: Retrieve job details for a job being cancelled (cancellation in progress)

```
{
    "type": "TM",
    "items": [],
    "error": null,
    "link": null,
    "status": -1,
    "details": "The job is being cancelled.",
    "links": [
        {
            "href": ""https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/arm/rest/v1/jobs/
100000000187003",
            "action": "GET",
            "rel": "self",
            "data": null
        }
    ]
}
```

Example 4: Retrieve job details for a job in cancelled state

```
{
    "type": "TM",
    "items": [],
    "error": null,
    "link": null,
    "status": 1,
    "details": "Job: 100000000163007 cancelled. Please check the job console
for more details",
    "links": [
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        {
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/arm/rest/v1/jobs/
100000000163007",
            "action": "GET",
            "rel": "self",
            "data": null
        }
    ]
```

Retrieve Application Access Level

Returns the access level for an Account Reconciliation application, indicating if all users can access the application or only Service Administrators can access the application.

REST Resource

`GET /armARCS/rest/{api_version}/appaccess`

Required Roles

Service Administrator

Request

Parameters:

The following table summarizes the client request parameters.

Table 4-68 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with (must be v1)	Path	Yes	None

Example URL

`https://<BASE-URL>/armARCS/rest/v1/appacess`

Response

Supported Media Type: `application/json`

Table 4-69 Parameters

Parameters	Description
`links`	Detailed information about the link
`access`	Indicates the access level for users. • ALL_USERS - all users can access the application • ADMINISTRATORS - only Service Administrators can access the application

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example of Response Body

```
{
    "items": [
        {
            "access": "ALL_USERS"
        }
    ],
    "links": [
        {
            "rel": "self",
            "href": "https://<BASE-URL>/armARCS/rest/v1/appaccess",
            "action": "GET",
            "data": null
        }
    ]
}
```

Run Auto Alert (Transaction Matching)

Runs the auto alert process for the specified match type in Transaction Matching. This job processes the alert rules defined for the match type and then automatically creates alerts for unmatched transactions. You can monitor the status of an Auto Alert job through the **Job History** tab in Account Reconciliation.

REST Resource

```
POST       /arm/rest/{api_version}/jobs
```

Required Roles

Service Administrator, Power User, or Profiles and Reconciliations - Manage

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job.

Table 4-70 runautoalert

Name	Description	Required
`api_version`	Version of the API you are working with: v1	Yes
`jobName`	The name of the job, `runautoalert`	Yes
`matchTypeId`	The Text ID of the match type (previously known as Reconciliation type) for which automated alerts must be generated	Yes

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example of request body

```
{"jobName":"runautoalert,
"parameters":{"matchTypeId":"INTERCO"}}
```

Response

Supported Media Types: `application/json`

Parameters:

Table 4-71 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Relationship type
`data`	Parameters as key value pairs passed in the request

Example of Response Body

The following is an example of the response body in JSON format.

```
{
  "type": "TM",
  "status": -1,
  "details": "In Process",
  "links": [
    {
      "rel": "self",
      "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/arm/rest/v1/jobs/2141",
      "action": "GET"
    }
  ],
  "error": null,
  "items": null,
  "link": null
}
```

Run Train Match Prediction (Transaction Matching)

Uses your historical manual match data to train a prediction model for the specified match type. The trained model is then used to identify potential matches for unmatched transactions within that match type.

REST Resource

```
POST       /arm/rest/{api_version}/jobs
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job.

Table 4-72 trainMatching

Name	Description	Required
`api_version`	Version of the API you are working with: v1	Yes
`jobName`	The name of the job, `trainMatching`	Yes
`matchTypeId`	The Text ID of the match type (previously known as Reconciliation type) for which training must be performed.	Yes

Example of request body

```
{"jobName":"trainMatching,
"parameters":{"matchTypeId":"INTERCOMPANY"}}
```

Response

Supported Media Types: `application/json`

Parameters:

Table 4-73 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Relationship type
`data`	Parameters as key value pairs passed in the request

Example of Response Body

The following is an example of the response body in JSON format.

```
{
   "type":"TM",
   "status":-1,
   "details":"In Process",
   "links":[
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
      {
         "rel":"self",
         "href":"https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/arm/rest/v1/jobs/3241",
         "action":"GET"
      }
   ],
   "error":null,
   "items":null,
   "link":null
}
```

Run Profile Rule

Use this REST API to execute applicable rules against Profiles for a specified period, optionally limited by a public Profile filter.

REST Resource

```
POST       /armARCS/rest/{api_version}/jobs
```

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job.

Table 4-74 trainMatching

Name	Description	Type	Required
`api_version`	Version of the API you are working with: v1	Path	Yes
`jobName`	The name of the job, `RUN_PROFILE_RULES`	Payload	Yes
`period`	The name of the period to run the rules, such as July-2025	Payload	Yes
`filter`	The name of a public filter appropriate for the objects being processed. If specified, rules are run only for the Profiles included in that filter (for example, **Cash Accounts**).	Payload	No

Example of request body

```
{
 "jobName" : "RUN_PROFILE_RULES",
 "parameters": {
     "period": "December 2025",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
     "filter": "Cost Account Profiles"
     }
}
```

Response

Supported Media Types: `application/json`

Parameters:

Table 4-75 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Relationship type
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
    "type": "ARCS",
    "status": -1,
    "details": "In Process",
    "links": [
        {
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1/jobs/
100000103240043",
            "action": "GET",
            "rel": "self"
        }
    ]
}
```

If the job completes successfully, the job details include the number of Profiles impacted by the rules. If it fails, the details include the error message.

```
{
    "type": "ARCS",
    "status": 0,
    "details": "Processed: 1032\nUpdated: 167\nWarnings: 0\nErrors: 0",
    "links": [
        {
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1/jobs/
100000103240030",
            "action": "GET",
            "rel": "self"
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            }
        ],

             "error": null,
             "items": null,
             "link": null
}
```

Run Reconciliation Rule

Use this REST API to execute applicable rules against reconciliations for a specified period, optionally constrained by a public reconciliation filter and limited to specific rule types.

REST Resource

```
POST       /armARCS/rest/{api_version}/jobs
```

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job.

Table 4-76 trainMatching

Name	Description	Type	Required
`api_version`	Version of the API you are working with: v1	Path	Yes
`jobName`	The name of the job, `RUN_RECONCILIATION_RULES`	Payload	Yes
`period`	The name of the period to run the rules, such as July-2025	Payload	Yes
`filter`	The name of a public filter appropriate for the objects being processed. If specified, rules are run only for the Reconciliations included in that filter (for example, **Expense Accounts**).	Payload	Yes
`ruleTypes`	The rule type(s) to run, provided as a case-insensitive, comma-separated list. If omitted, all rule types are run.	Payload	No

Example of request body

```
{
 "jobName" : "RUN_RECONCILIATION_RULES",
 "parameters": {
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
     "period": "December 2025",
     "filter": "Open Recs with Preparer"
     }
}
```

Response

Supported Media Types: `application/json`

Parameters:

Table 4-77 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call or status API
`action`	The HTTP call type
`rel`	Relationship type
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
    "type": "ARCS",
    "status": -1,
    "details": "In Process",
    "links": [
        {
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1/jobs/
100000103240030",
            "action": "GET",
            "rel": "self"
        }
    ]
}
```

If the job completes successfully, the job details include the number of Profiles impacted by the rules. If it fails, the details include the error message.

```
{
    "type": "ARCS",
    "status": 0,
    "details": "Processed: 1032\nUpdated: 167\nWarnings: 0\nErrors: 0",
    "links": [
        {
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1/jobs/
100000103240030",
            "action": "GET",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "rel": "self"
        }
    ],

        "error": null,
         "items": null,
         "link": null
}
```

Set Application Access Level

Sets the access level for an Account Reconciliation application. You can specify that the application can be accessed only by Service Administrators or by all users.

REST Resource

`POST /armARCS/rest/{api_version}/appaccess`

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters:

The following table summarizes the client request parameters.

Table 4-78 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with (must be v1)	Path	Yes	None
`access`	Specify the access level for users. Valid values include the following: • ALL_USERS - all users can access the application • ADMINISTRATORS - only Service Administrators can access the application	Payload	Yes	None

Examples of Request Body

Example 1

```
{
    "access": "ALL_USERS"
}
```

Example 2

```
{
    "access": "ADMINISTRATORS"
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Response

Supported Media Type: `application/json`

Table 4-79 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string.
`status`	See Migration Status Codes
`links`	Detailed information about the link

Example of Response Body

```
{
    "status": 0,
    "details": "Application access updated successfully",
    "links": [
        {
            "rel": "self",
            "href": "https://<BASE-URL>/armARCS/rest/v1/appaccess",
            "action": "GET",
            "data": null
        }
    ]
}
```

Train Predicted Attribute (Reconciliation Compliance)

Trains the predicted attribute for the specified period. The training is based on historical data of the target attribute and the parameters that were specified when creating the predicted attribute. After the training is complete, use a Predict Predicted Attribute job to predict values for a predicted attribute.

REST Resource

```
POST       /armARCS/rest/{api_version}/jobs
```

Required Roles

Service Administrator or Profiles and Reconciliations - Manage

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-80 TRAIN_ATTRIBUTE

Name	Description	Required
api_version	Version of the API you are working with: v1	Yes
jobName	The name of the job, TRAIN_ATTRIBUTE	Yes
period	The period used when training the predicted attribute. Data for one year prior to the specified period is used. For example, if you specify Oct-2025, historical data from November 2024 to October 2025 is used.	Yes
attributeName	The name of the predicted attribute that must be trained	Yes

Example of request body

```
{
 "jobName" : "TRAIN_ATTRIBUTE",
 "parameters": {
     "period": "Apr-2024",
    "attribute": "Predicted Risk Rating"
     }
}
```

Response

Supported Media Types: application/json

Parameters:

Table 4-81 Parameters

Name	Description
details	In case of errors, details are published with the error string
status	See Migration Status Codes
links	Detailed information about the link
href	Links to API call or status API
action	The HTTP call type
rel	Relationship type
data	Parameters as key value pairs passed in the request

Example of Response Body

The following is an example of the response body in JSON format.

Sample Response body:

```
{
    "type": "ARCS",
    "status": -1,
    "details": "In Process",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "links": [
        {
            "href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1/jobs/
100000103240030",
            "action": "GET",
            "rel": "self"
        }
    ]
}
```

Unmatch Matched Transactions (Transaction Matching)

Unmatches matched transactions in Transaction Matching. Users must specify the match type and one or more match Ids associated with this match type for which transactions must be unmatched.

For Transaction Matching profiles that are integrated with Reconciliation Compliance, the unmatch operation is skipped if the Accounting Date of one or more transactions that are being unmatched is lower than the Purge Through Date of the reconciliation.

REST Resource

```
POST       /arm/rest/{api_version}/jobs
```

Required Roles

Service Administrator, Power User, Preparer, or Profiles and Reconciliations - Manage

The user who created a profile can also unmatch transactions associated with that profile.

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request specific to this job.

Table 4-82 UNMATCH MATCHED TRANSACTIONS

Name	Description	Type	Required
`api_version`	Version of the API you are working with: v1	Path	Yes
`jobName`	The name of a job, such as unmatchtransactions	Payload	Yes
`matchTypeId`	The Text ID of the match type (previously known as Reconciliation Type, both parameter names continue to work) to which the matched transactions belong	Payload	Yes

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-82 (Cont.) UNMATCH MATCHED TRANSACTIONS

Name	Description	Type	Required
`matchIds`	The Match Ids, in a comma separated array A maximum of 10,000 Match Ids can be specified. Transactions with the following status are considered for unmatching: Confirmed Match, Confirmed Adjust, Suggested Match, Suggested Adjust.	Payload	Yes
`forceReopen`	Valid values are: • True - Reconciliations will be reopened if the Adjustment Accounting Date is less than the Closed Through Date. • False - Matched transactions whose Adjustment Accounting Date is less than the Closed Through Date are skipped. This is the default setting.	Payload	No

Example of request body

```
{
 "jobName": "unmatchtransactions",
 "parameters": {
   "matchTypeId": "IC120",
   "matchIds":[9195754,9219755],
   "forceReopen": false
  }
}
```

Response

Supported Media Types: `application/json`

Example of Response Body

The following is an example of the response body in JSON format.

```
{
    "type": "TM",
    "items": null,
    "error": null,
    "link": null,
    "status": -1,
    "details": null

  "links": [
     {
            "rel": "self",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "href": "https://<BASE-URL>/arm/rest/v1/jobs/100000002574034",
            "action": "GET"
        }    ]
}
```

To get the status of the unmatch transactions job and view its details, see Retrieve Job Status (Transaction Matching).

Unmatch Transactions Matched by Auto Match (Transaction Matching)

Unmatches all transactions that were matched as part of the specified Auto Match job or Import Transactions and Auto Match job.

REST Resource

```
POST       /arm/rest/{api_version}/jobs
```

Required Roles

Service Administrator, Power User, Preparer, or Profiles and Reconciliations - Manage

The user who created a profile can also unmatch transactions associated with that profile.

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request specific to this job.

Table 4-83 UNMATCH MATCHED TRANSACTIONS

Name	Description	Type	Required
`api_version`	Version of the API you are working with: v1	Path	Yes
`jobName`	The name of a job, such as unmatchtransactionsbyautomatch	Payload	Yes
`autoMatchJobId`	The ID of the Auto Match job or Import Transactions and Auto Match job.	Payload	Yes
`createReverseAdjustment`	Indicates if a reverse adjustment must be created for the unmatched transactions. Options are True or False.	Payload	Yes

Example of request body

```
{
"jobName": "unmatchtransactionsbyautomatch",
"parameters": {
  "autoMatchJobId": 100000000067039,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
  "createReverseAdjustment": true
}
```

Response

Supported Media Types: `application/json`

Example of Response Body

The following is an example of the response body in JSON format.

```
{
    "type": "TM",
    "items": null,
    "error": null,
    "link": null,
    "status": -1,
    "details": null,

"links": [
   {
       "href": "https://<BASE-URL>/arm/rest/jobs/100000000079002",
       "action": "GET",
       "rel": "self",
       "data": null
   }     ]
}
```

Update Unmatched Transactions (Transaction Matching)

Updates an editable attribute in an unmatched transaction. To update multiple attributes, use the command multiple times.

REST Resource

```
POST       /arm/rest/{api_version}/dataSources/{dataSource}/transactions/
{transaction}
```

Required Roles

Service Administrator, Power User, Preparer, or Profiles and Reconciliations - Manage

The user who created a profile can also unmatch transactions associated with that profile.

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request specific to this job.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-84 UPDATE UNMATCHED TRANSACTIONS

Name	Description	Type	Required
`api_version`	Version of the API you are working with: v1	Path	Yes
`dataSource`	Text ID of the data source associated with the unmatched transaction whose attributes must be updated	Path	Yes
`transaction`	Transaction ID of the unmatched transaction whose attributes must be updated	Path	Yes
`reconId`	Text Id of the reconciliation associated with the unmatched transaction that must be updated	Payload	Yes
`attributeId`	Text Id of the attribute within the unmatched transaction that must be updated	Payload	Yes
`calculate`	Set to one of the following values: • True - Values of calculated attributes are recalculated • False - Values of calculated attributes are left unchanged. The default setting is False.	Payload	No
`forceReopen`	Valid values are: • True - Reconciliations will be reopened if the Adjustment Accounting Date is less than the Closed Through Date. • False - Matched transactions whose Adjustment Accounting Date is less than the Closed Through Date are skipped. This is the default setting.	Payload	No

Example URL

```
https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/arm/rest/v1/
dataSources/POS/transactions/1012
```

Example of request body

```
{
   "reconId": "INTERCO133",
   "attributeId": "POS_AMOUNT",
   "value": "210015.05",
   "calculate": false,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
   "forceReopen": false
}
```

Response

Supported Media Types: `application/json`

Example of Response Body

The following is an example of the response body in JSON format.

```
{
    "type": "TM",
    "items": null,
    "error": null,
    "link": null,
    "status": 0,
    "details": "Success : Update transaction - 1012",
    "links": [
        {
            "rel": "self",
            "href":"https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/arm/rest/dataSources/POS/
transactions/1012",
            "action": "GET",
            "data": null
        }
    ]
}
```

View Reconciliation Comments

Returns all the comments, including attachments, for the specified reconciliation.

REST Resource

```
GET       /armARCS/rest/{api_version}/period/{period}/reconciliation/
{accountId}/comments
```

Required Roles

Service Administrator, Power User, or Viewer

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request specific to this job.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-85 VIEW RECONCILIATION COMMENTS

Name	Description	Type	Required	Default
`api_version`	Version of the API you are working with: v1	Path	Yes	None
`period`	The name of the reconciliation's period	Path	Yes	None
`accountId`	The Account ID of the reconciliation for which comments must be retrieved	Path	Yes	None

Example URL

`https:// <SERVICE_NAME>-<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/armARCS/rest/v1/period/Jan 2022/reconciliation/101-BC2-Premapped/comments`

Response

Supported Media Types: `application/json`

Example of Response Body

The following is an example of a reconciliation with one comment and two attachments.

```
[
    {
        "commentId": 100000002580008,
        "parentObjectId": 100000001956143,
        "commentText": "Please investigate the alert on the account. The Risk
Rating has been increased.",
        "postedBy": "admin1",
        "postedDate": "Oct 6, 2022 4:03 PM",
        "carryForward": null,
        "references": [
            {
                "referenceId": 100000002580012,
                "type": "FILE",
                "url": null,
                "name": "adjustment1.pdf",
                "fileDownloadLink": "https://<BASE-URL>/arm/rest/fcmapi/v1/rc/
references/100000002580012/file"
            },
            {
                "referenceId": 100000002580010,
                "type": "URL",
                "url": "https://www.my-example.com",
                "name": "my-example",
                "fileDownloadLink": null
            }
        ]
    }
]
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Manage Connections in Account Reconciliation

Use these REST APIs to work with connections.

With multiple environments, using REST APIs saves you time and effort by automating the process of logging in and configuring connections. For information about accessing environments, see Accessing the EPM Cloud or EDM Cloud Environment.

Table 4-86 Working with Connections in Account Reconciliation

Task	Request	REST Resource
Create a Connection	POST	`/arm/rest/fcmapi/{api_version}/{module}/connections`
View All Connections	GET	`/arm/rest/fcmapi/{api_version}/{module}/connections`
Update a Connection	PUT	`/arm/rest/fcmapi/{api_version}/{module}/connections/{id}`
Delete a Connection	DELETE	`/arm/rest/fcmapi/{api_version}/{module}/connections/{id}`

Create a Connection

Use this REST API to create a connection that will be saved in an application.

REST Resource

`POST /arm/rest/fcmapi/{api_version}/{module}/connections`

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters:

The following table summarizes the client request parameters specific to this job.

Table 4-87 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with (must be v1)	Path	Yes	None
`module`	The name of the module for which to create a connection. For Account Reconciliation, set this value to RC.	Path	Yes	None
`url`	The URL of the connection, such as https://*<BASE-URL>*	Payload	Yes	None
`username`	A username with the Service Administrator application role	Payload	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 4-87 (Cont.) Parameters

Name	Description	Type	Required	Default
`password`	The encrypted password for the user For security reasons, only an encrypted password is allowed. Use the EPM Automate encrypt command to generate the encrypted password. See encrypt .	Payload	Yes	None
`type`	The type of connection. Valid values include the following: • ENTERPRISE_JOURNALS - for Enterprise Journals connections • OBJECT_STORAGE - for Object Storage connections	Payload	Yes	None

Example URL

```
https://<BASE-URL>/arm/rest/fcmapi/v1/rc/connections
```

Example of Request Body

```
{
    "url": "https://<BASE-URL>",
    "username": "<NEW_USERNAME>",
    "password": "<NEW_PASSWORD>",
    "type" : "ENTERPRISE_JOURNALS"
}
```

Response

Supported Media Type: `application/json`

Table 4-88 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string.

Example of Response Body

```
{
  "details": "Connection created successfully."
}
```

Delete a Connection

Use this REST API to delete a specific connection that is saved in an application.

Required Roles

Service Administrator

Copyright © 2017, 2026, Oracle and/or its affiliates.

REST Resource

`DELETE /arm/rest/fcmapi/{api_version}/{module}/connections/{id}`

Request

Parameters:

The following table summarizes the client request.

Table 4-89 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with (must be v1)	Path	Yes	None
`module`	The name of the module for which to delete a connection. For Account Reconciliation, set this parameter to RC.	Path	Yes	None
`id`	The identifier of the connection that must be deleted	Path	Yes	None

Example URL

`https://<BASE-URL>/arm/rest/fcmapi/v1/rc/connections/100000000552006`

Response

Supported Media Type: `application/json`

Table 4-90 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string.

Example of Response Body

```
{
  "details": "Connection deleted successfully."
}
```

View All Connections

Use this REST API to view details for all of the connections saved in an application.

Required Roles

Service Administrator

REST Resource

`GET /arm/rest/fcmapi/{api_version}/{module}/connections`

Request

Parameters:

Copyright © 2017, 2026, Oracle and/or its affiliates.

The following table summarizes the client request.

Table 4-91 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with (must be v1)	Path	Yes	None
`module`	The name of the module for which to view connections. For Account Reconciliation, set this value to RC.	Path	Yes	None

Example URL

`https://<BASE-URL>/arm/rest/fcmapi/v1/rc/connections`

Response

Supported Media Types: `application/json`

The following table summarizes the parameters.

Table 4-92 Parameters

Parameters	Description
`items`	Collection of information about the resource
`id`	Unique identifier for the connection, such as 1c89922d-92ba-46c1-850f-e2a8a416ddf2
`type`	The type of connection
`url`	The URL of the connection, such as https://<*BASE-URL*>
`links`	Detailed information about the link
`details`	In case of errors, details are published with the error string

Example Response

```
{
    "links": [
        {
            "rel": "self",
            "href": "https://<BASE-URL>/arm/rest/fcmapi/v1/rc/connections",
            "action": "GET"
        }
    ],
    "details": null,
    "items": [
        {
            "username": "ats_admin2",
            "password": null,
            "url": "https://<BASE-URL>",
            "id": 100000000558005,
            "type": "ENTERPRISE_JOURNALS"
        }
    ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Update a Connection

Use this REST API to update a specific connection that is saved in an application.

REST Resource

`PUT /arm/rest/fcmapi/{api_version}/{module}/connections/{id}`

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters:

The following table summarizes the client request.

Table 4-93 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with (must be v1)	Path	Yes	None
`module`	The name of the module for which to update a connection. For Account Reconciliation, set this parameter to RC.	Path	Yes	None
`id`	The identifier of the connection that must be updated	Path	Yes	None
`url`	The URL of the connection, such as https://*<BASE-URL>*	Payload	Yes	None
`username`	A username with Service Administrator application role	Payload	Yes	None
`password`	The encrypted password for the user For security reasons, only an encrypted password is allowed. Use the EPM Automate encrypt command to generate the encrypted password. See encrypt .	Payload	Yes	None
`type`	The type of connection. Valid values include the following: • ENTERPRISE_JOURNALS - for Enterprise Journals connections • OBJECT_STORAGE - for Object Storage connections	Payload	Yes	None

Example URL

`https://<BASE-URL>/arm/rest/fcmapi/v1/rc/connections/100000000658005`

Example of Request Body

```
{
    "url": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com",
    "username": "<NEW_USERNAME>",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "password": "<NEW_PASSWORD>"
}
```

Response

Supported Media Type: `application/json`

Table 4-94 Parameters

Parameters	Description
`details`	In case of errors, details are published with the error string.

Example of Response Body

Example 1:

```
{
  "details": "Connection updated successfully."
}
```

Example 2:

```
{
  "details": "Invalid parameters. Test Connection is failed"
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

5

Enterprise Data Management REST APIs

> **Note**
>
> The Infrastructure REST APIs described in this guide work with Oracle Fusion Cloud Enterprise Data Management also.

Oracle Enterprise Data Management (EDM) maintains a separate REST API guide. See REST APIs for Enterprise Data Management Cloud to work with applications, files, jobs, requests, and views.

Copyright © 2017, 2026, Oracle and/or its affiliates.

6

Enterprise Profitability and Cost Management REST APIs

Table 6-1 Enterprise Profitability and Cost Management REST APIs

Enterprise Profitability and Cost Management REST APIs		
Get API Versions for Enterprise Profitability and Cost Management Generate Model Documentation Report Calculate Model (v3)	Clear Data By Point of View (v3) Copy Data by Point of View Delete Point of View	Use Substitution Variables in Enterprise Profitability and Cost Management REST APIs Validate Model

> **Note**
>
> Due to conflicts with other features, the ampersand (&) is no longer supported as a POV delimiter in Enterprise Profitability and Cost Management REST APIs. Please update your scripts to use a different delimiter. Supported delimiters are:
>
> - _ (under score)
> - # (hash)
> - ~ (tilde)
> - % (percentage)
> - ; (semicolon)
> - : (colon)
> - - (dash)

URL Structure for Enterprise Profitability and Cost Management

Use the following URL structure to access the Enterprise Profitability and Cost Management REST resources:

`https://<BASE-URL>/HyperionPlanning/rest/{api_version}/{path}`

Where:

- *<BASE-URL>*: The first part of your service URL, before the context.

  For example, if your service URL is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com`. Similarly, if your service URL is `https://epm2-acme.epm.us6.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm2-acme.epm.us6.oraclecloud.com`.

Copyright © 2017, 2026, Oracle and/or its affiliates.

- {*api_version*}: API version you are developing with. The current REST API version for Enterprise Profitability and Cost Management is v3.
- {*path*}: Identifies the resource.

> **Note**
>
> Oracle does not authorize or support the use of REST APIs with the path token "/internal/" in the URL.

Get API Versions for Enterprise Profitability and Cost Management

You can get information on REST API versions using REST resources.

Important: The version number is case-sensitive. For example, if the version number is listed as v3 with a lowercase v, you cannot enter the version number with a capital V as in this incorrect example, V3, which would result in an error. Instead, you must enter the version number with a lowercase v as in this correct example: v3.

Before using the REST resources, you must understand how to access the REST resources and other important concepts. See Cloud EPM REST APIs Best Practices. Using REST APIs requires prerequisites. See Prerequisites.

There are two sets of REST APIs relevant for Enterprise Profitability and Cost Management.

- Planning REST APIs (See Getting API Versions for Planning).
- Enterprise Profitability and Cost Management-specific REST APIs. (See Get Information About a Specific REST API Version for Enterprise Profitability and Cost Management).

Get Information About a Specific REST API Version for Enterprise Profitability and Cost Management

Returns information about a specific REST API version for Enterprise Profitability and Cost Management.

Required Roles

Service Administrator, Power User, User, Viewer

REST Resource

`GET /HyperionPlanning/rest/{api_version}`

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 6-2 Parameters

Name	Description	Type	Required	Default
api_version	Version of the API you are working with, such as V3	Path	Yes	None

Response Body

Supported Media Types: `application/json`

The following table summarizes the response parameters.

Table 6-3 Parameters

Attribute	Description
`version`	v3
`lifecycle`	Lifecycle of the resource, active or deprecated
`isLatest`	Whether this resource is the latest, true or false

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
    "version": "v3",
    "lifecycle": "active",
    "isLatest": true,
    "links": [{
        "rel": "canonical",
        "href": "https://<BASE-URL>/HyperionPlanning/rest/v3"
    }, {
        "rel": "predecessor-version",
        "href": "https://<BASE-URL>/HyperionPlanning/rest/v2"
    }]
}
```

Generate Model Documentation Report

Generates an Enterprise Profitability and Cost Management Model Documentation report.

This is an asynchronous call, so use the job status URI to determine whether the operation is complete.

Any validation failures are written to file with file name provided in the parameters, and can be accessed from Inbox/Outbox Explorer.

This API is version v3.

Required Roles

Service Administrators

Copyright © 2017, 2026, Oracle and/or its affiliates.

REST Resource

POST `/HyperionPlanning/rest/v3/applications/{AppName}/jobs/`

> **Note**
>
> Before using the REST resources, you must understand how to access the REST resources and other important concepts. See Cloud EPM REST APIs Best Practices. Using this REST API requires prerequisites. See Prerequisites.

Request

Supported Media Types: `application/json`

The following table summarizes the client request parameters specific to this job.

Table 6-4 Parameters

Name	Description	Type	Required	Default
`jobType`	`Generate EPCM Report`	Payload	Yes	None
`jobName`	User-specified name for this job execution **Example**: `"Model Documentation Report for 10 Actuals Allocation Process"`	Payload	Yes	None
`reportName`	`"MODEL_DOC"`	Payload	Yes	None
`outputFileName`	Name of the output file to which the report will be generated **Example:** `"My_Model_Doc_Report_Output"`	Payload	Yes	None
`outputType`	(PDF | Word | Excel | HTML | XML) Format in which the output will be generated **Example:** `"PDF"`	Payload	Yes	None
`modelName`	Name of model for which the report is generated **Example:** `"10 Actuals Allocation Process"`	Payload	Yes	None

Sample Payload

```
{
   "jobType":"Generate EPCM Report",
   "jobName":"Model Documentation Report for 10 Actuals Allocation Process",
   "parameters":{
        "reportName":"MODEL_DOC",
        "outputFileName":"My_Model_Doc_Report_Output",
        "outputType":"PDF",
        "modelName":"10 Actuals Allocation Process"
  }
}
```

Response

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 6-5 Parameters

Name	Description
`jobId`	ID of the job that is created
`jobName`	Name of the job
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes.
`links`	Detailed information about the link
`href`	Links to the API call
`action`	HTTP call type
`rel`	Can be `self` and/or `Job-details`. If set to `Job Status`, you can use the `href` to get the status of the job.
`data`	Parameters as key value pairs passed in the request

Example of Response Body

The following examples show the contents of the response body in JSON format:

Example 1: Job is in Progress

```
{
    "jobId": 26,
    "jobName": "Generate Report",
    "status": -1,
    "descriptiveStatus": "Processing",
    "details": null,
    "links": [
         {
            "rel": "self",
            "href":https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
BksML40/jobs/6,
            "action": "GET"
         },
         {
            "rel": "job-details",
            "href":https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
BksML40/jobs/6/details,
            "action": "GET"
        }
    ]
}
```

Example 2: Job Status with No Errors

```
{
    "jobId": 26,
    "jobName": "Generate Report",
    "status": 0,
    "descriptiveStatus": "Success",
    "details": null
    "links": [
        {
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "rel": "self",
            "href":https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
BksML40/jobs/6,
            "action": "GET"
        },
        {
            "rel": "job-details",
            "href":https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
BksML40/jobs/6/details,
            "action": "GET"
        }
    ],
}
```

Calculate Model (v3)

Runs the calculation on a given point of view in a selected cube. This API supports batch calculation with multiple POVs.

This is an asynchronous call, so use the job status URI to determine whether the operation is complete.

Required Roles

Service Administrators

> **Note**
>
> This REST API supports using an existing job as the source of parameter values. The job type must be **Calculation**, created and saved in PCM Agent. Any parameters defined in the saved job can be overridden at runtime by providing values in the REST request payload.

REST Resource

POST `/HyperionPlanning/rest/v3/applications/{AppName}/jobs/`

Request

Supported Media Types: `application/json`

> **Note**
>
> If substitution variables exist for parameters, you can use them instead of actual values in the REST API. See Use Substitution Variables in Enterprise Profitability and Cost Management REST APIs for more information.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 6-6 Request Parameters

Name	Description	Type	Required	Default
jobType	Calculation	Payload	Yes	None
jobName	Name of the job **Example**: "Calculation". The jobName parameter is required and must be provided, even if it's just a placeholder value. If a saved job exists with the provided job name, the platform jobs Framework resolves it and populates all parameters from the saved job definition. If no saved job is found, it treats the value as a user-defined job name.	Payload	Yes	None
povDelimiter	Delimiter used in POV values. The default delimiter is _ (under score). The delimiter must be enclosed in double quotation marks. Only these delimiters are supported: • _ (under score) • # (hash) • ~ (tilde) • % (percentage) • ; (semicolon) • : (colon) • - (dash) **Example**: "povDelimiter":":" **Note:** When submitting multiple POVs for calculation, do not use a comma as the delimiter to separate POV members. Comma is reserved for separating POV groups as shown in this example: FY21:Jan:Actual:Working,FY21:Feb:Actual:Working,FY21:Mar:Actual:Working	Payload	Yes	:: (Double Colon)
povName	Name of the POV to calculate. You can pass one or more POVs separated by a comma (,). **Example**: "sourcePOVName":"FY16:May:Actual:Working"	Payload	Yes	None
modelName	Name of the model to calculate **Example**: "modelName":"10 Actuals Allocation Process"	Payload	Yes	None
executionType	(ALL_RULES | RULESET_SUBSET | SINGLE_RULE | RUN_FROM_RULE | STOP_AFTER_RULE) Identifies the rule execution type • If executionType=ALL_RULES, rule related parameters are not required. • If executionType=SINGLE_RULE |RUN_FROM_RULE| STOP_AFTER_RULE, then provide ruleName only. • If executionType=RULESET_SUBSET, then provide values for rulesetSeqNumStart and rulesetSeqNumEnd. **Example**: "executionType":"ALL_RULES"	Payload	Yes	None
ruleName	Name of the single rule to run **Example**: "ruleName":"Utlities Expense Adjustment"	Payload	No	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 6-6 (Cont.) Request Parameters

Name	Description	Type	Required	Default
`rulesetSeqNumStart`	Sequence number of the first rule in the rule set to run **Example**: `"rulesetSeqNumStart:1"`	Payload	No	None
`rulesetSeqNumEnd`	Sequence number of the last rule in the rule set to run **Example**: `"rulesetSeqNumStart:10"`	Payload	No	None
`clearCalculatedData`	(True | False) Specifies whether to clear existing calculations **Example**: `"clearCalculatedData":"true",`	Payload	No	False
`executeCalculations`	(True | False) Specifies whether to run calculations **Example**: `"executeCalculations":"true"`	Payload	No	False
`optimizeForReporting`	(True | False) Specifies whether to optimize the calculation process for reporting When running multiple concurrent calculation jobs, set `optimizeReporting=true` for all jobs. Only the last job to complete will perform the aggregation, which avoids redundant processing and prevents running jobs from slowing down. Set `optimizeReporting=false` only when necessary to save processing time; for example, when running a single rule or a sequential series of several POVs. **Example**: `"optimizeForReporting":"false",`	Payload	No	False
`captureDebugScripts`	(True | False) Specifies whether to generate debug scripts **Example**: `"captureDebugScripts":"false"`	Payload	No	False
`comment`	Comment to describe the job	Payload	No	None

Sample Payload

```
{
    "jobType":"Calculation",
    "jobName":"Calculation",
    "parameters":{
        "povDelimiter":":",
        "povName":"FY21:Jan:Actual:Working",,
        "modelName":"10 Actuals Allocation Process",
        "executionType":"ALL_RULES",
        "rulesetSeqNumStart":"1",
        "rulesetSeqNumEnd":"1",
        "clearCalculatedData":"true",
        "executeCalculations":"true",
        "optimizeForReporting":"true",
        "captureDebugScripts":"false"
    }
}
```

Response

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

> **Note**
>
> If substitution variables exist for parameters, you can use them instead of actual values in the REST API. See Use Substitution Variables in Enterprise Profitability and Cost Management REST APIs for more information.

Table 6-7 Response Parameters

Name	Description
`jobId`	ID of the job that is created
`jobName`	Name of the job
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes.
`links`	Detailed information about the link
`href`	Links to the API call
`action`	HTTP call type
`rel`	Can be `self` and/or `Job-details`. If set to `Job Status`, you can use the `href` to get the status of the job.
`data`	Parameters as key value pairs passed in the request

Examples of Response Body

The following examples show the contents of the response body in JSON format:

Example 1: Job is in Progress

```
{
    "jobId": 26,
    "jobName": "Calculation",
    "status": -1,
    "descriptiveStatus": "Processing",
    "details": null,
    "links": [
        {
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
BksML40/jobs/26",
            "action": "GET",
            "rel": "self",
        },
        {
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
BksML40/jobs/26/details",
",
            "action": "GET",
            "rel": "job-details "
        }
    ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example 2: Job Status with No Errors

```
{
    "jobId": 26,
    "jobName": "Calculation",
    "status": 0,
    "descriptiveStatus": "Success",
    "details": null
    "links": [
        {
            "rel": "self"
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
jobs/26",
            "action": "GET",
        },
 {
            "rel": "job-details"
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
jobs/26/details",
            "action": "GET",
        }

    ]
}
```

Clear Data By Point of View (v3)

Clears the data for a given point of view in a selected cube.

This is an asynchronous call, so use the job status URI to determine whether the operation is complete.

Required Roles

Service Administrators

> **Note**
>
> This REST API supports using an existing job as the source of parameter values. The job type must be **Clear POV**, created and saved in PCM Agent. Any parameters defined in the saved job can be overridden at runtime by providing values in the REST request payload.

REST Resource

POST `/HyperionPlanning/rest/v3/applications/{AppName}/jobs/`

Request

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

> **Note**
>
> If substitution variables exist for parameters, you can use them instead of actual values in the REST API. See Use Substitution Variables in Enterprise Profitability and Cost Management REST APIs for more information.

Table 6-8 Request Parameters

Name	Description	Type	Required	Default
`jobType`	`Clear POV`	Payload	Yes	None
`jobName`	Name of the job **Example**: `"Clear POV"` The `jobName` parameter is required and must be provided, even if it's just a placeholder value. If a saved job exists with the provided job name, the platform jobs Framework resolves it and populates all parameters from the saved job definition. If no saved job is found, it treats the value as a user-defined job name.	Payload	Yes	None
`povDelimiter`	Delimiter used in POV values. The delimiter must be enclosed in double quotation marks. Other than a comma, only these delimiters are supported: • _ (under score) • # (hash) • ~ (tilde) • % (percentage) • ; (semicolon) • : (colon) • - (dash) **Example**: `"povDelimiter":":"` **Note:** When submitting multiple POVs for calculation, do not use a comma as the delimiter to separate POV members. Comma is reserved for separating POV groups as shown in this example: `FY21:Jan:Actual:Working,FY21:Feb:Actual:Working,FY21:Mar:Actual:Working`	Payload	Yes	:: (Double Colon)
`povName`	Name of the POV to clear **Example**: `"povName":"to FY21:Jan:Actual:Working"`	Payload	Yes	None
`cubeName`	Name of the cube on which clear operation is to be executed **Example**: `"cubeName":"PCM_CLC"`	Payload	Yes	PCM_CLC
`clearInput`	(True|False) Specifies whether to clear input data **Example**: `"clearInput":"true"`	Payload	Yes	None
`clearAllocatedValues`	(True|False) Specifies whether to clear allocated data **Example**: `"clearAllocatedValues":"true"`	Payload	Yes	None
`clearAdjustmentValues`	(True|False) Specifies whether to clear adjustment data **Example**: `"clearAdjustmentValues":"true"`	Payload	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Sample Payload

```
{
   "jobType":"Clear POV",
   "jobName":"Clear POV",
   "parameters":{
        "povDelimiter":":",
        "povName":"FY21:Jan:Actual:Working",
        "cubeName":"PCM_CLC",
        "clearInput":"true",
        "clearAllocatedValues":"true",
        "clearAdjustmentValues":"true"
   }
}
```

Response

Supported Media Types: `application/json`

> **Note**
>
> If substitution variables exist for parameters, you can use them instead of actual values in the REST API. See Use Substitution Variables in Enterprise Profitability and Cost Management REST APIs for more information.

Table 6-9 Response Parameters

Name	Description
`jobId`	ID of the job that is created
`jobName`	Name of the job
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes.
`links`	Detailed information about the link
`href`	Links to the API call
`action`	HTTP call type
`rel`	Can be `self` and/or `Job-details`. If set to `Job Status`, you can use the `href` to get the status of the job.
`data`	Parameters as key value pairs passed in the request

Examples of Response Body

The following examples show the contents of the response body in JSON format:

Example 1: Job is in Progress

```
{
    "jobId": 26,
    "jobName": "Clear POV",
    "status": -1,
    "descriptiveStatus": "Processing",
    "details": null,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "links": [
        {
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
BksML40/jobs/26",
            "action": "GET",
            "rel": "self",
        },
        {
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
BksML40/jobs/26/details",
",
            "action": "GET",
            "rel": "job-details "
        }
    ]
}
```

Example 2: Job Status with No Errors

```
{
    "jobId": 26,
    "jobName": " Copy POV",
    "status": 0,
    "descriptiveStatus": "Success",
    "details": null
    "links": [
        {
            "rel": "self"
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
jobs/26",
            "action": "GET",
        },
 {
            "rel": "job-details"
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
jobs/26/details",
            "action": "GET",
        }
```

Copy Data by Point of View

Copies data from a source to a destination point of view in a selected cube.

This is an asynchronous call, so use the job status URI to determine whether the operation is complete.

This API is version v3.

Required Roles

Service Administrators

REST Resource

POST `/HyperionPlanning/rest/v3/applications/{AppName}/jobs/`

Copyright © 2017, 2026, Oracle and/or its affiliates.

> **Note**
>
> This REST API supports using an existing job as the source of parameter values. The job type must be **Copy POV**, created and saved in PCM Agent. Any parameters defined in the saved job can be overridden at runtime by providing values in the REST request payload.

Request

Supported Media Types: `application/json`

> **Note**
>
> If substitution variables exist for parameters, you can use them instead of actual values in the REST API. See Use Substitution Variables in Enterprise Profitability and Cost Management REST APIs for more information.

Table 6-10 Request Parameters

Name	Description	Type	Required	Default
`jobType`	`Copy POV`	Payload	Yes	None
`jobName`	Name of the job **Example**: `"Copy POV"` The `jobName` parameter is required and must be provided, even if it's just a placeholder value. If a saved job exists with the provided job name, the platform jobs Framework resolves it and populates all parameters from the saved job definition. If no saved job is found, it treats the value as a user-defined job name.	Payload	Yes	None
`povDelimiter`	Delimiter used in POV values. The delimiter must be enclosed in double quotation marks. Other than a comma, only these delimiters are supported: • _ (under score) • # (hash) • ~ (tilde) • % (percentage) • ; (semicolon) • : (colon) • - (dash) **Example**: `"povDelimiter":":"` **Note:** When submitting multiple POVs for calculation, do not use a comma as the delimiter to separate POV members. Comma is reserved for separating POV groups as shown in this example: `FY21:Jan:Actual:Working,FY21:Feb:Actual:Working,FY21:Mar:Actual:Working`	Payload	Yes	:: (Double Colon)
`sourcePOVName`	Name of the source POV **Example**: `"sourcePOVName":"FY21:Jan:Actual:Working "`	Payload	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 6-10 (Cont.) Request Parameters

Name	Description	Type	Required	Default
destPOVName	Name of the destination POV **Example**: "destinationPOVName":"FY21:Feb:Actual:Working"	Payload	Yes	None
copyType	(ALL_DATA|INPUT) specifies the data to copy from the source **Example**: "copyType":"ALL_DATA"	Payload	Yes	None
sourceCubeName	Name of the source Oracle Essbase cube **Example**: "sourceCubeName":"PCM_CLC"	Payload	Yes	None
destCubeName	Name of the destination Essbase cube **Example**: "destCubeName":"PCM_CLC"	Payload	Yes	None

Sample Payload

```
{
   "jobType":"Copy POV",
   "jobName":"Copy POV",
   "parameters":{
        "povDelimiter":":",
        "sourcePOVName":"FY21:Jan:Actual:Working",
        "destPOVName":"FY21:Feb:Actual:Working",
        "sourceCubeName":"PCM_CLC",
        "destCubeName":"PCM_CLC",
        "createDestPOV":"true",
       "copyType":"ALL_DATA"
   }
}
```

Response

Supported Media Types: application/json

> **Note**
>
> If substitution variables exist for parameters, you can use them instead of actual values in the REST API. See Use Substitution Variables in Enterprise Profitability and Cost Management REST APIs for more information.

Table 6-11 Response Parameters

Name	Description
jobId	ID of the job that is created
jobName	Name of the job
details	In case of errors, details are published with the error string
status	See Migration Status Codes.
links	Detailed information about the link

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 6-11 (Cont.) Response Parameters

Name	Description
`href`	Links to the API call
`action`	HTTP call type
`rel`	Can be `self` and/or `Job-details`. If set to `Job Status`, you can use the `href` to get the status of the job.
`data`	Parameters as key value pairs passed in the request

Examples of Response Body

The following examples show the contents of the response body in JSON format:

Example 1: Job is in Progress

```
{
    "jobId": 26,
    "jobName": "Copy POV",
    "status": -1,
    "descriptiveStatus": "Processing",
    "details": null,
    "links": [
        {
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
BksML40/jobs/26",
            "action": "GET",
            "rel": "self",
        },
        {
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
BksML40/jobs/26/details",
",
            "action": "GET",
            "rel": "job-details "
        }
    ]
}
```

Example 2: Job Status with No Errors

```
{
    "jobId": 26,
    "jobName": " Copy POV",
    "status": 0,
    "descriptiveStatus": "Success",
    "details": null
    "links": [
        {
            "rel": "self"
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
jobs/26",
            "action": "GET",
        },
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
 {
            "rel": "job-details"
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
jobs/26/details",
            "action": "GET",
        }
```

Delete Point of View

Deletes the data associated with a point of view from the calculation cube.

This is an asynchronous call, so use the job status URI to determine whether the operation is complete.

Required Roles

Service Administrators

> **Note**
>
> This REST API supports using an existing job as the source of parameter values. The job type must be **Delete POV**, created and saved in PCM Agent. Any parameters defined in the saved job can be overridden at runtime by providing values in the REST request payload.

REST Resource

POST `/HyperionPlanning/rest/v3/applications/{AppName}/jobs/`

Request

Supported Media Types: `application/json`

> **Note**
>
> If substitution variables exist for parameters, you can use them instead of actual values in the REST API. See Use Substitution Variables in Enterprise Profitability and Cost Management REST APIs for more information.

Table 6-12 Request Parameters

Name	Description	Type	Required	Default
`jobType`	`Delete POV`	Payload	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 6-12 (Cont.) Request Parameters

Name	Description	Type	Required	Default
jobName	Name of the job **Example**: "Delete POV" The jobName parameter is required and must be provided, even if it's just a placeholder value. If a saved job exists with the provided job name, the platform jobs Framework resolves it and populates all parameters from the saved job definition. If no saved job is found, it treats the value as a user-defined job name.	Payload	Yes	None
povDelimiter	Delimiter used in POV values. The delimiter must be enclosed in double quotation marks. Other than a comma, only these delimiters are supported: • _ (under score) • # (hash) • ~ (tilde) • % (percentage) • ; (semicolon) • : (colon) • - (dash) **Example**: "povDelimiter":":" **Note:** When submitting multiple POVs for calculation, do not use a comma as the delimiter to separate POV members. Comma is reserved for separating POV groups as shown in this example: FY21:Jan:Actual:Working,FY21:Feb:Actual:Working,FY21:Mar:Actual:Working	Payload	Yes	:: (Double Colon)
povName	Name of the POV to delete **Example**: "povName":"FY21:Jan:Actual:Working"	Payload	Yes	None

Sample Payload

```
{
   "jobType":"Delete POV",
   "jobName":"Delete POV",
   "parameters":{
        "povDelimiter":":",
        "povName":"FY21:Jan:Actual:Working"
   }
}
```

Response

Supported Media Types: application/json

Copyright © 2017, 2026, Oracle and/or its affiliates.

> **Note**
>
> If substitution variables exist for parameters, you can use them instead of actual values in the REST API. See Use Substitution Variables in Enterprise Profitability and Cost Management REST APIs for more information.

Table 6-13 Response Parameters

Name	Description
`jobId`	ID of the job that is created
`jobName`	Name of the job
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes.
`links`	Detailed information about the link
`href`	Links to the API call
`action`	HTTP call type
`rel`	Can be `self` and/or `Job-details`. If set to `Job Status`, you can use the `href` to get the status of the job.
`data`	Parameters as key value pairs passed in the request

Example of Response Body

The following examples show the contents of the response body in JSON format:

Example 1: Job is in Progress

```
{
    "jobId": 26,
    "jobName": "Delete POV",
    "status": -1,
    "descriptiveStatus": "Processing",
    "details": null,
    "links": [
        {
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
BksML40/jobs/26",
            "action": "GET",
            "rel": "self",
        },
        {
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
BksML40/jobs/26/details",
",
            "action": "GET",
            "rel": "job-details "
        }
    ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Example 2: Job Status with No Errors

```
{
    "jobId": 26,
    "jobName": " Delete POV",
    "status": 0,
    "descriptiveStatus": "Success",
    "details": null
    "links": [
        {
            "rel": "self"
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
jobs/26",
            "action": "GET",
        },
 {
            "rel": "job-details"
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
jobs/26/details",
            "action": "GET",
        }

    ]
}
```

Use Substitution Variables in Enterprise Profitability and Cost Management REST APIs

Enterprise Profitability and Cost Management jobs support substitution variables as job parameters. These substitution variables are resolved at runtime, and the job executes accordingly.

When using substitution variables as job parameters, keep in mind the following:

- The substitution variable should start with &.
- If it does not start with &, it will be treated as a regular parameter.
- If the substitution variable does not exist or an invalid name is passed, the job fails with an error.

Example:

In the payload below, `&currYear` and `&execType` are substitution variables. These substitution variables are resolved at runtime, and the job executes accordingly.

```
{
    "jobType":"Calculation",
    "jobName":"Calculation",
    "parameters":{
        "povDelimiter":":",
        "povName":"&currYear:Jan:Actual:Working",,
        "modelName":"10 Actuals Allocation Process",
        "executionType":"&execType",
        "rulesetSeqNumStart":"1",
        "rulesetSeqNumEnd":"1",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        "clearCalculatedData":"true",
        "executeCalculations":"true",
        "optimizeForReporting":"true",
        "captureDebugScripts":"false"
    }
}
```

Validate Model

Automates the calculation process for validating a model.

This is an asynchronous call, so use the job status URI to determine whether the operation is complete.

Any validation failures are written to file with file name provided in the parameters, and can be accessed from Inbox/Outbox Explorer.

This API is version v3.

Required Roles

Service Administrators

REST Resource

POST `/HyperionPlanning/rest/v3/applications/{AppName}/jobs/`

> **Note**
>
> Before using the REST resources, you must understand how to access the REST resources and other important concepts. See Cloud EPM REST APIs Best Practices. Using this REST API requires prerequisites. See Prerequisites.

Request

Supported Media Types: `application/json`

> **Note**
>
> If substitution variables exist for parameters, you can use them instead of actual values in the REST API. See Use Substitution Variables in Enterprise Profitability and Cost Management REST APIs for more information.

Table 6-14 Request Parameters

Name	Description	Type	Required	Default
`jobType`	`Validate Model`	Payload	Yes	None
`jobName`	Name of the job **Example**: `"Validate Model"`	Payload	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 6-14 (Cont.) Request Parameters

Name	Description	Type	Required	Default
`modelName`	Name of the model to validate **Example**: `"modelName":"10 Actuals Allocation Process"`	Payload	Yes	None
`fileName`	Name of the output file to which all the validations (if any) will be written **Example**: `"fileName":"results.txt"`	Payload	Yes	None
`ruleStatus`	Exclude rules based on their status: • **All**: (Default) Validate all the rules for the selected model • **Enabled**: Validate all enabled rules • **Disabled**: Validate all disabled rules	Payload	Yes	All

Sample Payload

```
{
   "jobType":"Validate Model",
   "jobName":"Validate Model",
   "parameters":{
       "modelName":"10 Actuals Allocation Process",
       "fileName":"DISABLED_results4.txt"
       "ruleStatus":"DISABLED"
   }
}
```

Response

Supported Media Types: `application/json`

> **Note**
>
> If substitution variables exist for parameters, you can use them instead of actual values in the REST API. See Use Substitution Variables in Enterprise Profitability and Cost Management REST APIs for more information.

Table 6-15 Response Parameters

Name	Description
`jobId`	ID of the job that is created
`jobName`	Name of the job
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes.
`links`	Detailed information about the link
`href`	Links to the API call
`action`	HTTP call type

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 6-15 (Cont.) Response Parameters

Name	Description
`rel`	Can be `self` and/or `Job-details`. If set to `Job Status`, you can use the `href` to get the status of the job.
`data`	Parameters as key value pairs passed in the request

Examples of Response Body

The following examples show the contents of the response body in JSON format:

Example 1: Job is in Progress

```
{
    "jobId": 26,
    "jobName": "Validate Model",
    "status": -1,
    "descriptiveStatus": "Processing",
    "details": null,
    "links": [
        {
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
BksML40/jobs/26",
            "action": "GET",
            "rel": "self",
        },
        {
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
BksML40/jobs/26/details",
",
            "action": "GET",
            "rel": "job-details "
        }
    ]
}
```

Example 2: Job Status with No Errors

```
{
    "jobId": 26,
    "jobName": "validate Model",
    "status": 0,
    "descriptiveStatus": "Success",
    "details": null
    "links": [
        {
            "rel": "self"
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
jobs/26",
            "action": "GET",
        },
 {
            "rel": "job-details"
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/applications/
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
jobs/26/details",
            "action": "GET",
        }

    ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

7

Financial Consolidation and Close REST APIs

Use the Financial Consolidation and Close REST APIs to get the REST API version, retrieve journals and journal details, submit, approve, post, unpost, and reject journals, and update journal periods. You can also import supplementation data, copy data, clear data, and deploy form templates.

Table 7-1 Consolidation REST APIs

Financial Consolidation and Close REST APIs		
Get API Versions for Financial Consolidation and Close APIs Copy Data Clear Data Export Consolidation Journals Export Configurable Consolidation Rulesets	Generate an Intercompany Matching Report Import Configurable Consolidation Rulesets Import Consolidation Journals Perform Journal Actions for Financial Consolidation and Close Perform Journal Period Updates for Financial Consolidation and Close	Retrieve Journals for Financial Consolidation and Close Retrieve Journal Details for Financial Consolidation and Close Validate Metadata

URL Structure for Financial Consolidation and Close

Use the following URL structure to access the Financial Consolidation and Close REST resources:

`https://<BASE-URL>/HyperionPlanning/rest/{api_version}/{path}`

Where:

- *<BASE-URL>*: The first part of your service URL, before the context.

  For example, if your service URL is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com`. Similarly, if your service URL is `https://epm2-acme.epm.us6.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm2-acme.epm.us6.oraclecloud.com`.
- *api_version*: API version you are developing with. The current REST API version for Financial Consolidation and Close is v3.
- *path*: Identifies the resource.

Copyright © 2017, 2026, Oracle and/or its affiliates.

> **Note**
>
> Oracle does not authorize or support the use of REST APIs with the path token "/internal/" in the URL.

Get API Versions for Financial Consolidation and Close APIs

You can get information on REST API versions using REST resources. See Getting API Versions for Planning. Financial Consolidation and Close APIs use the same version numbers as Planning.

Get Information about a Specific API Version for Financial Consolidation and Close APIs

Returns details for a specific REST API version for Financial Consolidation and Close.

REST Resource

```
GET /HyperionPlanning/rest/{api_version}
```

Required Roles

Service Administrator, Power User, User, Viewer

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the parameters.

Table 7-2 Parameters

Name	Description
`api_version`	Version of the API you are developing with, such as V1

Response

Supported Media Types: `application/json`

Parameters

The following table summarizes the parameters.

Table 7-3 Parameters

Name	Description
`version`	The version, such as V1

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
"version": "v1",
"lifecycle": "active",
"isLatest": true,
"links": [{
"rel": "canonical",
"href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/HyperionPlanning/rest/v2"
}, {
"rel": "predecessor-version",
"href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/HyperionPlanning/rest/v1"
}]
}
```

Copy Data

This REST API is used to execute a Copy Data job using the profile name. Before executing this job, you should create a Copy Data profile in Financial Consolidation and Close.

For details on this task, see Using Copy Data Profiles.

This REST API returns the job id after starting the Copy Data job.

REST Resource

POST `/HyperionPlanning/rest/{api_version}/applications/{application}/jobs`

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Table 7-4 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are working with: v3	Path	Yes	None
`application`	The name of the application Get the application name by using the Get Applications API, for example, FCCS or TRCS. See Get Applications.	Path	Yes	None
`jobName`	Name of the job should be: `EXECUTE PROFILE`	String	Yes	None
`jobType`	Type of Job. Supported value: `COPY_DATA`	String	Yes	None
`ProfileName`	Name of the profile to use to copy data	String	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example of Request Body

```
{
    "jobType": "Copy_Data",
    "jobName": "Execute Profile",
    "parameters": {
        "ProfileName": "<ProfileName>",
    }
}
```

Response Body

Supported Media Types: `application/json`

Table 7-5 Parameters

Name	Description
`type`	Financial Consolidation and Close Application type, for example, FCCS
`status`	Status of the job: -1 =In progress; 0 = Success; 1 = Fail
`details`	In case of errors, details are published with the error string.
`descriptiveStatus`	The status of the job, such as Completed or Error
`items`	Collection of Notification categories
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Relationship type. Possible values: self

Example of Response Body:

The following shows an example of the response body in JSON format.

```
{
  "jobId": 8,
  "descriptiveStatus": "Processing",
  "details": null,
  "jobName": "Copy Data",
  "status": -1,
  "links": [
    {
      "href":"https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/HyperionPlanning/rest/v3/
applications/<applicationName>/jobs/<JobId>","rel":"self","action":"GET"},
      "href":"https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/HyperionPlanning/rest/v3/
applications/,
      "rel":"job-details","action":"GET"},
    }
  ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Clear Data

This REST API is used to execute a Clear Data job using the profile name. Before executing this job, you should create a Clear Data profile in Financial Consolidation and Close.

For details on this task, see Using Clear Data Profiles.

This REST API returns the job id after starting the job.

REST Resource

POST `/HyperionPlanning/rest/{api_version}/applications/{application}/jobs`

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job.

Table 7-6 Clear Data

Name	Description	Type	Required	Default
`api_version`	Version of the API you are working with: v3	Path	Yes	None
`application`	The name of the application Get the application name by using the Get Applications API, for example, FCCS or TRCS. See Get Applications.	Path	Yes	None
`jobName`	Name of the job should be: `EXECUTE PROFILE`			
`jobType`	Type of Job. Supported value: `Clear_Data`	String	Yes	None
`ProfileName`	The name of the profile to use to clear data	String	Yes	None

Example of request body

Example:

```
{
    "jobType": "Clear_Data",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    "jobName": "Execute Profile",
    "parameters": {
        "ProfileName": "<ClearData_01>",
    }
}
```

Response

Table 7-7 Parameters

Name	Description
`type`	Financial Consolidation and Close Application type, for example, FCCS
`status`	Status of the job: -1 =In progress; 0 = Success; 1 = Fail
`details`	In case of errors, details are published with the error string.
`descriptiveStatus`	The status of the job, such as Completed or Error
`items`	Collection of Notification categories
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Relationship type. Possible values: self

Supported Media Types: `application/json`

Example of Response Body

The following is an example of the response body in JSON format.

```
{
  "jobId": 8,
  "descriptiveStatus": "Processing",
  "details": null,
  "jobName": "Clear Data",
  "status": -1,
  "links": [
    {
      "href":"https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/HyperionPlanning/rest/v3/
applications/<applicationName>/jobs/<JobId>","rel":"self","action":"GET"},
      "href":"https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/HyperionPlanning/rest/v3/
applications/,
      "rel":"job-details","action":"GET"},
    }
  ]
}
```

Sample

```
{
  "jobId": 8,
  "descriptiveStatus": "Processing",
  "details": null,
  "jobName": "Clear Data",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
  "status": -1,
  "links": [
    {
      "href":"https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/HyperionPlanning/rest/v3/
applications/ Testapp /jobs/8",
      "rel":"self","action":"GET"},
      "href":"https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/HyperionPlanning/rest/v3/
applications/Testapp/jobs/8/details",
      "rel":"job-details","action":"GET"}    }
  ]
}
```

Export Consolidation Journals

This REST API is used to execute an Export Consolidation Journals job using the job name. Before executing this job, you should create an Export Consolidation Journals job in Financial Consolidation and Close.

For details on this task, see "Exporting Consolidation Journals" in *Working with Financial Consolidation and Close*.

This REST API returns the job ID after starting the Export Consolidation Journals job.

REST Resource

POST `/HyperionPlanning/rest/{api_version}/applications/{application}/jobs`

Required Roles

Service Administrator

Any user with User role and above can export journals, but only if they have write/read access to the dimension members. For any line in the journal where a user has None access to a member, the data is blank for that line.

Request

Supported Media Types: `application/json`

Table 7-8 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are working with: v3	Path	Yes	None
`application`	The name of the application Get the application name by using the Get Applications API. See Get Applications.	Path	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 7-8 (Cont.) Parameters

Name	Description	Type	Required	Default
`jobName`	Name of the job should be: `Export Journal`	String	Yes	None
`jobType`	Type of Job. Supported value: `EXPORT_JOURNAL`	String	Yes	None
`fileName`	Name of the file into which the journal entries are to be exported	String	Yes	None

Example of Request Body

```
{
"jobType": "EXPORT_JOURNAL,
"jobName": "Export Journal",
"parameters": {
   "fileName": "JExport1"
 }
}
```

Response Body

Supported Media Types: `application/json`

Table 7-9 Parameters

Name	Description
`status`	Status of the job: -1 =In progress; 0 = Success; 1 = Fail
`details`	In case of errors, details are published with the error string.
`descriptiveStatus`	The status of the job, such as Completed or Error
`items`	Collection of Notification categories
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Relationship type. Possible values: self

Example of Response Body:

The following shows an example of the response body in JSON format.

```
{
    "links": [
        {
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "rel": "self",
            "href": "https://<BASE-URL>/rest/v3/applications/FccsRef3/jobs/
184",
            "action": "GET"
        },
        {
            "rel": "job-details",
            "href": "https:<BASE-URL>/rest/v3/applications/FccsRef3/jobs/184/
details",
            "action": "GET"
        }
    ],
    "descriptiveStatus": "Processing",
    "status": -1,
    "jobId": 184,
    "jobName": "JExport1",
    "details": null
}
```

Export Configurable Consolidation Rulesets

This REST API launches an Export Configurable Consolidation Rulesets job for Financial Consolidation and Close, which exports the rulesets specified in the request to an xml file. The exported xml file, named `Configurable_Consolidation.xml`, can be downloaded from the Job Details page and edited as needed. The contents and structure of the xml file is similar to that exported through the user interface.

Required Roles

Service Administrator

REST Resource

```
POST /HyperionPlanning/rest/{api_version}/applications/{application}/
exportConfigConsolRules
```

Request

Supported Media Types: `application/json`

The following table summarizes the client request parameters specific to this job.

Table 7-10 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with: v3	Path	Yes	None
`application`	The name of the application	Path	Yes	None

`rules`	Array of ruleset names that needs to be exported, for example:
	{
	"rules"=["Test1","Test2"]
	}
		Payload	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Sample Request

```
{
"rules"= ["Test1","Test2"]
}
```

Response

Supported Media Types: `text/plain`

Examples of Response Body

Response is job submission message, or an error message, if any, for example:

```
Job is submitted. See the job console for more information.
```

If rules specified in the request body don't exist in the application, then the generated job will be errored out and the error file can be downloaded from the Job Details page.

If the `rules` parameter is not provided in the request, or if no value is specified for the `rules` parameter, the following error message will be returned as the response:

```
Please enter rules to be exported.
```

Generate an Intercompany Matching Report

This REST API is used to execute an Intercompany Matching Report job.

For details on this task, see Managing Intercompany Matching Reports.

This REST API returns the job ID after starting the Intercompany Matching Report job.

Required Roles

Service Administrator, Power User or User

REST Resource

```
POST /HyperionPlanning/rest/{api_version}/applications/{application}/jobs
```

Request

Supported Media Types: `application/json`

Table 7-11 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are working with: v3	Path	Yes	None
`application_name`	The name of the application Get the application name by using the Get Applications API. See Get Applications.	Path	Yes	None
`jobName`	The name of the saved Intercompany report definition, for example: IC_Job_01	Payload	Yes	None
`jobType`	Type of Job. Supported value: GENERATE_INTERCOMPANY_REPORT	Payload	Yes	None
`parameters`	Pass optional parameters to set the report POV	Payload	No	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 7-12 Optional Parameters

Name	Description
scenario	The member of the Scenario dimension for the report, for example, Actual
years	The member of the Year dimension for the report, for example, FY22
period	The member of the Period dimension for the report, for example, December
reportFormat	The format for the report, for example, HTML
fileName (optional)	A filename for the report, for example, intercompany_receivables_report

Example of Request Body

```
{
"jobType": "GENERATE_INTERCOMPANY_REPORT",
"jobName": "icp1",
"parameters": {
"scenario":"actual",
"years": "FY22",
"period":"Dec",
"reportFormat":"HTML"
"fileName":"intercompany_receivables_report"
}
}
```

Response Body

Supported Media Types: `application/json`

Table 7-13 Parameters

Name	Description
type	Financial Consolidation and Close Application type, for example, FCCS
status	Status of the job: • -1 =In progress • 0 = Success; • 1 = Fail • 2 = Cancel Pending • 3 = Cancelled • 4 = Invalid Parameter • >4 = Unknown
details	In case of errors, details are published with the error string.
descriptiveStatus	The status of the job, such as Completed or Error
items	Collection of Notification categories
links	Detailed information about the link
href	Links to API call
action	The HTTP call type
rel	Relationship type. Possible values: self

Example of Response Body:

Copyright © 2017, 2026, Oracle and/or its affiliates.

The following shows an example of the response body in JSON format.

```
{
    "descriptiveStatus": "Processing",
    "jobId": 33,
    "jobName": "icp1",
    "details": null,
    "status": -1,
    "links": [
        {
            "rel": "self",
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3/
applications/tst/jobs/33",
            "action": "GET"
        },
        {
            "rel": "job-details",
            "href": "https:<BASE-URL>/HyperionPlanning/rest/v3/
applications/tst/jobs/33/details",
            "action": "GET"
        }
    ]
}
```

Import Configurable Consolidation Rulesets

This REST API launches an Import Configurable Consolidation Rulesets job, which imports the specified ruleset xml into Financial Consolidation and Close, after validation of the specified rulesets. The import validation process is similar to that implemented in the Import Configurable Consolidation Rulesets user interface.

The xml file can be uploaded to the Planning Inbox/Outbox using the EPM Automate `uploadFile` command.

Required Roles

Service Administrator

REST Resource

```
POST /HyperionPlanning/rest/{api_version}/applications/{application}/
importConfigConsolRules
```

Request

Supported Media Types: `application/json`

The following table summarizes the client request parameters specific to this job.

Table 7-14 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with: v3	Path	Yes	None
`application`	The name of the application	Path	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 7-14 (Cont.) Parameters

Name	Description	Type	Required	Default
`file`	Name of the xml file located at the Planning Inbox/Outbox location, for example: `{"file" = "inbox/Configurable_Consolidation.xml"}`	Payload	Yes	None

Sample Request

```
{
"file" = "inbox/Configurable_Consolidation.xml"
}
```

Response

Supported Media Types: `text/plain`

Examples of Response Body

Response is job submission message, or an error message, if any.

The import details can be seen from submitted Job Details page, for example:

```
Job is submitted. See the job console for more information.
```

If any error exists in the rules specified in the xml file while importing/validating, the error details can be viewed on the Job Details page.

If the `file` parameter is not specified in the request, or if no value is provided for the `file` parameter, the following error message will be returned as the response:

```
Please enter the name of the file located at Inbox/Outbox location.
```

Import Consolidation Journals

This REST API is used to execute an Import Consolidation Journals job using the job name. Before executing this job, you should create an Import Consolidation Journals job in Financial Consolidation and Close.

For details on this task, see "Importing Consolidation Journals" in *Working with Financial Consolidation and Close*.

This REST API returns the job ID, job status and job details after starting the Import Consolidation Journals job.

REST Resource

POST `/HyperionPlanning/rest/{api_version}/applications/{application}/jobs`

Required Roles

Service Administrator

Copyright © 2017, 2026, Oracle and/or its affiliates.

Consolidation Journals - Create

Request

Supported Media Types: `application/json`

Table 7-15 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are working with: v3	Path	Yes	None
`application`	The name of the application Get the application name by using the Get Applications API. See Get Applications.	Path	Yes	None
`jobName`	Name of the job should be an existing journal import job: `<job name>`	String	Yes	None
`jobType`	Type of Job. Supported value: `IMPORT_JOURNAL`	String	Yes	None
`fileName`	Name of the file from which the journal entries are to be imported	String	No	File specified in the Job
`errorFileName`	Name of the log file in which messages generated during the import process are to be recorded	String	No	None

Example of Request Body

```
{
    "jobType": "IMPORT_JOURNAL",
    "jobName": "IMPORT1",
    "parameters": {
       "fileName": "TestImport1.jlf",
       "errorFileName": "DHQA_TestImport1_error.log"
    }
}
```

Response Body

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 7-16 Parameters

Name	Description
type	Application type, for example, FCCS
status	Status of the job: -1 =In progress; 0 = Success; 1 = Fail
details	In case of errors, details are published with the error string.in the job error file and Job Console.
descriptiveStatus	The status of the job, such as Completed or Error
items	Collection of Notification categories
links	Detailed information about the link
href	Links to API call
action	The HTTP call type
rel	Relationship type. Possible values: self

Example of Response Body:

The following shows an example of the response body in JSON format.

```
{
"links":[
{
"rel": "self",
"href": " https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/HyperionPlanning/rest/v3/
applications/FccsRef3/jobs/13",
"action": "GET"
},
{
"rel": "job-details",
"href": " https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/HyperionPlanning/rest/v3/
/applications/FccsRef3/jobs/13/details",
"action": "GET"
}
],
"descriptiveStatus": "Processing",
"status": -1,
"jobId": 13,
"jobName": "JIMPORT1",
"details": null
}
```

Perform Journal Actions for Financial Consolidation and Close

Performs journal action for the specified journal. Changes the journal status to the new state specified.

Journal actions supported: SUBMIT,APPROVE,POST,UNPOST,REJECT

Copyright © 2017, 2026, Oracle and/or its affiliates.

This API works only for Financial Consolidation and Close.

REST Resource

```
POST      /HyperionPlanning/rest/{api_version}/applications/{application}/
journals/{journalLabel}/actions
```

Required Roles

Role	Available Actions
Service Administrator	All
Power User/User	Submit/Post/Unpost: Need Write access to all the members in the journal Approve/Reject. Need Read access to all the members in the journal and Journal option must have been enabled. In addtion, need respective Consolidation Security roles: Consolidation Journals - Submit, Consolidation Journals - Approve, Consolidation Journals - Post, Consolidation Journals - Unpost.

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 7-17 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	The name of the application	Path	Yes	None
`journalLabel`	Label for the journal	Path	Yes	None
`parameters`	Parameters for journals, for example: `{"parameters" :{ "scenario": "Actual", "year": "FY17", "period": "Jan", "consolidation": "FCCS_Entity Input", "action": "POST" }}` These parameter fields are described in rows below.	JSON	Yes	None
`scenario`	The scenario for which you are performing the journal action	Query	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 7-17 (Cont.) Parameters

Name	Description	Type	Required	Default
`year`	The year for which you are performing the journal action	Query	Yes	None
`period`	The period for which you are performing the journal action	Query	Yes	None
`consolidation`	The consolidation for which you are performing the journal action	Query	No	Entity Input
`action`	The journal action. Supported valid Action values: SUBMIT,REJECT,APPROVE,POST,UNPOST	Query	Yes	None

Response

Parameters

The following table summarizes the response parameters.

Table 7-18 Parameters

Name	Description
`actionDetail`	Journal action, such as Posted
`actionStatus`	Action status, such as 0

Supported Media Types: `application/json`

Sample JSON Input

```
{
       "scenario": "Actual",
       "year": "FY17",
       "period": "Jan",
       "action": "POST"
     }
```

Example of Response Body

The following shows an example of the response body.

```
{
       "actionDetail": "Posted",
       "actionStatus": 0
       }
```

Perform Journal Period Updates for Financial Consolidation and Close

Performs journal period update action for the specified period.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Journal period actions supported: OPEN,CLOSE

This API works only for Financial Consolidation and Close.

REST Resource

```
POST      /HyperionPlanning/rest/{api_version}/applications/{application}/
journalPeriods/{period}/actions
```

Required Roles

Service Administrator

Consolidation Journals - Manage Periods

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 7-19 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	The name of the application	Path	Yes	None
`period`	The period for which you are performing the journal action	Path	Yes	None
`parameters`	Parameters for the journal period, for example: `{ "parameters": { "scenario": "Actual", "year": "FY17", "action": "OPEN" } }` These parameters are described in rows below.	JSON	Yes	None
`scenario`	The scenario for which you are performing the journal action	JSON	Yes	None
`year`	The year for which you are performing the journal action	JSON	Yes	None
`action`	The journal period action. Supported valid Action values: OPEN, CLOSE	JSON	Yes	None

Response

Parameters

The following table summarizes the response parameters.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 7-20 Parameters

Name	Description
scenario	Journal scenario, such as Actual
year	Journal year, such as FY18
period	Journal period, such as Jan
action	Journal period action, such as Open

Supported Media Types: application/json

Sample JSON Input

```
{
       "scenario": "Actual",
       "year": "FY17",
       "period": "Jan",
       "action": "OPEN"
        }
     }
```

Example of Response Body

The following shows an example of the response body.

```
{
       "actionDetail": "Open",
       "actionStatus": 0
         }
```

Retrieve Journals for Financial Consolidation and Close

Returns the list of journals for the given scenario, year, period, journal status and other specified filters.

Paging is supported if the optional offset and limit parameters are provided.

This API works only for Financial Consolidation and Close.

REST Resource

```
GET       /HyperionPlanning/rest/{api_version}/applications/{application}/
journals?
q={"scenario":"Actual","year":"FY16","period":"Jan","consolidation":"FCCS_Enti
ty Input","status":
"WORKING","group":"group1" ,"label":"J1" ,"description":"JournalDesc","entity"
:"FCCS_Total Geography"}&offset=0&limit=5
```

Required Roles

Service Administrator

Copyright © 2017, 2026, Oracle and/or its affiliates.

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 7-21 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	The name of the application	Path	Yes	None
`q`	Filters for retrieving the journals, for example: `{"scenario":"Actual","year":"FY16","period":"Jan","consolidation":"FCCS_Entity Input","status":"WORKING","group":"group1" ,"label":"J1" ,"description":"Journal Desc","entity":"FCCS_Total Geography"}` Possible values are described in the following rows.	Query	No	5 journals are returned.
`scenario`	Scenario for the journal, for example: "scenario":"Actual"	Query	Yes	None
`year`	Year for the journal, for example: "year":"FY16"	Query	Yes	None
`period`	Period for the journal, for example: "period":"Jan"	Query	Yes	None
`consolidation`	Consolidation for the journal, for example: "consolidation":"FCCS_Entity Input"	Query	No	Entity Input
`status`	Status for the journal, for example: "status":"WORKING" Valid values are "WORKING" , "SUBMITTED", "POSTED", "APPROVED"	Query	Yes	None
`group`	Group for the journal, for example: "group":"group1"	Query	No	None
`label`	Label for the journal, for example: "label":"j1"	Query	No	None
`description`	Description for the journal, for example: "description":"adjustment for salary"	Query	No	None
`entity`	Entity for the journal, for example: "entity":"FCCS_Total Geography"	Query	No	None
`offset`	Used for pagination of the records. Indicates the actual index from which the records are returned. It is 0 based.	Query	No	0
`limit`	Used for pagination of the records. Controls how many items to return. Defaults to 5 if not specified.	Query	No	5

Copyright © 2017, 2026, Oracle and/or its affiliates.

Response

The following table summarizes the response parameters.

Table 7-22 Parameters

Name	Description
`totalResults`	Total number of journals matching the filter criteria
`hasMore`	True/False, if there are more pages of records
`count`	Number of journals in this page
`limit`	Current page size
`offset`	Current page number

`items`	List of journals, followed by attributes of journals, such as below:
	
	`[{`
	`"scenario": "Actual",`
	`"currency": "Entity Currency",`
	`"createdOn": "2018-07-30 06:22:47.516",`
	`"modifiedBy": "epm_default_cloud_admin",`
	`"journalType": "Regular",`
	`"createdBy": "epm_default_cloud_admin",`
	`"balanceType": "Balanced",`
	`"postedBy": null,`
	`"year": "FY17",`
	`"description": "JournalDesc1",`
	`"group": "grp1",`
	`"status": "Working",`
	`"label": "J4",`
	`"period": "Jan"]`
	`}]`

Supported Media Types: `application/json`

Example of Response Body

The following shows an example of the response body.

```
{
       "totalResults": 10
       "hasMore": false,
       "count": 5,
       "limit": 5,
       "offset": 0,
       "items": [{
       "scenario": "Actual",
       "createdOn": "2018-07-30 06:22:47.516",
       "modifiedBy": "epm_default_cloud_admin",
       "journalType": "Regular",
       "createdBy": "epm_default_cloud_admin",
       "balanceType": "Balanced",
       "postedBy": null,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        "year": "FY17",
        "description": "JournalDesc1",
        "group": "grp1",
        "status": "Working",
        "label": "J4",
        "period": "Jan",
        "journalUrl": {,
        "rel": "Journal Item",
        "href": "https://<SERVICE_NAME-
<TENANT_NAME.<SERVICE_TYPE.<dcX>.oraclecloud.com/HyperionPlanning/faces/LogOn?
SO_jumpToEfsStructureHome=Y&SO_efsJumpToCardId=EPM_CA_6",",
        "data": null,
        "action": "GET",
              }
      },
        {
        "scenario": "Actual",
        "currency": "Entity Currency",
        "createdOn": "2018-07-26 10:21:35.634",
        "modifiedBy": "epm_default_cloud_admin",
        "journalType": "Regular",
        "createdBy": "epm_default_cloud_admin",
        "balanceType": "Balanced",
        "postedBy": null,
        "year": "FY17",
        "description": "JournalDesc1",
        "group": "grp1",
        "status": "Working",
        "label": "J2",
        "period": "Jan",
        "journalUrl": {,
        "rel": "Journal Item",
        "href": "https://<SERVICE_NAME-
<TENANT_NAME.<SERVICE_TYPE.<dcX>.oraclecloud.com/HyperionPlanning/faces/LogOn?
SO_jumpToEfsStructureHome=Y&SO_efsJumpToCardId=EPM_CA_6",",
        "data": null,
        "action": "GET",
      },
      }
      ],
      "links": [
      {
      "rel": "Get Journals",
      "href": "https://<SERVICE_NAME-
<TENANT_NAME.<SERVICE_TYPE.<dcX>.oraclecloud.com/HyperionPlanning/rest/v3/
applications/BotApp/journals",
      "action": "GET
      }
       ],
       }
```


Retrieve Journal Details for Financial Consolidation and Close

Returns the journal details for the given scenario, year, period, consolidation, and the journal name.

Copyright © 2017, 2026, Oracle and/or its affiliates.

This API works only for Financial Consolidation and Close.

REST Resource

```
GET       /HyperionPlanning/rest/{api_version}/applications/{application}/
journals/{journal label}?
q={"scenario":"Actual","year":"FY16","period":"Jan","consolidation":"Entity
Input"}&"lineItems"="true
```

Required Roles

Service Administrator

Respective Consolidation Journals role (Submit/Approve/Post/Unpost) for specified Journal Label

Request

Supported Media Types: `application/json`

The following table summarizes the client request.

Table 7-23 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	The name of the application	Path	Yes	None
`journal label`	The label of the journal for which to retrieve journal details	Path	Yes	None
`q`	Filters to retrieve the journal, for example: `q={"scenario":"Actual","year":"FY16","period":"Jan","consolidation":"Entity Input"}`	Query	Yes	None
`scenario`	Scenario for the journal, for example: "scenario":"Actual"	Query	Yes	None
`year`	Year for the journal, for example: "Year":"FY16	Query	Yes	None
`period`	Period for the journal, for example: "period":"Jan"	Query	Yes	None
`consolidation`	Consolidation for the journal, for example: "consolidation": "Entity Input"	Query	No	Entity Input

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 7-23 (Cont.) Parameters

Name	Description	Type	Required	Default
`lineItems`	Line items for the journal. Valid values are true or false. To display a Consolidation Journal's line items, you must specify "lineItems"="true".	Query	Yes	False

Response

Parameters

The following table summarizes the response parameters.

Table 7-24 Parameters

Name	Description
`totalResults`	Total number of journals matching the filter criteria
`hasMore`	True/False, if there are more pages of records
`count`	Number of journals in this page
`limit`	Current page size
`offset`	Current page number

`items`	List of journals, followed by attributes of journals, such as below:
	
	`[{`
	`"scenario": "Actual",`
	`"currency": "Entity Currency",`
	`"createdOn": "2018-07-30 06:22:47.516",`
	`"modifiedBy": "epm_default_cloud_admin",`
	`"journalType": "Regular",`
	`"createdBy": "epm_default_cloud_admin",`
	`"balanceType": "Balanced",`
	`"postedBy": null,`
	`"year": "FY17",`
	`"description": "JournalDesc1",`
	`"group": "grp1",`
	`"status": "Working",`
	`"label": "J4",`
	`"period": "Jan"]`
	`}]`

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Example of Response Body

The following shows an example of the response body.


```
{
[
"scenario": "Actual",
"year": "FY18",
"period": "Feb",
"label": "JETest11",
"journalType": "Regular",
"balanceType": "Balanced",
"status": "Posted",
"description": "Journal description",
"group": "IMPORT_Group",
"createdBy": "epm_default_cloud_admin",
"modifiedBy": "epm_default_cloud_admin",
"postedBy": "epm_default_cloud_admin",
"createdOn": "2023-12-06 18:48:33.503",
"currency": "Entity Currency",
"consolidation": "FCCS_Entity Input",
"totCredit": 1300,
"totDebit": 1300,
"journalLineItems":[
{"amountType": "Debit", "amount": 800, "descritption": "line description",
"entity": "YY_E1",…},
{"amountType": "Credit", "amount": 500, "descritption": "line description",
"entity": "YY_E1",…},
{"amountType": "Debit", "amount": 500, "descritption": "line description",
"entity": "YY_E1",…},
{"amountType": "Credit", "amount": 800, "descritption": "line description",
"entity": "YY_E1",…}
]
}
```


Validate Metadata

This REST API is used to automatically run the Validate Metadata process to ensure an error-free database refresh and consolidation.

For details on this task, see "Validating Metadata" in *Administering Financial Consolidation and Close*.

Required Roles

Service Administrator

REST Resource

POST `/HyperionPlanning/rest/{api_version}/applications/{application_name}/application/validatemetadata?logFileName={logfile_name}`

Request

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 7-25 Parameters

Name	Description	Type	Required	Default
api_version	Version of the API you are working with: v3	Path	Yes	None
application_name	The name of the application Get the application name by using the Get Applications API. See Get Applications.	Path	Yes	None
logFileName	Name of the log file of exported results	Payload	No	None

Response

Supported Media Types: application/json

Table 7-26 Parameters

Name	Description
numWarnings	Number of metadata warnings
numInfo	Number of metadata information messages
outPutFileName	Ouput file name with the extension of .csv
numErrors	Number of metadata error messages
status	The status of the job, such as Completed or Error

Example of Response Body:

The following shows an example of the response body in JSON format.

```
{
"numWarnings": 0,
"numInfo": 0,
"outPutFileName": "ValidateMetadata.csv,
"numErrors": 20,
"status": "Validate Metadata Completed"
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

8

Narrative Reporting REST APIs

> **Note**
>
> The Infrastructure REST APIs described in this guide will work with Narrative Reporting also.

See REST APIs for Narrative Reporting to work with Narrative Reporting artifacts, report packages, report snapshots, and reports. Use Narrative Reporting REST APIs to execute these actions:

- **Files**
  - Download a file from the temporary repository or to the Library.
  - Upload a temporary file to the Narrative Reporting repository.
- **Jobs**
  - Start a new Narrative Reporting job for asynchronous execution by the service.
  - Get a Narrative Reporting job's status that provides links to the job results when the job is complete.
- **Reports**
  - You can get the corresponding Report information
  - You can get the global point of view selections and member suggestions for the Report
  - You can get the required member selection prompts for the Report
- **Books**
  - You can get the corresponding Book information
  - You can get the global point of view selections and member suggestions for Book
- **Bursting Definitions**
  - You can view the Bursting Definitions and their content
  - You can execute the Bursting Definition file

Copyright © 2017, 2026, Oracle and/or its affiliates.

9

Planning REST APIs

The Planning component supports both Infrastructure APIs and Platform APIs.

> **Note**
>
> You can also use these REST APIs with FreeForm.

Table 9-1 Planning REST APIs

Applications		
Get Applications	Get Application Summary	
Data Slices		
Clear Data Slice Export Data Slice	Export Data Import Data Slice	Export Form Data
Dimensions		
Add Member Get Member	Get Dimensions for a Plan Type Get Plan Types	Get Dimension Details
Documents		
List Library Documents		
Jobs		
Get Job Definitions Retrieve Job Status Details	Execute a Job	p
Planning Units		
Change Planning Unit Status Get Filters with All Possible Values List All Planning Units	Get Available Planning Unit Actions Get Planning Unit History and Annotations	Get Planning Unit Owner Photo Get Planning Unit Promotional Path
Substituion Variables		
List All Planning Units List All Planning Units List All Planning Units List All Planning Units	List All Planning Units List All Planning Units List All Planning Units	List All Planning Units List All Planning Units List All Planning Units
User Preferences		
Get User Preferences		
User Variables		

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 9-1 (Cont.) Planning REST APIs

Applications		
Create User Variables Set the User Variable Values for the Application Get User Variable Values Defined for the Application by the User Name Get User Variable Values Defined in the Application by Value	Delete a User Variable Get All User Variables Get User Variable Values Defined in the Application by the User Name and Value Get a User Variable Using Its ID	Delete User Variable Definitions Get User Variable Values Defined for the Application Get User Variable Values Defined in the Application by the User Variable Name Update User Variables
Versions		
Get Information about a Specific REST API Version for Planning	Getting API Versions for Planning	

Note: The following fields from the exception response in REST APIs for Planning and Planning Modules have been removed:

- message
- localizedMessage

URL Structure for Planning

This topic shows the general URL structure for Planning REST APIs.

Use the following URL structure to access the Planning REST resources:

`https://<BASE-URL>/HyperionPlanning/rest/{api_version}/{path}`

Where:

- *<BASE-URL>*: The first part of your service URL, before the context.

  For example, if your service URL is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com`. Similarly, if your service URL is `https://epm2-acme.epm.us6.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm2-acme.epm.us6.oraclecloud.com`.
- *api_version*: API version you are developing with. The current REST API version for Planning is v3.
- *path*: Identifies the resource.

> **Note**
>
> Oracle does not authorize or support the use of REST APIs with the path token "`/internal/`" in the URL.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Resources and Available Actions

In the response, the Links section of the response parameters lists links to other resources and available actions for the current resource.

Table 9-2 Resources and Available Actions

Name	Description
`links`	Describes links to other resources and actions applicable on the current resource
`rel`	Relationship type; the relationship between the current state and the state to which the client will transition
`href`	The target resource's URI. If the value of rel is "self", this URI is how the resource is accessed currently
`action`	The HTTP method. For POST, data indicates the parameters and values with which it was invoked

Getting API Versions for Planning

You can get information on REST API versions using a set of REST resources, as summarized here.

Important: The version number is case-sensitive. For example, if the version number is listed as `v3` with a lowercase `v`, you cannot enter the version number with a capital `V` as in this incorrect example, `V3`, which would result in an error. Instead, you must enter the version number with a lowercase `v` as in this correct example: `v3`.

Before using the REST resources, you must understand how to access the REST resources and other important concepts. See Cloud EPM REST APIs Best Practices. Using this REST API requires prerequisites. See Prerequisites.

Table 9-3 Getting REST API Versions

Task	Request	REST Resource
Get REST API Versions for Planning	GET	`/HyperionPlanning/rest/`
Get Information about a Specific REST API Version for Planning	GET	`/HyperionPlanning/rest/{api_version}`

Get REST API Versions for Planning

You can use REST APIs to get information about which versions are available and supported. Multiple versions might be supported simultaneously.

> **Note**
>
> An API version is always supported even when deprecated.

Required Roles

Copyright © 2017, 2026, Oracle and/or its affiliates.

Service Administrator, Power User, User, Viewer

REST Resource

`GET /HyperionPlanning/rest/`

Request

Supported Media Types: `application/json`

Response

Supported Media Types: `application/json`

Parameters

The following table summarizes the parameters.

Table 9-4 Parameters

Name	Description
`items`	Version of the API you are developing with
`version`	The version, such as v3
`lifecycle`	Possible values: active, deprecated
`isLatest`	Whether this resource is the latest, true or false

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
    "items": [{
        "version": "v1",
        "lifecycle": "deprecated",
        "isLatest": false,
        "links": [{
            "rel": "canonical",
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v1"
        }, {
            "rel": "successor-version",
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v2"
        }]
    }, {
        "version": "v2",
        "lifecycle": "deprecated",
        "isLatest": false,
        "links": [{
            "rel": "canonical",
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v2"
        }, {
            "rel": "predecessor-version",
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v1"
        }, {
            "rel": "successor-version",
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3"
        }]
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    }, {
        "version": "v3",
        "lifecycle": "active",
        "isLatest": true,
        "links": [{
            "rel": "canonical",
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v3"
        }, {
            "rel": "predecessor-version",
            "href": "https://<BASE-URL>/HyperionPlanning/rest/v2"
        }]
    }],
    "links": [{
        "rel": "self",
        "href": "https://<BASE-URL>/HyperionPlanning/rest/"
    }, {
        "rel": "canonical",
        "href": "https://<BASE-URL>/HyperionPlanning/rest/"
    }, {
        "rel": "current",
        "href": "https://<BASE-URL>/HyperionPlanning/rest/v3"
    }]
}
```

Get Information about a Specific REST API Version for Planning

You can use REST APIs to get information about a specific REST API version for Planning.

Required Roles

Service Administrator, Power User, User, Viewer

REST Resource

`GET /HyperionPlanning/rest/{api_version}`

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request.

Table 9-5 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are working with, such as V3	Path	Yes	None

Response Body

Supported Media Types: `application/json`

Parameters

Copyright © 2017, 2026, Oracle and/or its affiliates.

The following table summarizes the response parameters.

Table 9-6 Parameters

Attribute	Description
`version`	The version, such as v3
`lifecycle`	Lifecycle of the resource, active or deprecated
`isLatest`	Whether this resource is the latest, true or false

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
    "version": "v3",
    "lifecycle": "active",
    "isLatest": true,
    "links": [{
        "rel": "canonical",
        "href": "https://<BASE-URL>/HyperionPlanning/rest/v3"
    }, {
        "rel": "predecessor-version",
        "href": "https://<BASE-URL>/HyperionPlanning/rest/v2"
    }]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

10

Profitability and Cost Management REST APIs

Table 10-1 Profitability and Cost Management REST APIs

Profitability and Cost Management REST APIs		
Get API Versions for Profitability and Cost Management REST APIs	Export Query Results	Optimize ASO Cube
Apply Data Grants	Export Template for Profitability and Cost Management	Retrieve Task Status for Profitability and Cost Management
Copy ML POV Data	Generate Program Documentation Report	Run ML Calculations
Create File-Based Application	Generate Program Documentation Report - Run as a Job	Run ML Clear POV
Deploy ML Cube	Import Template for Profitability and Cost Management	Run ML Rule Balancing
Enable File-Based Application	Merge Slices for Profitability and Cost Management	Update Dimensions As a Job
Essbase Data Load for Profitability and Cost Management		

URL Structure for Profitability and Cost Management

Use the following URL structure to access the Profitability and Cost Management REST resources:

`https://<BASE-URL>/epm/rest/{api_version}/{path}`

Where:

- `<BASE-URL>`: The first part of your service URL, before the context.

  For example, if your service URL is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com/epmcloud`, your `<BASE-URL>` is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com`. Similarly, if your service URL is `https://epm2-acme.epm.us6.oraclecloud.com/epmcloud`, your `<BASE-URL>` is `https://epm2-acme.epm.us6.oraclecloud.com`.
- `{api_version}`: API version you are developing with. The current REST API version for Profitability and Cost Management is V1.
- `{path}`: Identifies the resource.

> **Note**
>
> Oracle does not authorize or support the use of REST APIs with the path token "`/internal/`" in the URL.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Get API Versions for Profitability and Cost Management REST APIs

Returns information about which versions are available and supported. Multiple versions might be supported simultaneously.

> **Note**
>
> An API version is always supported even when deprecated.

Required Roles

Service Administrator, Power User, User, Viewer

REST Resource

`GET /epm/rest/`

Response

Supported Media Types: `application/json`

Table 10-2 Parameters

Name	Description
`details`	In case of errors, details are published with the error string
`status`	See Migration Status Codes
`items`	Version of the API you are developing with
`version`	The version, such as v1
`lifecycle`	Possible values: active, deprecated
`isLatest`	Whether this resource is the latest, true or false

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
    "items": [{
        "isLatest": false,
        "lifecycle": "deprecated",
        "version": "11.1.2.4.000",
        "links": [{
            "href": "https://<BASE-URL>>/epm/rest/11.1.2.4.000",
            "rel": "canonical"
        }, {
            "href": "https://<BASE-URL>>/epm/rest/v1",
            "rel": "successor-version"
        }]
    }, {
        "isLatest": true,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        "lifecycle": "active",
        "version": "v1",
        "links": [{
            "href": "https://<BASE-URL>>/epm/rest/v1",
            "rel": "canonical"
        }, {
            "href": "https://<BASE-URL>>/epm/rest/11.1.2.4.000",
            "rel": "predecessor-version"
        }]
    }],
    "links": [{
        "href": "https://<BASE-URL>>/epm/rest/11.1.2.4.000",
        "rel": "canonical"
    }, {
        "href": "https://<BASE-URL>>/epm/rest/v1",
        "rel": "current"
    }]
}
```

Get Information about a Specific API Version for Profitability and Cost Management

Returns details for a specific REST API version for Profitability and Cost Management.

Required Roles

Service Administrator, Power User, User, Viewer

REST Resource

`GET /epm/rest/`

Request

Supported Media Types: `application/json`

The following table summarizes the request parameters.

Table 10-3 Parameters

Name	Description	Type	Required	Default
api_version	Version of the API you are developing with, such as V1	Path	Yes	None

Response

Supported Media Types: `application/json`

Table 10-4 Parameters

Name	Description
`version`	The version, such as v1

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 10-4 (Cont.) Parameters

Name	Description
`lifecycle`	Possible values: active, deprecated
`isLatest`	Whether this resource is the latest, true or false

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
   "items": [{
      "version": "v1",
      "lifecycle": "active",
      "isLatest": true,
      "links": [{
        "rel": "canonical",
        "href": "https://<BASE-URL>>/epm/rest/v1",
      }, {
         "rel": "predecessor-version",
         "href": "https://<BASE-URL>/epm/rest/v1",
     }]
   }],
   "links": [{
      "rel": "current",
      "href": "https://<BASE-URL>/epm/rest/v1"
   }]
}
```

Apply Data Grants

Applies data grants for a given Profitability and Cost Management application.

This API submits a job to remove all existing data grants in Oracle Essbase and recreate them with the latest information from the application. It can also be used to repair data grants if there are any issues.

Required Roles

Service Administrator, Power User

REST Resource

POST `/epm/rest/{api_version}/applications/{application}/jobs/applyDataGrants`

> **Note**
>
> Before using the REST resources, you must understand how to access the REST resources and other important concepts. See Cloud EPM REST APIs Best Practices. Using this REST API requires prerequisites. See Prerequisites.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Request

Supported Media Types: `application/json`

The following table summarizes the client request.

Table 10-5 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with, such as v1	Path	Yes	None
`application`	Name of the application to create	Path	Yes	None

Example URL

`https://<BASE-URL>/epm/rest/v1/applications/BksML30/jobs/applyDataGrants`

Response

Supported Media Types: `application/json`

Table 10-6 Parameters

Name	Description
`details`	Task ID, such as `BksML12_BksML12_LoadData_D20160118T051020_ba8_1`
`status`	See Migration Status Codes
`statusMessage`	Message about the status, such as `Success`
`type`	Profitability
`data`	Parameters as key value pairs
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Relationship type
`data`	Parameters as key value pairs passed in the request

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
   "type":"Profitability",
   "status":-1,
   "statusMessage":"In Progress",
   "details":"BksML30_ApplyDataGrants_D20220511T114653_b85",
   "links":[
      {
         "href":"https://<BASE-URL>/epm/rest/v1/applications/jobs/
ChecktaskStatusJob/BksML30_ApplyDataGrants_D20220511T114653_b85",
         "action":"GET",
         "rel":"Job Status"
      }
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
    ]
}
```

Copy ML POV Data

Copies model artifacts and data from a Source POV combination to a Destination POV combination for any application. Use with Management Ledger applications.

Required Roles

Service Administrator, Power User

REST Resource

POST `/epm/rest/{api_version}/applications/{application}/povs/{srcPOVMemberGroup}/jobs/copyPOVJob/{destPOVMemberGroup}`

> **Note**
>
> Before using the REST resources, you must understand how to access the REST resources and other important concepts. See Cloud EPM REST APIs Best Practices. Using this REST API requires prerequisites. See Prerequisites.

Request

Supported Media Types: `application/json`

The following table summarizes the client request.

Table 10-7 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	Name of the application for which to deploy the cube	Path	Yes	None
`srcPOVMemberGroup`	Source POV member group, such as 2014_January_Actual	Path	Yes	None
`destPOVMemberGroup`	Destination POV member group, such as 2014_March_Actual	Path	Yes	None
`isManageRule`	Whether to copy the program rule details	Payload	Yes	None
`isInputData`	Whether to copy input data **Note**: Do not set the value of this parameter to true if the value of `isAllData` or `isAllInputData` is set to true.	Payload	Yes	None
`modelViewName`	Whether to copy a slice of data from source POV to destination POV	Payload	No	Nothing copied
`isAllInputData`	Whether to copy all input data at the NoRule member, including AdjustmentIn/Out	Form	No	False
`isAllData`	Whether to copy all POV data	Form	No	False
`createDestPOV`	Whether to create the destination POV if it does not already exist	Payload	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 10-7 (Cont.) Parameters

Name	Description	Type	Required	Default
nonEmptyTupleEnabled	Specifies whether to enable the Non Empty Tuple (NET). Valid values are *true* and *false*. In some cases, the default nonEmptyTupleEnabled=true does not perform well when copying the Oracle Essbase data. In those cases, use nonEmptyTupleEnabled=false to improve performance.	Payload	No	True
stringDelimiter	String delimiter for POV group members	Payload	Yes	None

Example URL and Payload

```
https://<BASE-URL>/epm/rest/v1/applications/LM1T2/povs/2014_January_Actual/jobs/
copyPOVJob/2014_March_Actual
```

```
{"isManageRule":"true","isInputData":"true","modelViewName":"Operating
Expenses","createDestPOV":"true","nonEmptyTupleEnabled":"true","stringDelimiter":
"_"}
```

Response

Supported Media Types: `application/json`

Table 10-8 Parameters

Name	Description
details	Task ID, such as LM1T2_LM1T2_CopyMLPOV_D20160113T065943_75b_1
status	See Migration Status Codes
statusMessage	Message about the status, such as In Progress
type	Profitability
links	Detailed information about the link
href	Links to API call
action	The HTTP call type
rel	Relationship type
data	Parameters as key value pairs passed in the request

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
   "type":"Profitability",
   "status":-1,
   "statusMessage":"In Progress",
   "details":"BksML30_CopyMLPOV_D20220511T114800_7ad",
   "links":[
      {
         "href":"https://<BASE-URL>/epm/rest/v1/applications/jobs/
ChecktaskStatusJob/BksML30_CopyMLPOV_D20220511T114800_7ad",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "action":"GET",
            "rel":"Job Status"
         }
      ]
}
```

Create File-Based Application

Creates an application using a flat file using a REST API.

Required Roles

Service Administrator

REST Resource

POST `/epm/rest/{api_version}/fileApplications/{application}`

> **Note**
>
> Before using the REST resources, you must understand how to access the REST resources and other important concepts. See Cloud EPM REST APIs Best Practices. Using this REST API requires prerequisites. See Prerequisites.

Request

Supported Media Types: `application/json`

The following table summarizes the client request.

Table 10-9 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	Name of the application to create	Path	Yes	None
`description`	User comment for this application	Payload	Yes	None
`ruleDimensionName`	Rule dimension name	Payload	Yes	None
`balanceDimensionName`	Balance dimension name	Payload	Yes	None

Example URL and Payload

`https://<BASE-URL>/epm/rest/v1/fileApplications/BksML12`

```
{"description":
"description","ruleDimensionName":"Rule","balanceDimensionName":"Balance"}
```

Response

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 10-10 Parameters

Name	Description
details	Task ID, such as BksML12_BksML12_LoadData_D20160118T051020_ba8_1
status	See Migration Status Codes
statusMessage	Message about the status, such as Success
type	Profitability
data	Parameters as key value pairs
links	Detailed information about the link
href	Links to API call
action	The HTTP call type
rel	Relationship type
data	Parameters as key value pairs passed in the request

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
   "type":"Profitability",
   "status":-1,
   "statusMessage":"In Progress",
   "details":"BksML30_UpdateDimensions_D20220513T062046_c61",
   "links":[
      {
         "href":"https://<<BASE-URL>/epm/rest/v1/applications/jobs/
ChecktaskStatusJob/BksML30_UpdateDimensions_D20220513T062046_c61",
         "action":"GET",
         "rel":"Job Status"
      }
   ]
}
```

Deploy ML Cube

Deploys or redeploys the calculation cube for a selected Profitability and Cost Management application.

Required Roles

Service Administrator, Power User

REST Resource

POST /epm/rest/{api_version}/applications/{application}/jobs/ledgerDeployCubeJob

Request

Supported Media Types: application/json

The following table summarizes the client request.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 10-11 Parameters

Name	Description	Type	Required	Default
api_version	Version of the API you are developing with	Path	Yes	None
application	Name of the application for which to deploy the cube	Path	Yes	None
isKeepData	Specify whether to preserve existing data	Payload	Yes	None
isReplaceCube	Specifies whether to replace existing cube **Note:** Both isKeepData and isReplaceCube cannot be true at the same time.	Payload	Yes	None
isRunNow	Run now or schedule for later. (Schedule for later is not currently supported.)	Payload	Yes	None
comment	Any user comments	Payload	Yes	None

Example URL and Payload

```
https://<BASE-URL>/epm/rest/v1/applications/{applicationName}/jobs/
ledgerDeployCubeJob
```

```
{"isKeepData":"true","isRunNow":"true","comment":"Test Ml Deploy"}
```

Response

Supported Media Types: application/json

Table 10-12 Parameters

Name	Description
details	In case of errors, details are published with the error string
status	See Migration Status Codes
statusMessage	Message about the status, such as In Progress
type	Profitability
links	Detailed information about the link
href	Links to API call
action	The HTTP call type
rel	Relationship type
data	Parameters as key value pairs passed in the request

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
   "type":"Profitability",
   "status":-1,
   "statusMessage":"In Progress",
   "details":"BksML30_DeployCube_D20220511T114550_da1",
   "links":[
      {
         "href":"https://<BASE-URL>/epm/rest/v1/applications/jobs/
ChecktaskStatusJob/BksML30_DeployCube_D20220511T114550_da1",
         "action":"GET",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
            "rel":"Job Status"
         }
      ]
}
```

Enable File-Based Application

Enables an application using a flat file.

Required Roles

Service Administrator, Power User

REST Resource

POST `/epm/rest/{api_version}/fileApplications/{application}/enableApplication`

Request

Supported Media Types: `application/json`

The following table summarizes the client request.

Table 10-13 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	Name of the application to enable	Path	Yes	None

Example URL

`https://<BASE-URL>/epm/rest/v1/fileApplications/BksML12/enableApplication`

Response

Supported Media Types: `application/json`

Table 10-14 Parameters

Name	Description
`details`	Task ID, such as `BksMl12_BksMl12_EnableApplication_D20160113T075011_53c_1`
`status`	See Migration Status Codes
`statusMessage`	Message about the status, such as `Success`
`type`	Profitability
`data`	Parameters as key value pairs
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Relationship type
`data`	Parameters as key value pairs passed in the request

Example of Response Body

Copyright © 2017, 2026, Oracle and/or its affiliates.

The following shows an example of the response body in JSON format.

```
{
   "type":"Profitability",
   "status":-1,
   "statusMessage":"In Progress",
   "details":"BksML30_EnableApplication_D20220511T114947_65c",
   "links":[
      {
         "href":"https://<BASE-URL>/epm/rest/v1/applications/jobs/
ChecktaskStatusJob/BksML30_EnableApplication_D20220511T114947_65c",
         "action":"GET",
         "rel":"Job Status"
      }
   ]
}
```

Essbase Data Load for Profitability and Cost Management

Loads input data to an Oracle Essbase application.

Required Roles

Service Administrator, Power User

REST Resource

POST `/epm/rest/{api_version}/applications/{application}/jobs/essbaseDataLoadJob`

Request

Supported Media Types: `application/json`

The following table summarizes the client request.

Table 10-15 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	Name of the application for which to load the data	Path	Yes	None
`clearAllDataFlag`	Whether to clear existing data (`true`) or not (`false`)	Payload	Yes	None
`dataLoadValue`	Possible values are `ADD_EXISTING_VALUES` or `OVERWRITE_EXISTING_VALUES`	Payload	Yes	None
`dataFileName`	Name of the data file already present in the inbox folder	Payload	Yes	None

Example URL and Payload

`https://<BASE-URL>/epm/rest/v1/applications/BksML12/jobs/essbaseDataLoadJob`

```
{"clearAllDataFlag":"true","dataLoadValue":"OVERWRITE_EXISTING_VALUES","dataFileN
ame":"input.txt"}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Response

Supported Media Types: `application/json`

Table 10-16 Parameters

Name	Description
`details`	Task ID, such as `BksML12_BksML12_LoadData_D20160118T051020_ba8_1`
`status`	See Migration Status Codes
`statusMessage`	Message about the status, such as `Success`
`type`	Profitability
`data`	Parameters as key value pairs
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Relationship type
`data`	Parameters as key value pairs passed in the request

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
   "type":"Profitability",
   "status":-1,
   "statusMessage":"In Progress",
   "details":"BksML30_LoadData_D20220511T114654_8bf",
   "links":[
      {
         "href":"https://<BASE-URL>/epm/rest/v1/applications/jobs/
ChecktaskStatusJob/BksML30_LoadData_D20220511T114654_8bf",
         "action":"GET",
         "rel":"Job Status"
      }
   ]
}
```

Export Query Results

Exports query results for a given query or exports all Oracle Essbase data into a file in the Outbox.

When exporting all Essbase data, there is an option for writing the output in columnar format, and columnar-formatted data can be filtered by level-0 dimension members. This API triggers a job that can be monitored in the Job Library.

Required Roles

Service Administrator, Power User, User, Viewer

Copyright © 2017, 2026, Oracle and/or its affiliates.

REST Resource

POST `/epm/rest/{api_version}/applications/{application}/jobs/exportQueryResultsJob`

Request

Supported Media Types: `application/json`

The following table summarizes the client request.

Table 10-17 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with, such as v1	Path	Yes	None
`application`	Name of the application	Path	Yes	None
`exportOnlyLevel0Flg`	Whether to export only Level0 data; values are `true` or `false`	Payload	No	false
`fileName`	Name of the query output file to be exported into the Outbox folder	Payload	Yes	None
`fileOutputOptions`	File output options. Available options are: • `ZIP_ONLY` • `ZIP_AND_TEXT` • `TEXT_ONLY`	Payload	No	`ZIP_ONLY`
`queryName`	Query name from the Profitability and Cost Management application When `queryName` has a value, results for the given query are exported; `exportOnlyLevel0Flg` is considered if it is included. When `queryName` is blank or not included, data for the entire application is exported. In this case, `exportOnlyLevel0Flg` is ignored.	Payload	No	None
`roundingPrecision`	The rounding precision (decimal places) for exported data. (**Note:** Applies only if `queryName` is also used.)	Payload	No	2
`dataFormat`	Select the output format as native Essbase format, or as columnar format. Values are `NATIVE` or `COLUMNAR`. With the `COLUMNAR` option, all Essbase data is exported, so the `queryName` parameter is ignored. Data can be filtered using the `memberFilters` parameter.	Payload	No	NATIVE
The following parameters are only considered when `dataFormat=COLUMNAR`.				
`memberFilters`	Accepts a JSON formatted string for dimension and respective level-0 member format. For example: `{\"Dim1\":[\"Mem1\"],\"Dim2\":[\"Mem21\",\"Mem22\"]}`	Payload	No	None
`includeHeader`	Adds dimension names as column headers. Values are `true` or `false`.	Payload	No	true
`delimiter`	Character used to separate dimension members in the results file; must be enclosed in double quotes.	Payload	No	Space

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 10-17 (Cont.) Parameters

Name	Description	Type	Required	Default
keepDuplicateMemberFormat	When this parameter is set to true, prints member names in Essbase duplicate member format, such as [Account]@[Accoun1]. If set to false, only the member name is printed.	Payload	No	true

Example URL and Payload

```
https://<BASE-URL>/epm/rest/v1/applications/Ex3F3/jobs/exportQueryResultsJob
```

```
{"queryName":"Profitability -
Product","fileName":"ProfitabilityProduct_03232016.txt","exportOnlyLevel0Flg":"tr
ue","roundingPrecision":"3"}
```

Response

Supported Media Types: application/json

Table 10-18 Parameters

Name	Description
details	Task ID, such as BksML12_BksML12_ExportQueryResults_D20160323T024820_f73_1
status	See Migration Status Codes
statusMessage	Message about the status, such as In Progress
type	Profitability
data	Parameters as key value pairs
links	Detailed information about the link
href	Links to API call
action	The HTTP call type
rel	Relationship type
data	Parameters as key value pairs passed in the request

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
   "type":"Profitability",
   "status":-1,
   "statusMessage":"In Progress",
   "details":"BksML30_ExportQueryResults_D20220511T114843_935",
   "links":[
      {
         "href":"https://<BASE-URL>/epm/rest/v1/applications/jobs/
ChecktaskStatusJob/BksML30_ExportQueryResults_D20220511T114843_935",
         "action":"GET",
         "rel":"Job Status"
      }
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
   ]
}
```

Export Template for Profitability and Cost Management

Exports Profitability and Cost Management applications as a template into the Outbox.

Required Roles

Service Administrator, Power User

REST Resource

POST `/epm/rest/{api_version}/applications/{application}/jobs/templateExportJob?fileName={fileName}`

Request

Supported Media Types: `application/json`

The following table summarizes the client request.

Table 10-19 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	Name of the application	Path	Yes	None
`fileName`	Name of the template zip file to be exported to the outbox folder	Query	Yes	None

> **Note**
>
> If the file name is the same as an existing file name, this will override content in existing file.

Example URL and Payload

`https://<BASE-URL>/epm/rest/v1/applications/BksML30/jobs/templateExportJob{"fileName":"testFile"}`

Response

Supported Media Types: `application/json`

Table 10-20 Parameters

Name	Description
`details`	Task ID, such as `BksML30_ExportTemplate_D20180201T210316_a80`
`status`	See Migration Status Codes
`statusMessage`	Message about the status, such as `In Progress`
`type`	Profitability

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 10-20 (Cont.) Parameters

Name	Description
`data`	Parameters as key value pairs
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Relationship type
`data`	Parameters as key value pairs passed in the request

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
   "type":"Profitability",
   "status":-1,
   "statusMessage":"In Progress",
   "details":"BksML30_ExportTemplate_D20220511T114738_16e",
   "links":[
      {
         "href":"https://<BASE-URL>/epm/rest/v1/applications/jobs/
ChecktaskStatusJob/BksML30_ExportTemplate_D20220511T114738_16e",
         "action":"GET",
         "rel":"Job Status"
      }
   ]
}
```

Generate Program Documentation Report

Generates a Program Documentation report for a given Profitability and Cost Management point of view.

The report is generated in the profitoutbox folder with the name `HPCMMLProgramDocumentationReport_{AppName)_{POV}.pdf`. The file can be downloaded using File Explorer.

Required Roles

Service Administrator, Power User, User, or Viewer

REST Resource

GET `epm/rest/{api_version}/applications/{application}/povs/{POV}/programDocumentationReport`

Request

Supported Media Types: `application/json`

The following table summarizes the client request.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 10-21 Parameters

Name	Description	Type	Required	Default
api_version	Version of the API you are developing with, such as v1	Path	Yes	None
application	Name of the application for which to create the report	Path	Yes	None
pov	The POV for which to create the report, for example, FY17_JUN_Actual_Working	Path	Yes	None
fileType	The file format to use for the report, PDF, XML, WORD, EXCEL, or HTML	Query	No	PDF
skipFilters	Setting this parameter to *true* skips the process of resolving each rule filter to determine the values for " Estimated Source Count", "Estimated Destination Count", and "Estimated Target Count" in the report. Instead, the corresponding Level0 member counts are used. This can speed up report generation for large models having many rules that use filters. When this parameter is skipped or passed with *false*, it resolves all the filters to give more accurate counts.	Query	No	False
useAlias	Boolean value to specify whether to use aliases in the report, true or false	Query	No	False

Example URL with `fileType` set to `PDF` and `useAlias` set to `true`:

```
https://<BASE-URL>/epm/rest/v1/applications/BksML30/povs/2016_January_Actual/
programDocumentationReport?queryParameter={"fileType":"PDF","useAlias":"true"}
```

Response

Supported Media Types: application/json

Table 10-22 Parameters

Name	Description
details	Program Documentation report name, such as HPCMMLProgramDocumentationReport_BksML30_2016_January_Actual.pdf, and report status
status	See Migration Status Codes
statusMessage	Message about the status, such as Success
type	Profitability
data	Parameters as key value pairs
links	Detailed information about the link
href	Links to API call
action	The HTTP call type
rel	Relationship type
data	Parameters as key value pairs passed in the request

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
   "type":"Profitability",
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
   "status":0,
   "statusMessage":"Success",
   "details":"Program Documentation report
HPCMMLProgramDocumentationReport_BksML30_2016_January_Actual.pdf generated
successfully in the Outbox folder."
}
```

Generate Program Documentation Report - Run as a Job

Submits a job to generate a Program Documentation report for a given Profitability and Cost Management point of view.

The report is generated in the profitoutbox folder with the name as fileName parameter value or `HPCMMLProgramDocumentationReport_{AppName)_{POV}.pdf` as default. The file can be downloaded using File Explorer or by using the EPM Automate `downloadfile` command.

Required Roles

Service Administrator, Power User, User, or Viewer

REST Resource

POST

`/epm/rest/{api_version}/applications/<applicationName>/povs/<povName>/jobs/programDocReportJob`

Request

Supported Media Types: `application/json`

The following table summarizes the client request.

Table 10-23 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with, such as `v1`	Path	Yes	None
`applicationName`	Name of the application for which to create the report	Path	Yes	None
`povName`	The POV for which to create the report, for example, FY17_JUN_Actual_Working	Path	Yes	None
`fileType`	The file format to use for the report, `PDF`, `XML`, `WORD`, `EXCEL`, or `HTML`	Payload	No	PDF
`fileName`	Name of the output file	Payload	No	`HPCMMLProgramDocumentationReport_<AppName>_POV.pdf`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 10-23 (Cont.) Parameters

Name	Description	Type	Required	Default
`skipFilters`	Setting this parameter to *true* skips the process of resolving each rule filter to determine the values for " Estimated Source Count", "Estimated Destination Count", and "Estimated Target Count" in the report. Instead, the corresponding Level0 member counts are used. This can speed up report generation for large models having many rules that use filters. When this parameter is skipped or passed with *false*, it resolves all the filters to give more accurate counts.	Payload	No	False
`subsetStart`	Rule set starting sequence number to specify a range of rule sets to include in the report	Payload	No	None
`subsetEnd`	Rule set ending sequence number to specify a range of rule sets to include in the report	Payload	No	None
`useAlias`	Boolean value to specify whether to use aliases in the report, `true` or `false`	Payload	No	False
`stringDelimiter`	POV Dimension members separator	Payload	No	"_"

Example URL

`https://<BASE-URL>/rest/v1/applications/<applicationName>/povs/<povName>/jobs/programDocReportJob`

Request Payload

```
{
     "fileName":"FY12ActualReport.pdf",
     "fileType": "PDF",
     "subsetStart":"1",
     "subsetEnd":"6",
     "useAlias": false,
     "stringDelimiter":"_"
}
```

Response

Supported Media Types: `application/json`

Table 10-24 Parameters

Name	Description
`details`	Program Documentation report name, such as `HPCMMLProgramDocumentationReport_BksML30_2016_January_Actual.pdf`, and report status
`status`	See Migration Status Codes
`statusMessage`	Message about the status, such as `Success`
`type`	Profitability
`data`	Parameters as key value pairs
`links`	Detailed information about the link

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 10-24 (Cont.) Parameters

Name	Description
`href`	Links to API call
`action`	The HTTP call type
`rel`	Relationship type
`data`	Parameters as key value pairs passed in the request

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
   "type":"Profitability",
   "status":-1,
   "statusMessage":"In Progress",
   "details":"Program Documentation report 2016JanActual1.pdf generated
successfully in the Outbox folder.",
   "links":[
      {
         "href":"https://<BASE-URL>/epm/rest/v1/applications/jobs/
ChecktaskStatusJob/BksML30_ProgramDocumentation_D20220511T115113_52a",
         "action":"GET",
         "rel":"Job Status"
      }
   ]
}
```

Import Template for Profitability and Cost Management

Imports a template zip file as an application from the inbox.

Required Roles

Service Administrator, Power User

REST Resource

POST `/epm/rest/{api_version}/applications/{application}/jobs/templateImportJob`

Request

Supported Media Types: `application/json`

The following table summarizes the client request.

Table 10-25 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	Name of the application	Path	Yes	None
`description`	User comment for the application	Payload	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 10-25 (Cont.) Parameters

Name	Description	Type	Required	Default
`fileName`	Name of the template zip file to be imported from the inbox folder	Payload	Yes	None
`isApplicationOverwrite`	Whether to override an application if one already exists with same name. Values are *true* or *false*.	Payload	Yes	None

Example URL and Payload

`https://<BASE-URL>/epm/rest/v1/applications/Ex3F3/jobs/templateImportJob`

```
{"description":"description","fileName":"
testFile12345.zip","isApplicationOverwrite":"true"}
```

Response

Supported Media Types: `application/json`

Table 10-26 Parameters

Name	Description
`details`	Task ID, such as `TD_ae61e427d9ab4d6f99e3b87378fa1c94`
`status`	See Migration Status Codes
`statusMessage`	Message about the status, such as `In Progress`
`type`	Profitability
`data`	Parameters as key value pairs
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Relationship type
`data`	Parameters as key value pairs passed in the request

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
   "type":"Profitability",
   "status":-1,
   "statusMessage":"In Progress",
   "details":"BksML30_ImportTemplate_D20220511T114059_d3b",
   "links":[
      {
         "href":"https:// ://<BASE-URL>/epm/rest/v1/applications/jobs/
ChecktaskStatusJob/BksML30_ImportTemplate_D20220511T114059_d3b",
         "action":"GET",
         "rel":"Job Status"
      }
   ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Merge Slices for Profitability and Cost Management

Merges all incremental data slices into the main database slices.

Optionally, removes the Oracle Essbase cells with zero values to make the cube compact.

Required Roles

Service Administrator, Power User

REST Resource

POST `/epm/rest/{api_version}/applications/{application}/jobs/mergeSlices`

Request

Supported Media Types: `application/json`

The following table summarizes the client request.

Table 10-27 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	Name of the Profitability and Cost Management application	Path	Yes	None
`removeZeroCells`	If `"true"`, removes cells with zero values	Path	No	`"false"`

Request URI Example

`https://<BASE-URL>/epm/rest/v1/applicaitions/BksML30/jobs/mergeSlices`

Request Payload:

```
{
 "removeZeroCells":"true"
 )
```

Response

Supported Media Types: `application/json`

Table 10-28 Parameters

Name	Description
`details`	In case of errors, details are published with the error string.
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 10-28 (Cont.) Parameters

Name	Description
`rel`	Can be `self` and/or `Job Status`. If set to `Job Status`, you can use the `href` to get the status of the import operation.
`data`	Parameters as key value pairs passed in the request

Example of Response Body

```
{
   "type":"Profitability",
   "status":-1,
   "statusMessage":"In Progress",
   "details":"BksML30_MERGE_CUBE_D20220511T115052_771",
   "links":[
      {
"href":"https://<BASE-URL>/epm/rest/v1/applications/jobs/ChecktaskStatusJob/
BksML30_MERGE_CUBE_D20220511T115052_771",
         "action":"GET",
         "rel":"Job Status"
      }
   ]
}
```

Optimize ASO Cube

Optimizes the performance of queries for data extraction by creating aggregate views in ASO cubes for Profitability and Cost Management applications.

This command allows you to perform query optimization operations on ASO cubes in cases where default aggregation is deemed insufficient to meet your data extraction or reporting needs because of large data size. The typical optimzation process is as follows:

- Drop default and query-based aggregations.
- Start query tracking.
- Run sample queries from Profitability and Cost Management Query Manager, Oracle Smart View for Office (Windows), or Data Management, and any other MDX queries representative of the type of queries for which optimization is desired to train Oracle Essbase.
- Create aggregation based on optimized or default queries.

Required Roles

Service Administrator, Power User

REST Resource

POST `/epm/rest/v1/applications/{AppName}/jobs/optimizeASOCube`

Request

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

The following table summarizes the client request.

Table 10-29 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`appName`	Name of the application used to run Optimize ASO	Path	Yes	None
`type`	Type of operation. Valid values are: • `clearAggregations` removes default and query-based views. • `createAggregations` creates default Essbase aggregate views. Use this option to perform default aggregation instead of query-based aggregation. • `startQueryTracking` starts query tracking. Use this option to allow Essbase to collect optimization information for creating query-based aggregations. • `stopQueryTracking` stops query tracking. Use this option to stop Essbase from collecting optimization information. Essbase continues to collect optimization information until you stop query tracking or stop Essbase.) • `createQBOAggregations` creates Essbase aggregate views based on the optimized queries that you run after enabling query tracking.	Form	Yes	None

Response

Supported Media Types: `application/json`

Table 10-30 Parameters

Name	Description
`details`	In case of errors, details are published with the error string.
`status`	See Migration Status Codes
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Can be `self` and/or `Job Status`. If set to `Job Status`, you can use the `href` to get the status of the import operation.
`data`	Parameters as key value pairs passed in the request

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
   "type":"Profitability",
   "status":-1,
   "statusMessage":"In Progress",
   "details":"BksML30_OptimizeASOCube_D20220511T115135_55d",
   "links":[
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
      {
         "href":"https://<BASE-URL>/epm/rest/v1/applications/jobs/
ChecktaskStatusJob/BksML30_OptimizeASOCube_D20220511T115135_55d",
         "action":"GET",
         "rel":"Job Status"
      }
   ]
}
```

Retrieve Task Status for Profitability and Cost Management

Displays the current status of the job process name.

Required Roles

Service Administrator, Power User

REST Resource

GET `/epm/rest/{api_version}/applications/jobs/ChecktaskStatusJob/{processName}`

Request

Supported Media Types: `application/json`

The following table summarizes the client request.

Table 10-31 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`applications`	Included in the path	Path	Yes	None
`processName`	The ID of the process or task flow for which to check the task status	Path	Yes	None

Response

Supported Media Types: `application/json`

The following table summarizes the response parameters.

Table 10-32 Parameters

Name	Description
`processName`	The Process Name or TaskflowId, such as `RBkML1_ExportTemplate_D20160112T025419_836`
`task`	Task name, such as `ExportTemplate`
`status`	Task status, such as `Success`

Example of Response Body

```
{
    "type": "Profitability",
    "links": [{
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        "href": "https://<BASE-URL>/epm/rest/v1/applications/jobs/
ChecktaskStatusJob/RBkML1_ExportTemplate_D20160112T025419_836",
        "action": "GET",
        "rel": "self"
    }],
    "status": 0,
    "details":
"ExportTemplate=Success,RBkML1_ExportTemplate_D20160112T025419_836=Done",
    "statusMessage": "Success"
}
```

Run ML Calculations

Runs or clears calculations for a selected application. You can run calculations using rules in a model POV against data in a different data POV without copying rules.

Required Roles

Service Administrator, Power User

REST Resource

POST `/epm/rest/{api_version}/applications/{application}/povs/{povGroupMember}/jobs/runLedgerCalculationJob`

Request

Supported Media Types: `application/json`

The following table summarizes the client request.

Table 10-33 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	Name of the application for which to run calculations	Path	Yes	None
`povGroupMember`	The model POV group member from which the rules will be used for calculations, such as `2016_January_Actual` If *dataPOVName* is not passed, *povGroupMember* is used as both model and data POV.	Path	Yes	None
`dataPOVName`	The data POV group member for which to run calculations, such as `2015_January_Actual` `exeType=ALL_RULES` is the valid combination while using *dataPOVName*.	Payload	No	None
`isClearCalculated`	Whether to clear the calculation data, `true` or `false`	Payload	No	None
`isRunNow`	Whether to run now (`true`) or schedule for later (`false`); schedule for later is not currently supported	Payload	Yes	`true`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 10-33 (Cont.) Parameters

Name	Description	Type	Required	Default
optimizeReporting	Whether to optimize for reporting (true) or not (false). When *optimizieReporting* is used, Profitability and Cost Management runs default aggregations on the Essbase cube when the calculation is complete. You can also run this setting by itself, which improves performance for queries and analytics. If you don't pass this parameter, its setting is assumed to be true ("About Optimizing for Reporting" in *Administering Profitability and Cost Management*).	Payload	No	true
subsetStart	Rule Set Starting Sequence Number	Payload	No	None
subsetEnd	Rule Set Ending Sequence Number	Payload	No	None
ruleName	Rule Name for a SINGLE_RULE option	Payload	No	None
ruleSetName	Rule Set Name for a SINGLE_RULE option	Payload	No	None
exeType	The execution type specifies which rules to run; possible values are ALL_RULES, RULESET_SUBSET, SINGLE_RULE. Other parameters are required based on the exeType value: • *exeType* = ALL_RULES overrides all other options like subsetStart, subsetEnd, ruleSetName, and ruleName. • *exeType* = RULESET_SUBSET considers only subsetStart and subsetEnd. • *exeType* = SINGLE_RULE considers only ruleSetName and ruleName.	Payload	Yes	None
comment	Use comment text, such as "This is run by user1"	Payload	No	None
stringDelimiter	String delimiter for POV group members, such as _	Payload	No	None

Example URL and Payload without Passing Data POV

```
https://<BASE-URL>/epm/rest/{api_version}/applications/{application}/povs/
{povGroupMember}/jobs /runLedgerCalculationJob
```

```
{"isClearCalculated":"true","isExecuteCalculations":"true","isRunNow":"true","opt
imizeReporting":"false","comment":"This is run by
user1","exeType":"ALL_RULES","stringDelimiter":"_"}
```

Example URL and Payload with Data POV Passed

```
https://<BASE-URL>/epm/rest/{api_version}/applications/{application}/povs/
{povGroupMember}/jobs/runLedgerCalculationJob
```

```
{"dataPOVName":"2015_January_Actual","isClearCalculated":"true","isExecuteCalcula
tions":"true","isRunNow":"true","optimizeReporting":"false","comment":"This is
run by user1","exeType":"ALL_RULES","stringDelimiter":"_"}
```

Response

Supported Media Types: application/json

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 10-34 Parameters

Name	Description
details	Task ID, such as BksML1_BksML1_RunCalcs_D20160113T070358_1da_1
status	See Migration Status Codes
statusMessage	Message about the status, such as In Progress
type	Profitability
links	Detailed information about the link
href	Links to API call
action	The HTTP call type
rel	Relationship type
data	Parameters as key value pairs passed in the request

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
   "type":"Profitability",
   "status":-1,
   "statusMessage":"In Progress",
   "details":"BksML30_RunCalcs_D20220511T114716_a14",
   "links":[
      {
         "href":"https://<BASE-URL>/epm/rest/v1/applications/jobs/
ChecktaskStatusJob/BksML30_RunCalcs_D20220511T114716_a14",
         "action":"GET",
         "rel":"Job Status"
      }
   ]
}
```

Run ML Clear POV

Clears model artifacts and data from a POV combination for any application.

Required Roles

Service Administrator, Power User

REST Resource

POST /epm/rest/{api_version}/applications/{application}/povs/{povGroupMember}/jobs/clearPOVJob

Request

Supported Media Types: application/json

The following table summarizes the client request.

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 10-35 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	Name of the application for which to run calculations	Path	Yes	None
`povGroupMember`	The POV group member for which to clear model artifacts sand data, such as `2015_January_Actual`	Path	Yes	None
`isManageRule`	To clear the program rule details or not; true/false	Payload	No	None
`isInputData`	To clear input data or not; true/false	Payload	No	None
`queryName`	A query name already existing within the application; used to clear a region within the given POV	Payload	No	None
`isAllocatedValues`	To clear allocation values or not; true/false	Payload	No	None
`isAdjustmentValues`	To clear adjustment values or not; true/false	Payload	No	None
`stringDelimiter`	String delimiter for POV group members	Payload	No	"_" (Underscore)

> **Note**
>
> If `queryName` is used (is not null), then isManageRule, isAllocatedValues, and `isAdjustmentValues` must be set to `false`.
>
> If one of these parameters or `isInputData` is not passed, it is considered as `false`.

Example URL and payload to clear to a particular region within input data

```
https://<BASE-URL>/epm/rest/{api_version}/applications/{application}/povs/{povGroupMember}/jobs/clearPOVJob
```

```
{"isInputData":"true","queryName":"myQueryName","stringDelimiter":"_"}
```

Response

Supported Media Types: `application/json`

Table 10-36 Parameters

Name	Description
`details`	Task ID, such as `BksML1_BksML1_ClearMLPOV_D20160113T070358_1da_1`
`status`	See Migration Status Codes
`statusMessage`	Message about the status, such as `In Progress`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 10-36 (Cont.) Parameters

Name	Description
`type`	Profitability
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Relationship type
`data`	Parameters as key value pairs passed in the request

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
   "type":"Profitability",
   "status":-1,
   "statusMessage":"In Progress",
   "details":"BksML30_ClearMLPOV_D20220511T114821_f4b",
   "links":[
      {
         "href":"https://<BASE-URL>/epm/rest/v1/applications/jobs/
ChecktaskStatusJob/BksML30_ClearMLPOV_D20220511T114821_f4b",
         "action":"GET",
         "rel":"Job Status"
      }
   ]
}
```

Run ML Rule Balancing

Retrieves Rule Balancing data for a particular POV for a given application.

Required Roles

Service Administrator, Power User

REST Resource

GET `/epm/rest/{api_version}/applications/{application}/povs/{povGroupMember}/ruleBalance`

Request

Supported Media Types: `application/json`

The following table summarizes the client request.

Table 10-37 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 10-37 (Cont.) Parameters

Name	Description	Type	Required	Default
`application`	Name of the application for which to retrieve rule balancing data	Path	Yes	None
`povGroupMember`	POV name for which to retrieve the results, such as `2015_January_Actual`	Path	Yes	None
`modelViewName`	Model view name to filter the results within the POV area	Query	Yes	None
`stringDelimiter`	String delimiter for POV group members, such as `"_"`	Query	No	Underscore, `"_"`

Example URL and Sample Query Parameter

```
https://<BASE-URL>/epm/rest/{api_version}/applications/{application}/povs/
{povGroupMembers}/ruleBalance?queryParameter={"modelViewName":"modelViewName"}
```

Response

Supported Media Types: `application/json`

Table 10-38 Parameters

Name	Description
`details`	Rule balancing output for the given POV
`status`	See Migration Status Codes
`statusMessage`	Message about the status, such as `Success`
`type`	Profitability
`data`	Parameters as key value pairs
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Relationship type
`data`	Parameters as key value pairs passed in the request

Example of Response Body

The following shows an example of the response body in JSON format.

```
"items": [{
      "ruleNumber": "",
      "rules": [],
      "balanceTypeRule": true,
      "scale": 2,
      "sequence": 0,
      "name": "NoRule",
      "description": null,
      "runningBalance": 49357098.03,
      "balance": 49357098.03,
      "allocationIn": null,
      "allocationOut": null,
      "adjustmentIn": null,
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

```
        "adjustmentOut": null,
        "input": 49357098.03,
        "runningRemainder": 49357098.03,
        "remainder": 49357098.03,
        "netChange": null,
        "offset": null,
        "inputAsString": "49,357,098.03",
        "adjInAsString": "-",
        "adjOutAsString": "-",
        "allocInAsString": "-",
        "allocOutAsString": "-",
        "balanceAsString": "49,357,098.03",
        "runningBalanceAsString": "49,357,098.03",
        "runningRemainderAsString": "49,357,098.03",
        "remainderAsString": "49,357,098.03",
        "netChangeAsString": "-",
        "offsetAsString": "-"
      },
    ],
    "type": "Profitability",
  "status": 0,
    "details": "",
    "statusMessage": "Success"
  }
```


Update Dimensions As a Job

Updates one or more dimensions from a dimension text/csv file.

Update Dimensions As a Job runs asynchronously; it immediately returns the job ID and the job status (Running or Failed).

Required Roles

Service Administrator, Power User

REST Resource

POST `/epm/rest/{api_version}/fileApplications/{application}/jobs/updateDimension`

Request

Supported Media Types: `application/json`

The following table summarizes the client request.

Table 10-39 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are developing with	Path	Yes	None
`application`	Name of the application to update	Path	Yes	None

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 10-39 (Cont.) Parameters

Name	Description	Type	Required	Default
`dataFileName`	Dimension Metadata flat file name that has already been uploaded to the Inbox folder; multiple file names can be passed separated by comma or other separator character listed in the stringDelimiter parameter	Payload	Yes	None
`stringDelimiter`	Separator character to use if different from commas	Payload	No	Comma (,)
`acceptableDecrease Percentage`	Specifies the percentage difference in member count that is allowed for the operation. If the new member count from the incoming file is less than the existing member count, this represents the percentage decrease that is allowed. If the percentage is exceeded, then the operation will fail. Use this parameter to safeguard against data loss that can happen during a subsequent cube deploy if one or more dimensions did not get fully updated due to missing data in the input file.	Payload	No	None

Example URL and Payload

```
https://<BASE-URL>/epm/rest/<api_version>/fileApplications/BksML12/jobs/
updateDimension{"dataFileName":"input.txt","stringDelimiter":",","acceptableDec
reasePercentage":"5"}
```

Response

Supported Media Types: `application/json`

Table 10-40 Parameters

Name	Description
`details`	Task ID, such as `BksML12_BksML12_ UpdateDimension_D20160118T051020_bb8_1`
`status`	See Migration Status Codes
`statusMessage`	Message about the status, such as `In Progress`
`type`	Profitability
`data`	Parameters as key value pairs
`links`	Detailed information about the link
`href`	Links to API call
`action`	The HTTP call type
`rel`	Relationship type
`data`	Parameters as key value pairs passed in the request

Example of Response Body

Copyright © 2017, 2026, Oracle and/or its affiliates.

The following shows an example of the response body in JSON format.

```
{
   "type":"Profitability",
   "status":-1,
   "statusMessage":"In Progress",
   "details":"BksML30_UpdateDimensions_D20220513T062046_c61",
   "links":[
      {
         "href":"https:// ://<BASE-URL>/epm/rest/v1/applications/jobs/
ChecktaskStatusJob/BksML30_UpdateDimensions_D20220513T062046_c61",
         "action":"GET",
         "rel":"Job Status"
      }
   ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

11

Tax Reporting REST APIs

Use the Tax Reporting REST APIs to get the REST API version, to import supplementation data, copy data, clear data, and deploy form templates.

Table 11-1 Tax Reporting REST APIs

Tax Reporting REST APIs	
Get API Versions for Tax Reporting APIs Copy Data	Clear Data

URL Structure for Tax Reporting

Use the following URL structure to access the Tax Reporting REST resources:

`https://<BASE-URL>/HyperionPlanning/rest/{api_version}/{path}`

Where:

- *<BASE-URL>*: The first part of your service URL, before the context.

  For example, if your service URL is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm-acme.epm.us-phoenix-1.ocs.oraclecloud.com`. Similarly, if your service URL is `https://epm2-acme.epm.us6.oraclecloud.com/epmcloud`, your *<BASE-URL>* is `https://epm2-acme.epm.us6.oraclecloud.com`.
- *api_version*: API version you are developing with. The current REST API version for Tax Reporting is v3.
- *path*: Identifies the resource.

> **Note**
>
> Oracle does not authorize or support the use of REST APIs with the path token "`/internal/`" in the URL.

Get API Versions for Tax Reporting APIs

You can get information on REST API versions using REST resources. See Getting API Versions for Planning. Tax Reporting APIs use the same version numbers as Planning.

Get Information about a Specific API Version for Tax Reporting

Returns details for a specific REST API version for Tax Reporting.

Copyright © 2017, 2026, Oracle and/or its affiliates.

REST Resource

`GET /HyperionPlanning/rest/{api_version}`

Required Roles

Service Administrator, Power User, User, Viewer

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the parameters.

Table 11-2 Parameters

Name	Description
`api_version`	Version of the API you are developing with, such as V1

Response

Supported Media Types: `application/json`

Parameters

The following table summarizes the parameters.

Table 11-3 Parameters

Name	Description
`version`	The version, such as V3

Example of Response Body

The following shows an example of the response body in JSON format.

```
{
"version": "v1",
"lifecycle": "active",
"isLatest": true,
"links": [{
"rel": "canonical",
"href": "https://https://<BASE-URL>/HyperionPlanning/rest/v2"
}, {
"rel": "predecessor-version",
"href": "https://<SERVICE_NAME>-
<TENANT_NAME>.<SERVICE_TYPE>.<dcX>.oraclecloud.com/HyperionPlanning/rest/v1"
}]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.

Copy Data

This REST API is used to execute a Copy Data job using the job name. Before executing this job, you should create a Copy Data job in Tax Reporting.

For details on this task, see "Using Copy Data Job" in *Administering Tax Reporting*

This REST API returns the job ID after starting the Copy Data job.

REST Resource

POST `/HyperionPlanning/rest/{api_version}/applications/{application}/jobs`

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Table 11-4 Parameters

Name	Description	Type	Required	Default
`api_version`	Version of the API you are working with: v3	Path	Yes	None
`application`	The name of the application Get the application name by using the Get Applications API, for example, FCCS or TRCS. See Get Applications.	Path	Yes	None
`jobName`	Name of the job should be: `Execute Profile`	Payload	Yes	None
`jobType`	Type of Job. Supported value: `COPY_DATA`	Payload	Yes	None
`ProfileName`	Name of the saved copy data job	Payload	Yes	None

Example of Request Body

```
{
"jobType": "COPY_DATA",
"jobName": "Execute Profile",
"parameters": {
   "ProfileName": "CopyJobTesting"
 }
}
```

Response Body

Supported Media Types: `application/json`

Table 11-5 Parameters

Name	Description
`type`	Tax Reporting Application type, for example, TRCS

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 11-5 (Cont.) Parameters

Name	Description
status	Status of the job: -1 =In progress; 0 = Success; 1 = Fail
details	In case of errors, details are published with the error string.
descriptiveStatus	The status of the job, such as Completed or Error
items	Collection of Notification categories
links	Detailed information about the link
href	Links to API call
action	The HTTP call type
rel	Relationship type. Possible values: self

Example of Response Body:

The following shows an example of the response body in JSON format.

```
{
    "jobId": 45,
    "jobName": "Copy Data",
    "descriptiveStatus": "Processing",
    "details": null,
    "status": -1,
    "links": [
        {
            "href": "https://https://<BASE-URL>/HyperionPlanning/rest/v3/
applications/<applicationName>/jobs/<JobId>",
            "rel": "self",
            "action": "GET"
        },
        {
            "href": "https://https://<BASE-URL>/HyperionPlanning/rest/v3/
applications/<applicationName>/jobs/<JobId>/details",
            "rel": "job-details",
            "action": "GET"
        }
    ]
}
```

Clear Data

This REST API is used to execute a Clear Data job using the profile name. Before executing this job, you should create a Clear Data job in Tax Reporting.

For details on this task, see "Using Clear Data Jobs" in *Administering Tax Reporting*

This REST API returns the job ID after starting the job.

REST Resource

POST `/HyperionPlanning/rest/{api_version}/applications/{application}/jobs`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Required Roles

Service Administrator

Request

Supported Media Types: `application/json`

Parameters

The following table summarizes the client request parameters specific to this job.

Table 11-6 Clear Data

Name	Description	Type	Required	Default
`api_version`	Version of the API you are working with: v3	Path	Yes	None
`application`	The name of the application Get the application name by using the Get Applications API, for example, FCCS or TRCS. See Get Applications.	Path	Yes	None
`jobName`	Name of the job should be: `Execute Profile`	Payload	Yes	None
`jobType`	Type of Job. Supported value: `CLEAR_DATA`	Payload	Yes	None
`ProfileName`	Name of the saved clear data job	Payload	Yes	None

Example of Request Body

```
{
  "jobType": "CLEAR_DATA",
  "jobName": "Execute Profile",
     "parameters": {
             "ProfileName": "ClearJobTesting"
      }
}
```

Response Body

Supported Media Types: `application/json`

Copyright © 2017, 2026, Oracle and/or its affiliates.

Table 11-7 Parameters

Name	Description
type	Tax Reporting Application type, for example, TRCS
status	Status of the job: -1 =In progress; 0 = Success; 1 = Fail
details	In case of errors, details are published with the error string.
descriptiveStatus	The status of the job, such as Completed or Error
items	Collection of Notification categories
links	Detailed information about the link
href	Links to API call
action	The HTTP call type
rel	Relationship type. Possible values: self

Example of Response Body

The following is an example of the response body in JSON format.

```
{
  "jobId": 46,
  "jobName": "Clear Data",
    "descriptiveStatus": "Processing",
    "details": null,
    "status": -1,
    "links": [
        {
            "href": "https://https://<BASE-URL>/HyperionPlanning/rest/v3/
applications/<applicationName>/jobs/<JobId>",
            "rel": "self",
            "action": "GET"
        },
        {
            "href":"https://https://<BASE-URL>/HyperionPlanning/rest/v3/
applications/<applicationName>/jobs/<JobId>/details",
            "rel": "job-details",
            "action": "GET"
        }
    ]
}
```


Copyright © 2017, 2026, Oracle and/or its affiliates.