

*<localhost> Script-1

AI

● CREATE TABLE orders (
ord_no INT PRIMARY KEY,
purch_amt DECIMAL(10,2),
ord_date DATE,
customer_id INT,
salesman_id INT
);

Statistics 1

Name	Value	
Updated Rows	0	
Execute time	0.048s	
Start time	Tue Aug 11 09:03:02 IST 2026	
Finish time	Tue Aug 11 09:03:02 IST 2026	
Query	CREATE TABLE orders (ord_no INT PRIMARY KEY, purch_amt DECIMAL(10,2), ord_date DATE, customer_id INT, salesman_id INT)	

*localhost> Script-1 X

QUERY:

```
SELECT *  
FROM orders  
WHERE purch_amt > 2000;
```

orders 1 X

SELECT * FROM orders WHERE purch_amt | Enter a SQL expression to filter results (use Ctrl+Space)

	123 ord_no	123 purch_amt	ord_date	123 customer_id	123 salesman_id	
1	70,003	2,480.4	2012-10-10	3,009	5,003	
2	70,005	2,400.6	2012-07-27	3,007	5,001	
3	70,008	5,760	2012-09-10	3,002	5,001	
4	70,013	3,045.6	2012-04-25	3,002	5,001	

*localhost> Script-1 X

```
SELECT *  
FROM orders  
WHERE ord_date='2012-09-10';
```

orders 1 X

SELECT * FROM orders WHERE ord_date=2 | Enter a SQL expression to filter results (use Ctrl+Space)

	123 ord_no	123 purch_amt	ord_date	123 customer_id	123 salesman_id	
1	70,007	948.5	2012-09-10	3,005	5,002	
2	70,008	5,760	2012-09-10	3,002	5,001	
3	70,009	270.65	2012-09-10	3,001	5,005	

*<localhost> Script-1 X

```

SELECT *
FROM orders
WHERE salesman_id=5001;

```

orders 1 X

SELECT * FROM orders WHERE salesman_id Enter a SQL expression to filter results (use Ctrl+Space)

	123 ord_no	123 purch_amt	ord_date	123 customer_id	123 salesman_id
1	70,002	65.26	2012-10-05	3,002	5,001
2	70,005	2,400.6	2012-07-27	3,007	5,001
3	70,008	5,760	2012-09-10	3,002	5,001
4	70,013	3,045.6	2012-04-25	3,002	5,001

*<localhost> Script-1 X

QUERY:

```


SELECT *
FROM orders
ORDER BY purch_amt DESC;

```

orders 1 X

SELECT * FROM orders ORDER BY purch_amt Enter a SQL expression to filter results (use Ctrl+Space)

	123 ord_no	123 purch_amt	ord_date	123 customer_id	123 salesman_id
1	70,008	5,760	2012-09-10	3,002	5,001
2	70,013	3,045.6	2012-04-25	3,002	5,001
3	70,003	2,480.4	2012-10-10	3,009	5,003
4	70,005	2,400.6	2012-07-27	3,007	5,001
5	70,010	1,983.43	2012-10-10	3,004	5,006
6	70,007	948.5	2012-09-10	3,005	5,002
7	70,009	270.65	2012-09-10	3,001	5,005
8	70,012	250.45	2012-06-27	3,008	5,002
9	70,001	150.5	2012-10-05	3,005	5,002
10	70,004	110.5	2012-08-17	3,009	5,003

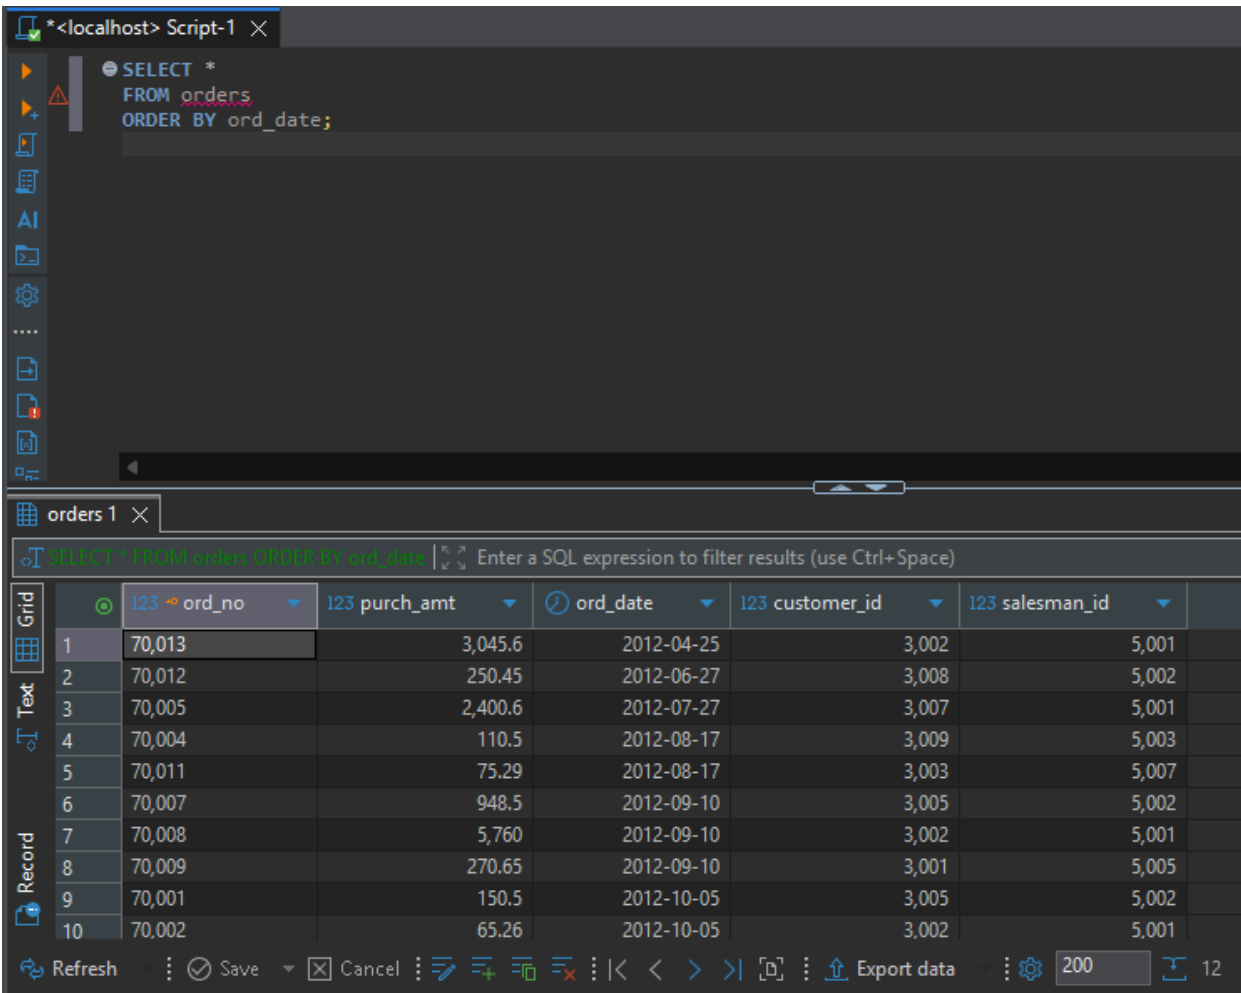

*<localhost> Script-1

QUERY:

SELECT SUM(purch_amt) AS total_revenue

FROM orders;

orders 1

SELECT SUM(purch_amt) AS total_revenue

Enter a SQL expression to filter results

Grid

123 total_revenue

117,541.18

Text

*<localhost> Script-1 X

```
SELECT AVG(purch_amt) AS average_order  
FROM orders;
```

orders 1 X

SELECT AVG(purch_amt) AS average_order | Enter a SQL expression to

Grid	123 average_order
1	1,461.765


*<localhost> Script-1 X


```
SELECT MAX(purch_amt) AS highest_order  
FROM orders;
```

orders 1 X

SELECT MAX(purch_amt) AS highest_order | Enter a SQL expression to filter results (

Grid	123 highest_order
1	5,760

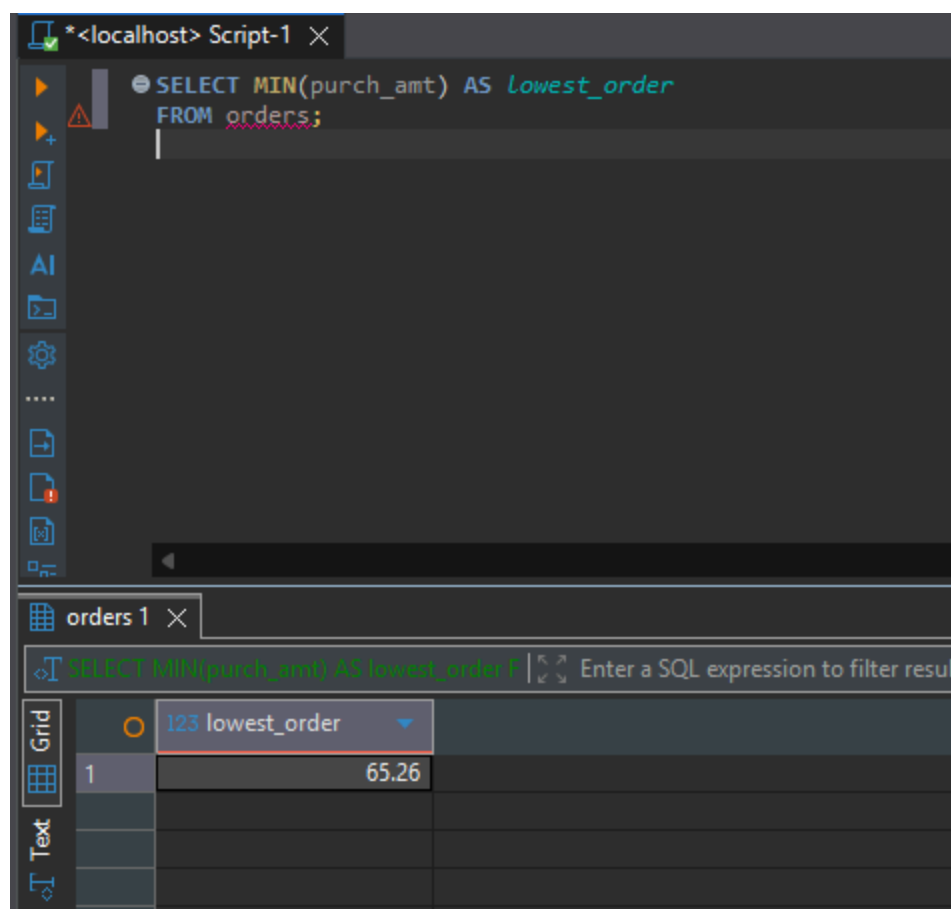

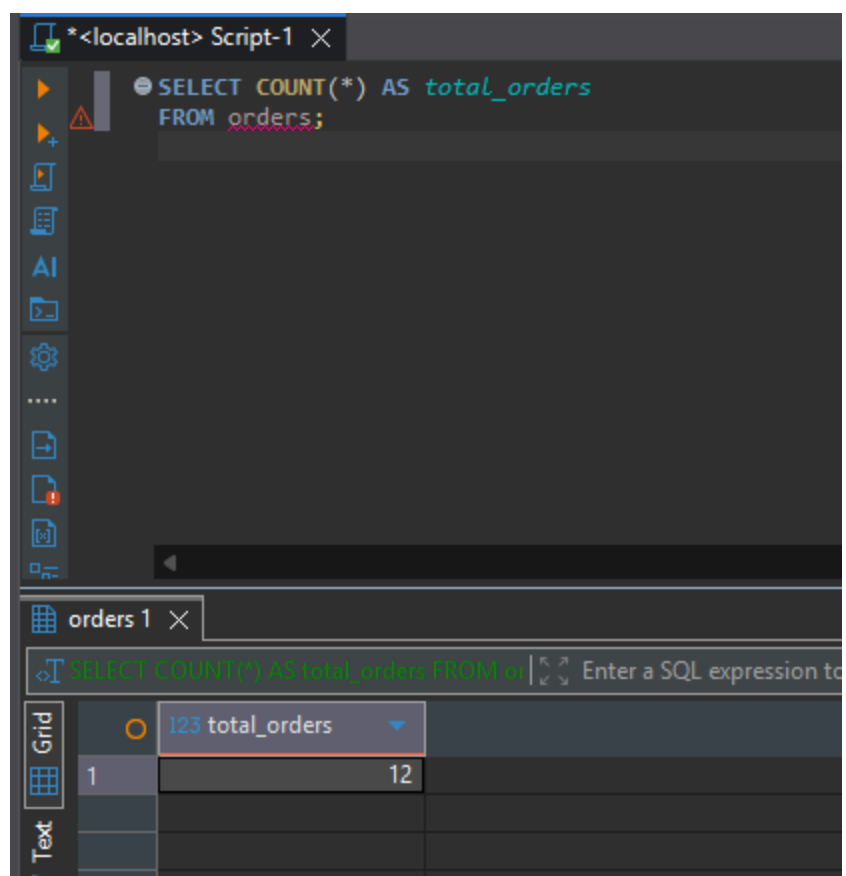

*<localhost> Script-1

SELECT salesman_id,
SUM(purch_amt) AS total_sales
FROM orders
GROUP BY salesman_id;

orders 1

SELECT salesman_id, SUM(purch_amt) AS t


Enter a SQL expression to filter re

Grid

Text

ord

	123 salesman_id	123 total_sales	
1	5,002	1,349.45	
2	5,001	11,271.46	
3	5,003	2,590.9	
4	5,005	270.65	
5	5,006	1,983.43	
6	5,007	75.29	

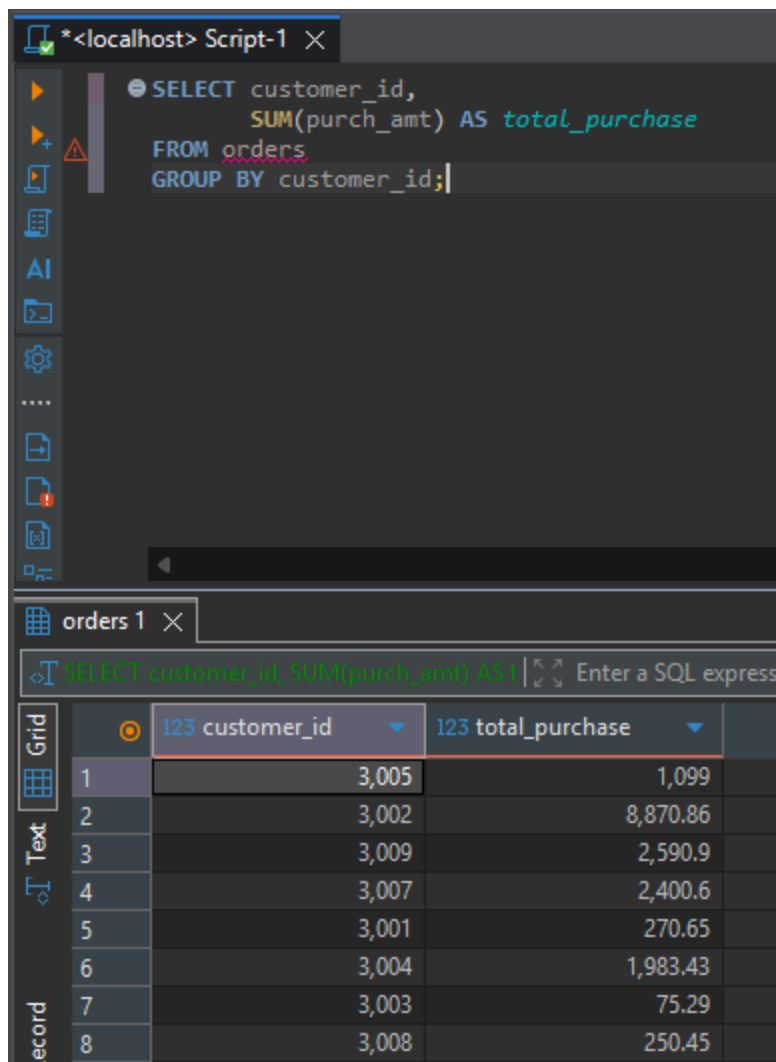

*<localhost> Script-1 X

```
SELECT customer_id,  
       SUM(purch_amt) AS total_purchase  
FROM orders  
GROUP BY customer_id  
HAVING SUM(purch_amt) > 2500;
```

orders 1 X

SELECT customer_id, SUM(purch_amt) AS total_purchase | Enter a SQL expression

	123 customer_id	123 total_purchase
1	3,002	8,870.86
2	3,009	2,590.9

