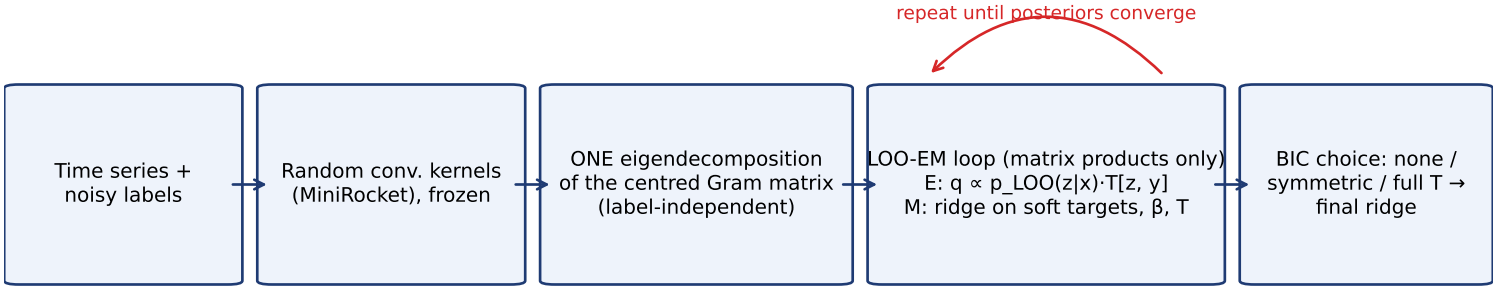
repeat until posteriors converge
Time series + noisy labels
Random conv. kernels (MiniRocket), frozen
ONE eigendecomposition of the centred Gram matrix (label-independent)
LOO-EM loop (matrix products only)
E: q ∝ p_LOO(z|x)·T[z, y]
M: ridge on soft targets, β, T
BIC choice: none / symmetric / full T → final ridge