


SLF4J logging framework

SL4J Logging exercises

Exercise 1: Logging Error Messages and Warning Levels

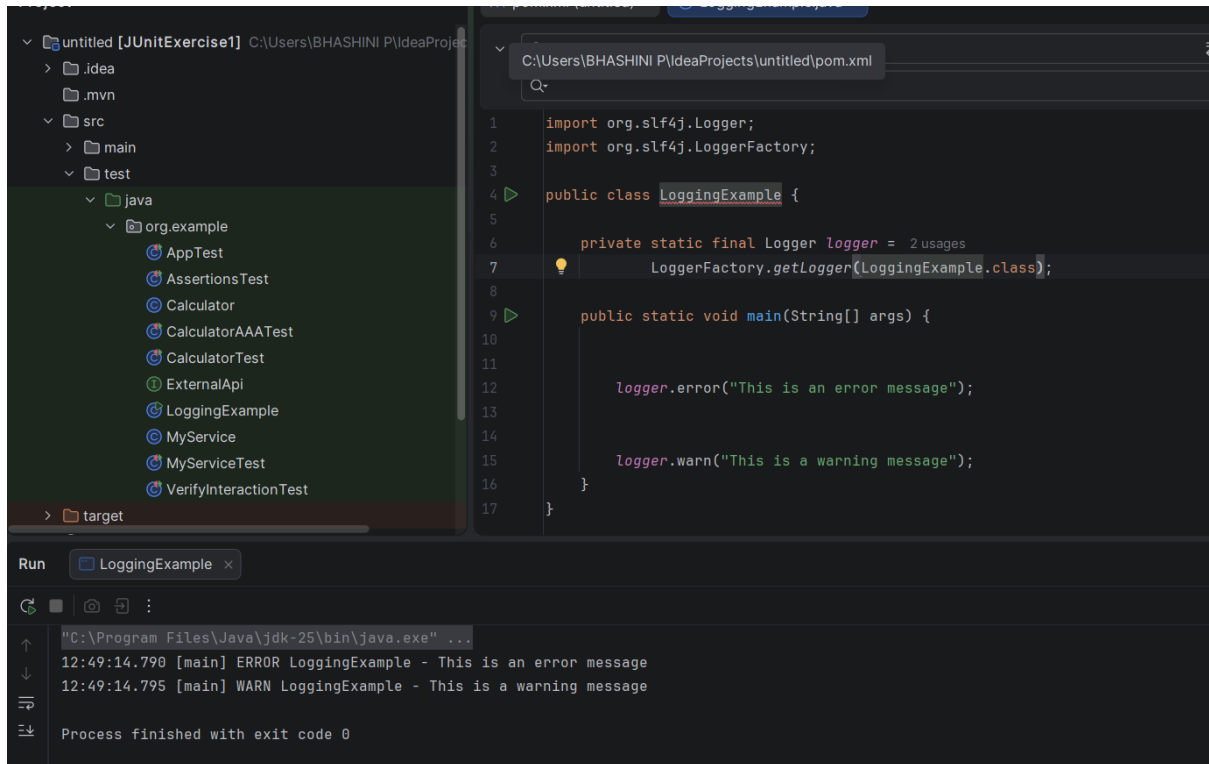

The screenshot displays an IDE environment with a project named 'untitled [JUnitExercise1]'. The project structure shows a 'src' directory with 'main' and 'test' subdirectories. The 'main' directory contains a 'java' package with a 'org.example' subpackage. The 'org.example' package contains several classes, including 'LoggingExample'. The 'LoggingExample' class is selected, and its code is visible in the editor. The code imports 'org.slf4j.Logger' and 'org.slf4j.LoggerFactory', defines a static final 'logger' field, and implements a 'main' method that logs an error and a warning message. The 'Run' button is clicked, and the output console shows the execution results.

```
1 import org.slf4j.Logger;
2 import org.slf4j.LoggerFactory;
3
4 public class LoggingExample {
5
6     private static final Logger logger =
7         LoggerFactory.getLogger(LoggingExample.class);
8
9     public static void main(String[] args) {
10
11         logger.error("This is an error message");
12
13         logger.warn("This is a warning message");
14     }
15 }
16
17 }
```

Run LoggingExample x

"C:\Program Files\Java\jdk-25\bin\java.exe" ...

12:49:14.790 [main] ERROR LoggingExample - This is an error message

12:49:14.795 [main] WARN LoggingExample - This is a warning message

Process finished with exit code 0