

# **ePowerCenter Data Model**

## **Version 9.03.00**

**This document includes proprietary and confidential information, including trade secrets of Astute Solutions. For disclosure only to licensed customers of ePowerCenter, who are bound by the confidentiality provisions of the Astute Solutions' Software License and Service Agreement.**

Physical Data Model		
Project: Astute Solution Data Model Proprietary & Confidential		
Model : Subject to change without notice		
Author :	Version9.03.00	8/19/2015

case_text	
<u>company_id</u>	CHAR(3)
<u>case_id</u>	INT
<u>case_text_seq</u>	INT
text_type_code	VARCHAR(40)
description	VARCHAR(40)
modified_by_user_code	VARCHAR(40)
last_modified	DATETIME
case_text	TEXT
action_seq	INT
issue_seq	INT
date_added	DATETIME
added_by_user_code	VARCHAR(40)
language_id	VARCHAR(40)

action	
<u>company_id</u>	CHAR(3)
<u>case_id</u>	INT
<u>action_seq</u>	INT
action_type_code	VARCHAR(40)
action_type	CHAR(3)
action_status	CHAR(1)
action_date	datetime
action_priority	INT
action_text	text
issue_seq	INT
letter_seq	INT
case_text_seq	INT
case_enclosure_seq	INT
referred_to_address_id	INT
referred_to_user_code	VARCHAR(40)
passed_from_user_code	VARCHAR(40)
accepted_by_user_code	VARCHAR(40)
performed_by_user_code	VARCHAR(40)
response_due	datetime
responded	datetime
d05_code	VARCHAR(40)
d06_code	VARCHAR(40)
d07_code	VARCHAR(40)
d08_code	VARCHAR(40)
d09_code	VARCHAR(40)
ref_ctr_visible	CHAR(1)

function_history	
<u>company_id</u>	CHAR(3)
<u>case_id</u>	INT
<u>history_seq</u>	INT
date_occurred	DATE
user_code	VARCHAR(40)
issue_seq	INT
key_type	VARCHAR(40)
key_id1	VARCHAR(40)
key_id2	VARCHAR(40)
history_value	TEXT

issue	
<u>company_id</u>	CHAR(3)
<u>case_id</u>	INT
<u>issue_seq</u>	INT
product_code	VARCHAR(40)
assigned_to_user_code	VARCHAR(40)
issue_status	CHAR(1)
issue_status_code	VARCHAR(40)
closed	datetime
issue_multiplier	INT
c05_code____c30_code	VARCHAR(40)
c31_code	VARCHAR(255)
c32_code____c60_code	VARCHAR(40)
c61_code	VARCHAR(255)
c62_code____c90_code	VARCHAR(40)
c91_code	VARCHAR(255)
c92_code____c99_code	VARCHAR(40)
custom_date1	DATETIME
date_added	DATETIME
added_by_user_code	VARCHAR(40)
date_changed	DATETIME
changed_by_user_code	VARCHAR(40)
address_id	INT

issue_detail	
<u>company_id</u>	CHAR(3)
<u>case_id</u>	INT
<u>issue_seq</u>	INT
<u>issue_detail</u>	INT
t01_code____t30_code	VARCHAR(40)
t31_code	VARCHAR(255)
date_added	DATETIME
added_by_user_code	VARCHAR(40)
date_changed	DATETIME
changed_by_user_code	VARCHAR(40)

case_user	
<u>company_id</u>	CHAR(3)
<u>case_id</u>	INT
<u>system_user_id</u>	VARCHAR(40)
<u>opened</u>	DATE

case_interaction	
<u>company_id</u>	CHAR(3)
<u>case_id</u>	INT
<u>interaction_id</u>	VARCHAR(255)
<u>date_added</u>	DATETIME
recording_attached	CHAR(1)

case_agentassist_interaction	
<u>company_id</u>	CHAR(3)
<u>case_id</u>	INT
<u>issue_seq</u>	INT
question_text	VARCHAR(125)
agent_assist_used	CHAR(1)
issue_created_updated	CHAR(1)
user_id	VARCHAR(40)
date_added	DATETIME
added_by_user_code	VARCHAR(40)

Ref\_3759

Ref\_58758


Ref\_1739


Ref\_58763

Ref\_1608

Ref\_23662

Ref\_1572

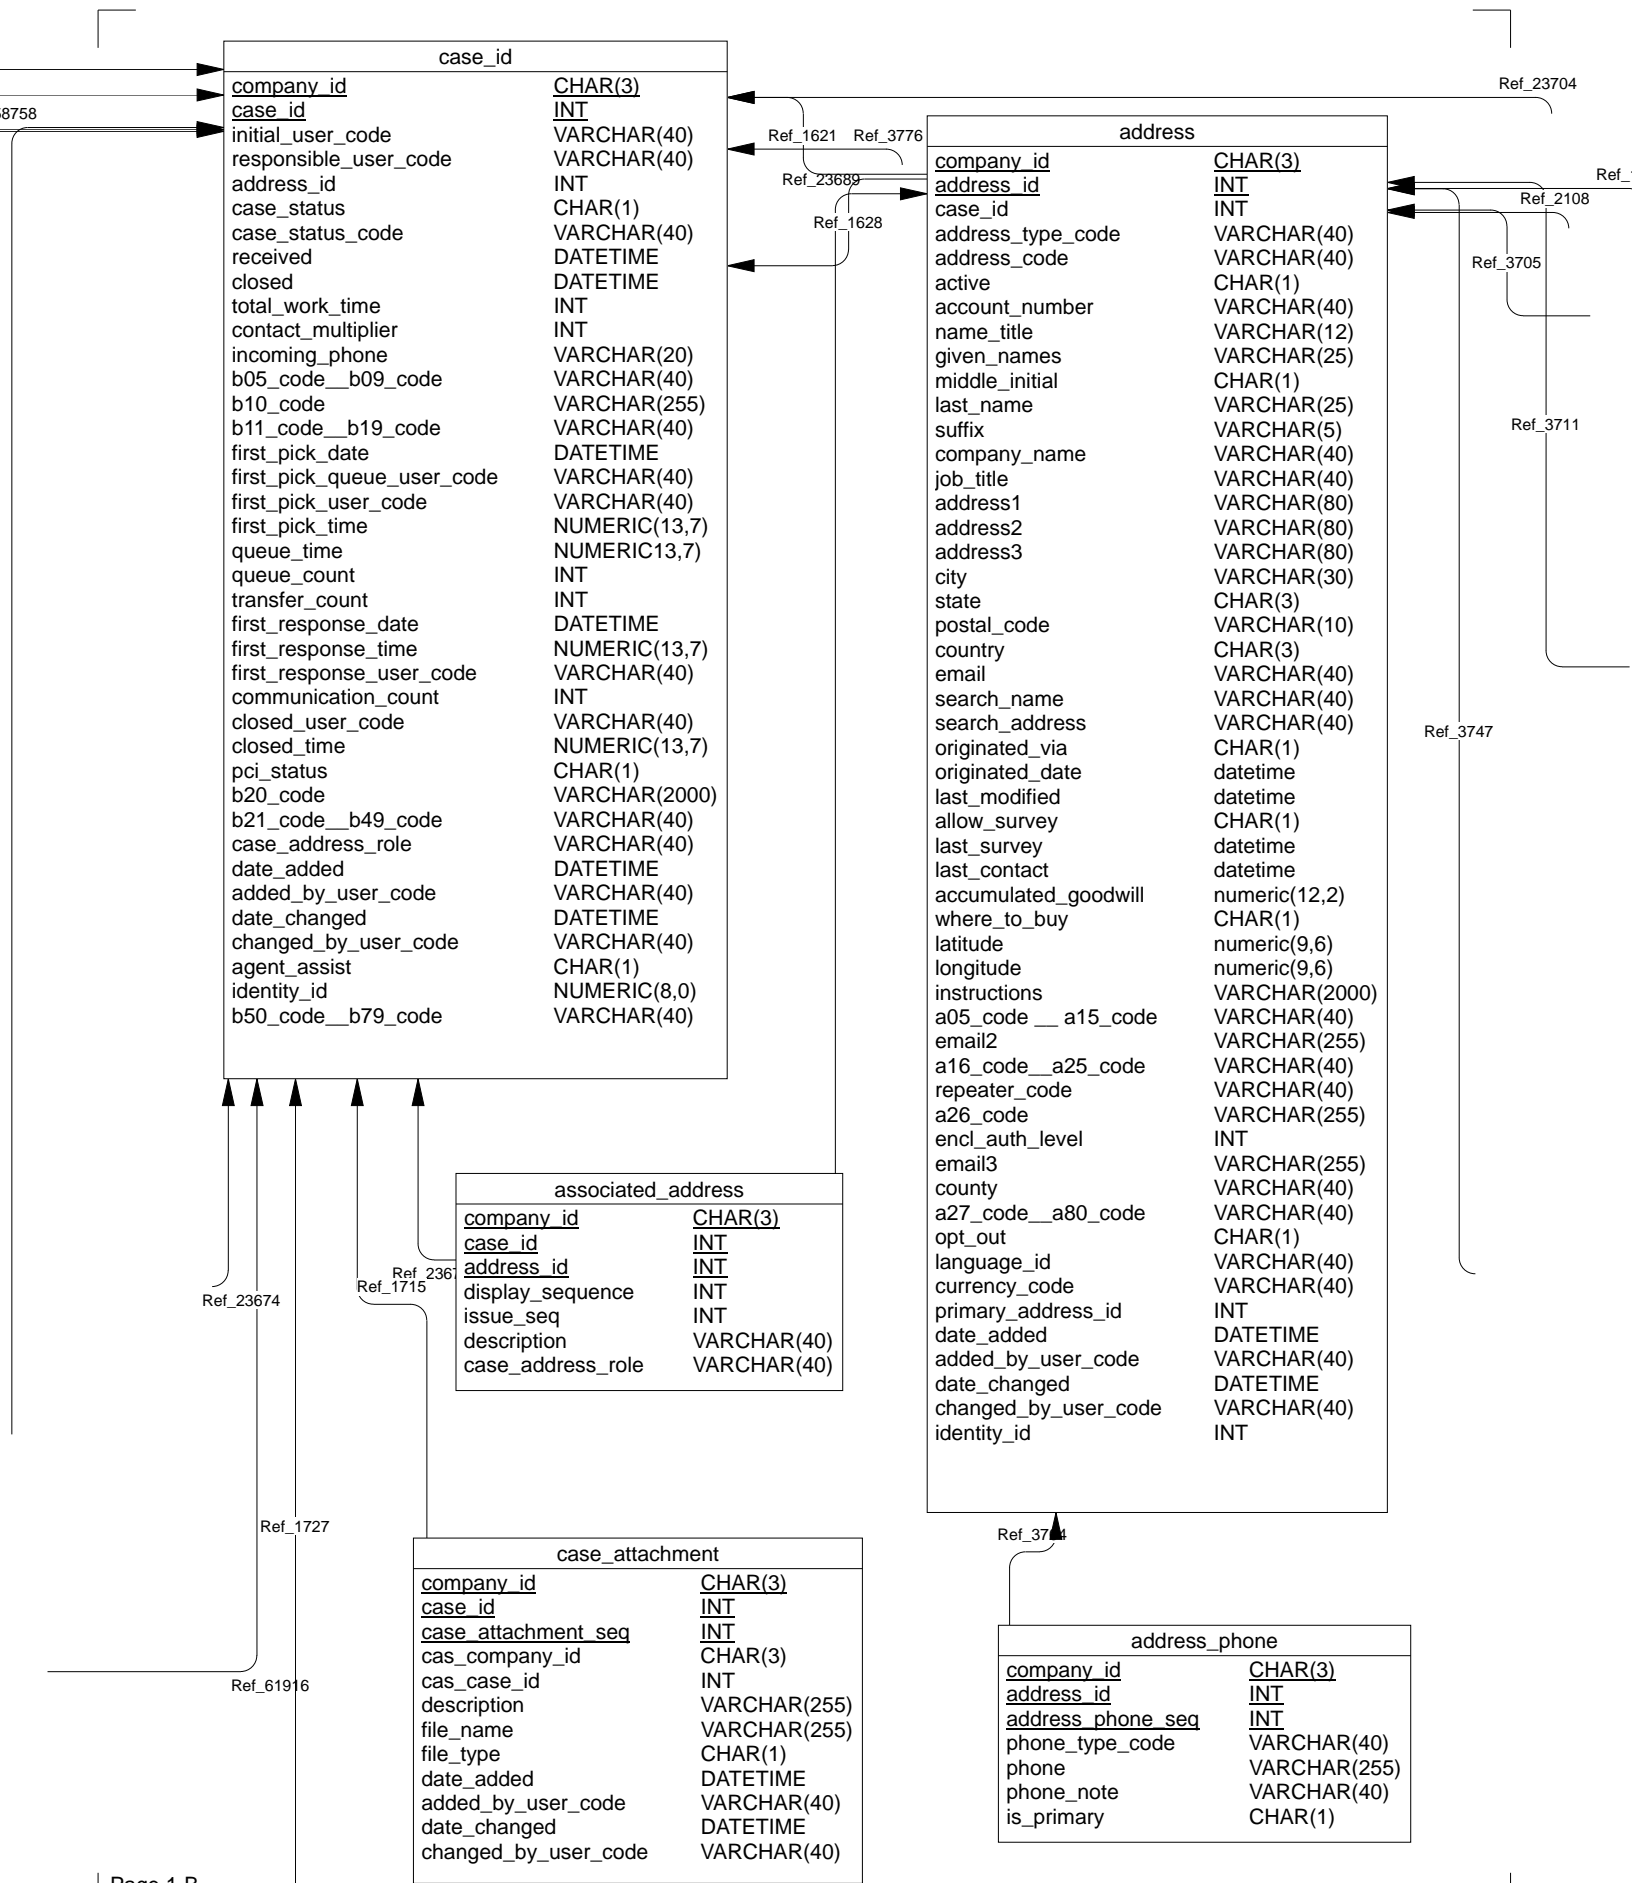

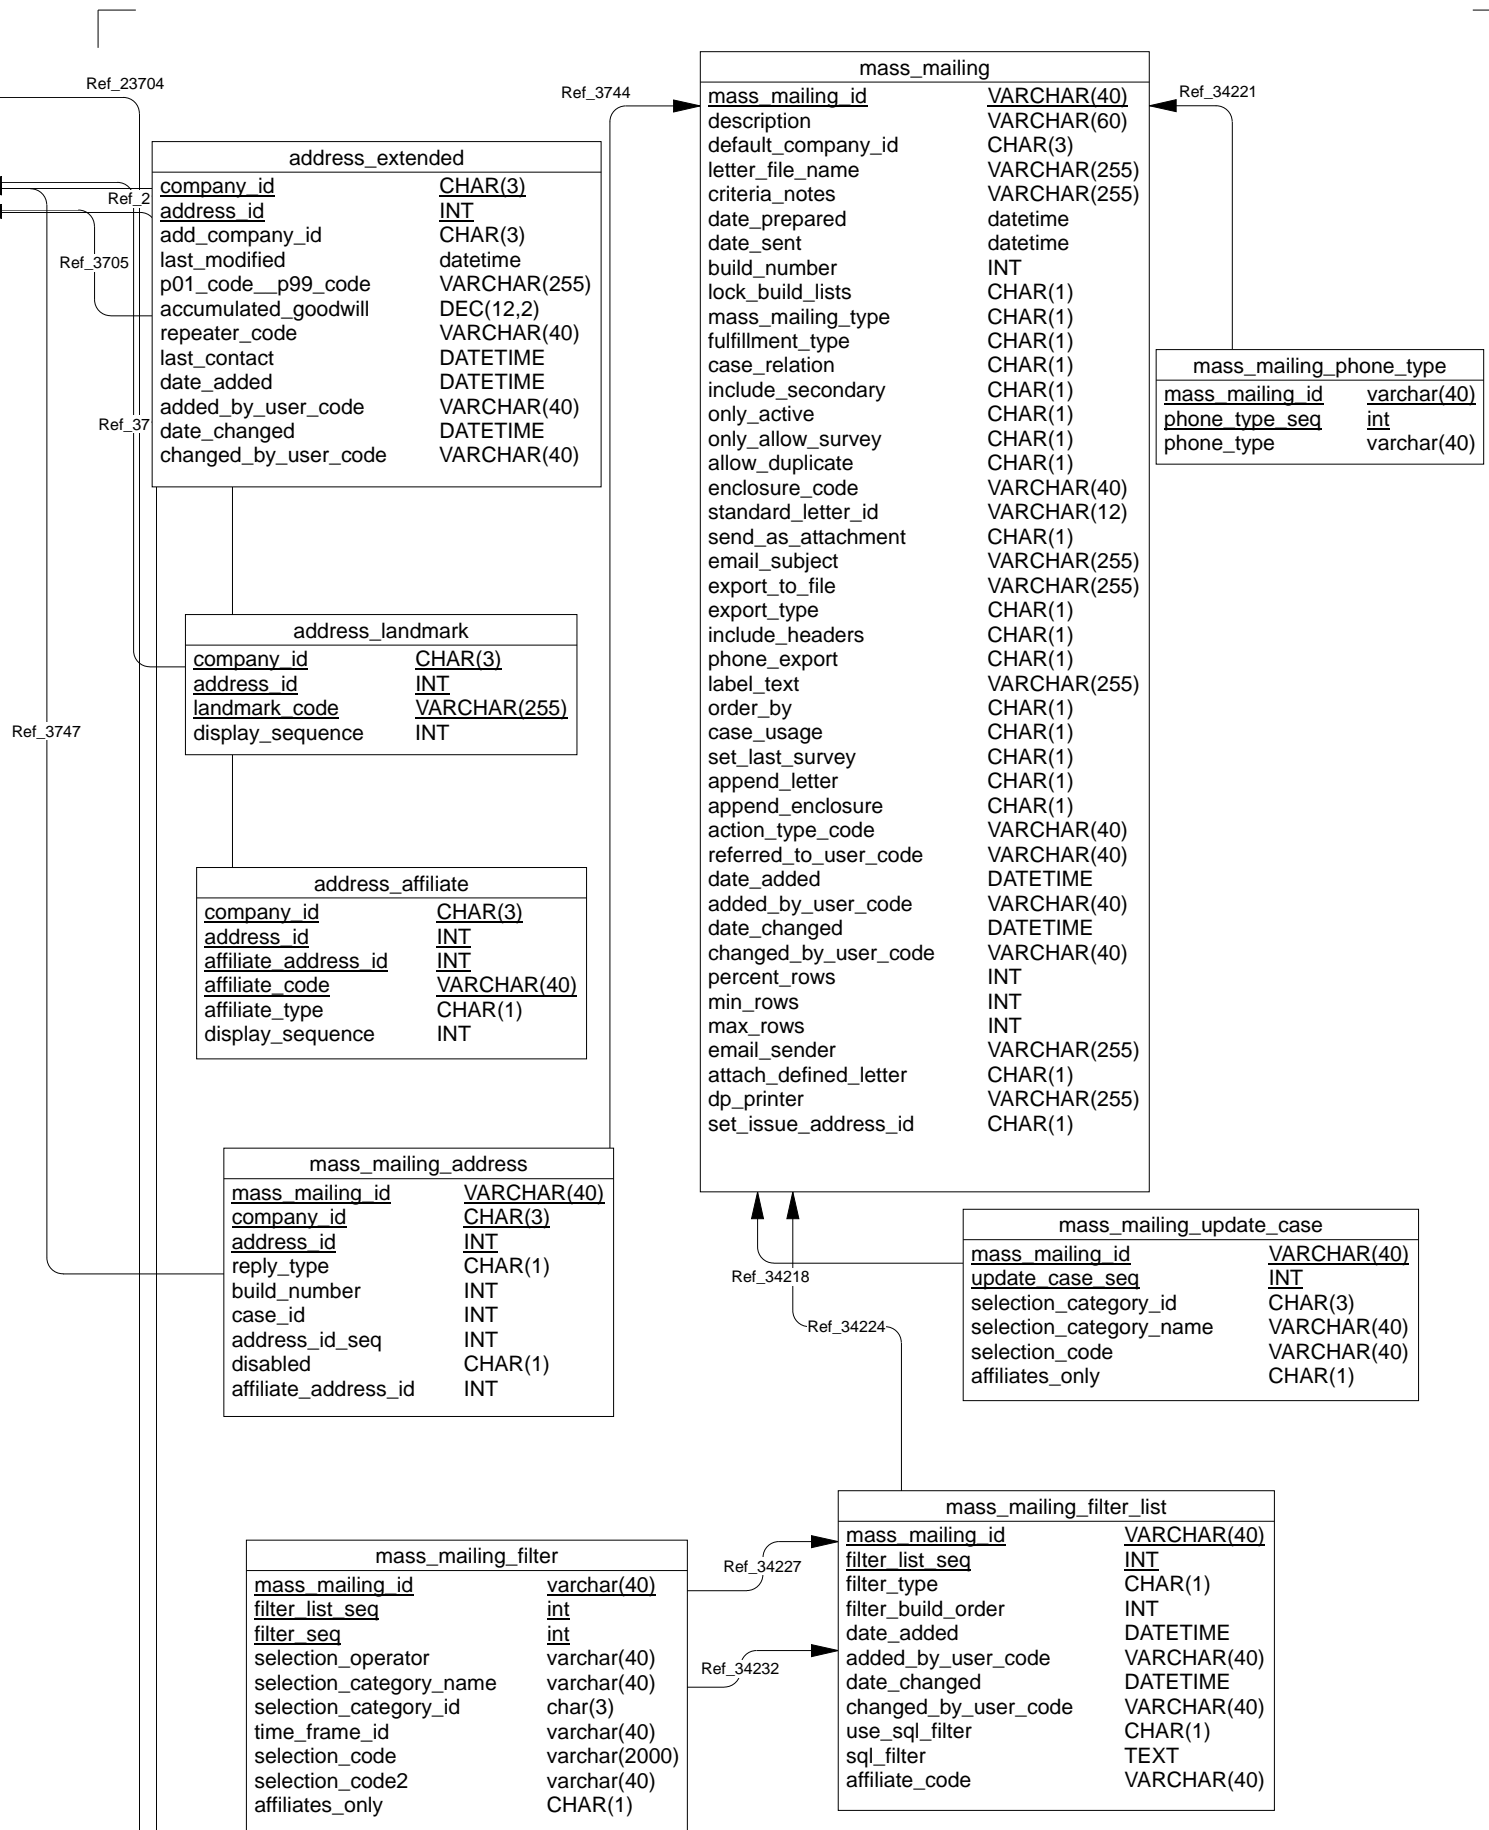

area_code	
<u>area_code</u>	CHAR(3)
<u>prefix</u>	CHAR(3)
country	CHAR(3)
state	CHAR(3)
city	VARCHAR(30)
new_area_code	CHAR(3)
latitude	numeric(9,6)
longitude	numeric(9,6)
postal_code	VARCHAR(10)

country	
<u>country</u>	CHAR(3)
country_name	VARCHAR(40)
internet_domains	VARCHAR(255)
address_format	CHAR(1)
state_type	CHAR(1)
postal_code_type	CHAR(1)
area_code_type	CHAR(1)
currency_code	VARCHAR(40)

state	
<u>country</u>	CHAR(3)
<u>state</u>	CHAR(3)
state_name	VARCHAR(40)

postal_code	
<u>country</u>	CHAR(3)
<u>postal_code</u>	VARCHAR(10)
<u>postal_city</u>	VARCHAR(30)
state	CHAR(3)
county	VARCHAR(40)
latitude	numeric(9,6)
longitude	numeric(9,6)
area_code	CHAR(3)
prefix	CHAR(3)
street_name	VARCHAR(40)

action_definition	
<u>company_id</u>	CHAR(3)
<u>action_type_code</u>	VARCHAR(40)
description	VARCHAR(40)
active	CHAR(1)
base_action_type	CHAR(1)
applies_to	CHAR(1)
allow_closed	CHAR(1)
maintain_queue_count	CHAR(1)
datawindow	VARCHAR(60)
case_status	CHAR(1)
issue_status	CHAR(1)
case_status_code	VARCHAR(40)
issue_status_code	VARCHAR(40)
text_type_code	VARCHAR(40)
action_status	CHAR(1)
action_priority	INT
delta_response_due	numeric(4,1)
referred_to_user_code	VARCHAR(40)
completed_by_action_type_code	VARCHAR(40)
completes_existing	CHAR(1)
completes_action_type_code	VARCHAR(40)
completes_action_status	CHAR(1)
copy_from_1_category_id	CHAR(3)
copy_to_1_category_id	CHAR(3)
copy_from_2_category_id	CHAR(3)
copy_to_2_category_id	CHAR(3)
copy_from_3_category_id	CHAR(3)
copy_to_3_category_id	CHAR(3)
copy_from_4_category_id	CHAR(3)
copy_to_4_category_id	CHAR(3)
copy_from_5_category_id	CHAR(3)
copy_to_5_category_id	CHAR(3)
run_prep_tag	CHAR(1)
requires_esignature	CHAR(1)
order_status	CHAR(1)

Ref\_71247

action_definition_migration	
<u>company_id</u>	CHAR(3)
<u>action_def_migration_seq</u>	INT
<u>action_type_code</u>	VARCHAR(40)
target_category_id	VARCHAR(40)
target_code	VARCHAR(255)
override_flag	CHAR(1)

enclosure_split	
<u>company_id</u>	CHAR(3)
<u>enclosure_code</u>	VARCHAR(40)
<u>split_seq</u>	INT
split_code	VARCHAR(40)
split_amount	numeric(12,2)
split_pct	INT
fa2_code	VARCHAR(40)
fa3_code	VARCHAR(40)
fa4_code	VARCHAR(40)
fa5_code	VARCHAR(40)
fa6_code	VARCHAR(40)

enclosure	
<u>COMPANY_ID</u>	CHAR(3)
<u>enclosure_code</u>	VARCHAR(40)
description	VARCHAR(60)
enclosure_type	CHAR(1)
active	CHAR(1)
unit_value	numeric(12,3)
unit_price	numeric(12,3)
unit_cost	numeric(12,3)
qty_on_hand	INT
reorder_point	INT
reorder_qty	INT
j05_code	VARCHAR(40)
j06_code	VARCHAR(40)
j07_code	VARCHAR(40)
j08_code	VARCHAR(40)
j09_code	VARCHAR(40)
print_label	CHAR(1)
last_coupon_seq	INT
coupon_dw	VARCHAR(30)
coupon_format	VARCHAR(20)
qty_limit	INT
checking_account	VARCHAR(40)
split_type	CHAR(1)
split_save	CHAR(1)
encl_auth_level	INT
j10_code____j20_code	VARCHAR(40)
filename	VARCHAR(255)
print_label_return	CHAR(1)
linked_from_letter	CHAR(1)
min_value	DEC(12,3)
max_value	DEC(12,3)
language_id	VARCHAR(40)
currency_code	VARCHAR(40)
currency_unit_value	DEC(12,3)
requires_approval	CHAR(1)
exclude_from_fulfillment	CHAR(1)
retain_rejected	CHAR(1)
require_reject_reason	CHAR(1)
require_void_reason	CHAR(1)
label_standard_letter_id	VARCHAR(40)
pick_websrv_provider	VARCHAR(40)
require_link_to_letter	CHAR(1)
require_send_to_match	CHAR(1)
requires_high_value_permit	CHAR(1)
print_letter_type_code	VARCHAR(40)
link_on_add	CHAR(1)
ecoupon_code	VARCHAR(40)

Ref\_58770

Ref\_23699

case_enclosure	
<u>COMPANY_ID</u>	CHAR(3)
<u>case_id</u>	INT
<u>case_enclosure_seq</u>	INT
enclosure_code	VARCHAR(40)
letter_seq	INT
issue_seq	INT
send_to_address_id	INT
coupon_number	VARCHAR(12)
check_number	INT
user_code	VARCHAR(40)
quantity	INT
value	numeric(12,2)
date_picked	datetime
date_entered	datetime
date_shipped	datetime
enclosure_status	CHAR(1)
entered_by_user_code	VARCHAR(40)
enclosure_note_code	VARCHAR(255)
ship_acct_code	VARCHAR(40)
shipped_by_code	VARCHAR(40)
shipping_code	VARCHAR(40)
f06_code____f50_code	VARCHAR(40)
batch_id	INTEGER
selected	CHAR(1)
language_id	VARCHAR(40)
currency_code	VARCHAR(40)
currency_value	DEC(12,2)
currency_spot_conv_rate	DEC(15,8)
currency_budget_conv_rate	DEC(15,9)
approved	CHAR(1)
enclosure_status_changed_by	VARCHAR(40)
enclosure_status_changed_date	DATETIME
enclosure_status_reason_code	VARCHAR(255)
date_changed	DATETIME
changed_by_user_code	VARCHAR(40)
f51_code____f70_code	VARCHAR(40)
pick_websrv_response	VARCHAR(255)
egiftcard_code	VARCHAR(25)
egiftcard_number	VARCHAR(50)
egiftcard_merchant_code	VARCHAR(15)
egiftcard_faceplate_file	VARCHAR(255)
egiftcard_target	VARCHAR(255)
egiftcard_balance	NUMERIC(12,2)
egiftcard_balance_last_updated	DATETIME
egiftcard_status	VARCHAR(25)
egiftcard_note	VARCHAR(255)
egiftcard_url	VARCHAR(255)
egiftcard_promo_code	VARCHAR(30)
ecoupon_code	VARCHAR(40)
ecoupon_api_url	VARCHAR(255)

case_enclosure_split	
<u>COMPANY_ID</u>	CHAR(3)
<u>case_id</u>	INT
<u>case_enclosure_seq</u>	INT
<u>split_seq</u>	INT
enclosure_code	VARCHAR(40)
split_code	VARCHAR(40)
split_amount	numeric(12,2)
split_pct	INT
fa2_code	VARCHAR(40)
fa3_code	VARCHAR(40)
fa4_code	VARCHAR(40)
fa5_code	VARCHAR(40)
fa6_code	VARCHAR(40)
last_modified	datetime
modified_by_user_code	VARCHAR(40)
date_added	DATETIME
added_by_user_code	VARCHAR(40)

letter	
<u>company_id</u>	CHAR(3)
<u>case_id</u>	INT
<u>letter_seq</u>	INT
standard_letter_id	VARCHAR(12)
letter_type_code	VARCHAR(40)
send_to_address_id	INT
custom_file_name	VARCHAR(255)
date_sent	datetime
faxed	CHAR(1)
carbon_copy_1	VARCHAR(60)
carbon_copy_2	VARCHAR(60)
carbon_copy_3	VARCHAR(60)
carbon_copy_4	VARCHAR(60)
carbon_copy_5	VARCHAR(60)
proofed	CHAR(1)
email_to	VARCHAR(255)
email_subject	VARCHAR(255)
email_type	CHAR(1)
auto_prep	CHAR(1)
customized	CHAR(1)
letter_status	CHAR(1)
date_entered	datetime
entered_by_user_code	VARCHAR(40)
file_size	Numeric(8,2)
batch_id	INT
selected	CHAR(1)
issue_seq	INT
email_sender	VARCHAR(255)
email_cc	VARCHAR(255)
email_bcc	VARCHAR(255)
document_type	CHAR(1)
language_id	VARCHAR(40)
date_changed	DATETIME
changed_by_user_code	VARCHAR(40)

case_paragraph	
<u>company_id</u>	CHAR(3)
<u>case_id</u>	INT
<u>letter_seq</u>	INT
<u>case_paragraph_seq</u>	INT
display_sequence	INT
case_paragraph_type	CHAR(1)
standard_paragraph_id	VARCHAR(40)
paragraph_merge_code	VARCHAR(40)
case_paragraph_text	Text
issue_seq	INT
faq_name	VARCHAR(60)
faq_entry_id	VARCHAR(60)

letter_email_attachment	
<u>company_id</u>	CHAR(3)
<u>case_id</u>	INT
<u>letter_seq</u>	INT
<u>attachment_seq</u>	INT
filename	VARCHAR(255)
path	VARCHAR(60)
file_type	CHAR(1)

Ref\_4989


Ref\_1762

Ref\_52877


Ref\_53035

Ref\_3805

Ref\_2114

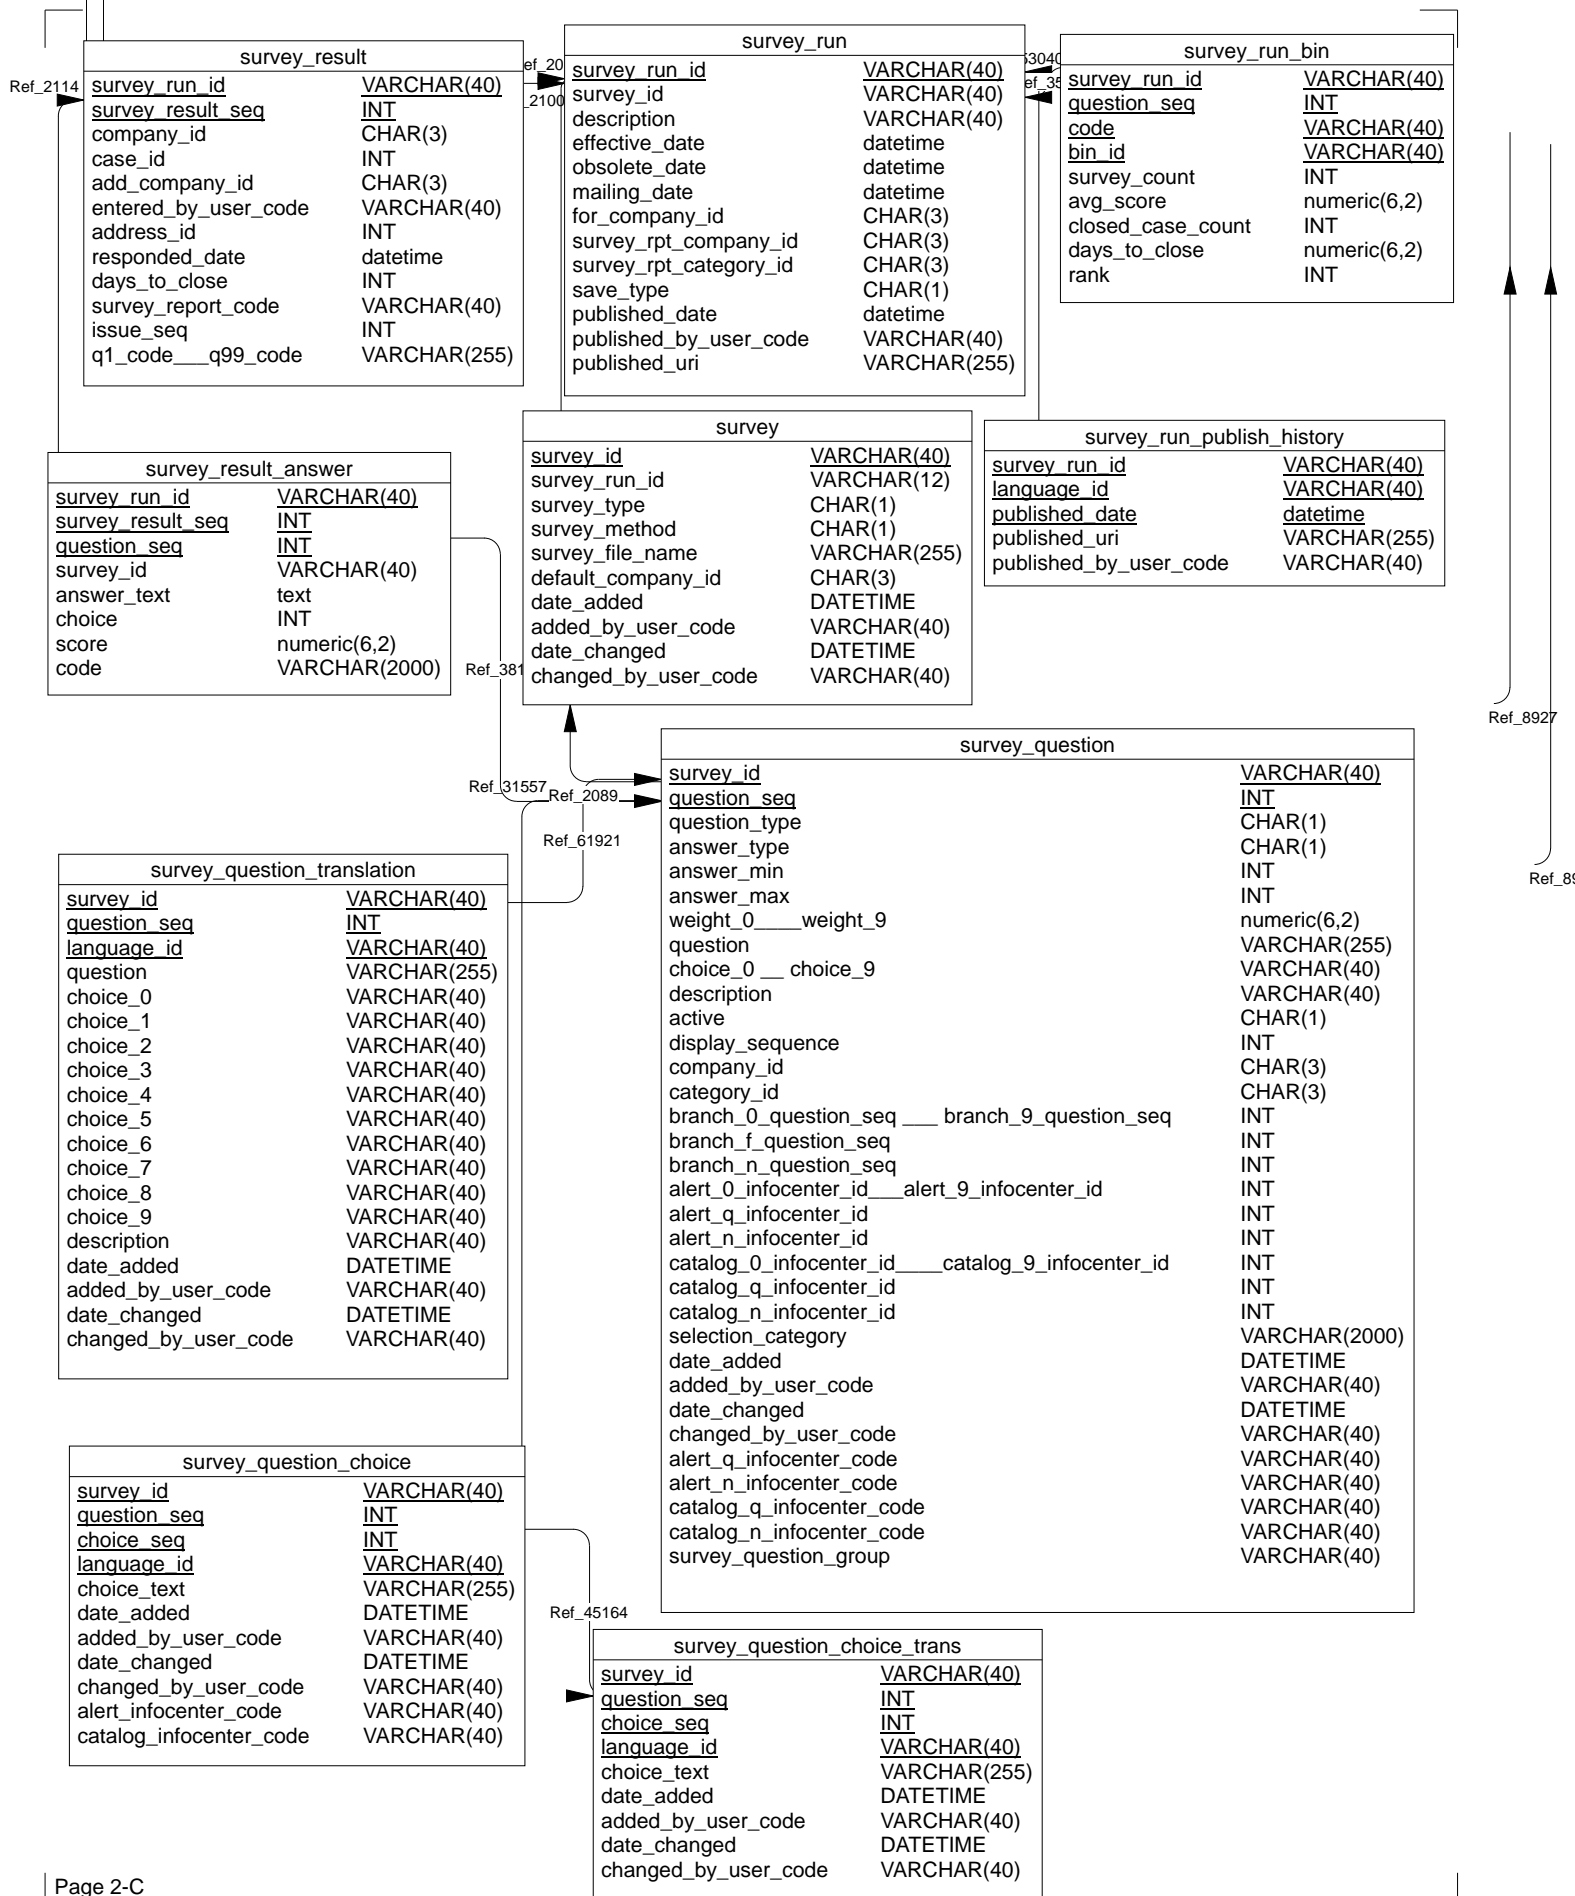



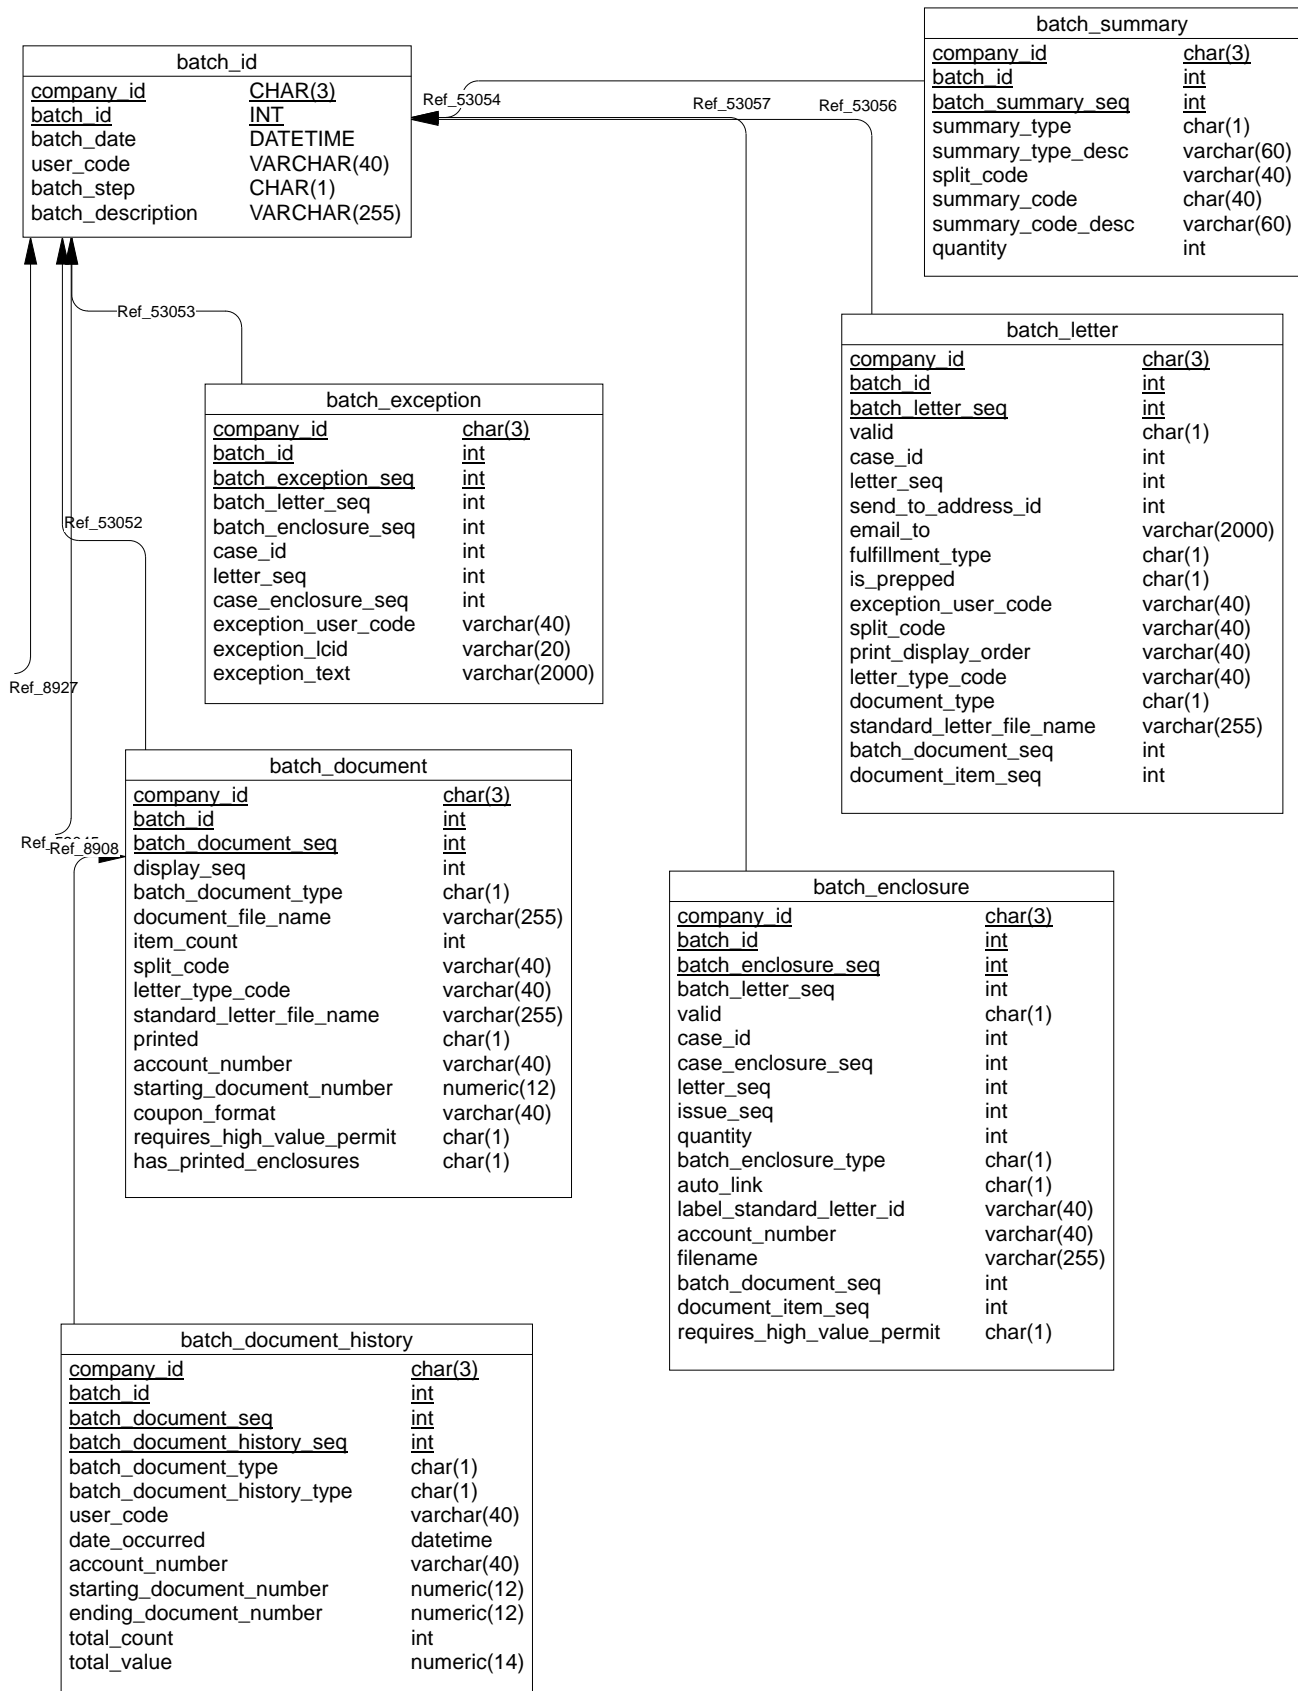

check_register	
<u>COMPANY_ID</u>	CHAR(3)
<u>check_number</u>	INT
case_id	INT
case_enclosure_seq	INT
user_code	VARCHAR(40)
address_id	INT
dated	datetime
voided	CHAR(1)
date_printed	datetime
check_amount	numeric(12,2)
<u>checking_account</u>	VARCHAR(40)
currency_code	VARCHAR(40)
currency_check_amount	DEC(12,2)
currency_spot_conv_rate	DEC(15,8)
currency_budget_conv_rate	DEC(15,8)
date_void_exported	DATETIME

coupon_register	
<u>COMPANY_ID</u>	CHAR(3)
<u>coupon_number</u>	VARCHAR(12)
case_id	INT
case_enclosure_seq	INT
user_code	VARCHAR(40)
address_id	INT
dated	datetime
voided	CHAR(1)
date_printed	datetime
coupon_amount	numeric(12,2)
currency_code	VARCHAR(40)
currency_coupon_amount	DEC(12,2)
currency_spot_conv_rate	DEC(15,8)
currency_budget_conv_rate	DEC(15,8)

standard_letter	
<u>company_id</u>	CHAR(3)
<u>standard_letter_id</u>	VARCHAR(12)
letter_type_code	VARCHAR(40)
standard_letter_file_name	VARCHAR(255)
auto_prep	CHAR(1)
customized	CHAR(1)
paragraph_subject	VARCHAR(12)
document_type	CHAR(1)
language_id	VARCHAR(40)
issue_association	CHAR(1)
letter_status	CHAR(1)

Ref\_3441

standard_letter_paragraph	
<u>company_id</u>	CHAR(3)
<u>standard_letter_id</u>	VARCHAR(12)
<u>paragraph_merge_code</u>	VARCHAR(40)
<u>standard_paragraph_id</u>	VARCHAR(12)
<u>display_sequence</u>	INT

Ref\_3454

standard_paragraph	
<u>company_id</u>	CHAR(3)
<u>standard_paragraph_id</u>	VARCHAR(12)
active	CHAR(1)
repeat_table	VARCHAR(40)
paragraph_text	text
language_id	VARCHAR(40)

letter_type	
<u>company_id</u>	CHAR(3)
<u>letter_type_code</u>	VARCHAR(40)
fulfillment_type	CHAR(1)
print_display_order	INT
label_standard_letter_id	VARCHAR(40)
address_rule	CHAR(1)
date_added	DATETIME
added_by_user_code	VARCHAR(40)
date_changed	DATETIME
changed_by_user_code	VARCHAR(40)
manual_handling	CHAR(1)
disable_default_email	CHAR(1)

Ref\_49889

order_header	
company_id	char(3)
order_id	int
initial_user_code	varchar(40)
responsible_user_code	varchar(40)
address_id	int
order_status	varchar(40)
order_status_code	varchar(40)
date_entered	datetime
total_price	numeric(10,2)
total_amount	numeric(10,2)
total_work_time	int
interaction_id	varchar(255)
pci_status	char(1)
transfer_count	int
communication_count	int
promotional_id	varchar(40)
issue_case_id	int
order_items_count	int
ship_available	varchar(40)
tax_total	numeric(10,2)
state_total	numeric(10,2)
county_total	numeric(10,2)
city_total	numeric(10,2)
district_total	numeric(10,2)
shipping_total	numeric(10,2)
upsell_price	numeric(10,2)
cross_sell_price	numeric(10,2)
order_qty_discount_value	numeric(10,2)
l05_code_l29_code	varchar(40)
currency_code	varchar(40)

order_action	
company_id	char(3)
order_id	int
action_seq	int
action_type_code	varchar(40)
action_type	char(3)
action_status	char(1)
action_date	datetime
action_priority	int
action_text	text
issue_seq	int
letter_seq	int
referred_to_address_id	int
referred_to_user_code	varchar(40)
passed_from_user_code	varchar(40)
accepted_by_user_code	varchar(40)
performed_by_user_code	varchar(40)
response_due	datetime
responded	datetime
d05_code	varchar(40)
d06_code	varchar(40)
d07_code	varchar(40)
d08_code	varchar(40)
d09_code	varchar(40)

order_action_queue_count	
company_id	char(3)
referred_to_user_code	varchar(40)
action_count	int


order_letter	
company_id	char(3)
order_id	int
letter_seq	int
standard_letter_id	varchar(12)
letter_type_code	varchar(40)
send_to_address_id	int
custom_file_name	varchar(255)
date_sent	datetime
faxed	char(1)
carbon_copy_1	varchar(60)
carbon_copy_2	varchar(60)
carbon_copy_3	varchar(60)
carbon_copy_4	varchar(60)
carbon_copy_5	varchar(60)
proofed	char(1)
email_to	text
email_subject	varchar(255)
email_type	char(1)
auto_prep	char(1)
customized	char(1)
letter_status	char(1)
date_entered	datetime
entered_by_user_code	varchar(40)
file_size	numeric(8)
batch_id	int
selected	char(1)
issue_seq	int
email_sender	varchar(255)
email_cc	varchar(255)
email_bcc	varchar(255)
document_type	char(1)
language_id	varchar(40)

order_user_lock	
company_id	char(3)
order_id	int
system_user_id	varchar(40)
opened	datetime

order_paragraph_text	
company_id	char(3)
order_id	int
letter_seq	int
order_paragraph_seq	int
display_sequence	int
order_paragraph_type	char(1)
standard_paragraph_id	varchar(40)
paragraph_merge_code	varchar(40)
order_paragraph_text	text
issue_seq	int
faq_name	varchar(60)
faq_entry_id	varchar(60)

order_product_attempt	
company_id	char(3)
order_id	int
order_product	varchar(40)
line_sell_type	char(1)

creditcard_history	
company_id	char(3)
order_id	int
seq_no	int
request_id	varchar(40)
transaction_type	varchar(10)
transaction_date	varchar(20)
transaction_amount	numeric(12,2)
auth_result	varchar(40)
auth_code	varchar(40)
auth_type	varchar(40)
card_type	char(3)
card_exp_month	char(2)
card_exp_year	char(4)
card_number	varchar(20)
card_cv_number	char(4)
card_hash	varchar(32)
processed_by_user_code	varchar(40)
auth_error	varchar(255)

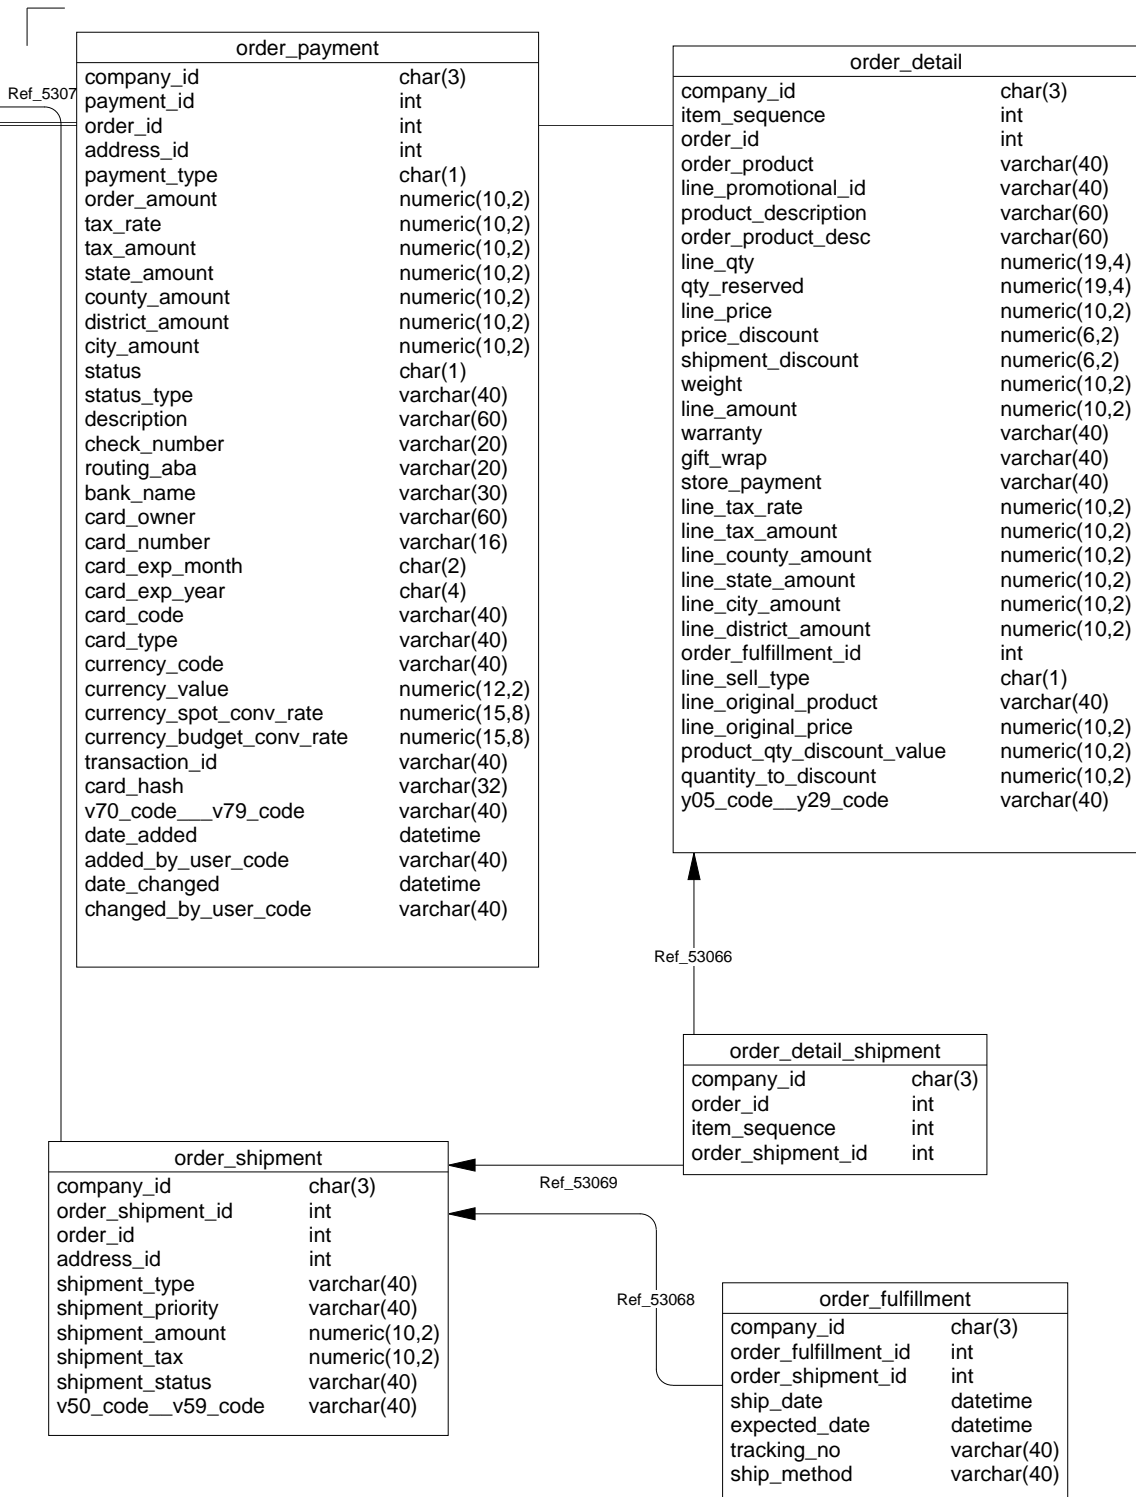

order_product	
company_id	char(3)
order_product	varchar(40)
product_description	varchar(60)
price	numeric(10,2)
price_discount	numeric(6,2)
shipment_discount	numeric(6,2)
weight	numeric(10,2)
qty_available	numeric(19,2)
expected_date	datetime
threshold_quantity	numeric(10,2)
v05_code__v29_code	varchar(40)

order_product_discount	
<u>company_id</u>	char(3)
<u>order_product</u>	varchar(40)
<u>product_quantity</u>	numeric(10,2)
<u>currency_code</u>	varchar(40)
price_qty_discount	numeric(6,2)
price_qty_discount_value	numeric(10,2)

order_product_replacement	
company_id	char(3)
order_product	varchar(40)
order_product_replacement	varchar(40)

order_product_price	
<u>company_id</u>	char(3)
<u>order_product</u>	varchar(40)
<u>currency_code</u>	varchar(40)
product_price	numeric(10,2)

promotion	
company_id	char(3)
promotional_id	varchar(40)
price_discount	numeric(19,4)
shipment_discount	numeric(19,4)

order_product_shipping_cost	
company_id	char(3)
shipping_product_total	numeric(10,2)
shipping_cost	numeric(10,2)
description	varchar(40)

order_discount	
<u>company_id</u>	char(3)
<u>order_value</u>	numeric(10,2)
<u>currency_code</u>	VARCHAR(40)
order_price_discount	numeric(6,2)
order_price_discount_value	numeric(10,2)

order_quantity_discount	
<u>company_id</u>	char(3)
<u>quantity_discount_id</u>	int
order_quantity	numeric(10,2)
order_quantity_discount	numeric(10,2)
order_qty_discount_value	numeric(10,2)
currency_code	varchar(40)
description	varchar(40)

order_case_migration	
company_id	char(3)
category_id	char(3)
target_category_id	char(3)
migration_sequence	int
migration_type	char(1)
migration_when_type	char(1)
code_offset	int
code_length	int
date_added	datetime
added_by_user_code	varchar(40)
date_changed	datetime
changed_by_user_code	varchar(40)

order_case_code_migration	
company_id	char(3)
category_id	char(3)
target_category_id	char(3)
code	varchar(40)
target_code	varchar(40)

order_case_code_dependent	
company_id	char(3)
category_id	char(3)
dependent_category_id	char(3)
code	varchar(40)
dependent_code	varchar(40)
hierarchy_level	int
description1	varchar(60)

notification_recipient	
<u>company_id</u>	CHAR(3)
<u>notification_code</u>	VARCHAR(40)
<u>recipient_seq</u>	INT
recipient_type	VARCHAR(3)
recipient_category	VARCHAR(255)
recipient_details	VARCHAR(40)
address	VARCHAR(255)
format	VARCHAR(40)
device	VARCHAR(40)
category_level	CHAR(1)

notification_event	
<u>company_id</u>	CHAR(3)
<u>notification_code</u>	VARCHAR(40)
<u>event_seq</u>	INT
event_type	VARCHAR(40)
event_id	VARCHAR(40)

notification_format	
<u>company_id</u>	CHAR(3)
<u>notification_code</u>	VARCHAR(40)
<u>format_seq</u>	INT
format_type	VARCHAR(40)
format_id	VARCHAR(40)

notification	
<u>company_id</u>	CHAR(3)
<u>notification_code</u>	VARCHAR(40)
description	VARCHAR(60)
active	CHAR(1)

Ref\_9090

Ref\_9070

Ref\_9050

profile_responsibility	
<u>company_id</u>	CHAR(3)
<u>profile_code</u>	VARCHAR(40)
<u>responsibility_seq</u>	INT
category	varchar(3)
category_level	CHAR(1)
value	VARCHAR(40)
type	VARCHAR(40)

Ref\_9138


profile	
<u>company_id</u>	CHAR(3)
<u>profile_code</u>	VARCHAR(40)
description	VARCHAR(60)
web_login	VARCHAR(40)
web_password	VARCHAR(40)
active	CHAR(1)
date_added	DATETIME
added_by_user_code	VARCHAR(40)
date_changed	DATETIME
changed_by_user_code	VARCHAR(40)



Ref\_9148

Ref\_9128

profile_subscriptions	
<u>company_id</u>	CHAR(3)
<u>profile_code</u>	VARCHAR(40)
<u>subscription_seq</u>	INT
category	VARCHAR(3)
category_level	CHAR(1)
value	VARCHAR(40)
notification	VARCHAR(40)
device	VARCHAR(40)
format	VARCHAR(40)
active	CHAR(1)

profile_device	
<u>company_id</u>	CHAR(3)
<u>profile_code</u>	VARCHAR(40)
<u>device_seq</u>	INT
device_id	VARCHAR(40)
type	VARCHAR(40)
address	VARCHAR(255)

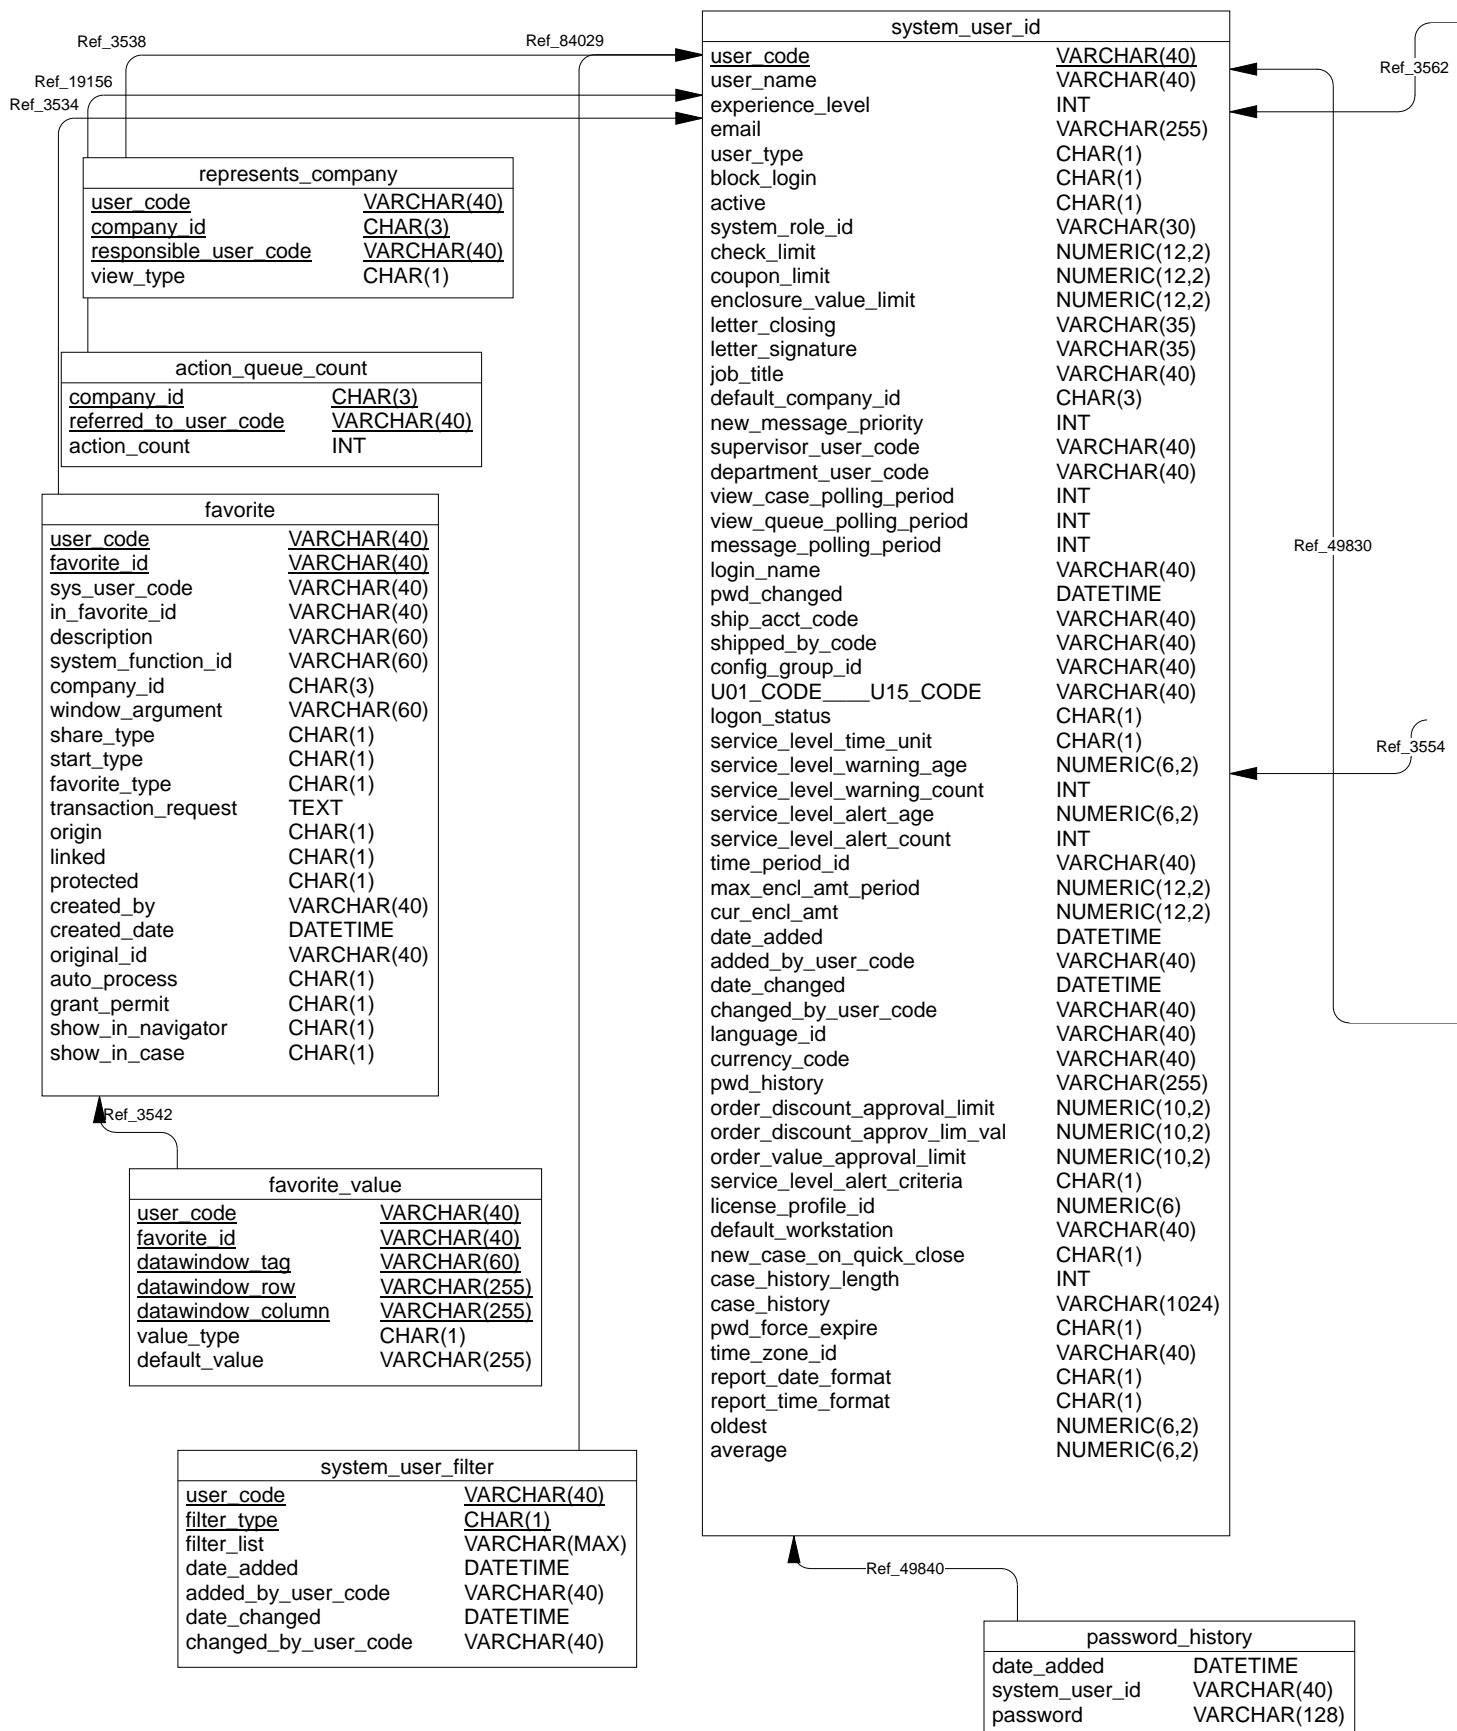


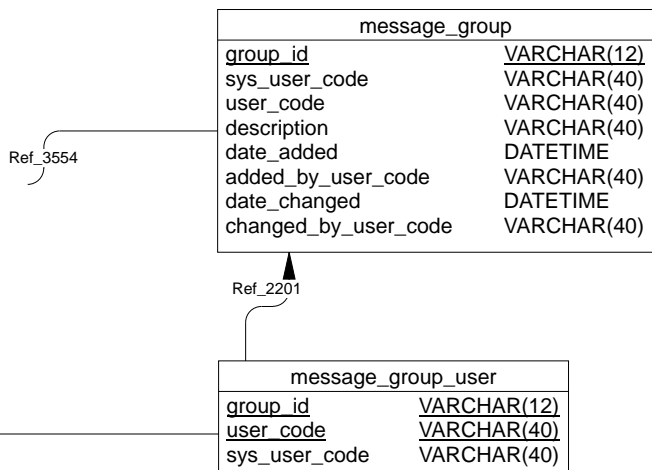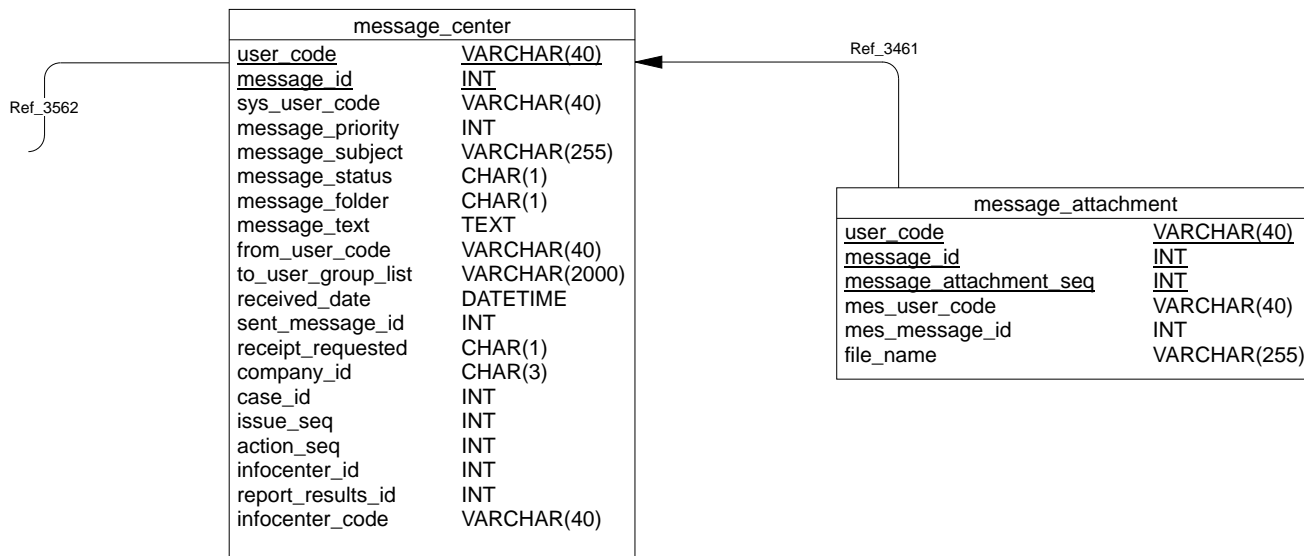


user_post	
<u>user_post_id</u>	INT
posting	VARCHAR(2000)
date_added	DATETIME
added_by_user_code	VARCHAR(40)


resource_post	
<u>resource_id</u>	INT
company_id	CHAR(3)
title	VARCHAR(40)
text	VARCHAR(2000)
start_date	DATETIME
end_date	DATETIME
added_by_user_code	VARCHAR(40)
date_added	DATETIME
changed_by_user_code	VARCHAR(40)
date_changed	DATETIME
active	CHAR(1)



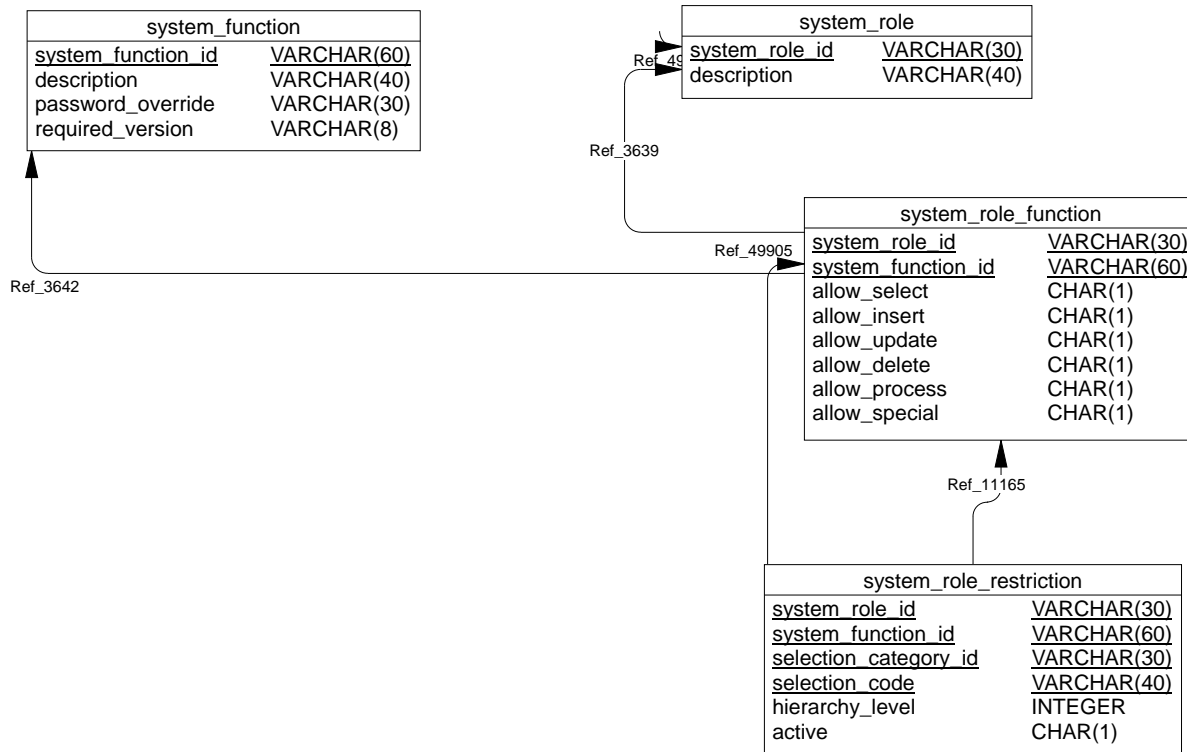

Ref\_31605

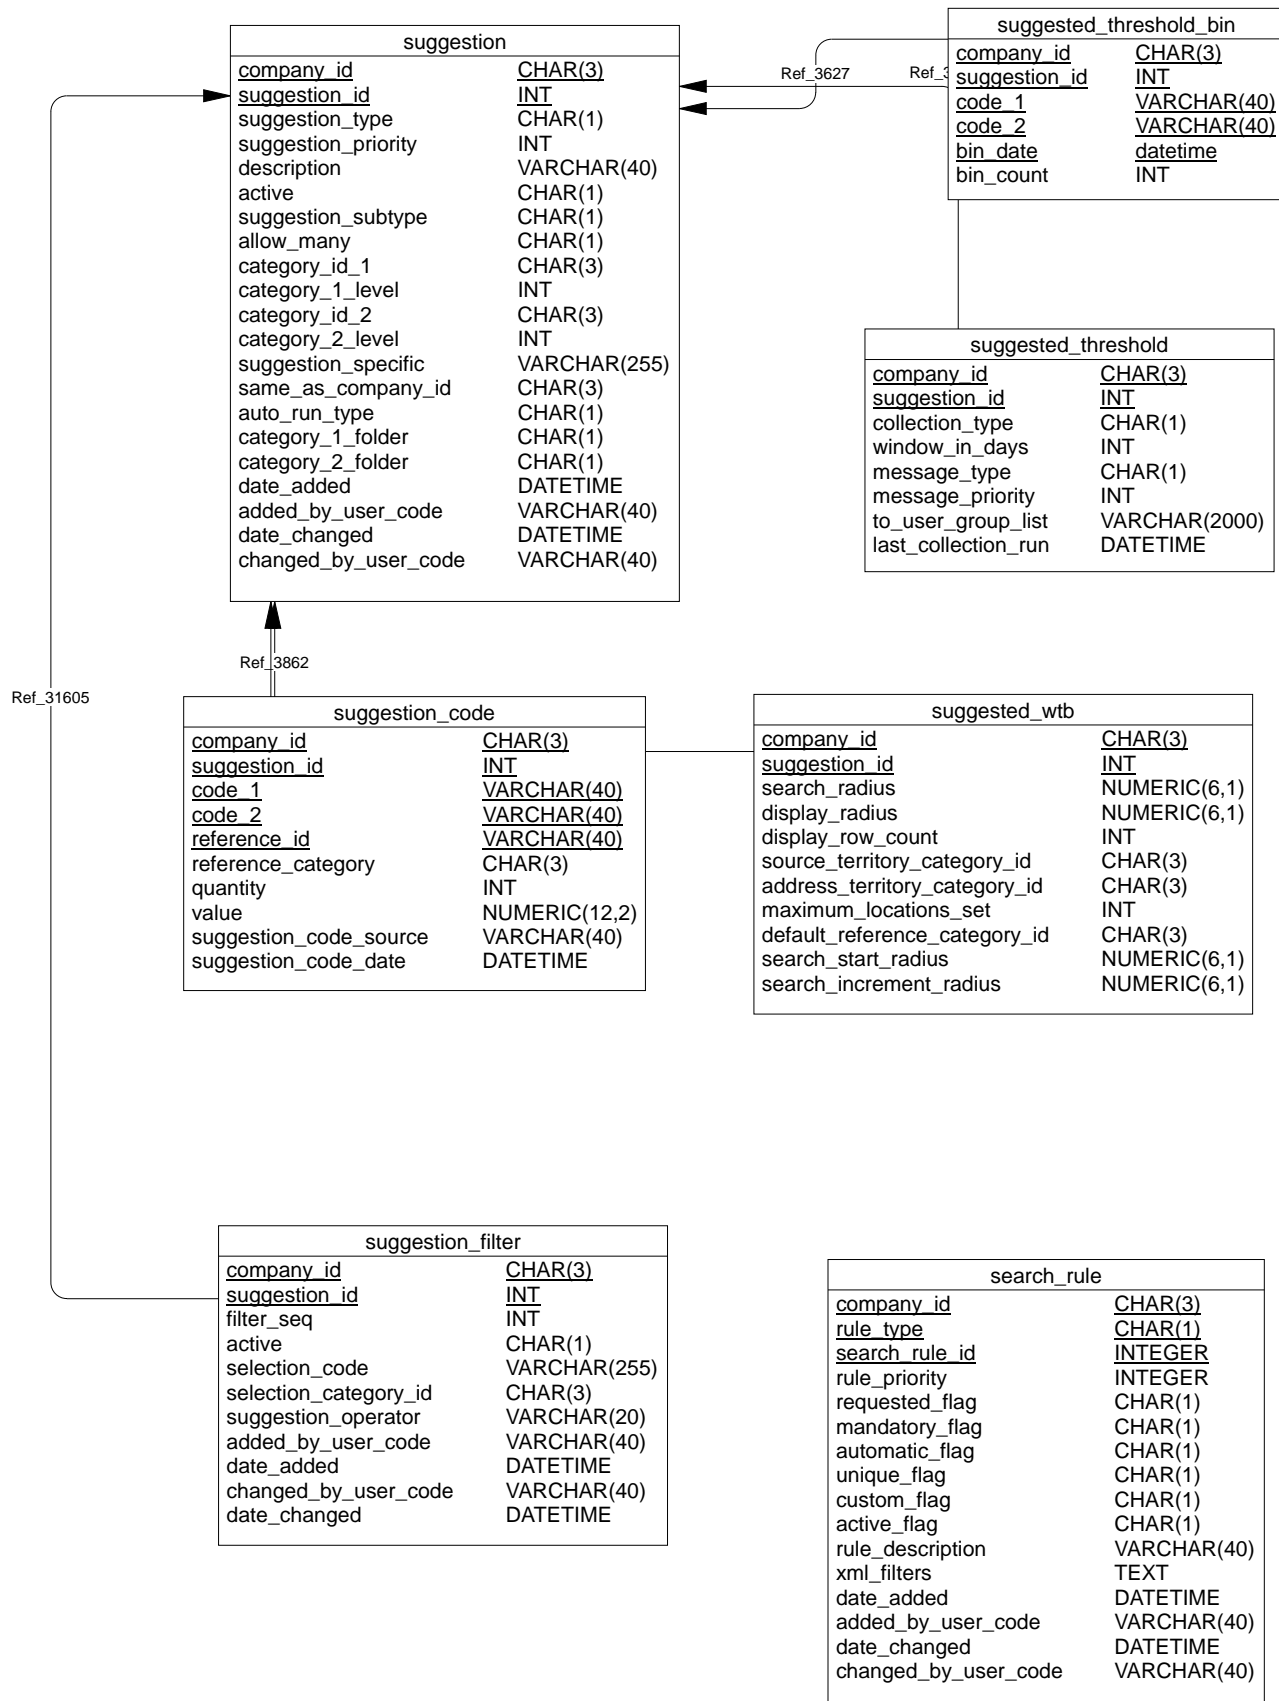

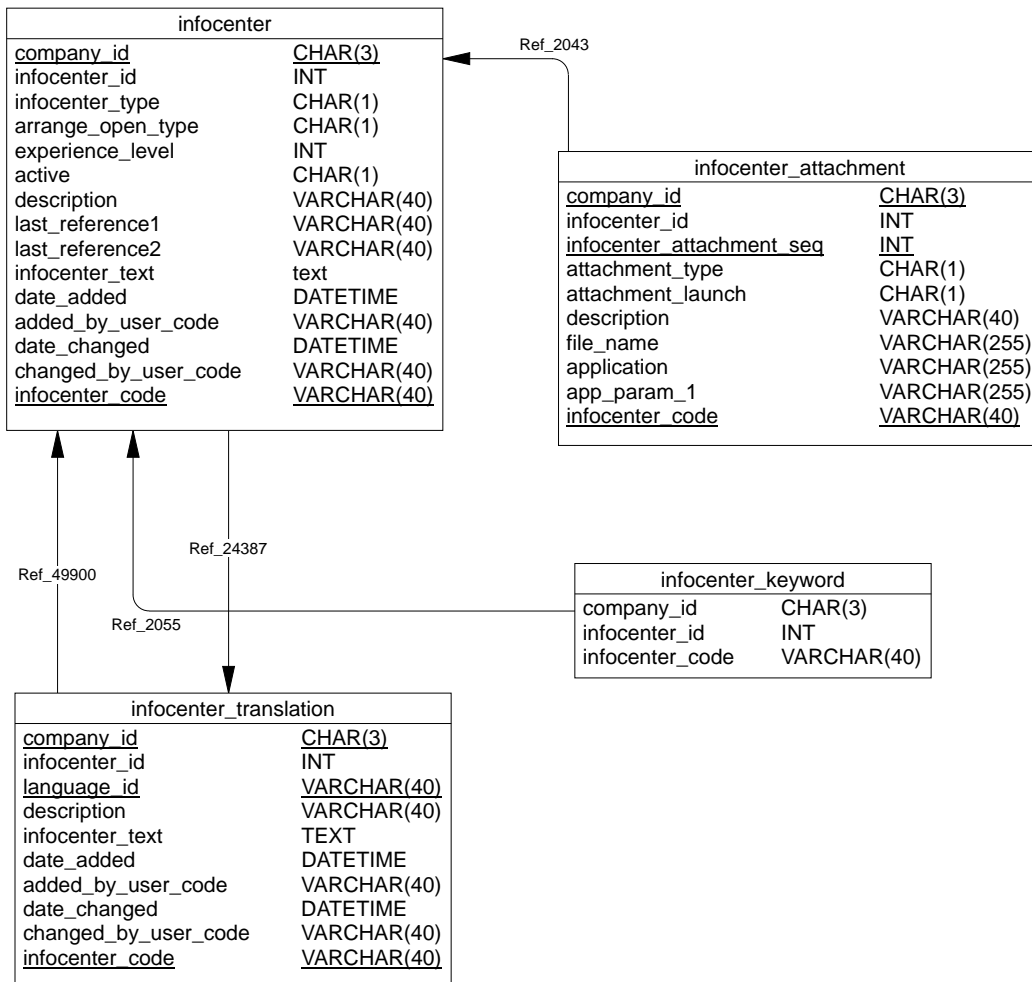

category	
<u>company_id</u>	CHAR(3)
<u>category_id</u>	CHAR(3)
same_as_company_id	CHAR(3)
same_as_category_id	CHAR(3)
table_column	VARCHAR(61)
category_type	CHAR(1)
active	CHAR(1)
number_of_levels	INT
save_mandatory	CHAR(1)
close_mandatory	CHAR(1)
quick_close_mandatory	CHAR(1)
allow_insert	CHAR(1)
code_length	INT
category_label	VARCHAR(16)
category_name	VARCHAR(40)
description1_label	VARCHAR(16)
description2_label	VARCHAR(16)
description3_label	VARCHAR(16)
default_code	VARCHAR(40)
capitalize_type	CHAR(1)
trim_type	CHAR(1)
prefix_search_length	INT
infocenter_id	INT
desc_capitalize_type	CHAR(1)
desc_prefix_search_length	INT
edit_mask	VARCHAR(40)
date_added	DATETIME
added_by_user_code	VARCHAR(40)
date_changed	DATETIME
changed_by_user_code	VARCHAR(40)
highlight_important	CHAR(1)
keywords_defined	CHAR(1)
prefix_browse	VARCHAR(40)
requires_translation	CHAR(1)
category_heading	VARCHAR(60)
infocenter_code	VARCHAR(40)
code_search_1	CHAR(1)
code_search_2	CHAR(1)
code_search_3	CHAR(1)
code_search_4	CHAR(1)
text_search_defined	CHAR(1)
confirm_unique	CHAR(1)
type_down	CHAR(1)
sensitive_data_type	VARCHAR(40)

category_migration	
<u>company_id</u>	CHAR(3)
<u>category_id</u>	CHAR(3)
<u>target_category_id</u>	CHAR(3)
code	VARCHAR(40)
migration_sequence	INT
migration_type	CHAR(1)
migration_when_type	CHAR(1)
code_offset	INT
code_length	INT
date_added	DATETIME
added_by_user_code	VARCHAR(40)
date_changed	DATETIME
changed_by_user_code	VARCHAR(40)
web_service_id	VARCHAR(40)
web_service_operation	VARCHAR(100)
web_service_target_namespace	VARCHAR(255)
web_service_soap_action	VARCHAR(255)

category_translation	
<u>company_id</u>	CHAR(3)
<u>category_id</u>	CHAR(3)
<u>language_id</u>	VARCHAR(40)
category_name	VARCHAR(40)
category_label	VARCHAR(60)
category_heading	VARCHAR(60)

category_code_migration	
<u>company_id</u>	CHAR(3)
<u>category_id</u>	CHAR(3)
<u>target_category_id</u>	CHAR(3)
<u>code</u>	VARCHAR(40)
target_code	VARCHAR(40)

category_code	
<u>company_id</u>	CHAR(3)
<u>category_id</u>	CHAR(3)
<u>code</u>	VARCHAR(40)
hierarchy_level	INT
display_sequence	INT
active	CHAR(1)
full_case_required	CHAR(1)
subcategory_code	VARCHAR(40)
group_code	VARCHAR(40)
subgroup_code	VARCHAR(40)
section_code	VARCHAR(40)
subsection_code	VARCHAR(40)
category_specific	VARCHAR(40)
description1	VARCHAR(60)
description2	VARCHAR(255)
description3	VARCHAR(60)
alert_infocenter_id	INT
infocenter_id	INT
active_start_date	DATETIME
active_end_date	DATETIME
date_added	DATETIME
added_by_user_code	VARCHAR(40)
date_changed	DATETIME
changed_by_user_code	VARCHAR(40)
alert_infocenter_code	VARCHAR(40)
infocenter_code	VARCHAR(40)
text_search	TEXT
identity_id	INT
category_specific2	VARCHAR(255)

category_code_dependent	
<u>company_id</u>	CHAR(3)
<u>category_id</u>	CHAR(3)
<u>dependent_category_id</u>	CHAR(3)
<u>code</u>	VARCHAR(40)
<u>dependent_code</u>	VARCHAR(40)
hierarchy_level	INT
description1	VARCHAR(60)

category_code_keyword	
<u>company_id</u>	CHAR(3)
<u>category_id</u>	CHAR(3)
<u>code</u>	VARCHAR(40)
<u>keyword</u>	VARCHAR(40)

product	
<u>company_id</u>	CHAR(3)
<u>product_code</u>	VARCHAR(40)
product_description	VARCHAR(60)
upc	VARCHAR(25)
item_number	VARCHAR(40)
mfg	VARCHAR(40)
e05_code__e99_code	VARCHAR(40)
e31_e61_e91_code	VARCHAR(MAX)

currency_conversion	
<u>company_id</u>	CHAR(3)
<u>from_currency_code</u>	VARCHAR(40)
<u>to_currency_code</u>	VARCHAR(40)
spot_conv_rate	DEC(15,8)
budget_conv_rate	DEC(15,8)

category_code_translation	
<u>company_id</u>	CHAR(3)
<u>category_id</u>	CHAR(3)
<u>code</u>	VARCHAR(40)
<u>language_id</u>	VARCHAR(40)
hierarchy_level	INT
description1	VARCHAR(60)
description2	VARCHAR(255)
description3	VARCHAR(60)

sensitive_data	
<u>company_id</u>	CHAR(3)
<u>sensitive_data_type</u>	VARCHAR(40)
sensitive_data_description	VARCHAR(60)
document_type_id	INT
date_added	DATETIME
added_by_user_code	VARCHAR(40)
date_changed	DATETIME
changed_by_user_code	VARCHAR(40)

Ref\_84022

sensitive_data_attribute	
<u>company_id</u>	CHAR(3)
<u>sensitive_data_type</u>	VARCHAR(40)
<u>attribute_id</u>	INT
attribute_name	VARCHAR(40)
attribute_type	CHAR(1)
attribute_length	INT
same_as_category_id	CHAR(3)
attribute_label	VARCHAR(60)
attribute_heading	VARCHAR(60)

sensitive_data_retention	
<u>company_id</u>	CHAR(3)
<u>retention_policy_type</u>	VARCHAR(40)
retention_policy_description	VARCHAR(60)
retention_policy_id	INT
date_added	DATETIME
added_by_user_code	VARCHAR(40)
date_changed	DATETIME
changed_by_user_code	VARCHAR(40)

