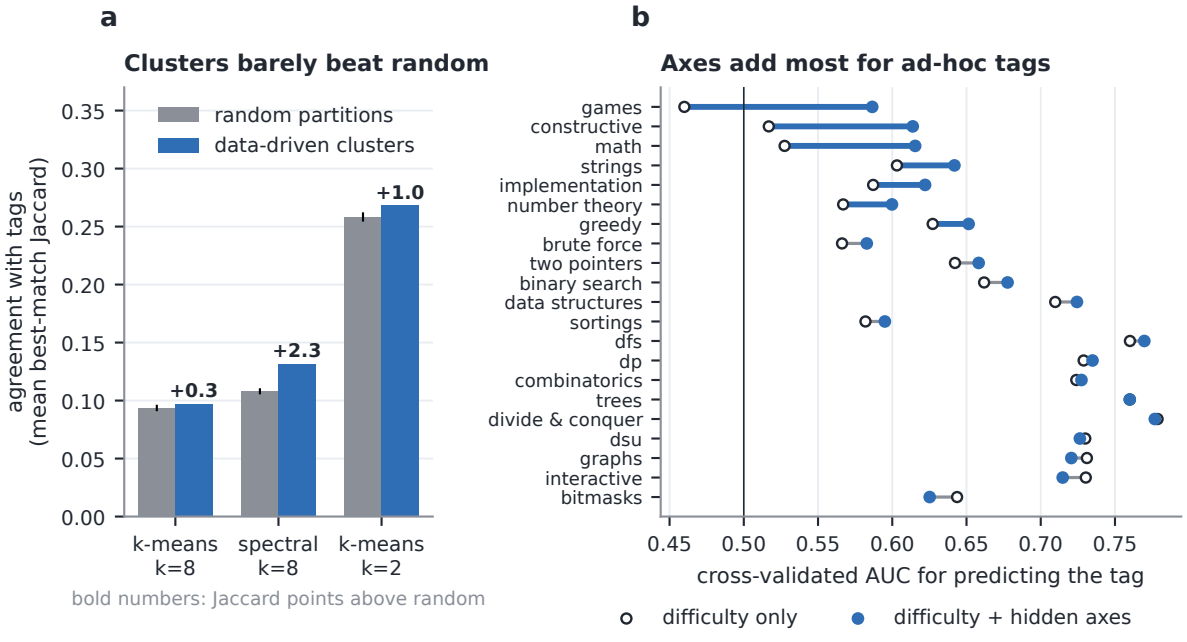
a
Clusters barely beat random
random partitions
data-driven clusters
agreement with tags
(mean best-match Jaccard)
0.35
0.30
0.25
0.20
0.15
0.10
0.05
0.00
+0.3
+2.3
+1.0
k-means
k=8
spectral
k=8
k-means
k=2
bold numbers: Jaccard points above random
b
Axes add most for ad-hoc tags
games
constructive
math
strings
implementation
number theory
greedy
brute force
two pointers
binary search
data structures
sortings
dfs
dp
combinatorics
trees
divide & conquer
dsu
graphs
interactive
bitmasks
0.45
0.50
0.55
0.60
0.65
0.70
0.75
cross-validated AUC for predicting the tag
difficulty only
difficulty + hidden axes