



A PROJECT REPORT

Submitted by

Shilpa Gadgil

In fulfilment of the subject PROJECT

Of

MSC-IT Part II

In

Information Technology

IDOL

Mumbai University, Mumbai



Institute of Distance & Open Learning (IDOL)

CERTIFICATE

Date: June 2020

This is to certify that the project entitled **Anubandh - Reform the Bonding** have been carried out by **Shilpa Gadgil (Student ID. 17117606 / Application ID- 1712800002)** under my guidance in fulfilment of the subject PROJECT of MScIT Part-II of University of Mumbai, Mumbai during the academic year 2019-20.

Internal Guide: Ms. Rafat Khan

Director

ACKNOWLEDGEMENT

I have put all my efforts in this project. However, it would not have been possible without the kind support and help of many individuals and organizations. I would like to express my sincere thanks to all of them.

I am highly indebted to Mr. Muzzaffar Ali Sir and Ms. Rafat Khan Ma'am for their guidance and constant supervision as well as for providing necessary information regarding the project & also for their support in completing the project.

I would like to express my special gratitude and thanks to industry persons for giving me such attention and time.

My thanks and appreciation also goes to my colleagues who have willingly helped me out with their abilities.

Last but not the least, I would like to mention here that we are greatly indebted to each and every one who has been associated with my project at any stage but whose names do not find a place in this acknowledgement.

With sincere regards,
Shilpa Gadgil

ABSTRACT

'Anubandh' <http://danubandh.com> is an Online Application and Backend process which allows Grandparents to communicate with Grandchildren, College Students, for their day-to-day needs and requirements. There are hundreds of Social sites, with various technological affordances, supporting a wide range of interests and practices. Sites also vary in the extent to which they incorporate new way of communication tools by Application connectivity.

Moreover, Anubandh' encourages 'Grandparents' to communicate more and more with their Tasks and Requirements to the 'Grandchildren, College Students'.

*'Anubandh' have implemented a wide variety of technical features.
In our site we have two facet viz. Mobile APP and Backend System.*

Mobile APP contains:

Login Page -> which require Login Details as Username and Password to be added by Users so user can login into the site

Tasks listing page -> which displays Tasks List in descending order, added by Grandparents

Tasks detail page -> which displays each Tasks, Student can accept Task by clicking on Accept button

Profile Page -> which displays User's Profile image with his/her Task List

Feedback Form page -> which displays list of Feedbacks, by default it will show latest

Feedback Listing page -> which displays list of Feedbacks, by default it will show latest Feedback

Contact us page -> user can contact us by sending his message or query

Backend or CMS contains:

There are three CMS user types

SupeaAdmin -> who can have all privileges of all modules.

Registered Society/Group by Buildings Society Admin -> who can have access to manage and check Grandparent's and Student's entries about Tasks and Feedbacks.

Student's Relative and Grandparent's Relative (Read only users) -> who can have access but can only see related Tasks and Feedbacks but cannot perform any action.

Grandparent -> who can add / edit / delete any task.

Students -> who can accept any Task, perform same and can give relevant feedback

Profile List -> users are added will get displayed in this module

Each Profile/User has unique id. After joining Anubandh, an individual is asked to fill out forms containing a series of questions, which typically include descriptors such as age, location, Address and "about me" section.

'Anubandh' is an Online System intends to provide a well-established Application and web-based system where Grandparents or their Relatives can add Tasks and College Students or Grandchildren can perform the selected Tasks so can communicate between them and let the connection help each other at right place for right people.

LIST OF FIGURES

Figure No	Figure Name	Page No.
3.1	Spiral Model	16
5.1	Use Case Diagram of Anubandh	21
5.2	Activity diagram for Adding Task from Mobile Application	23
5.3	Activity diagram for Accepting Task from Mobile Application	24
5.4	Activity Diagram for New User (Profile) Registration from Backend portal	25
5.5	Activity diagram for Adding Feedback from Mobile Application	26
5.6	Activity diagram for Selecting Task	27
5.8	DFD Level 0	30
5.9	DFD Level 1.0	31
5.10	DFD Level 1.1	32
5.11	DFD Level 2.0	33
5.12	DFD Level 2.1	34
6.1	Login Page of Anubandh APP	44
		45
6.3	Task listing on Anubandh APP	46
6.4	Task details on Anubandh APP	47
		48
6.6	Login Page of Anubandh Backend	49
		50
		51
6.9	Profile listing on Anubandh Backend	52
6.10	Task listing on Anubandh Backend	53
6.11	Feedback listing on Anubandh Backend	54

LIST OF TABLES

Table No	Table Name	Page No.
5.4.1	Table structure for table daily_visit_detailstb	35
5.4.2	Table structure for table feedbacktb	35
5.4.3	Table structure for table profiletb	36
5.4.4	Table structure for table tasktb	37
5.4.5	Table structure for table task_person_linktb	38
5.4.6	Table structure for table usertb	39
5.4.7	Table structure for table user_typedtb	40

LIST OF SYMBOLS, ABBREVIATIONS AND NOMENCLATURE

Name	Abbreviations
Application Programming Interface	API
Central Processing Unit	CPU
Cascading Style Sheets	CSS
Cross Site Scripting	XSS
Data Flow Diagram	DFD
Database Management System	DBMS
General Public Licence	GPL
PHP Data Objects	PDO
PHP Intrusion Detection System	PHPIDS
PHP: Hypertext Preprocessor	PHP
Structured Query Language	SQL
Mobile Application	APP

TABLE OF CONTENTS

i	Acknowledgement	1
ii	Abstract	2
iii	List Of Figures	4
iv	List Of Tables	5
v	List Of Abbreviations	6
Chapter-1	Project Introduction	9
	1.1 Introduction	9
	1.2 Motivation	9
Chapter-2	Survey of Technologies	10
	2.1 Web design and development	10
	2.2 About PHP	10
	2.3 About MySQL	12
Chapter-3	System Analysis	14
	3.1 Problem Description	14
	3.2 Component Parts	15
	3.3 Project Model	15
Chapter-4	System Requirements	17
	4.1 Hardware Requirements	17
	4.2 Software Requirements	17
	4.3 Quality Requirements	17
Chapter-5	System Design	19
	5.1 Use Case Diagram	19
	5.2 Activity Diagram	21
	5.3 Data Flow Diagram	28
	5.4 Data Dictionary	34
Chapter-6	User Manual	44
	6.1 Front End	44
	6.2 Backend-CMS Pages	50

TABLE OF CONTENTS

Chapter-7	Source Codes	56
Chapter-8	Deployment Document	57
Chapter-9	Conclusion	65
Chapter-10	Appendix	66
10.1	Tools Used	67
Chapter-11	Bibliography	68

CHAPTER 1

Project Introduction

1.1 Introduction

Definition of the system

Anubandh - *Reform The Bonding* allows to create bond between Grandparents and Grandchildren. As all of us know due to busy life schedule people get less time to look after all Home requirements. Also most parents having single child and if Child is staying in other country or far from Parents then such Parents require help in daily tasks like Learning new feature of Mobile or going to Hospital or getting medicine from Dispensary etc. These are such task where Servants can't help and need help from educated person. So they can contact College students who will help such Parents. It's just small interaction with Grandparents and Grandchildren.

Objective and Purpose

Anubandh...*Reform The Bonding* is Mobile APP based services having below parts...

- (1) Construct a Mobile APP / Web page for Grandparents to post their Requirements as Tasks.
- (2) Construct a Mobile APP / Web page for Students to get the list of Task and accept one of them and perform.
- (3) Construct a Backend System for the Superadmin and Society Admin to know the Performance of System
- (4) Analyse the list of users and those who use the system
- (5) Thus to have bonding between Grandparents and Grandchildren/College Students

1.2 Motivation

What motivates us to create this Mobile App and Backend System?

- There are hundreds of blog sites, with various technological affordances, supporting a wide range of interests and practices. Sites also vary in the extent to which they incorporate new information and communication tools, such as mobile connectivity, chatting, and photo/video-sharing.
- Various Blog Network sites have attracted millions of users, many of whom have integrated these sites into their daily practices.
- But, we step ahead of them by taking Task added by Grandparents and Accepted by Students also more importantly connecting Grandparents to add Students.
- Thus, this project aims to develop a B2B portal where Authors/Experts and readers form a virtual community between them.

CHAPTER 2

Survey of Technologies

2.1 Web design and development

What is Web Design?

Web design is a broad term covering many different skills and disciplines that are used in the production and maintenance of websites. The different areas of web design include; web graphic design, interface design, authoring; including standardised code and proprietary software, user experience design and search engine optimization. Often many individuals will work in teams covering different aspects of the design process, although some designers will cover them all.

What is Web Development?

Web development is a term for the work involved in developing a web site for the Internet (World Wide Web) or an intranet (a private network).

However, among web professionals, "web development" usually refers to the main non-design aspects of building web sites: writing mark-up and coding. Web development can range from developing the simplest static single page of plain text to the most complex web-based internet applications, electronic businesses, or social network services.

2.2 About PHP

PHP development began in 1994 when the programmer Rasmus Lerdorf initially created a set of Perl scripts he called "Personal Home Page Tools" to maintain his personal homepage. The scripts performed tasks such as displaying his resume and recording his web-page traffic. Lerdorf initially announced the release of PHP on the Usenet discussion group on June 8, 1995.

On July 13, 2004, PHP 5 was released, powered by the new Zend Engine II. PHP 5 included new features such as improved support for object-oriented programming, the

PHP Data Objects (PDO) extension (which defines a lightweight and consistent interface for accessing databases), and numerous performance enhancements. In 2008, PHP 5 became the only stable version under development. Late static binding had been missing from PHP and was added in version 5.3.

Some important features of PHP are listed here:

- PHP is a general-purpose scripting language that is especially suited to server-side web development where PHP generally runs on a web server. Any PHP code in a requested file is executed by the PHP runtime, usually to create dynamic web page content or dynamic images used on Web sites or elsewhere.
- PHP is a powerful tool for making dynamic and interactive Web pages.
- PHP combined with MySQL are cross-platform (you can develop in Windows and serve on a Unix platform)
- PHP runs on different platforms (Windows, Linux, Unix, etc.)
- PHP is compatible with almost all servers used today (Apache, IIS, etc.)
- PHP supports many databases (MySQL, Informix, Oracle, Sybase, Solid, PostgreSQL, Generic ODBC, etc.)
- PHP is an open source software.

Security in PHP:

- PHPIDS (PHP Intrusion Detection System) detects attacks based on cross-site scripting (XSS), SQL injection, header injection, directory traversal, remote file execution, remote file inclusion, and denial-of-service (DoS).
- The algorithm we have used in designing our system known as Salt Algorithm, is typically used for password authentication, the salt is stored along with the output of the one-way function, sometimes along with the number of iterations to be used in generating the output (for key stretching).

2.3 About MySQL

It is named after co-founder Michael Widenius' daughter, My. The SQL phrase stands for Structured Query Language.

On 15 June 2001, NuSphere sued MySQL AB, TcX DataKonsult AB and its original authors Michael ("Monty") Widenius and David Axmark in U.S District Court in Boston.

In October 2005, Oracle Corporation acquired Innobase OY, the Finnish company that developed the third-party InnoDB storage engine that allows MySQL to provide such functionality as transactions and foreign keys. After the acquisition, an Oracle press release mentioned that the contracts that make the company's software available to MySQL AB would be due for renewal (and presumably renegotiation) sometime in 2006. During the MySQL Users Conference in April 2006, MySQL issued a press release that confirmed that MySQL and Innobase OY agreed to a "multi-year" extension of their licensing agreement. In October 2005, Oracle Corporation acquired Innobase OY, the Finnish company that developed the third-party InnoDB storage engine that allows MySQL to provide such functionality as transactions and foreign keys. After the acquisition, an Oracle press release mentioned that the contracts that make the company's software available to MySQL AB would be due for renewal (and presumably renegotiation) sometime in 2006. During the MySQL Users Conference in April 2006, MySQL issued a press release that confirmed that MySQL and Innobase OY agreed to a "multi-year" extension of their licensing agreement.

In January 2009, Oracle bought the MySQL.

Usage of MySQL

- MySQL is a database management system & relational database system.
- MySQL software is Open Source and can be used under GPL.
- The MySQL Database Server is very fast, reliable, and easy to use.
- MySQL Server works in client/server or embedded systems.

- It implements SQL functions using a highly optimized class library that should be as fast as possible. Usually there is no memory allocation at all after query initialization.
- It is designed to be fully multi-threaded using kernel threads, to easily use multiple CPUs if they are available.

Limitations of MySQL

- Like other SQL databases, MySQL does not currently comply with the full SQL standard for some of the implemented functionality, including foreign key references when using some storage engines other than the 'standard' InnoDB.
- Triggers are currently limited to one per action / timing, i.e. maximum one after insert and one before insert on the same table. There are no triggers on views.

CHAPTER 3

System Analysis

3.1 Problem Description

- There are thousands of information blog available. Finding the expert content is a challenging task.
- Having a specialized blog where Experts can share their content and get value for their work from readers. Finding such specialized blog is a challenging task.
- Motivation for Experts for consistently sharing their content/innovative write-up is major challenge.
- Proposed system will serve as an online community where Authors/Experts can connect and share their content.
- Readers are users can read these contents after logging in to the site. Users can also post their comments on the contents or ask further queries to the Author.
- Signing up as user will take place, which will give a worldwide exposure to expert content and will be able to comment/ query.
- System will sends regular updates to the users by email upon in the form of newsletter on content changes.
- Analytical data on users browsing history and hits to enable other monitory avenues in the form of advertisement insertion on portal. This will intern feed-in the benefits to the Experts to motivate them further. This analysis can share insight on the reader's choice of content which feedback to Experts to explore the write-ups in those areas.
- Users can have online chat with Experts.
- Signing up as expert will take place, which will give a worldwide exposure to their contents and will be browsed regularly by thousands of readers.
- Contents can be of any form text, image, video etc.
- All the contents and user comments authorized manually for publishing.

- Rather than just being blog, the system will provide the premier online service for readers on expert content similarly encouraging experts to contribute more knowledge sharing.

3.2 Component Parts

The major components of Anubandh...Reform The Bondings are:

- Grandparents Details (Name, Email Id, Gender, Age,)
- Students Details (Name, Email Id, Gender, Age, Photograph)
- Task List / Feedback List

3.3 Project Model

Which life cycle will work best for any project? This is an important strategic question because making the wrong choice could lead to disastrous results of catastrophic proportions considering delayed deliveries, unhappy clients, project overruns, and cancelled projects on mind.

The spiral model is more suitable in modeling our system.

The spiral model is similar to the incremental model, with more emphasis placed on risk analysis. The spiral model has four phases: Planning, Risk Analysis, Engineering and Evaluation. A software project repeatedly passes through these phases in iterations (called Spirals in this model). The baseline spiral, starting in the planning phase, requirements are gathered and risk is assessed. Each subsequent spirals builds on the baseline spiral. **Requirements** are gathered during the planning phase. In the **risk analysis phase**, a process is undertaken to identify risk and alternate solutions. A prototype is produced at the end of the risk analysis phase.

Software is produced in the **engineering phase**, along with testing at the end of the phase. The **evaluation phase** allows the customer to evaluate the output of the project to date before the project continues to the next spiral.

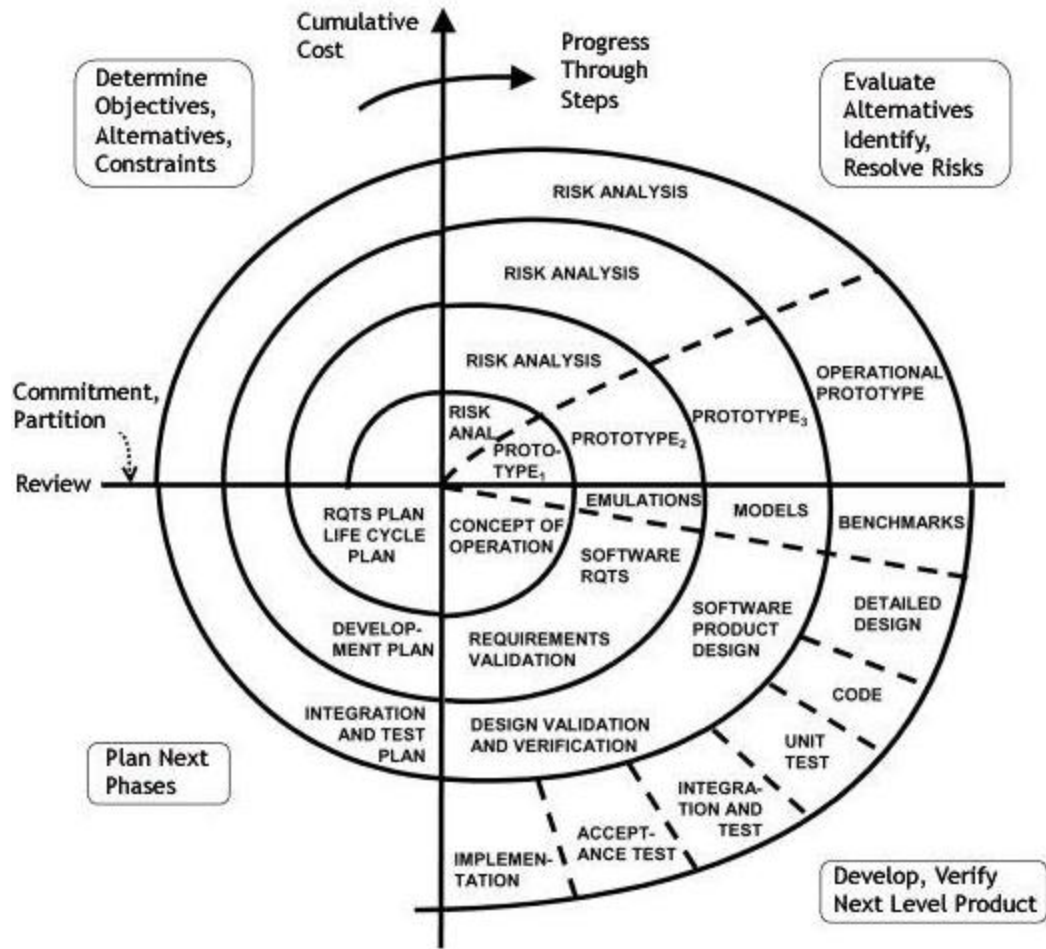


Figure 3.1: Spiral Model

CHAPTER 4

System Requirements

4.1 Hardware Requirements

- Processor: Pentium 5 or higher
- RAM: 6 GB or more
- Memory Space 80 GB or higher.

4.2 Software Requirements

- PHP version 7
- My SQL Database 5.5.24
- Apache Web Server 2.2.22

4.3 Quality Requirements

- **Functional Quality:** System should comply with or conforms to the given design, based on functional requirements or specifications.
- **Structural quality:** It refers to how it meets non-functional requirements that support the delivery of the functional requirements, such as robustness or maintainability, the degree to which the software was produced correctly.
- **Ease of Access:** The user among the system must easily be able to move forward into the system and easily and interactively use the various features of the application and the project should be able to respond to the users demand successfully and immediately.
- **Security:** Important requirement of all others is the security. It is the most important part of any project as the information has to be kept secure from malicious users.

- **Reliability:** As it measures the level of risk and the likelihood of potential application failures as well as the defects injected due to modifications made to the software, this is an essential quality requirement.
- **Portability:** The project should be able to swiftly run on any system meeting the mentioned software and hardware requirements.
- **Maintainability:** The maintenance of the project should be easy and the cost required for maintenance should also be efficient.
- **Consistency:** Any operation must be consistent, which means that each operation performed must be performed completely.
- **Size:** While not a quality attribute per se, the sizing of source code is a software characteristic that obviously impacts maintainability.
- **Modularity:** The project must be built after breaking it into various modules so that no point is missed out and the complexity in the analysis, design and coding is reduced.

CHAPTER 5

System Design

5.1 Activity Diagram

Activity diagrams provide visual depictions of the flow of activities, whether in a system, business, workflow, or other process. These diagrams focus on the activities that are performed and who (or what) is responsible for the performance of those activities.

The various symbols and notations of the Activity diagram are:

Actions: Actions are the elemental unit of behaviour in an activity diagram. Activities can contain many actions which are what activity diagrams depict.




Actions

Since an activity diagram shows a process flow, that flow must start and stop somewhere. The starting point (the initial node) for an activity flow is shown as a solid dot, and the stopping point (the activity final node) is shown as a bull's-eye.



Initial and Final Nodes

Decision and merge nodes control the flow in an activity diagram. Each node is represented by a diamond shape with incoming and outgoing arrows.

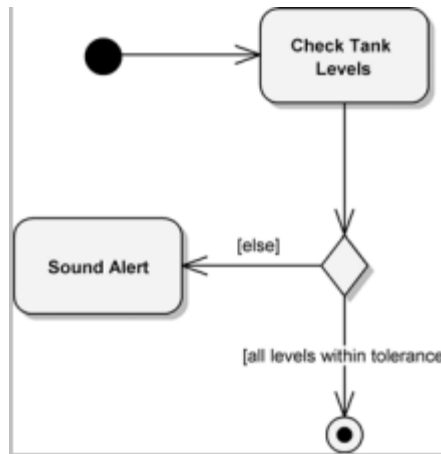

Decision Nodes

Activity diagrams of our system are given below:

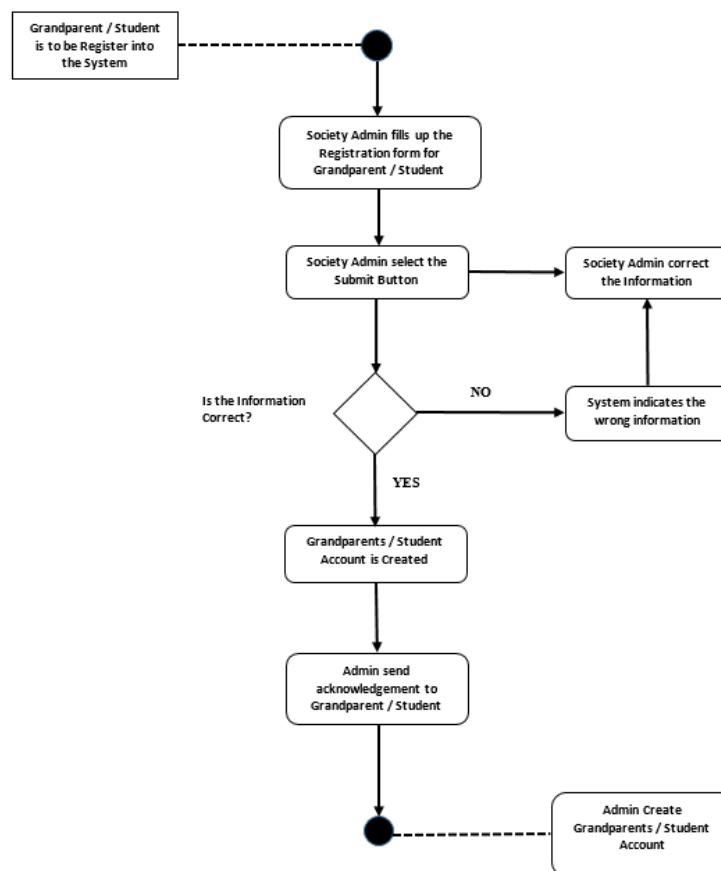


Figure 5.2: Activity diagram for Grandparent or Student Registration from Backend

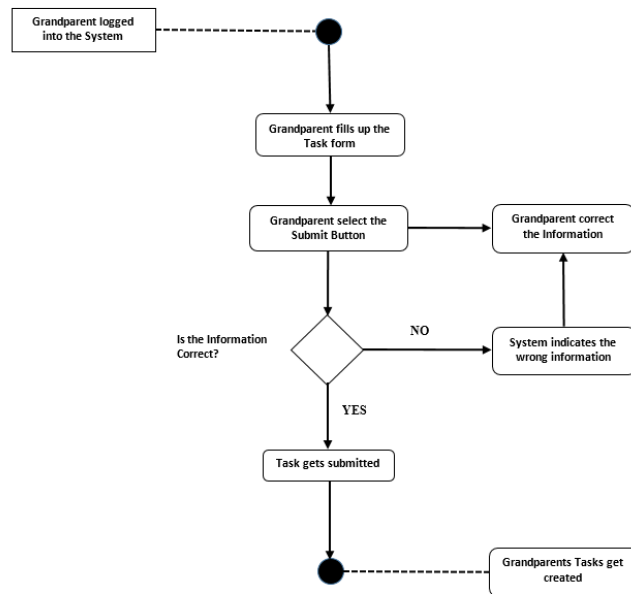


Figure 5.3: Activity diagram for Add Task

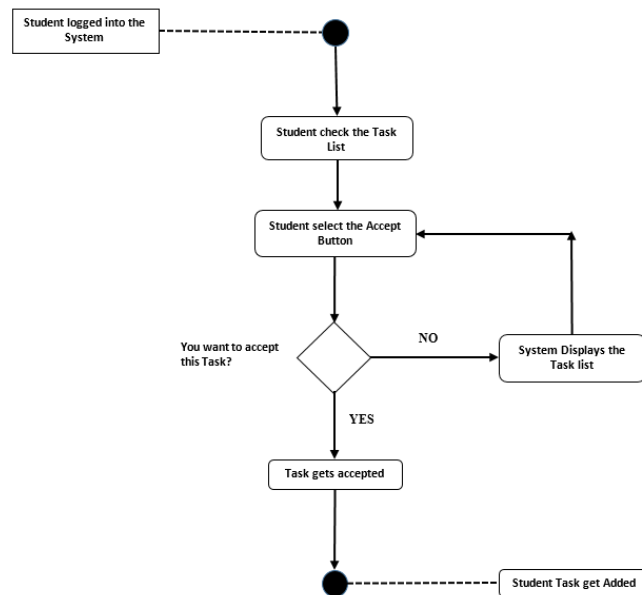


Figure 5.4: Activity Diagram for New User (Reader) Registration from web portal

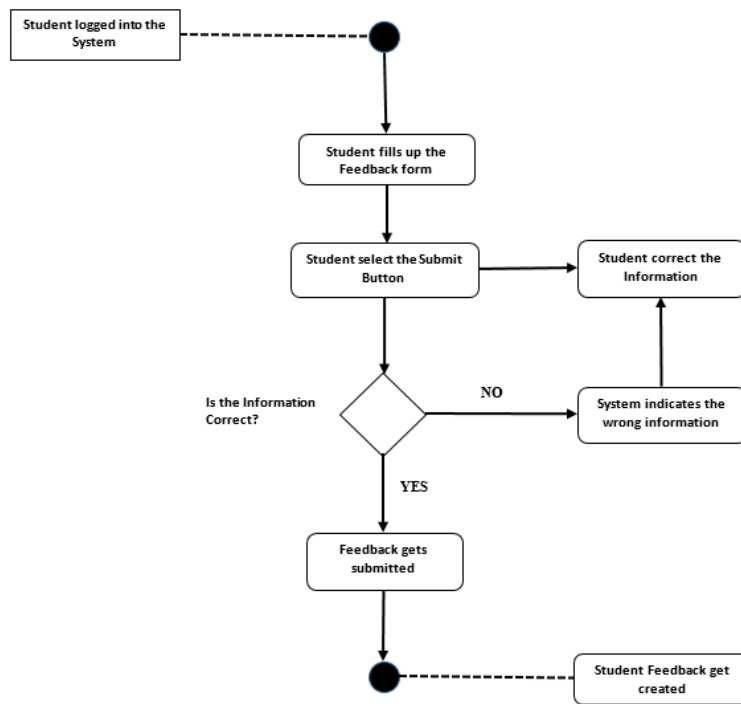


Figure 5.5: Activity diagram for Content Update by Expert in CMS

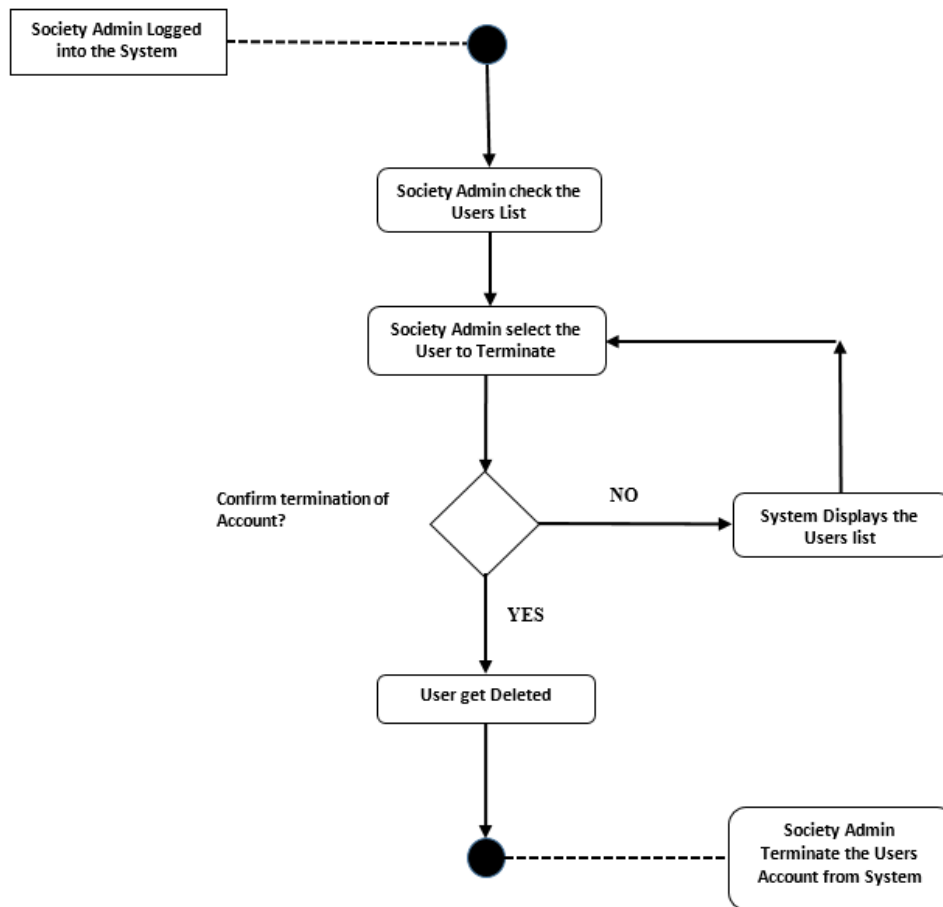


Figure 5.6: Activity diagram for Closing Expert Account

5.3 Data Flow Diagram


A data flow diagram (DFD) is a graphical representation of the "flow" of data through an information system, modelling its process aspects, DFDs can also be used for the visualization of data processing.

A DFD shows what kinds of information will be input to and output from the system, where the data will come from and go to, and where the data will be stored. It does not show information about the timing of processes, or information about whether processes will operate in sequence or in parallel.


Symbols used in DFD are as follows:



This symbol is used to show the input to the system or process and to show the output from the system or process.



This symbol is used to show the process which held in the system to generate information from the raw input.



This symbol is used to show the database storage of the system. It is common practice to draw the context-level data flow diagram first, which shows the interaction between the system and external agents which act as data sources and data sinks. On the context diagram the system's interactions with the outside world are modelled purely in terms of data flows across the *system boundary*.

Following figures depict different levels of DFDs of proposed system:

5.3.1 DFD Level 0

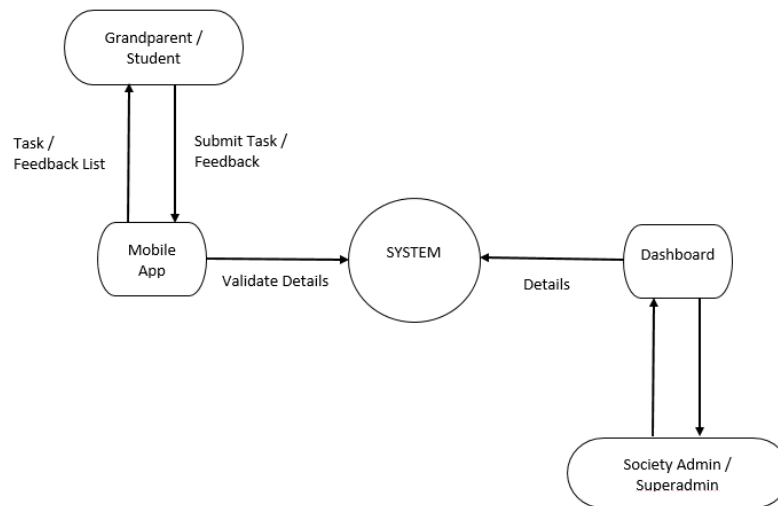


Figure 5.8: DFD Level 0

5.3.2 DFD Level 1.0

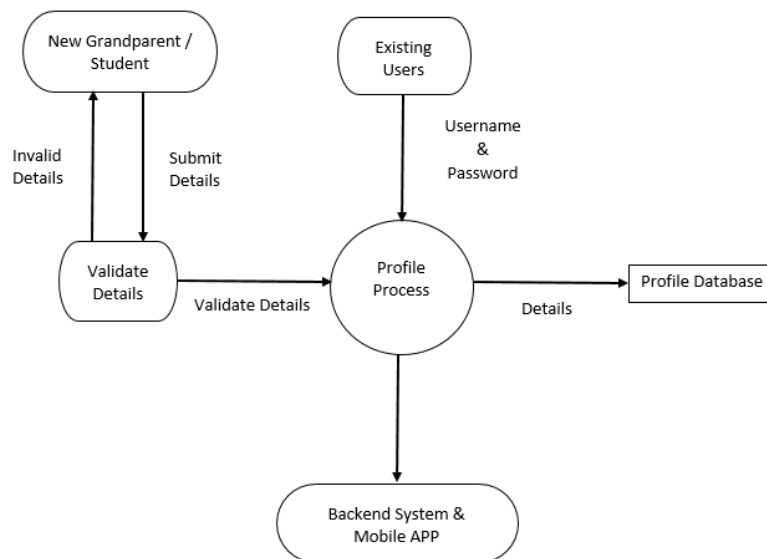


Figure 5.9: DFD Level 1.0

5.3.3 DFD Level 1.1

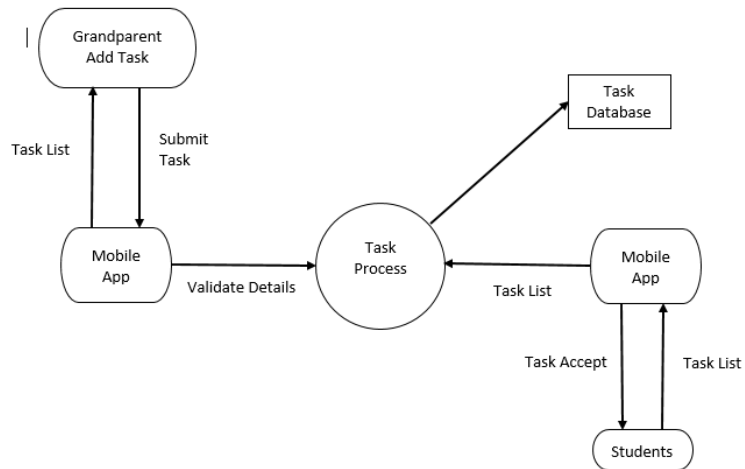


Figure 5.10: DFD Level 1.1

5.3.3 DFD Level 1.2

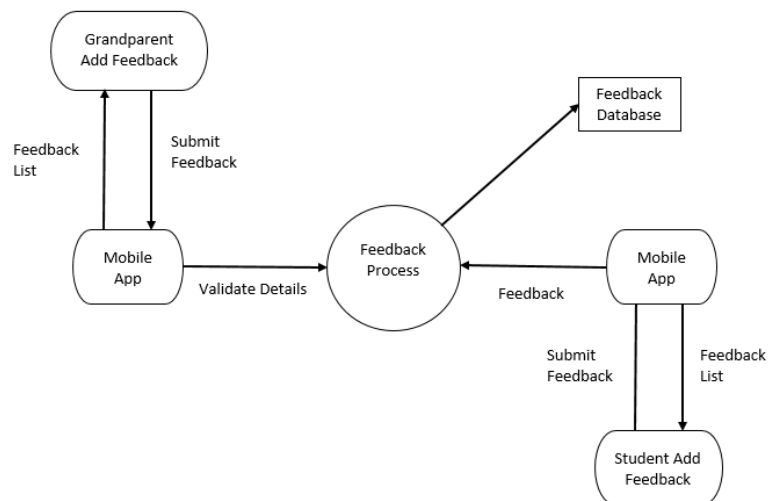


Figure 5.11: DFD Level 1.2

5.4 Data Dictionary

Data dictionary can be defined as "centralized repository of information about data such as meaning, relationships to other data, origin, usage, and format." The term may have one of several closely related meanings pertaining to databases and database management systems (DBMS):

- A document describing a database or collection of databases.
- An integral component of a DBMS that is required to determine its structure.
- A piece of middleware that extends or supplants the native data dictionary of a DBMS.

5.4.1 Table structure for table daily_visit_detailstb

Column	Type	Null	Default
id	bigint(20)	No	
profile_id	bigint(20)	No	
profile_type	varchar(25)	No	
profile_name	varchar(100)	No	
remark	varchar(250)	No	
location	varchar(300)	No	
latitude	varchar(100)	No	
longitude	varchar(100)	No	
creation_date	datetime	No	

Table structure for table feedbacktb

Column	Type	Null	Default
id	bigint(20)	No	
task_id	int(11)	No	
task_title	varchar(250)	Yes	NULL
rating	tinyint(4)	Yes	NULL
comment	varchar(500)	No	
fdk_giver_profile_id	bigint(20)	No	
fdk_giver_name	varchar(50)	Yes	NULL
fdk_receiver_profile_id	bigint(20)	No	
fdk_receiver_name	varchar(50)	Yes	NULL
good_social_behavior	tinyint(4)	Yes	NULL
bad_social_behavior	tinyint(4)	Yes	NULL
creation_date	Datetime	No	
status	tinyint(4)	No	
deletion_date	Datetime	Yes	NULL
deletion_reason	varchar(500)	Yes	NULL

Table structure for table profiletb

Column	Type	Null	Default
id	bigint(20)	No	
profile_type	varchar(50)	No	
email_address	varchar(50)	No	
first_name	varchar(25)	No	
middle_name	varchar(25)	No	
last_name	varchar(25)	No	
date_of_birth	datetime	No	
age	tinyint(4)	No	0
gender	varchar(15)	No	
profile_image_link	varchar(250)	Yes	NULL
profile_update_date	datetime	Yes	NULL
blood_group	varchar(15)	Yes	NULL
mother_tongue	varchar(25)	Yes	NULL
other_language_1	varchar(25)	Yes	NULL
other_language_2	varchar(25)	Yes	NULL
marital_status	varchar(25)	Yes	NULL
mobile_number	varchar(15)	Yes	NULL
relatives_name	varchar(150)	Yes	NULL
relatives_mobile_number	varchar(15)	Yes	NULL
other_mobile_number	varchar(15)	Yes	NULL
job_background	varchar(150)	Yes	NULL
is_pensioner	tinyint(4)	No	0
ready_for_free	tinyint(4)	No	0
address	varchar(150)	No	
area	varchar(25)	No	
city	varchar(25)	No	
state	varchar(25)	No	
country	varchar(25)	No	India
pincode	varchar(50)	No	
native_address	varchar(150)	Yes	NULL
native_area	varchar(25)	Yes	NULL
native_city	varchar(25)	Yes	NULL
native_state	varchar(25)	Yes	NULL
native_country	varchar(25)	Yes	NULL
native_pincode	varchar(50)	Yes	NULL

last_education	varchar(250)	Yes	NULL
university	varchar(250)	Yes	NULL
creation_date	datetime	No	
status	tinyint(4)	No	0
deletion_date	datetime	Yes	NULL
deletion_reason	varchar(500)	Yes	NULL
biography	varchar(1000)	Yes	NULL
editors_comment	varchar(500)	Yes	NULL
read_terms_condition	tinyint(4)	No	0
parent_id	bigint(20)	No	0

Table structure for table tasktb

Column	Type	Null	Default
id	bigint(20)	No	
task_title	varchar(255)	No	
profile_id	bigint(20)	No	
task_duration	time	No	00:00:00
task_start_date_time	datetime	No	
task_end_date_time	datetime	Yes	NULL
task_spend_range	int(11)	Yes	NULL
address	varchar(250)	Yes	NULL
creation_date	datetime	No	
status	tinyint(1)	No	0
deletion_date	datetime	Yes	NULL
deletion_reason	varchar(500)	Yes	NULL
read_terms_condition	tinyint(1)	Yes	NULL

Table structure for table task_person_linktb

Column	Type	Null	Default
id	bigint(20)	No	
task_id	bigint(20)	No	
task_giver_id	bigint(20)	No	
task_performer_id	bigint(20)	No	
creation_date	datetime	No	
status	tinyint(4)	No	

Table structure for table usertb

Column	Type	Null	Default
<i>Id</i>	bigint(20)	No	
profile_id	bigint(20)	No	
Username	varchar(25)	No	
Password	varchar(100)	No	
type_id	tinyint(4)	No	
Status	tinyint(4)	No	1
creation_date	datetime	No	
profile_name	varchar(150)	No	
Active	tinyint(4)	No	1
last_login	datetime	Yes	NULL
device_id	varchar(100)	Yes	NULL

Table structure for table user_typedb

Column	Type	Null	Default
<i>Id</i>	tinyint(4)	No	
user_type	varchar(50)	No	
Status	tinyint(4)	No	1
creation_date	datetime	No	

5.4.13 Table structure for table citylist

Field	Type	Null	Default
city_id	double	Yes	NULL
city_name	varchar(150)	Yes	NULL
Latitude	varchar(30)	Yes	NULL
Longitude	varchar(30)	Yes	NULL
State	varchar(150)	Yes	NULL

CHAPTER 6


User Manual

6.1 Front End


Home Page

Gives you the basic information about Anubandh

Login Page

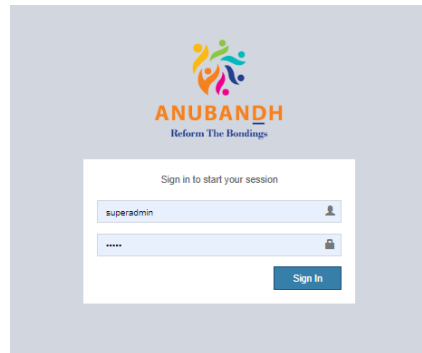

Task Request Details

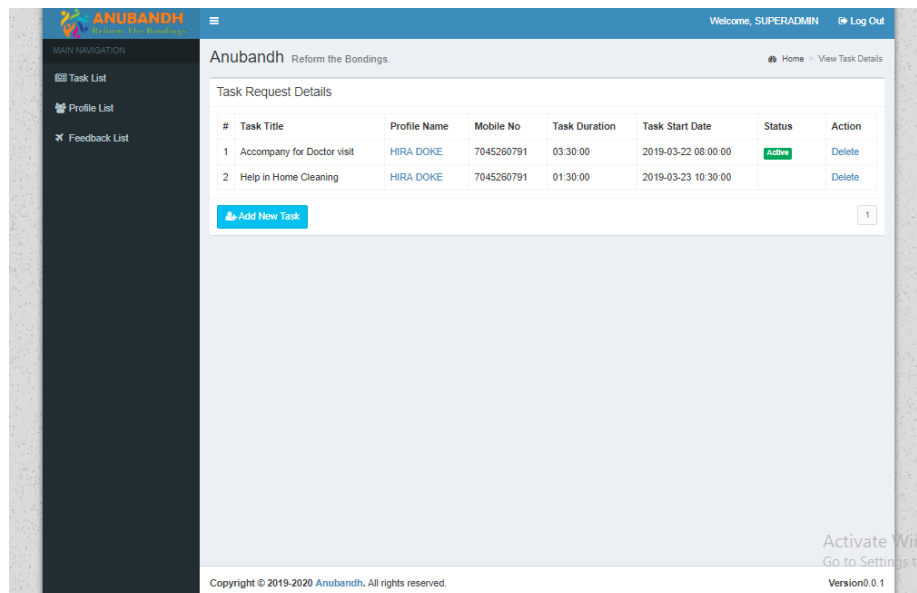

Add Task

The screenshot shows the 'Add Task' form in the Anubandh application. The form is titled 'Add Task' and is part of the 'Reform the Bondings' section. It includes fields for Profile, Title, Address, Task Date, Task Time, Task Duration, and Terms and Conditions. The 'Profile' field has a dropdown menu with the option 'select GrandParent'. The 'Title' field has a dropdown menu with the option 'select Task'. The 'Address' field has a text input with a placeholder 'if different from Home Address'. The 'Task Date' field has a text input with a placeholder 'YYYY-mm-dd'. The 'Task Time' field has a text input with a placeholder 'i.e 20:10'. The 'Task Duration' field has a text input with a placeholder 'i.e 00:30'. The 'Terms and Conditions' field has a checkbox. A 'Submit' button is located at the bottom of the form.

Copyright © 2019-2020 Anubandh. All rights reserved.

Version 0.0.1

User Details

The screenshot shows the 'User Details' table in the Anubandh application. The table lists users with columns for #, Name, Email, Phone, User Role, Status, and Action. The users listed are Rutik Nene, Sharvari Pabrekar, Mukund Doke, Hira Doke, Shilpa Student, Ankur, and Superadmin. The 'Status' column shows 'CREATED' for the first three users and 'ACTIVE' for the last four. The 'Action' column provides links for 'Active', 'Inactive / Account Lock / Delete', and 'Delete'.

#	Name	Email	Phone	User Role	Status	Action
1	RUTIK NENE	rutik@gmail.com	9898989898	STUDENT	CREATED	Active
2	SHARVARI PABREKAR	sharvari@gmail.com	9999999999	STUDENT	CREATED	Active
3	MUKUND DOKE	m2@gmail.com	9999999999	STUDENT	CREATED	Active
4	HIRA DOKE	hira@gmail.com	7045260791	GRANDPARENT	ACTIVE	Inactive / Account Lock / Delete
5	SHILPA STUDENT	shilpa.doke@gmail.com	9820806197	STUDENT	ACTIVE	Inactive / Account Lock / Delete
6	ANKUR	ankur@gmail.com		SOCIETY	ACTIVE	Inactive / Account Lock / Delete
7	SUPERADMIN	anubandh2019@gmail.com		SUPERADMIN	ACTIVE	Inactive / Account Lock / Delete

Copyright © 2019-2020 Anubandh. All rights reserved.

Version 0.0.1

Profile Registration Page

The screenshot shows the 'Profile Registration' form in the Anubandh application. The form is titled 'Profile Registration' and is part of the 'Reform the Bondings' section. It includes a sidebar with navigation links: 'Task List', 'Profile List', and 'Feedback List'. The form fields are as follows:

- Profile Type:** A dropdown menu with the option '-- select Profile type --'.
- Society:** A dropdown menu with the option '-- select Society --'.
- First Name:** A text input field with the placeholder 'First Name'.
- Middle Name:** A text input field with the placeholder 'Middle Name'.
- Last Name:** A text input field with the placeholder 'Last Name'.
- Address:** A text input field with the placeholder 'Address'.
- Area:** A text input field with the placeholder 'Dadar West'.
- Pincode:** A text input field with the placeholder 'Pincode'.
- City:** A text input field with the placeholder 'Mumbai'.
- State:** A text input field with the placeholder 'Maharashtra'.
- Mobile No:** A text input field with the placeholder 'Mobile No number'.
- Email address:** A text input field with the placeholder 'Enter email'.
- Birth Date:** A text input field with the placeholder 'YYYY-mm-dd'.
- Gender:** A dropdown menu with the option 'Male'.
- Blood Group:** A text input field.

A 'Submit' button is located at the bottom of the form. The footer of the page includes the copyright notice 'Copyright © 2019-2020 Anubandh. All rights reserved.' and the version number 'Version0.0.1'.

Feedback List

The screenshot shows the 'Feedback List' page in the Anubandh application. The page is titled 'Feedback List' and is part of the 'Reform the Bondings' section. It includes a sidebar with navigation links: 'Task List', 'Profile List', and 'Feedback List'. The table displays the following data:

#	Date	Task	Feedback Giver	Feedback Receiver	Good Behavior	Bad Behavior	Comment
1	2019-03-23 00:00:00	task te	HIRA DOKE	SHILPA	Enthusiastic: has strong feelings; ardent		good, Kind: thoughtful, caring

A button labeled 'Add New Feedback' is located below the table. The footer of the page includes the copyright notice 'Copyright © 2019-2020 Anubandh. All rights reserved.' and the version number 'Version0.0.1'.

Add Feedback

ANUBANDH Reform the Bondings

Welcome, SUPERADMIN [Log Out](#)

MAIN NAVIGATION

- Task List
- Profile List
- Feedback List

Anubandh Reform the Bondings.

[Home](#) > [Add New Feedback](#)

Add Feedback

GrandParent

-- select GrandParent --

Please select GrandParent.

Students

-- select Students --

Please select Students.

Title

-- select Task --

Title is required. Title must specify at least 10 characters.

Feedback Date

yyyy-mm-dd

Feedback Reason

Feedback reason


[Add Feedback](#)

Activate Win
Go to Settings to
Version0.0.1


Copyright © 2019-2020 Anubandh. All rights reserved.

Figure 6.1: Home Page of Anubandh


Login Page

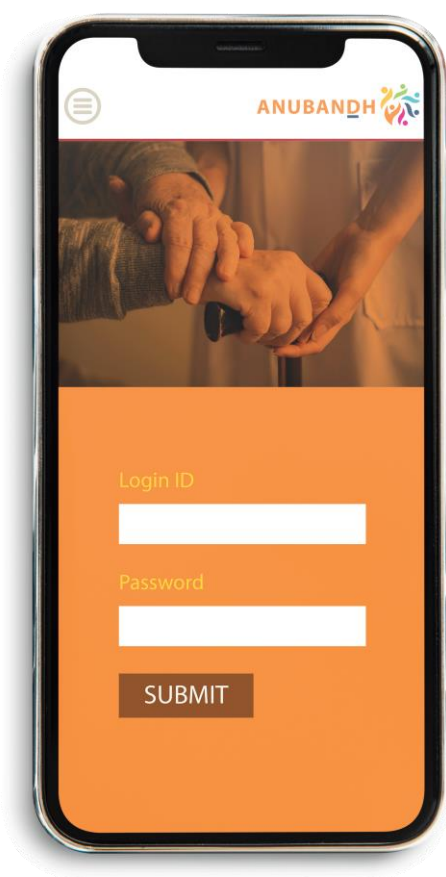


Task List Page

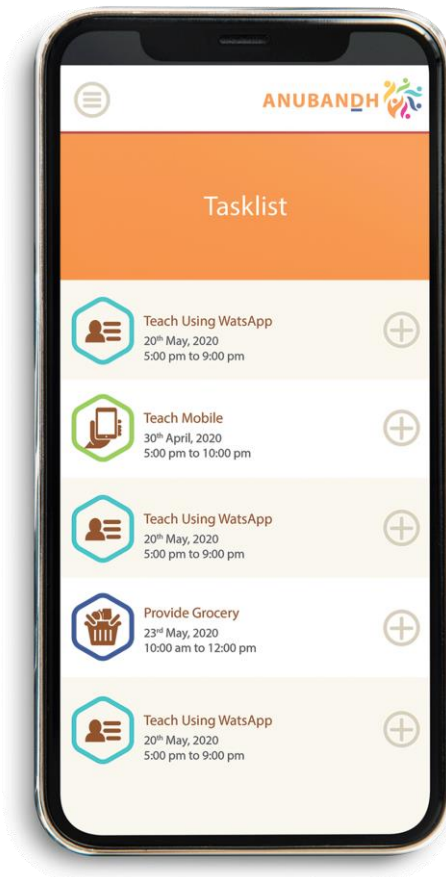


Task Detail Page

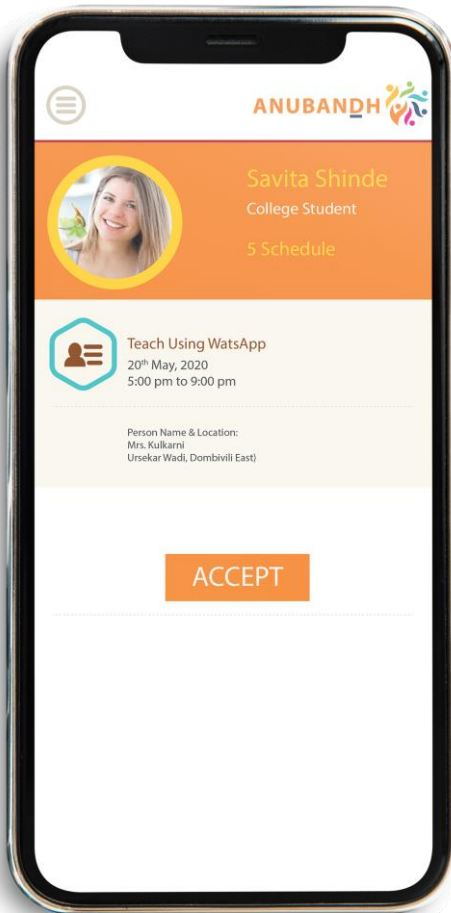

Task Completed Page

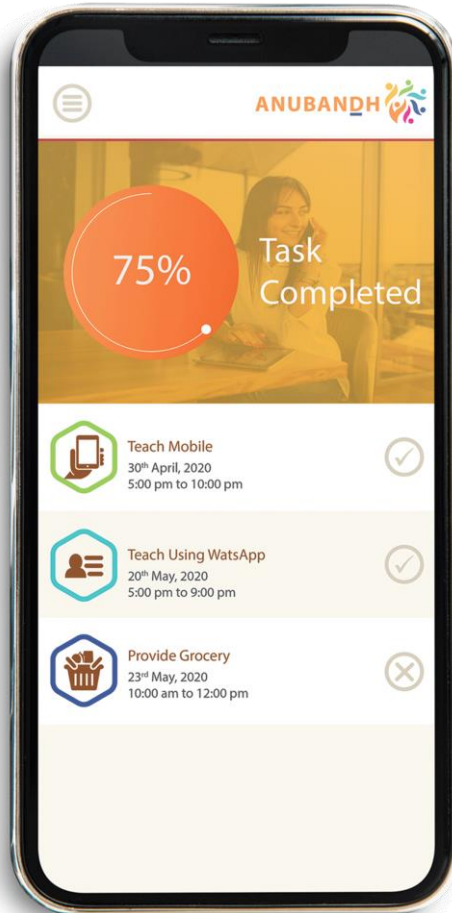

Profile page with Task list

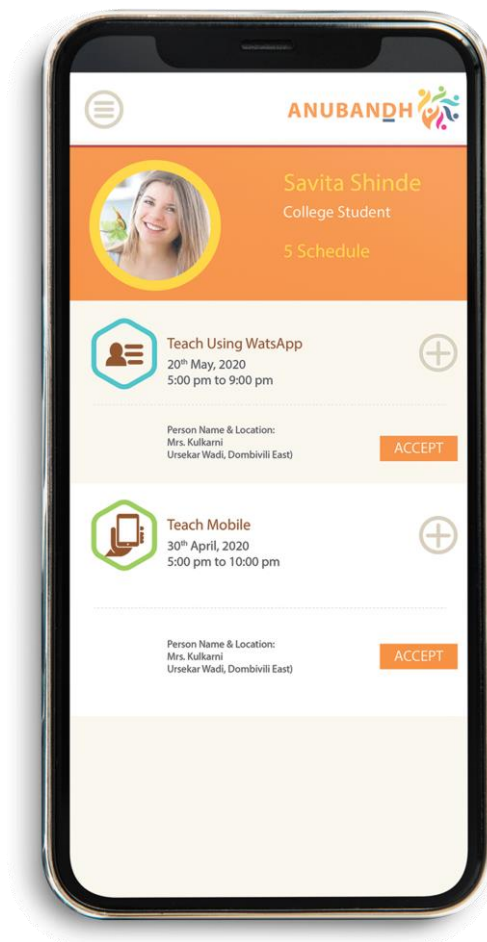

CHAPTER 8

Deployment Document

8.1 Deployment Process

Copy **anubandh** folder in \wamp\www\

Create "abandh" database from PHPMYSQL and import
\wamp\www\anubandh\dashboard\db-script\abandh.sql this sql file


Tab Privileges – Add New User

Username – ABandh

Pasword – bond2019

Host – localhost

Database – abandh

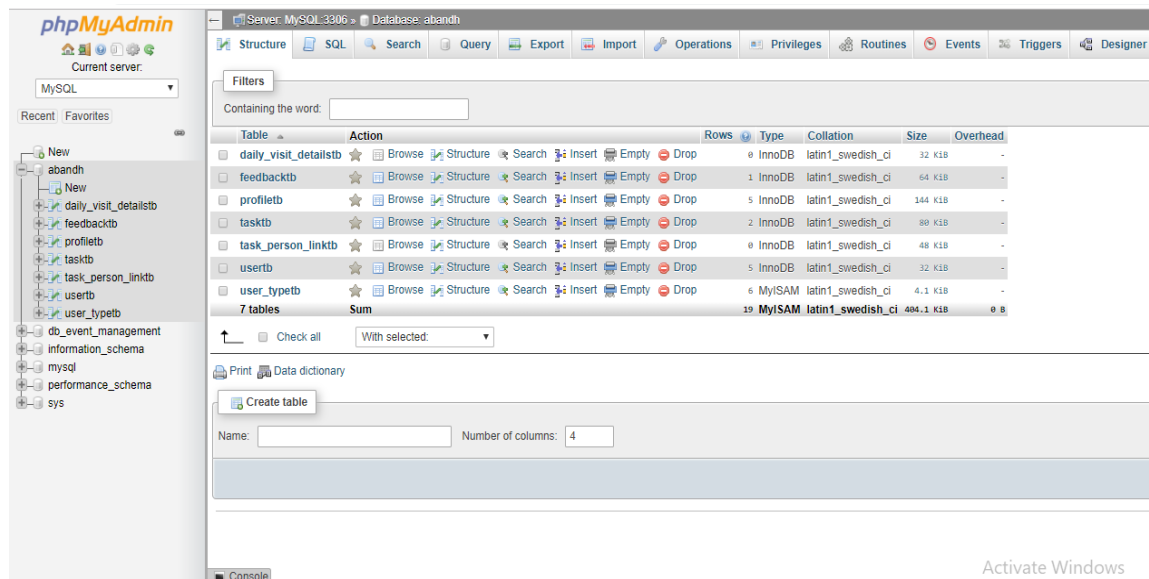

Now from Mozilla or Chrome open following pages

Backend - <http://localhost/anubandh/dashboard/index.php>

8.2 How to set up and Get Started with PHP MySQL Web Development

1. Introduction

AMP is an acronym for Apache (an HTTP Server), MySQL (a relational database) and PHP (a server-side programming platform). These are industrial-strength, open-source software that collectively can be used to develop, deploy and run web applications. Depending on the operating platform, we have:

- WAMP: Windows-Apache-MySQL-PHP
- LAMP: Linux-Apache-MySQL-PHP
- MAMP: Mac-Apache-MySQL-PHP

You can choose to install the components individually, or use a *bundled* software package. For example,

- Zend Server (@ <http://files.zend.com/help/Zend-Server-Community-Edition/zend-server-community-edition.htm>) (for Windows, Linux, and Mac OS).
- WampServer (@ <http://www.wampserver.com/en/>) (Windows only).
- Easy PHP (@ <http://www.easyphp.org/>).
- XAMPP (@ <http://www.apachefriends.org/en/xampp.html>) (for Linux, Windows, Mac OS).
- Glossword WAMP (@ <http://glossword.biz/glosswordwamp/>) (Windows only).

I shall assume that you are familiar with Apache, MySQL and PHP. Otherwise, read "[How to setup and get started with Apache HTTP Server](#)", "[How to setup and get started with MySQL](#)".

2. Setting Up WampServer

WampServer (@ <http://www.wampserver.com/en/>) bundles Apache, MySQL and PHP for Windows in a single package. It also includes tools such as PhpMyAdmin (a MySQL database administration tool), SQL Buddy (an alternative to PhpMyAdmin), XDebug (a PHP Debugging Tool), WebGrind (a PHP Profiling Tool).

2.1 Installing WampServer

To Install WampServer:

1. Download: Goto WampServer mother site at <http://www.wampserver.com/en> ⇒ Select "DOWNLOADS" ⇒ Choose the appropriate package for your platform (e.g., WampServer 2.2e (32 bits)) ⇒ Download the installation file (e.g., wampserver2.2e-php5.4.3-httpd2.2.22-mysql5.5.24-32b.exe).
2. Install: To install the WAMPServer, simply run the downloaded installation file. Choose your installation directory. I shall assume that WampServer is installed in "d:\WampServer", denoted as <WAMP_SERVER_HOME>, in this article.

2.2 Starting WampServer

To start the WampServer, choose "start WampServer" from the "Start" menu; or run "wampmanager.exe" from the WampServer installed directory. An icon will appear on the icon tray. "Green" icon indicates that all the services have started. "Red" indicates that all the services have stopped. You can put the server online (so that user can access the server over the Internet) by selecting the option "Put Online". Alternatively, you could put the server "Offline", such that it is accessible only within the localhost.

2.3 Verifying the Installation

By default, a directory called "www" was created under the WampServer installed directory, which serves as the root directory of the Apache Server. A welcome page called "index.php" was also created in the "www" directory.

To verify the installation:

1. Start the WampServer. Wait for the icon to appear green (indicates that all services have started). Otherwise, click the icon and select "Start All Services". For testing, put the server "offline" to disable external access (i.e., it can be accessed only in localhost).
2. Start a browser and issue URL `http://localhost`. This will in turn request for "index.php". Observe the output and compare with "index.php" source.

2.4 Writing a Hello-world PHP Script

Use a program editor to write a simple PHP script called "hello.php" and save under the "www" directory, as follows:

```
<html>
  <head>
    <title>First PHP Page</title>
  </head>
  <body>
    <?php echo
      '<h1>Hello, world!</h1>';
    ?>
  </body>
</html>
```

To run this script, start a browser and issue URL `http://localhost/hello.php`.

Check the output produced via "view source". Take note that PHP is a server-side technology (instead of client-side technology like JavaScript). The PHP statements `<?php ... ?>` are processed in the server, and the results returned to the client (browser).

Reference:-

8.3 How to set up and Get Started with PHP MySQL Web Development

http://www.ntu.edu.sg/home/ehchua/programming/howto/WampServer_HowTo.html

Web Hosting Guide for Beginners: How to choose a web host?

In this article we have collected all important information you need as a new webmaster in order to plan and build your own website successfully. There are three main steps you should consider when creating a website: you have to choose a web host, a domain name, and an application to create and manage your website content with.



You can use the graphic above for quick navigation between the three steps.

How to choose a web host?

Choosing a web host is the first step you should consider when starting a website project. In order to have your website available in the World Wide Web, you need a place where to host it. This place is provided by the web hosting provider. The web hosting as a service incorporates the space where your website files are stored, the traffic to your website, and lots of extra services such as firewall protection, technical assistance, email services, FTP access, domain name registration, website building tools and more.



In order to choose a web host for your website you have to consider a few important issues:

How to setup Android Studio

<https://developer.android.com/studio/>

React Native Tutorial

React Native CLI Quickstart

Getting Started

[EDIT](#)

This page will help you install and build your first React Native app. If you already have React Native installed, you can skip ahead to the [Tutorial](#).

If you are coming from a web background, the easiest way to get started with React Native is with Expo tools because they allow you to start a project without installing and configuring Xcode or Android Studio. Expo CLI sets up a development environment on your local machine and you can be writing a React Native app within minutes. For instant development, you can use [Snack](#) to try React Native out directly in your web browser.

If you are familiar with native development, you will likely want to use React Native CLI. It requires Xcode or Android Studio to get started. If you already have one of these tools installed, you should be able to get up and running within a few minutes. If they are not installed, you should expect to spend about an hour installing and configuring them.

[Expo CLI Quickstart](#)[React Native CLI Quickstart](#)

Follow these instructions if you need to build native code in your project. For example, if you are integrating React Native into an existing application, or if you "ejected" from [Expo](#) or [Create React Native App](#), you'll need this section.

The instructions are a bit different depending on your development operating system, and whether you want to start developing for iOS or Android. If you want to develop for both iOS and Android, that's fine - you just have to pick one to start with, since the setup is a bit different.

Development OS: [macOS](#) [Windows](#) [Linux](#) Target OS: [iOS](#) [Android](#)

Installing dependencies

You will need Node, the React Native command line interface, Python2, a JDK, and Android Studio.

While you can use any editor of your choice to develop your app, you will need to install Android Studio in order to set up the necessary tooling to build your React Native app for Android.

Node, Python2, JDK

We recommend installing Node and Python2 via [Chocolatey](#), a popular package manager for Windows.

React Native also requires a recent version of the [Java SE Development Kit \(JDK\)](#), as well as Python 2. Both can be installed using Chocolatey.

Open an Administrator Command Prompt (right click Command Prompt and select "Run as Administrator"), then run the following command:

```
choco install -y nodejs.install python2 jdk8
```

If you have already installed Node on your system, make sure it is Node 8.3 or newer. If you already have a JDK on your system, make sure it is version 8 or newer.

You can find additional installation options on [Node's Downloads page](#).

The React Native CLI

Node comes with npm, which lets you install the React Native command line interface.

Run the following command in a Command Prompt or shell:

```
npm install -g react-native-cli
```

If you get an error like `Cannot find module 'npmlog'`, try installing npm directly: `curl -0 -L https://npmjs.org/install.sh | sudo sh`.

Activate Windows

Android development environment

Setting up your development environment can be somewhat tedious if you're new to Android development. If you're already familiar with Android development, there are a few things you may need to configure. In either case, please make sure to carefully follow the next few steps.

1. Install Android Studio

[Download and install Android Studio](#). Choose a "Custom" setup when prompted to select an installation type. Make sure the boxes next to all of the following are checked:

- `Android SDK`
- `Android SDK Platform`
- `Performance (Intel® HAXM)` ([See here for AMD](#))
- `Android Virtual Device`

Then, click "Next" to install all of these components.

If the checkboxes are grayed out, you will have a chance to install these components later on.


Once setup has finalized and you're presented with the Welcome screen, proceed to the [next step](#).

Activate Windows

2. Install the Android SDK

Android Studio installs the latest Android SDK by default. Building a React Native app with native code, however, requires the `Android 9 (Pie)` SDK in particular. Additional Android SDKs can be installed through the SDK Manager in Android Studio.

The SDK Manager can be accessed from the "Welcome to Android Studio" screen. Click on "Configure", then select "SDK Manager".

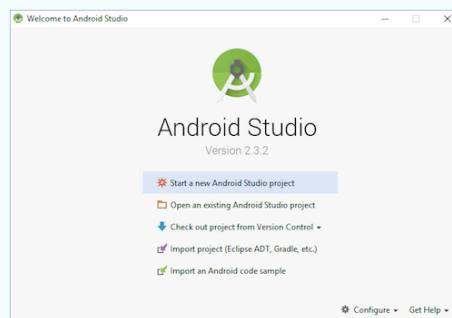

Activate Windows
Go to Settings to activate V

The SDK Manager can also be found within the Android Studio "Preferences" dialog, under **Appearance & Behavior** → **System Settings** → **Android SDK**.

Select the "SDK Platforms" tab from within the SDK Manager, then check the box next to "Show Package Details" in the bottom right corner. Look for and expand the **Android 9 (Pie)** entry, then make sure the following items are checked:

- **Android SDK Platform 28**
- **Intel x86 Atom_64 System Image** Or **Google APIs Intel x86 Atom System Image**


Next, select the "SDK Tools" tab and check the box next to "Show Package Details" here as well. Look for and expand the "Android SDK Build-Tools" entry, then make sure that **28.0.3** is selected.

Finally, click "Apply" to download and install the Android SDK and related build tools.

3. Configure the ANDROID_HOME environment variable

The React Native tools require some environment variables to be set up in order to build apps with native code.

Open the System pane under **System and Security** in the Windows Control Panel, then click on **Change settings....** Open the **Advanced** tab and click on **Environment Variables....** Click on **New...** to create a new **ANDROID_HOME** user variable that points to the path to your Android SDK:

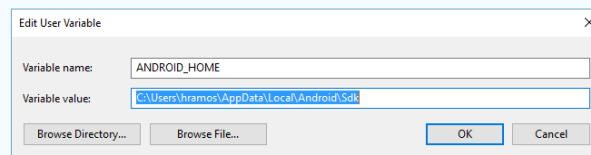

The SDK is installed, by default, at the following location:

```
c:\Users\YOUR_USERNAME\AppData\Local\Android\Sdk
```

You can find the actual location of the SDK in the Android Studio "Preferences" dialog, under **Appearance & Behavior** → **System Settings** → **Android SDK**.

Open a new Command Prompt window to ensure the new environment variable is loaded before proceeding to the next step.

Activate Windows
Go to Settings to activate Windows

4. Add platform-tools to Path

Open the System pane under **System and Security** in the Windows Control Panel, then click on **Change settings....** Open the **Advanced** tab and click on **Environment Variables....** Select the **Path** variable, then click **Edit**. Click **New** and add the path to platform-tools to the list.

The default location for this folder is:

```
c:\Users\YOUR_USERNAME\AppData\Local\Android\Sdk\platform-tools
```

Creating a new application

Use the React Native command line interface to generate a new React Native project called "AwesomeProject":

```
react-native init AwesomeProject
```

This is not necessary if you are integrating React Native into an existing application, if you "ejected" from Create React Native App, or if you're adding Android support to an existing React Native project (see [Platform Specific Code](#)). You can also use a third-party CLI to init your React Native app, such as [ignite-cli](#).
Activate Windows
Go to Settings to activate Windows

[Optional] Using a specific version

If you want to start a new project with a specific React Native version, you can use the `--version` argument:

```
react-native init AwesomeProject --version X.XX.X
```

```
react-native init AwesomeProject --version react-native@next
```

Preparing the Android device

You will need an Android device to run your React Native Android app. This can be either a physical Android device, or more commonly, you can use an Android Virtual Device which allows you to emulate an Android device on your computer.

Either way, you will need to prepare the device to run Android apps for development.

Using a physical device

If you have a physical Android device, you can use it for development in place of an AVD by plugging it in to your computer using a USB cable and following the instructions [here](#).

Using a virtual device

If you use Android Studio to open `./AwesomeProject/android`, you can see the list of available Android Virtual Devices (AVDs) by opening the "AVD Manager" from within Android Studio. Look for an icon that looks like this:



If you have just installed Android Studio, you will likely need to [create a new AVD](#). Select "Create Virtual Device...", then pick any Phone from the list and click "Next", then select the **Pie** API Level 28 image.

If you don't have HAXM installed, click on "Install HAXM" or follow [these instructions](#) to set it up, then go back to the AVD Manager.


Click "Next" then "Finish" to create your AVD. At this point you should be able to click on the green triangle button next to your AVD to launch it, then proceed to the next step.

Running your React Native application

Run `react-native run-android` inside your React Native project folder:

```
cd AwesomeProject
react-native run-android
```

If everything is set up correctly, you should see your new app running in your Android emulator shortly.

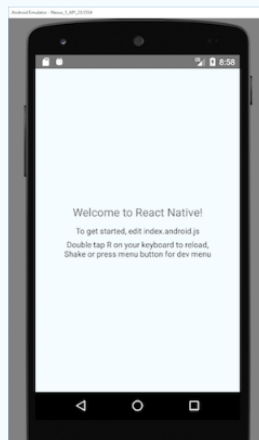

Activate
Go to Settings

`react-native run-android` is just one way to run your app - you can also run it directly from within Android Studio or Nuclide.

If you can't get this to work, see the [Troubleshooting](#) page.

Modifying your app

Now that you have successfully run the app, let's modify it.

- Open `App.js` in your text editor of choice and edit some lines.
- Press the `R` key twice or select `Reload` from the Developer Menu (`Ctrl + M`) to see your changes!

That's it!

Congratulations! You've successfully run and modified your first React Native app.



Reference

<https://facebook.github.io/react-native/docs/getting-started.html>

<https://nodejs.org/en/download/>

<https://www.python.org/downloads/>

https://www3.ntu.edu.sg/home/ehchua/programming/howto/JDK_Howto.html

CHAPTER 9

Conclusion

By developing this System, the practical knowledge has been applied in order to reduce efforts of the users of this system.

This System provides non-vulnerability against SQL injections as well as brute force attack by means of adding salt to the password. This feature provides privacy to its members.

Due to the ease of use, anyone familiar with Web application and Mobile APP usage will find this system user friendly.

Modeling the system in incremental way is quite useful, making the current version easier to modify or expand so that the enhanced version can be deployed after testing and analyzing the current version of the system.

The combination of PHP and MySQL make the web pages load fast enough and make it easier for the database administrator to manage databases.

Also the User of React Native makes the Mobile App load faster can run on Android AS well as IOS Systems

Attractive and effective user interface of the Mobile App will encourage the visitor to visit more and more.

CHAPTER 10

Appendix

10.1 Tools Used

Application Tools For PHP

Apache Version	2.4.37
Server Software	Apache/2.4.37 (Win64) PHP/7.2.14 - Port defined for Apache: 80
PHP Version	7.2.14
Database	MySQL 5.7
Operating System	Windows 7 and above
Application Areas	Web Development and Designing
GUI Tool	Apache Web Server 2.4.37 (WAMP)

REFERENCES

Books

1. Simon Stobart, David Parsons (2008), 'Dynamic Web Application development using PHP and MySQL', ISBN: 978-1844807536
2. Seyed M.M, Tahaghoghi, Hugh Williams (2006), 'Learning MySQL', ISBN: 978-0596008642
3. Grady Booch (2007), 'Object Oriented Analysis & Design With Application', ISBN: 978-0201895513
4. Luke Welling, Laura Thomson (2008), 'PHP and MySQL Web Development', ISBN: 978-0672329166
5. Roger.S.Pressman (2009), 'Software engineering: a practitioner's approach', ISBN: 978-0073375977

Web References

1. http://en.wikipedia.org/wiki/Data_flow_diagram
2. http://en.wikipedia.org/wiki/Incremental_build_model
3. http://en.wikipedia.org/wiki/Software_quality
4. <http://www.fordmodels.com/>
5. <http://www.magicboxsofttech.com/about.php>
6. <http://www.modelscouts.com/>
7. <http://www.newfaces.com/>
8. <http://www.php.net/>
9. <http://www.php.net/manual/en/intro-whatcando.php>
10. <http://www.cprogramto.com/run-php-script-wamp-server/>
11. <http://www.homeandlearn.co.uk/php/php1p3.html>

<https://facebook.github.io/react-native/docs/tutorial>

<https://reactnativeexample.com/>

<https://codebrahma.com/awesome-react-native-building-android-app-javascript/>

<https://facebook.github.io/react-native/docs/getting-started.html>