Unit -1 (Software Engineering)

Software Engineering

LECTURE NOTE – 1

INTRODUCTION TO SOFTWARE ENGINEERING

The term ***software engineering*** is composed of two words, software and engineering.

Software is more than just a program code. A program is an executable code, which serves some computational purpose. Software is considered to be a collection of executable programming code, associated libraries and documentations. Software, when made for a specific requirement is called **software product.**

Engineering on the other hand, is all about developing products, using well-defined, scientific principles and methods.

So, we can define ***software engineering*** as an engineering branch associated with the development of software product using well-defined scientific principles, methods and procedures. The outcome of software engineering is an efficient and reliable software product.

IEEE defines software engineering as:
The application of a systematic, disciplined, quantifiable approach to the development, operation and maintenance of software.

We can alternatively view it as a systematic collection of past experience. The experience is arranged in the form of methodologies and guidelines. A small program can be written without using software engineering principles. But if one wants to develop a large software product, then software engineering principles are absolutely necessary to achieve a good quality software cost effectively.

Without using software engineering principles it would be difficult to develop large programs. In industry it is usually needed to develop large programs to accommodate multiple functions. A problem with developing such large commercial programs is that the complexity and difficulty levels of the programs increase exponentially with their sizes. Software engineering helps to reduce this programming complexity. Software engineering principles use two important techniques to reduce problem complexity: ***abstraction*** and ***decomposition*****.** The principle ofabstraction implies that a problem can be simplified by omitting irrelevant details. In other words, the main purpose of

abstraction is to consider only those aspects of the problem that are relevant for certain purpose and suppress other aspects that are not relevant for the given purpose. Once the simpler problem is solved, then the omitted details can be taken into consideration to solve the next lower level abstraction, and so on. Abstraction is a powerful way of reducing the complexity of the problem. The other approach to tackle problem complexity is decomposition. In this technique, a complex problem is divided into several smaller problems and then the smaller problems are solved one by one. However, in this technique any random decomposition of a problem into smaller parts will not help. The problem has to be decomposed such that each component of the decomposed problem can be solved independently and then the solution of the different components can be combined to get the full solution. A good decomposition of a problem should minimize interactions among various components. If the different subcomponents are interrelated, then the different components cannot be solved separately and the desired reduction in complexity will not be realized.

NEED OF SOFTWARE ENGINEERING

The need of software engineering arises because of higher rate of change in user requirements and environment on which the software is working.

- **Large software -** It is easier to build a wall than to a house or building, likewise, as the size of software become large engineering has to step to give it a scientific process.
- **Scalability-** If the software process were not based on scientific and engineering concepts, it would be easier to re-create new software than to scale an existing one.
- **Cost-** As hardware industry has shown its skills and huge manufacturing has lower down the price of computer and electronic hardware. But the cost of software remains high if proper process is not adapted.
- **Dynamic Nature-** The always growing and adapting nature of software hugely depends upon the environment in which the user works. If the nature of software is always changing, new enhancements need to be done in the existing one. This is where software engineering plays a good role.
- **Quality Management-** Better process of software development provides better and quality software product.

CHARACTERESTICS OF GOOD SOFTWARE

A software product can be judged by what it offers and how well it can be used. This software must satisfy on the following grounds:

- Operational

- Transitional
- Maintenance

Well-engineered and crafted software is expected to have the following characteristics:

Operational

This tells us how well software works in operations. It can be measured on:

- Budget
- Usability
- Efficiency
- Correctness
- Functionality
- Dependability
- Security
- Safety

Transitional

This aspect is important when the software is moved from one platform to another:

- Portability
- Interoperability
- Reusability
- Adaptability

Maintenance

This aspect briefs about how well a software has the capabilities to maintain itself in the ever-changing environment:

- Modularity
- Maintainability
- Flexibility
- Scalability

In short, Software engineering is a branch of computer science, which uses well-defined engineering concepts required to produce efficient, durable, scalable, in-budget and on-time software products

LECTURE NOTE - 2

SOFTWARE DEVELOPMENT LIFE CYCLE

LIFE CYCLE MODEL

A software life cycle model (also called process model) is a descriptive and diagrammatic representation of the software life cycle. A life cycle model represents all the activities required to make a software product transit through its life cycle phases. It also captures the order in which these activities are to be undertaken. In other words, a life cycle model maps the different activities performed on a software product from its inception to retirement. Different life cycle models may map the basic development activities to phases in different ways. Thus, no matter which life cycle model is followed, the basic activities are included in all life cycle models though the activities may be carried out in different orders in different life cycle models. During any life cycle phase, more than one activity may also be carried out.

THE NEED FOR A SOFTWARE LIFE CYCLE MODEL

The development team must identify a suitable life cycle model for the particular project and then adhere to it. Without using of a particular life cycle model the development of a software product would not be in a systematic and disciplined manner. When a software product is being developed by a team there must be a clear understanding among team members about when and what to do. Otherwise it would lead to chaos and project failure. This problem can be illustrated by using an example. Suppose a software development problem is divided into several parts and the parts are assigned to the team members. From then on, suppose the team members are allowed the freedom to develop the parts assigned to them in whatever way they like. It is possible that one member might start writing the code for his part, another might decide to prepare the test documents first, and some other engineer might begin with the design phase of the parts assigned to him. This would be one of the perfect recipes for project failure. A software life cycle model defines entry and exit criteria for every phase. A phase can start only if its phase-entry criteria have been satisfied. So without software life cycle model the entry and exit criteria for a phase cannot be recognized. Without software life cycle models it becomes difficult for software project managers to monitor the progress of the project.

Different software life cycle models

Many life cycle models have been proposed so far. Each of them has some advantages as well as some disadvantages. A few important and commonly used life cycle models are as follows:

- Classical Waterfall Model
- Iterative Waterfall Model
- Prototyping Model
- Evolutionary Model
- Spiral Model

1. CLASSICAL WATERFALL MODEL

The classical waterfall model is intuitively the most obvious way to develop software. Though the classical waterfall model is elegant and intuitively obvious, it is not a practical model in the sense that it cannot be used in actual software development projects. Thus, this model can be considered to be a *theoretical way of developing software*. But all other life cycle models are essentially derived from the classical waterfall model. So, in order to be able to appreciate other life cycle models it is necessary to learn the classical waterfall model. Classical waterfall model divides the life cycle into the following phases as shown in fig.2.1:

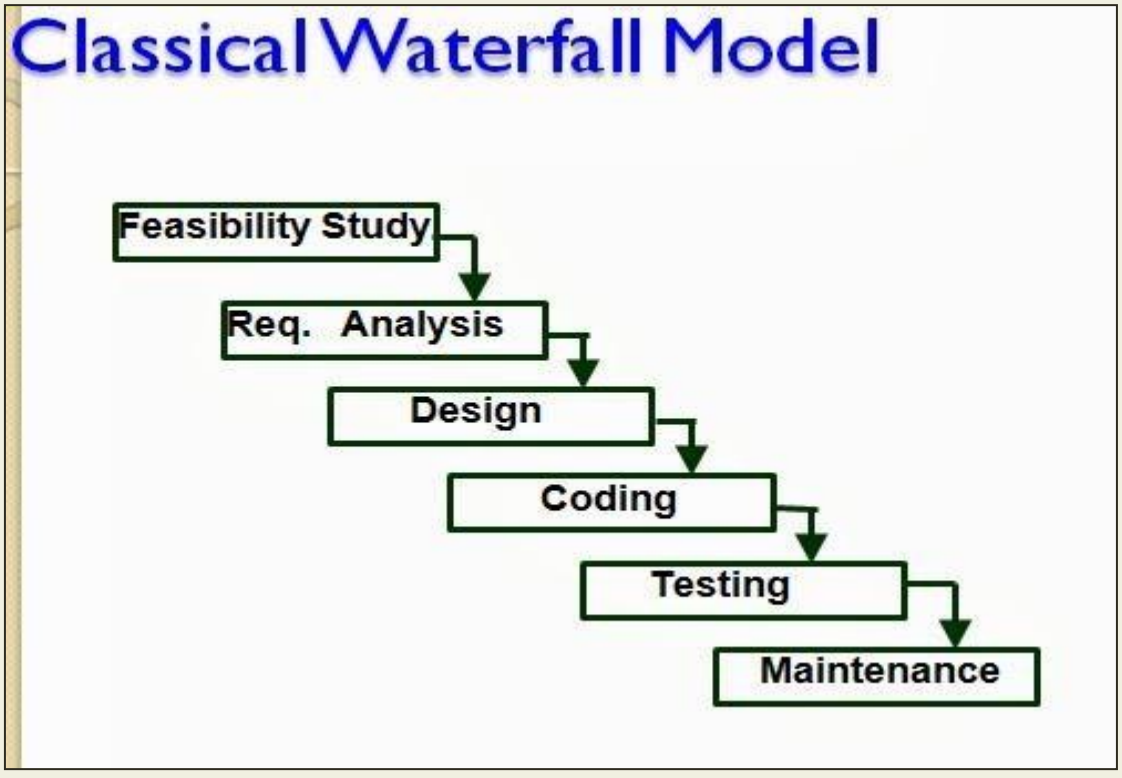


Fig 2.1: Classical Waterfall Model

Feasibility study - The main aim of feasibility study is to determine whether it would be financially and technically feasible to develop the product.

- At first project managers or team leaders try to have a rough understanding of what is required to be done by visiting the client side. They study different input data to the system and output data to be produced by the system. They study what kind of processing is needed to be done on these data and they look at the various constraints on the behavior of the system.

- After they have an overall understanding of the problem they investigate the different solutions that are possible. Then they examine each of the solutions in terms of what kind of resources required, what would be the cost of development and what would be the development time for each solution.

- Based on this analysis they pick the best solution and determine whether the solution is feasible financially and technically. They check whether the customer budget would meet the cost of the product and whether they have sufficient technical expertise in the area of development.

Requirements analysis and specification: - The aim of the requirements analysis and specification phase is to understand the exact requirements of the customer and to document them properly. This phase consists of two distinct activities, namely

- Requirements gathering and analysis
- Requirements specification

The goal of the requirements gathering activity is to collect all relevant information from the customer regarding the product to be developed. This is done to clearly understand the customer requirements so that incompleteness and inconsistencies are removed.

The requirements analysis activity is begun by collecting all relevant data regarding the product to be developed from the users of the product and from the customer through interviews and discussions. For example, to perform the requirements analysis of a business accounting software required by an organization, the analyst might interview all the accountants of the organization to ascertain their requirements. The data collected from such a group of users usually contain several contradictions and ambiguities, since each user typically has only a partial and incomplete view of the system. Therefore it is necessary to identify all ambiguities and contradictions in the requirements and resolve them through further discussions with the customer. After all ambiguities, inconsistencies, and incompleteness have been resolved and all the requirements properly understood, the requirements specification activity can start. During this activity, the user requirements are systematically organized into a Software Requirements Specification (SRS) document. The customer requirements identified during the requirements gathering and analysis activity are organized into a SRS document. The important components of this document are functional requirements, the nonfunctional requirements, and the goals of implementation.

Design: - The goal of the design phase is to transform the requirements specified in the SRS document into a structure that is suitable for implementation in some programming language. In technical terms, during the design phase the software architecture is derived from the SRS document. Two distinctly different approaches are available: the traditional design approach and the object-oriented design approach.

- **Traditional design approach -**Traditional design consists of two different activities; firsta structured analysis of the requirements specification is carried out where the detailed structure of the problem is examined. This is followed by a structured design activity. During structured design, the results of structured analysis are transformed into thesoftware design.
- **Object-oriented design approach** -In this technique, various objects that occur in the problem domain and the solution domain are first identified, and the different relationships that exist among these objects are identified. The object structure is further refined to obtain the detailed design.

Coding and unit testing:-The purpose of the coding phase (sometimes called the implementation phase) of software development is to translate the software design into source code. Each component of the design is implemented as a program module. The end-product of this phase is a set of program modules that have been individually tested. During this phase, eachmodule is unit tested to determine the correct working of all the individual modules. It involves testing each module in isolation as this is the most efficient way to debug the errors identified at this stage.

Integration and system testing: -Integration of different modules is undertaken once they have been coded and unit tested. During the integration and system testing phase, the modules are integrated in a planned manner. The different modules making up a software product are almost never integrated in one shot. Integration is normally carried out incrementally over a number of steps. During each integration step, the partially integrated system is tested and a set of previously planned modules are added to it. Finally, when all the modules have been successfully integrated and tested, system testing is carried out. The goal of system testing is to ensure that the developed system conforms to its requirements laid out in the SRS document. System testing usually consists of three different kinds of testing activities:

- α – testing: It is the system testing performed by the development team.
- β –testing: It is the system testing performed by a friendly set of customers.
- Acceptance testing: It is the system testing performed by the customer himself after theproduct delivery to determine whether to accept or reject the delivered product.

System testing is normally carried out in a planned manner according to the system test plan document. The system test plan identifies all testing-related activities that must

be performed,

specifies the schedule of testing, and allocates resources. It also lists all the test cases and the expected outputs for each test case.

Maintenance: -Maintenance of a typical software product requires much more than the effort necessary to develop the product itself. Many studies carried out in the past confirm this and indicate that the relative effort of development of a typical software product to its maintenance effort is roughly in the 40:60 ratios. Maintenance involves performing any one or more of the following three kinds of activities:

- Correcting errors that were not discovered during the product development phase. This is called corrective maintenance.
- Improving the implementation of the system, and enhancing the functionalities of the system according to the customer's requirements. This is called perfective maintenance.
- Porting the software to work in a new environment. For example, porting may be required to get the software to work on a new computer platform or with a new operating system. This is called adaptive maintenance.

Shortcomings of the classical waterfall model

The classical waterfall model is an idealistic one since it assumes that no development error is ever committed by the engineers during any of the life cycle phases. However, in practical development environments, the engineers do commit a large number of errors in almost every phase of the life cycle. The source of the defects can be many: oversight, wrong assumptions, use of inappropriate technology, communication gap among the project engineers, etc. These defects usually get detected much later in the life cycle. For example, a design defect might go unnoticed till we reach the coding or testing phase. Once a defect is detected, the engineers need to go back to the phase where the defect had occurred and redo some of the work done during that phase and the subsequent phases to correct the defect and its effect on the later phases. Therefore, inany practical software development work, it is not possible to strictly follow the classicalwaterfall model.

LECTURE NOTE 3

2. ITERATIVE WATERFALL MODEL

To overcome the major shortcomings of the classical waterfall model, we come up with the iterative waterfall model.

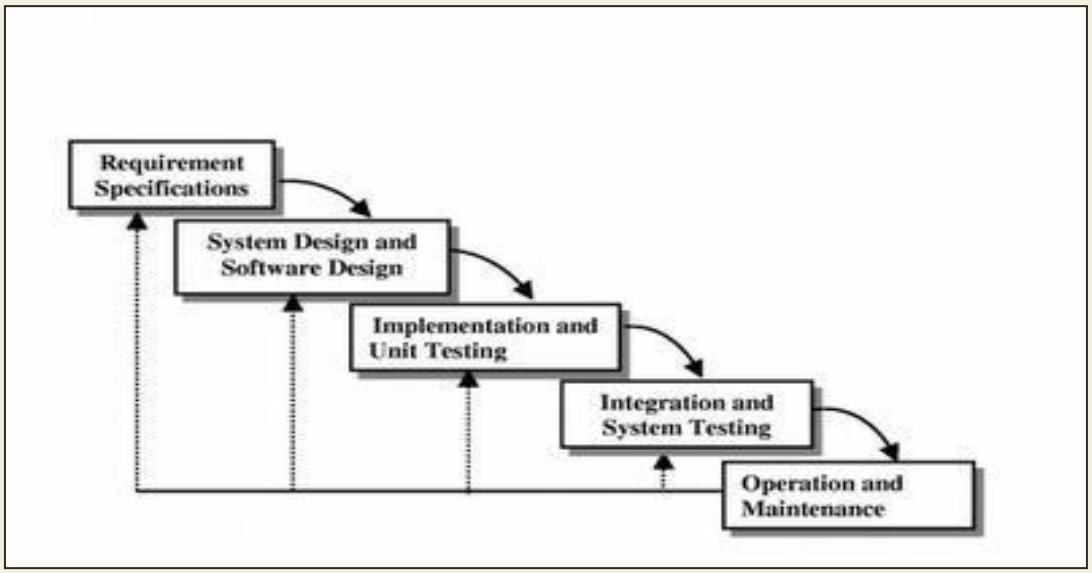


Fig 3.1 : Iterative Waterfall Model

Here, we provide feedback paths for error correction as & when detected later in a phase. Though errors are inevitable, but it is desirable to detect them in the same phase in which they occur. If so, this can reduce the effort to correct the bug.

The advantage of this model is that there is a working model of the system at a very early stage of development which makes it easier to find functional or design flaws. Finding issues at an early stage of development enables to take corrective measures in a limited budget.

The disadvantage with this SDLC model is that it is applicable only to large and bulky software development projects. This is because it is hard to break a small software system into further small serviceable increments/modules.

PRTOTYPING MODEL

A prototype is a toy implementation of the system. A prototype usually exhibits limited functional capabilities, low reliability, and inefficient performance compared to the actual software. A prototype is usually built using several shortcuts. The shortcuts might involve using inefficient, inaccurate, or dummy functions. The shortcut implementation of a function, for example, may produce the desired results by using a table look-up instead of performing the actual computations. A prototype usually turns out to be a very crude version of theactual system.

Need for a prototype in software development

There are several uses of a prototype. An important purpose is to illustrate the input data formats, messages, reports, and the interactive dialogues to the customer. This is a valuable mechanism for gaining better understanding of the customer's needs:

- how the screens might look like
- how the user interface would behave
- how the system would produce outputs

Another reason for developing a prototype is that it is impossible to get the perfect product in the first attempt. Many researchers and engineers advocate that if you want to develop a good product you must plan to throw away the first version. The experience gained in developing the prototype can be used to develop the final product.

A prototyping model can be used when technical solutions are unclear to the development team. A developed prototype can help engineers to critically examine the technical issues associated with the product development. Often, major design decisions depend on issues like the response time of a hardware controller, or the efficiency of a sorting algorithm, etc. In such circumstances, a prototype may be the best or the only way to resolve the technical issues.

A prototype of the actual product is preferred in situations such as:

- User requirements are not complete
- Technical issues are not clear

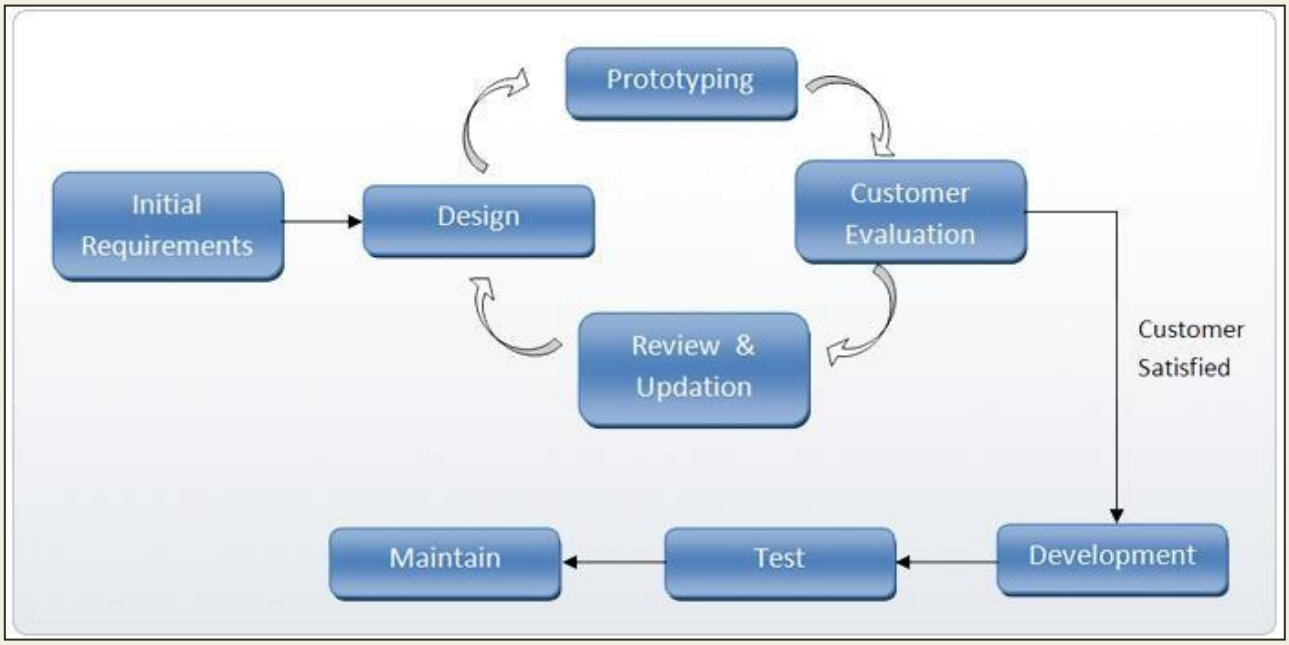


Fig 3.2: Prototype Model

EVOLUTIONARY MODEL

It is also called *successive versions model* or *incremental model*. At first, a simple working model is built. Subsequently it undergoes functional improvements & we keep on adding new functions till the desired system is built.

Applications:

- Large projects where you can easily find modules for incremental implementation. Often used when the customer wants to start using the core features rather than waiting for the full software.
- Also used in object oriented software development because the system can be easily portioned into units in terms of objects.

Advantages:

- User gets a chance to experiment partially developed system
- Reduce the error because the core modules get tested

thoroughly.Disadvantages:

- It is difficult to divide the problem into several versions that would be acceptable to thecustomer which can be incrementally implemented & delivered.

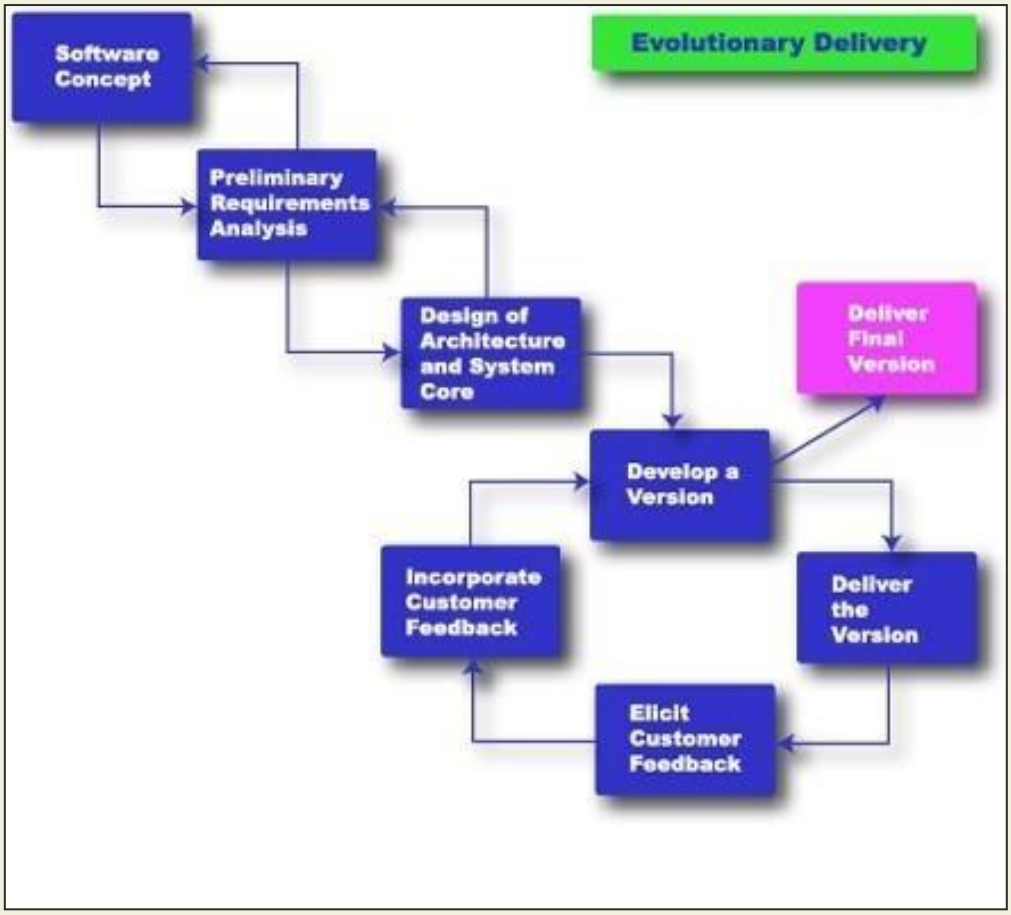


Fig 3.3: Evolutionary Model

LECTURE NOTE 4

3. SPIRAL MODEL

The Spiral model of software development is shown in fig. 4.1. The diagrammatic representationof this model appears like a spiral with many loops. The exact number of loops in the spiral is not fixed. Each loop of the spiral represents a phase of the software process. For example, the innermost loop might be concerned with feasibility study, the next loop with requirements specification, the next one with design, and so on. Each phase in this model is split into four sectors (or quadrants) as shown in fig. 4.1. The following activities are carried out during each phase of a spiral model.

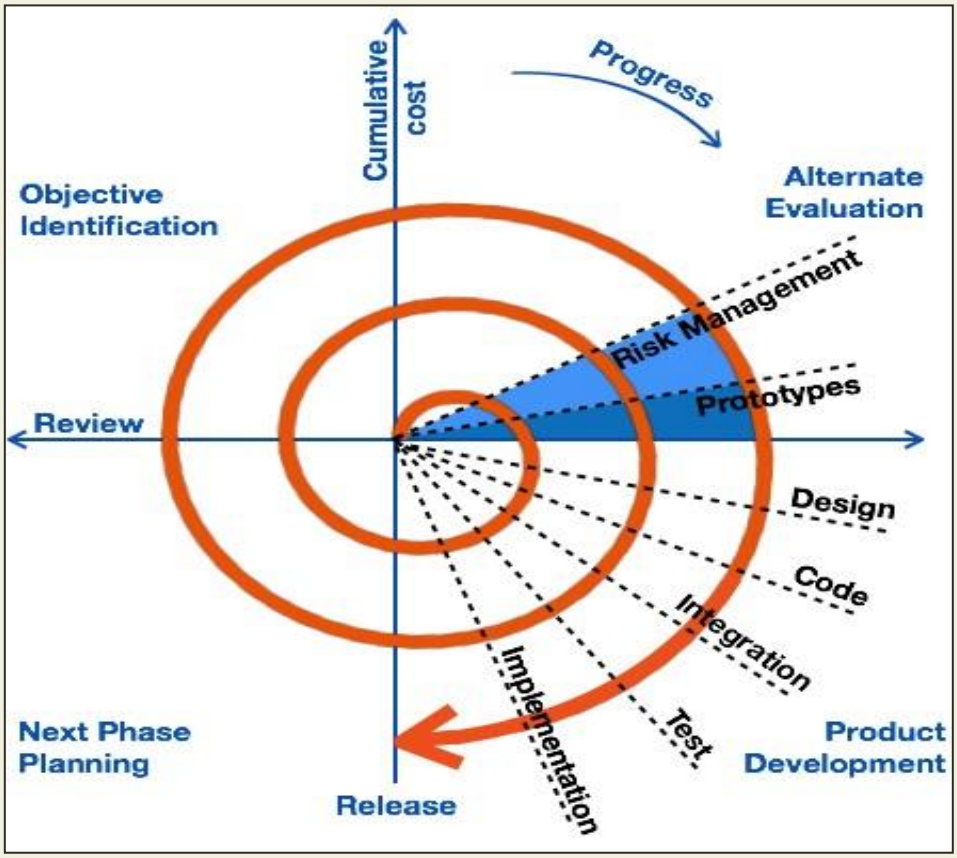


Fig 4.1: Spiral Model

First quadrant (Objective Setting)

- During the first quadrant, it is needed to identify the objectives of the phase.
- Examine the risks associated with these objectives.

Second Quadrant (Risk Assessment and Reduction)

- A detailed analysis is carried out for each identified project risk.
- Steps are taken to reduce the risks. For example, if there is a risk that the requirements are inappropriate, a prototype system may be developed.

Third Quadrant (Development and Validation)

- Develop and validate the next level of the product after resolving the identified risks.

Fourth Quadrant (Review and Planning)

- Review the results achieved so far with the customer and plan the next iteration around the spiral.
- Progressively more complete version of the software gets built with each iteration around the spiral.

Circumstances to use spiral model

The spiral model is called a meta model since it encompasses all other life cycle models. Risk handling is inherently built into this model. The spiral model is suitable for development of technically challenging software products that are prone to several kinds of risks. However, this model is much more complex than the other models – this is probably a factor deterring its use in ordinary projects.

Comparison of different life-cycle models

The classical waterfall model can be considered as the basic model and all other life cycle models as embellishments of this model. However, the classical waterfall model cannot be used in practical development projects, since this model supports no mechanism to handle the errors committed during any of the phases.

This problem is overcome in the iterative waterfall model. The iterative waterfall model is probably the most widely used software development model evolved so far. This model is simple to understand and use. However this model is suitable only for well-understood problems; it is not suitable for very large projects and for projects that are subject to many risks.

The prototyping model is suitable for projects for which either the user requirements or the underlying technical aspects are not well understood. This model is especially popular for development of the user-interface part of the projects.

The evolutionary approach is suitable for large problems which can be decomposed into a set of modules for incremental development and delivery. This model is also widely used for object- oriented development projects. Of course, this model can only be used if the incremental deliveryof the system is acceptable to the customer.

The spiral model is called a meta model since it encompasses all other life cycle models. Risk handling is inherently built into this model. The spiral model is suitable for development of technically challenging software products that are prone to several kinds of risks. However, this model is much more complex than the other models – this is probably a factor deterring its use inordinary projects.

The different software life cycle models can be compared from the viewpoint of the customer. Initially, customer confidence in the development team is usually high irrespective of the development model followed. During the lengthy development process, customer confidence normally drops off, as no working product is immediately visible. Developers answer custo2mer queries using technical slang, and delays are announced. This gives rise to customer resentment. On the other hand, an evolutionary approach lets the customer experiment with a working product much earlier than the monolithic approaches. Another important advantage of the incremental model is that it reduces the customer's trauma of getting used to an entirely new system. The gradual introduction of the product via incremental phases provides time to the customer to adjust to the new product. Also, from the customer's financial viewpoint, incremental development does not require a large upfront capital outlay. The customer can order the incremental versions as and when he can afford them.

LECTURE NOTE 5

Software Requirement Analysis

Software Requirement Specification (SRS)

In order to form a good SRS, here you will see some points that can be used and should be considered to form a structure of good Software Requirements Specification (SRS). These are below mentioned in the table of contents and are well explained below.

Software Requirement Specification (SRS) Format as the name suggests, is a complete specification and description of requirements of the software that need to be fulfilled for the successful development of the software system. These requirements can be functional as well as non-functional depending upon the type of requirement. The interaction between different customers and contractors is done because it is necessary to fully understand the needs of

customers. Depending upon information gathered after interaction, SRS is developed which describes requirements of software that may include changes and modifications that is needed to be done to increase quality of product and to satisfy customer's demand.

Introduction

- **Purpose of this Document –** At first, main aim of why this document is necessary and what's purpose of document is explained and described.
- **Scope of this document –** In this, overall working and main objective of document and what value it will provide to customer is described and explained. It also includes a description of development cost and time required.
- **Overview –** In this, description of product is explained. It's simply summary or overall review of product.

General description

In this, general functions of product which includes objective of user, a user characteristic, features, benefits, about why its importance is mentioned. It also describes features of user community.

Functional Requirements

In this, possible outcome of software system which includes effects due to operation of program is fully explained. All functional requirements which may include calculations, data processing, etc. are placed in a ranked order. Functional requirements specify the expected behavior of the system-which outputs should be produced from the given inputs. They describe the relationship between the input and output of the system. For each functional requirement, detailed description all the data inputs and their source, the units of measure, and the range of valid inputs must be specified.

Interface Requirements

In this, software interfaces which mean how software program communicates with each other or users either in form of any language, code, or message are fully described and explained. Examples can be shared memory, data streams, etc.

Performance Requirements

In this, how a software system performs desired functions under specific condition is explained. It also explains required time, required memory, maximum error rate, etc. The performance requirements part of an SRS specifies the performance constraints on the software system. All the requirements relating to the performance characteristics of the system must be clearly specified. There are two types of performance requirements: static and dynamic. Static requirements are those that do not impose constraint on the execution characteristics of the system. Dynamic requirements specify constraints on the execution behaviour of the system.

Design Constraints

In this, constraints which simply means limitation or restriction are specified and explained for design team. Examples may include use of a particular algorithm, hardware and software limitations, etc. There are a number of factors in the client's environment that may restrict the choices of a designer leading to design constraints such factors include standards that must be followed resource limits, operating environment, reliability and security requirements and policies that may have an impact on the design of the system. An SRS should identify and specify all such constraints.

Non-Functional Attributes

In this, non-functional attributes are explained that are required by software system for better performance. An example may include Security, Portability, Reliability, Reusability, Application compatibility, Data integrity, Scalability capacity, etc.

Preliminary Schedule and Budget

In this, initial version and budget of project plan are explained which include overall time duration required and overall cost required for development of project.

Appendices

In this, additional information like references from where information is gathered, definitions of some specific terms, acronyms, abbreviations, etc. are given and explained.

Uses of SRS document

- Development team require it for developing product according to the need.
- Test plans are generated by testing group based on the describe external behaviour.
- Maintenance and support staff need it to understand what the software product is supposed to do.
- Project manager base their plans and estimates of schedule, effort and resources on it.
- customer rely on it to know that product they can expect.
- As a contract between developer and customer.
- in documentation purpose.

Properties of a good SRS document

The important properties of a good SRS document are the following:

- **Concise.** The SRS document should be concise and at the same time unambiguous, consistent, and complete. Verbose and irrelevant descriptions reduce readability and also increase error possibilities.

- **Structured.** It should be well-structured. A well-structured document is easy to understand and modify. In practice, the SRS document undergoes several revisions to cope up with the customer requirements. Often, the customer requirements evolve over a period of time. Therefore, in order to make the modifications to the SRS document easy, it is important to make the document well-structured.

- **Black-box view.** It should only specify what the system should do and refrain from stating how to do these. This means that the SRS document should specify the external behavior of the system and not discuss the implementation issues. The SRS document should view the system to be developed as black box, and should specify the externally visible behavior of the system. For this reason, the SRS document is also called the black-box specification of a system.

- **Conceptual integrity.** It should show conceptual integrity so that the reader can easily understand it.

- **Response to undesired events.** It should characterize acceptable responses to undesired events. These are called system response to exceptional conditions.

- **Verifiable.** All requirements of the system as documented in the SRS document should be verifiable. This means that it should be possible to determine whether or not requirements have been met in an implementation.

Problems without a SRS document

The important problems that an organization would face if it does not develop a SRS document are as follows:

- Without developing the SRS document, the system would not be implemented according to customer needs.

- Software developers would not know whether what they are developing is what exactly required by the customer.

- Without SRS document, it will be very much difficult for the maintenance engineers to understand the functionality of the system.

- It will be very much difficult for user document writers to write the users' manuals properly without understanding the SRS document.

Problems with an unstructured specification

- It would be very much difficult to understand that document.
- It would be very much difficult to modify that document.
- Conceptual integrity in that document would not be shown.
- The SRS document might be unambiguous and inconsistent.

LECTURE NOTE - 6

FORMAL SPECIFICATION

A formal software specification is a statement expressed in a language whose vocabulary, syntax, and semantics are formally defined. The need for a formal semantic definition means that the specification languages cannot be based on natural language; it must be based on mathematics.

The advantages of a formal language are:

- The development of a formal specification provides insights and understanding of the software requirements and the software design.
- Given a formal system specification and a complete formal programming language definition, it may be possible to prove that a program conforms to its specifications.
- Formal specification may be automatically processed. Software tools can be built to assist with their development, understanding, and debugging.
- Depending on the formal specification language being used, it may be possible to animate a formal system specification to provide a prototype system.
- Formal specifications are mathematical entities and may be studied and analyzed using mathematical methods.
- Formal specifications may be used as a guide to the tester of a component in identifying appropriate test cases.

Formal specifications sometimes are not used because:

• Software management is conservative and unwilling to adopt new techniques whose payoff is not immediately obvious.

• Most software engineers have not been trained in formal specification techniques.
• Some classes of systems are difficult to specify using existing specification techniques. Interactive and interrupt driven systems might be examples.

Lecture Note - 7

Requirement Gathering Techniques

Techniques describe how tasks are performed under specific circumstances. A task may have none or one or more related techniques. A technique should be related to at least one task.

The following are some of the well-known requirements gathering techniques −

Brainstorming

Brainstorming is used in requirement gathering to get as many ideas as possible from group of people. Generally used to identify possible solutions to problems, and clarify details of opportunities.

Document Analysis

Reviewing the documentation of an existing system can help when creating AS–IS process document, as well as driving gap analysis for scoping of migration projects. In an ideal world, we would even be reviewing the requirements that drove creation of the existing system – a starting point for documenting current requirements. Nuggets of information are often buried in existing documents that help us ask questions as part of validating requirement completeness.

Focus Group

A focus group is a gathering of people who are representative of the users or customers of a product to get feedback. The feedback can be gathered about needs/opportunities/ problems to identify requirements, or can be gathered to validate and refine already elicited requirements. This form of market research is distinct from brainstorming in that it is a managed process with specific participants.

Interface analysis

Interfaces for a software product can be human or machine. Integration with external systems and devices is just another interface. User centric design approaches are very effective at making sure that we create

usable software. Interface analysis – reviewing the touch points with other external systems is important to make sure we don't overlook requirements that aren't immediately visible to users.

Interview

Interviews of stakeholders and users are critical to creating the great software. Without understanding the goals and expectations of the users and stakeholders, we are very unlikely to satisfy them. We also have to recognize the perspective of each interviewee, so that, we can properly weigh and address their inputs. Listening is the skill that helps a great analyst to get more value from an interview than an average analyst.

Observation

By observing users, an analyst can identify a process flow, steps, pain points and opportunities for improvement. Observations can be passive or active (asking questions while observing). Passive observation is better for getting feedback on a prototype (to refine requirements), where active observation is more effective at getting an understanding of an existing business process. Either approach can be used.

Prototyping

Prototyping is a relatively modern technique for gathering requirements. In this approach, you gather preliminary requirements that you use to build an initial version of the solution - a prototype. You show this to the client, who then gives you additional requirements. You change the application and cycle around with the client again. This repetitive process continues until the product meets the critical mass of business needs or for an agreed number of iterations.

Requirement Workshops

Workshops can be very effective for gathering requirements. More structured than a brainstorming session, involved parties collaborate to document requirements. One way to capture the collaboration is with creation of domain-model artifacts (like static diagrams, activity diagrams). A workshop will be more effective with two analysts than with one.

Reverse Engineering

When a migration project does not have access to sufficient documentation of the existing system, reverse engineering will identify what the system does. It will not identify what the system should do, and will not identify when the system does the wrong thing.

Survey/Questionnaire

When collecting information from many people – too many to interview with budget and time constraints – a survey or questionnaire can be used. The survey can force users to select from choices, rate something ("Agree Strongly, agree…"), or have open ended questions allowing free-form responses. Survey design is hard – questions can bias the respondents.

Lecture Note – 8

Verification and Validation

- **Verification and Validation** is the process of investigating whether a software system satisfies specifications and standards and fulfills the required purpose. **Barry Boehm** described verification and validation as the following:

Verification: *Are we building the product right?*

Validation: *Are we building the right product?*

Verification

Verification is the process of checking that software achieves its goal without any bugs. It is the process to ensure whether the product that is developed is right or not. It verifies whether the developed product fulfills the requirements that we have. Verification is simply known as **Static Testing.**

Static Testing

Verification Testing is known as Static Testing and it can be simply termed as checking whether we are developing the right product or not and also whether our software is fulfilling the customer's requirement or not. Here are some of the activities that are involved in verification.

- Inspections
- Reviews
- Walkthroughs
- Desk-checking

Verification ----------→ Validation

Validation

Validation is the process of checking whether the software product is up to the mark or in other words product has high-level requirements. It is the process of checking the validation of the product i.e. it checks what we are developing is the right product. it is a validation of actual and expected products. Validation is simply known as **Dynamic Testing.**

Dynamic Testing

Validation Testing is known as Dynamic Testing in which we examine whether we have developed the product right or not and also about the business needs of the client. Here are some of the activities that are involved in Validation.

1. Black Box Testing
2. White Box Testing
3. Unit Testing
4. Integration Testing

Note: Verification is followed by Validation.