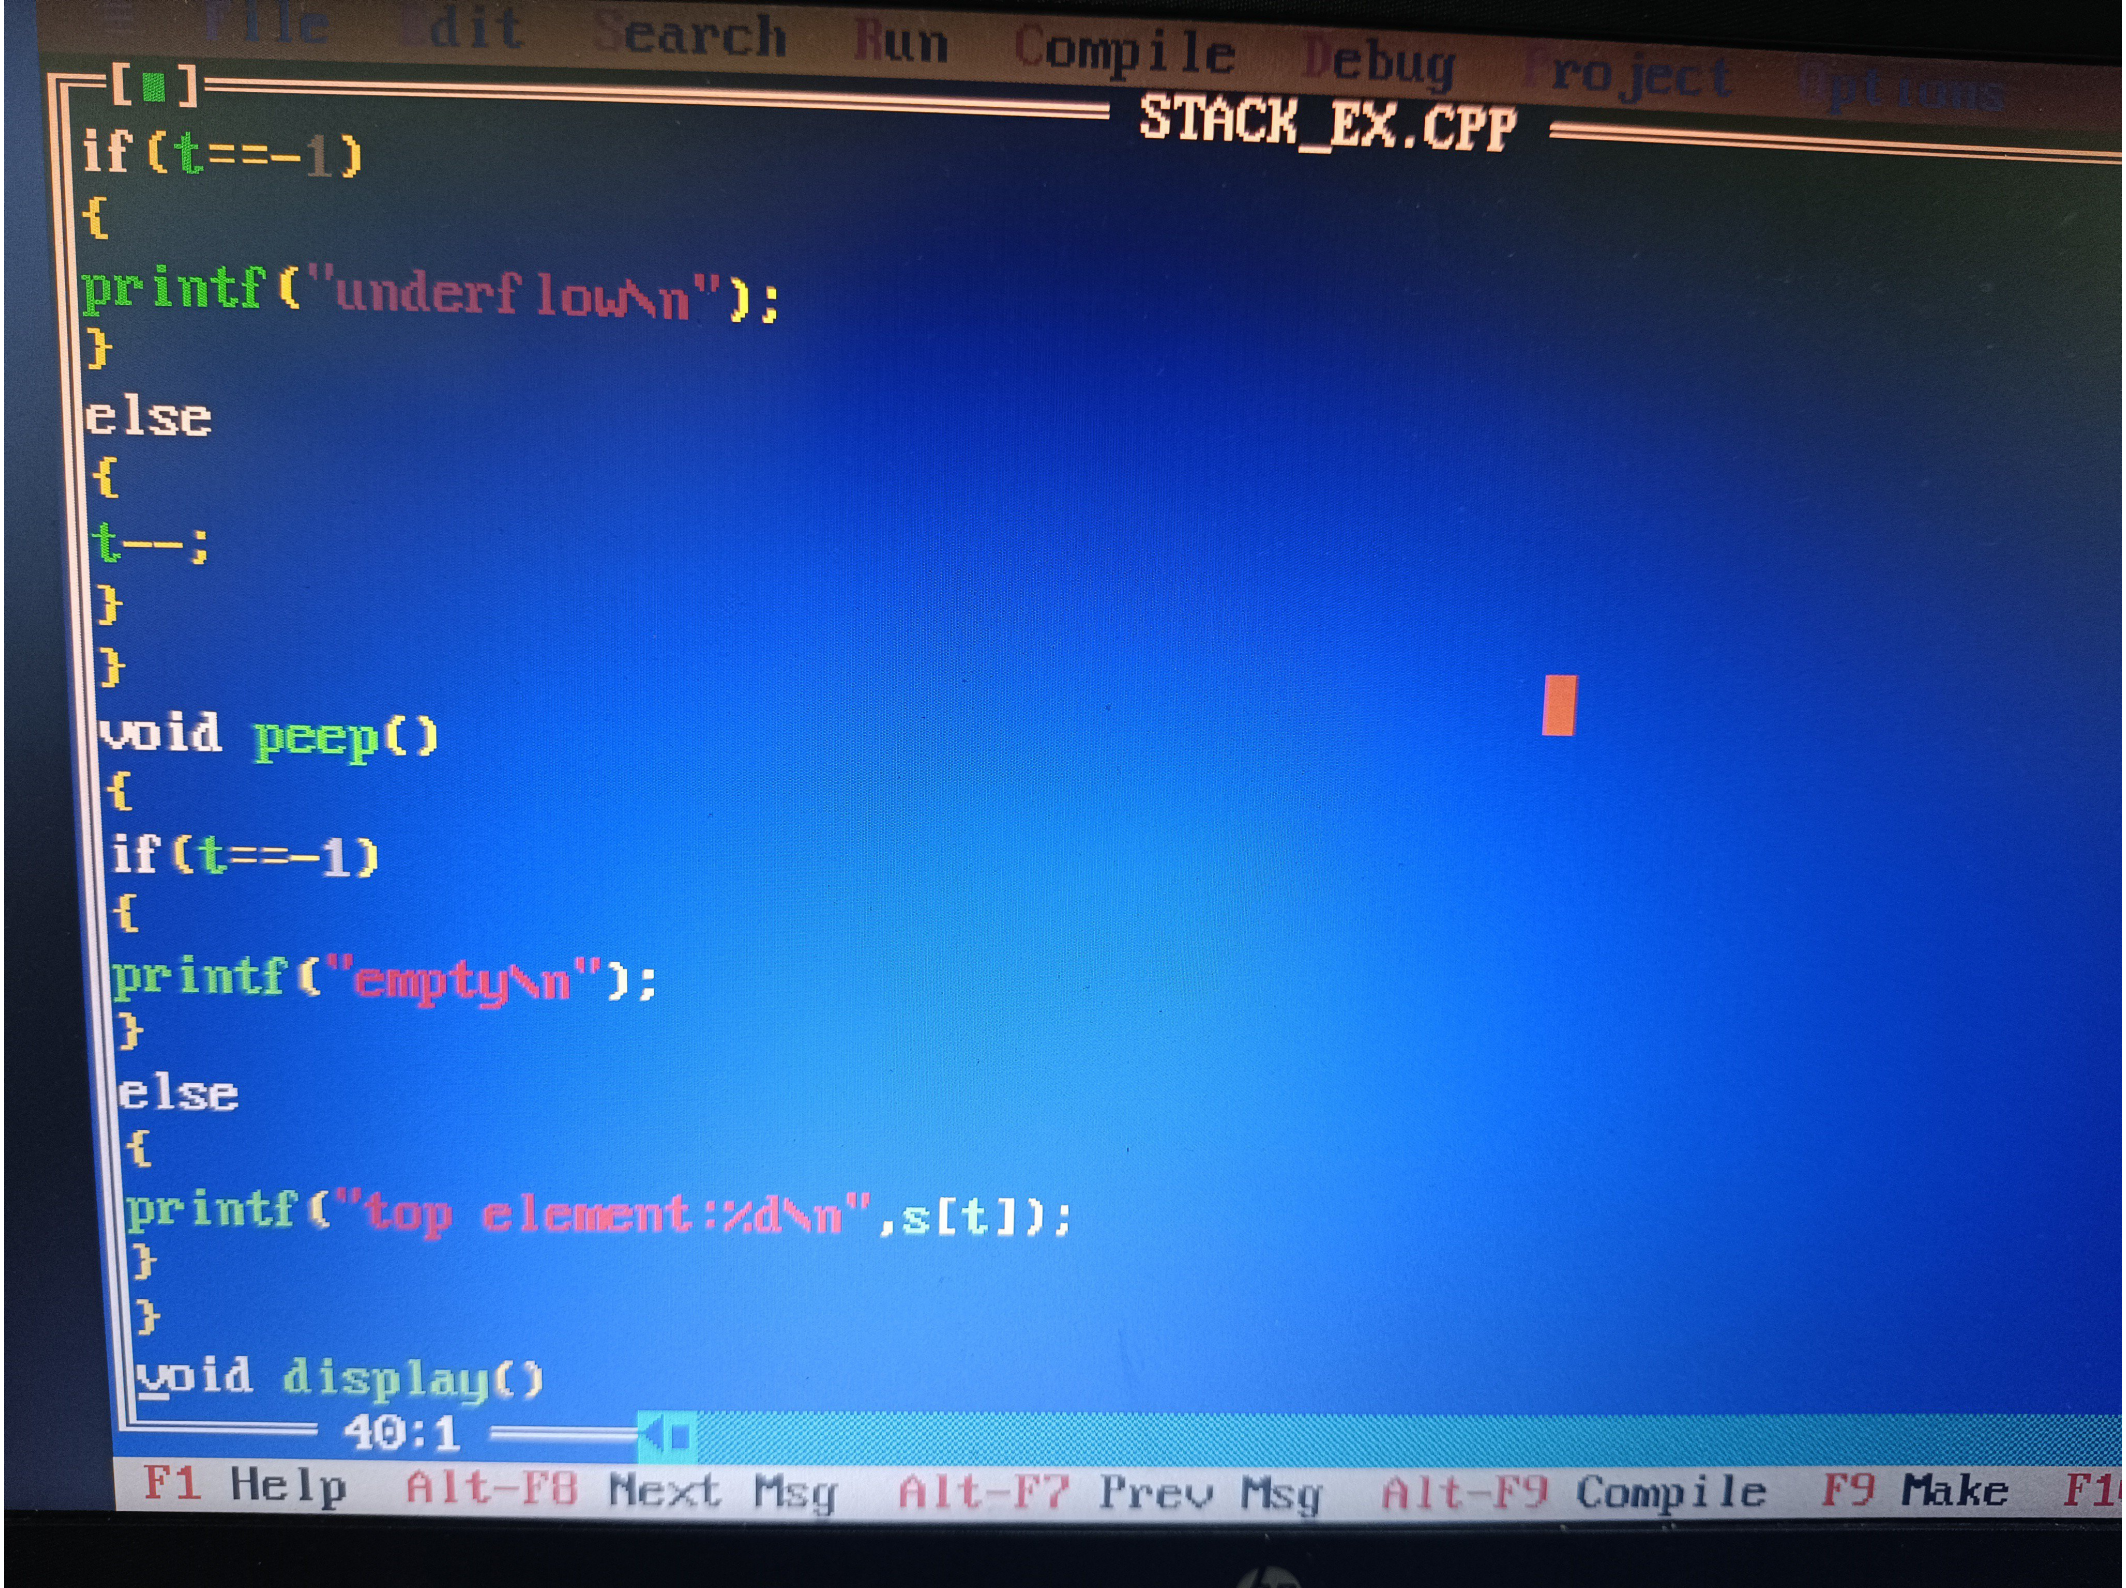
File Edit Search Run Compile Debug Project Options Window

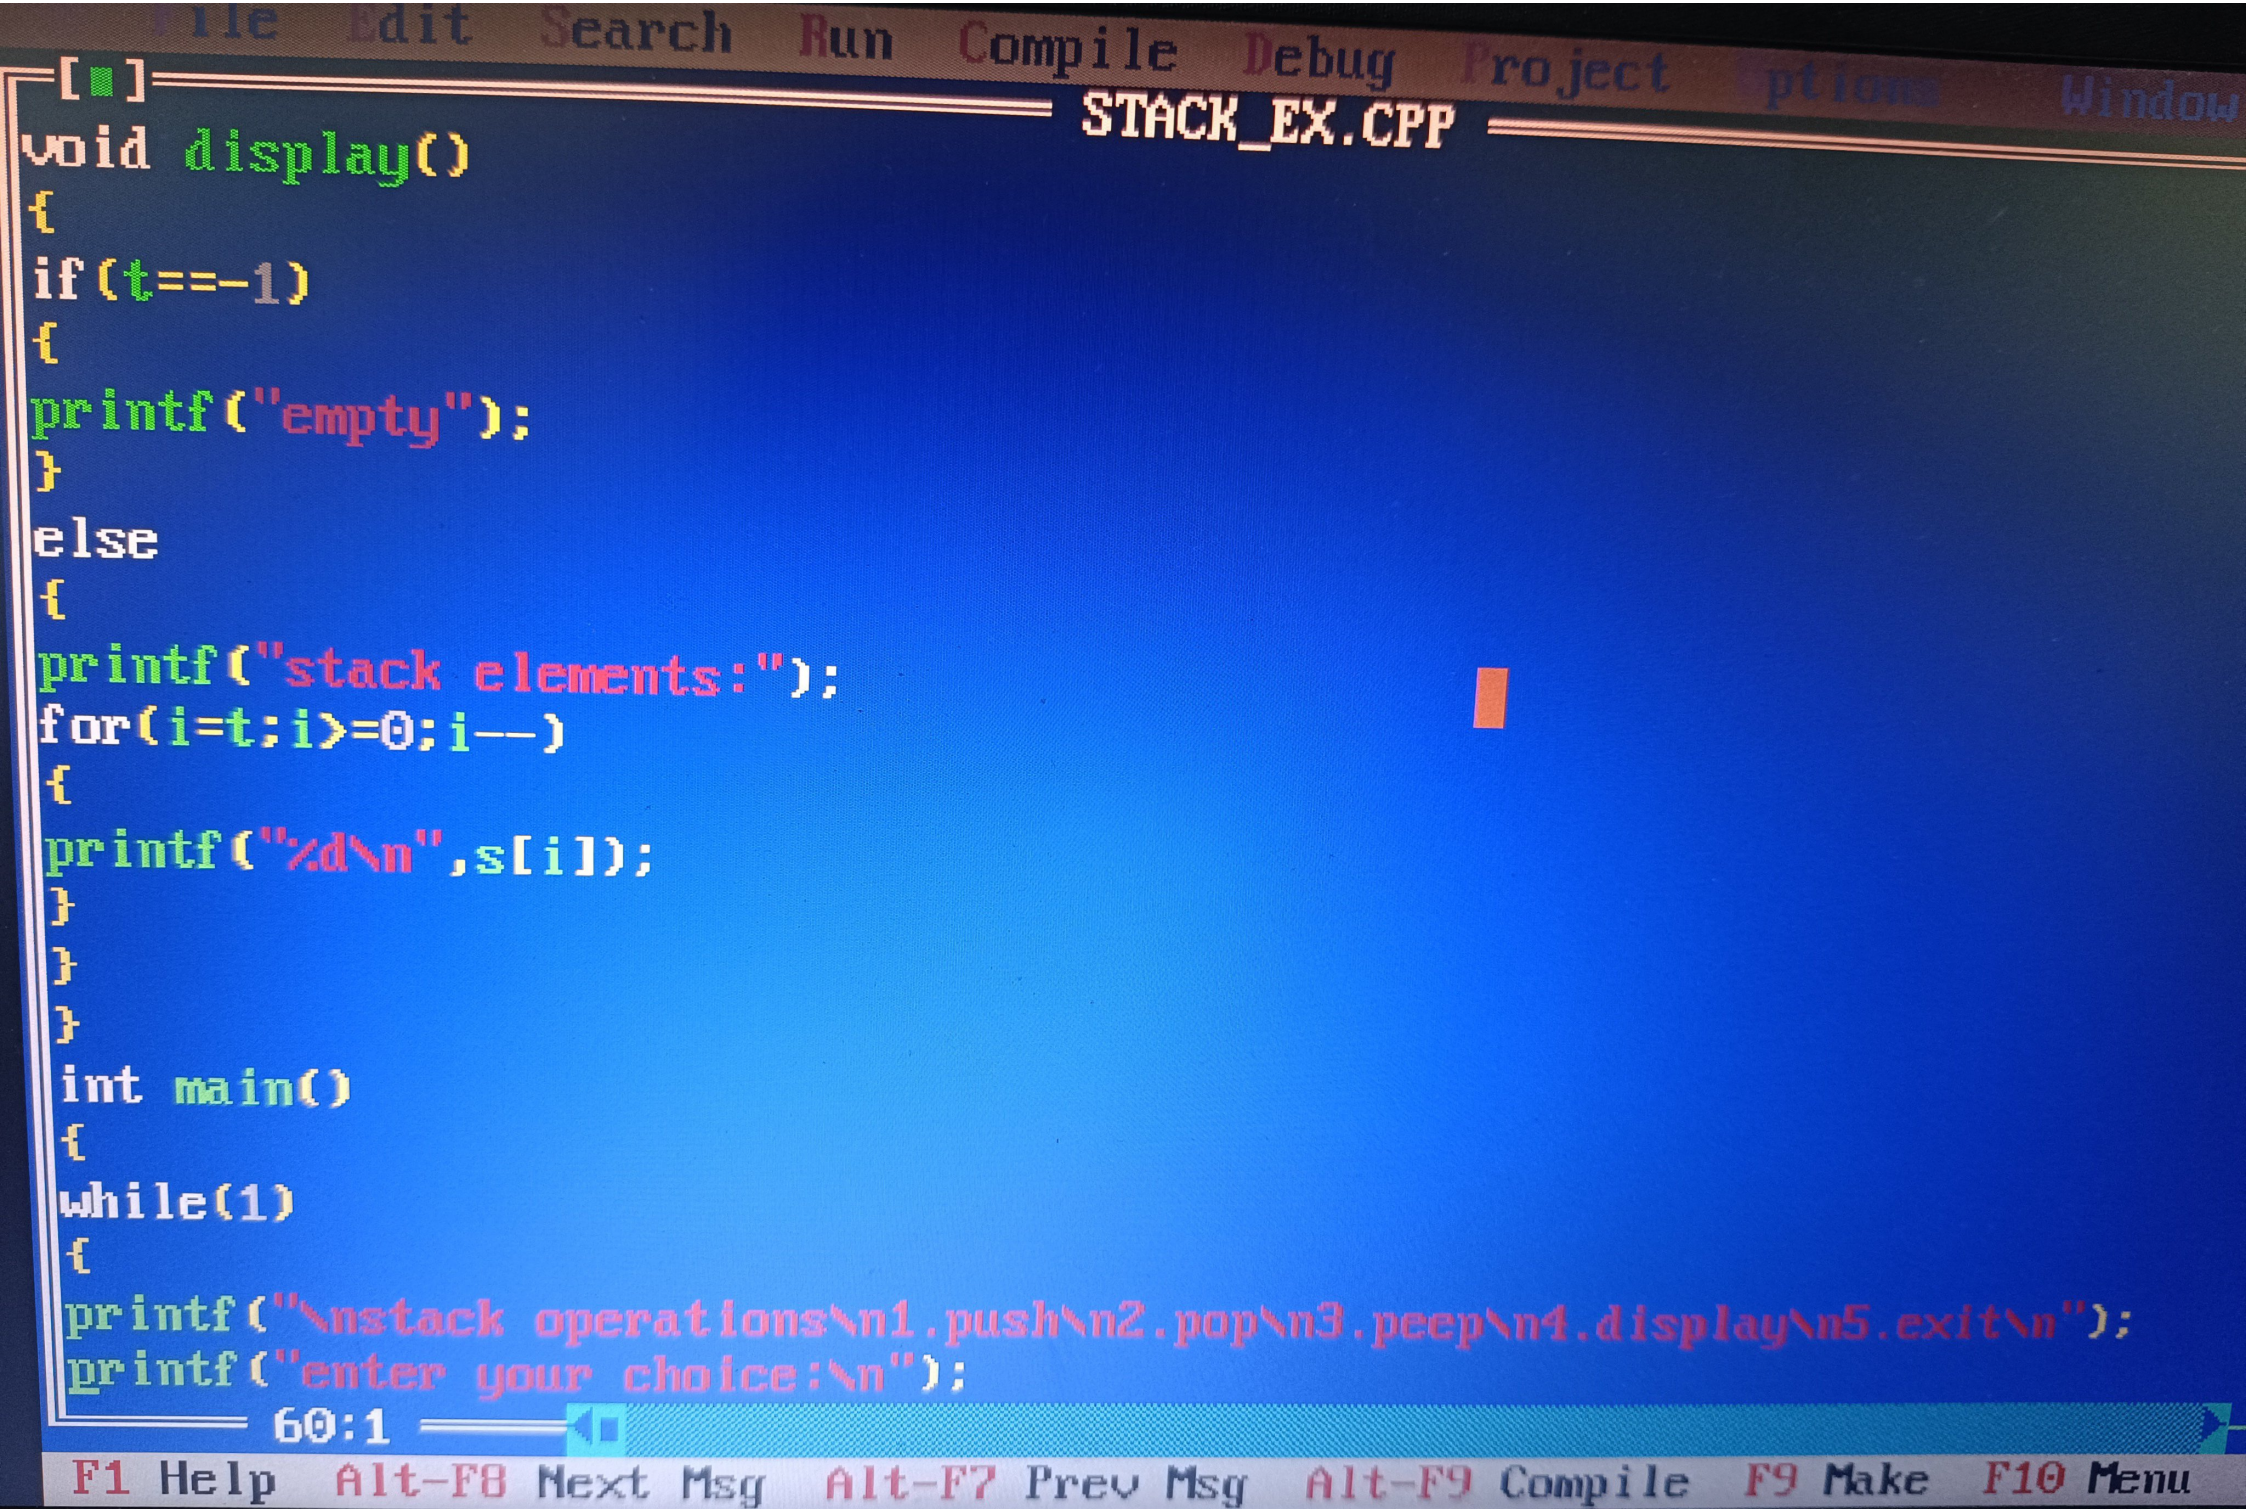
STACK_EX.CPP

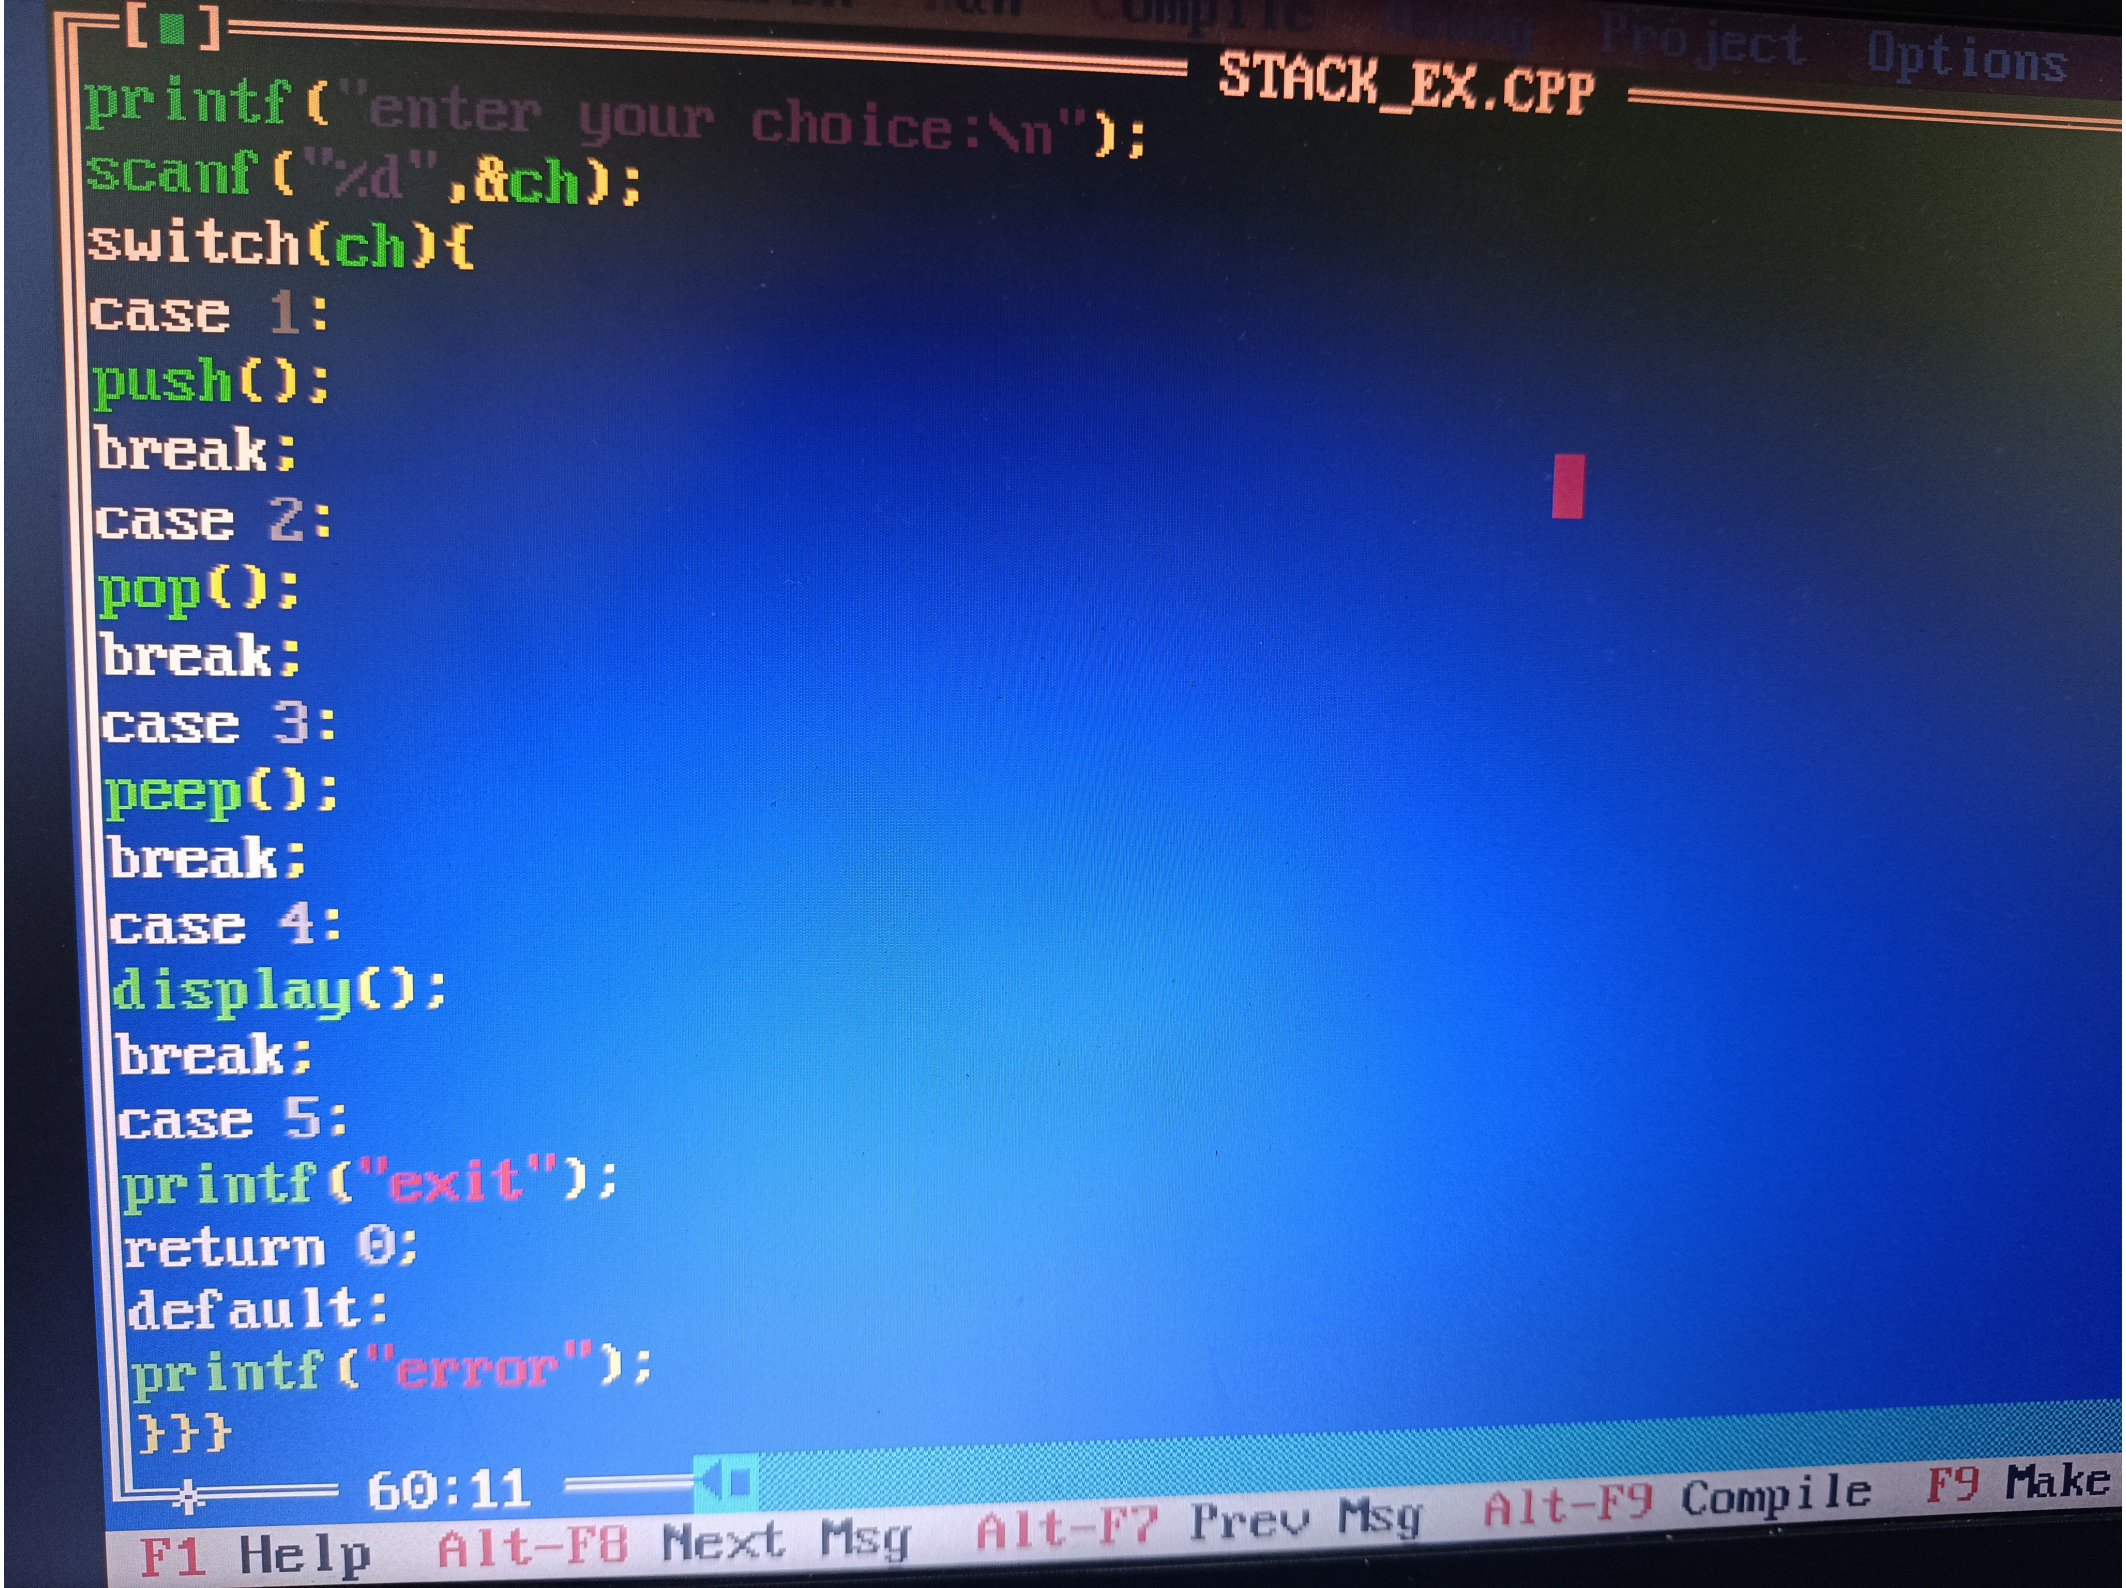
```
#include<stdio.h>
#define max 5
int s[max],n,i,ch,t=-1;
void push()
{
if(t==max-1)
{
printf("overflow\n");
}
else
{
printf("enter element:\n");
scanf("%d",&n);
t++;
s[t]=n;
}
}
void pop()
{
if(t==-1)
{
```

1:1

F1 Help Alt-F8 Next Msg Alt-F7 Prev Msg Alt-F9 Compile F9 Make F10 Menu


File Edit Search Run Compile Debug Project Options
STACK_EX.CPP
if(t==-1)
{
printf("underflow\n");
}
else
{
t--;
}
}
void peep()
{
if(t==-1)
{
printf("empty\n");
}
else
{
printf("top element::%d\n",s[t]);
}
}
void display()
40:1
F1 Help Alt-F8 Next Msg Alt-F7 Prev Msg Alt-F9 Compile F9 Make


File Edit Search Run Compile Debug Project Options Window
STACK_EX.CPP
void display()
{
if(t==-1)
{
printf("empty");
}
else
{
printf("stack elements:");
for(i=t;i>=0;i--)
{
printf("%d\n",s[i]);
}
}
}
int main()
{
while(1)
{
printf("\nstack operations\n1.push\n2.pop\n3.peep\n4.display\n5.exit\n");
printf("enter your choice:\n");
60:1
F1 Help Alt-F8 Next Msg Alt-F7 Prev Msg Alt-F9 Compile F9 Make F10 Menu


STACK_EX.CPP
printf("enter your choice:\n");
scanf("%d",&ch);
switch(ch){
case 1:
push();
break;
case 2:
pop();
break;
case 3:
peep();
break;
case 4:
display();
break;
case 5:
printf("exit");
return 0;
default:
printf("error");
}}}
60:11
F1 Help
Alt-F8 Next Msg
Alt-F7 Prev Msg
Alt-F9 Compile
F9 Make

```
C:\TURBOC3\BIN>TC

stack operations
1.push
2.pop
3.peep
4.display
5.exit
enter your choice:
1
enter element:
10

stack operations
1.push
2.pop
3.peep
4.display
5.exit
enter your choice:
1
enter element:
20_
```

```
3.peep
4.display
5.exit
enter your choice:
3
top element:20

stack operations
1.push
2.pop
3.peep
4.display
5.exit
enter your choice:
2

 stack operations
 1.push
 2.pop
 3.peep
 4.display
 5.exit
 enter your choice:
 4_
```

```
3.peep
4.display
5.exit
enter your choice:
2

stack operations
1.push
2.pop
3.peep
4.display
5.exit
enter your choice:
4
stack elements:10

stack operations
1.push
2.pop
3.peep
4.display
5.exit
enter your choice:
5
```