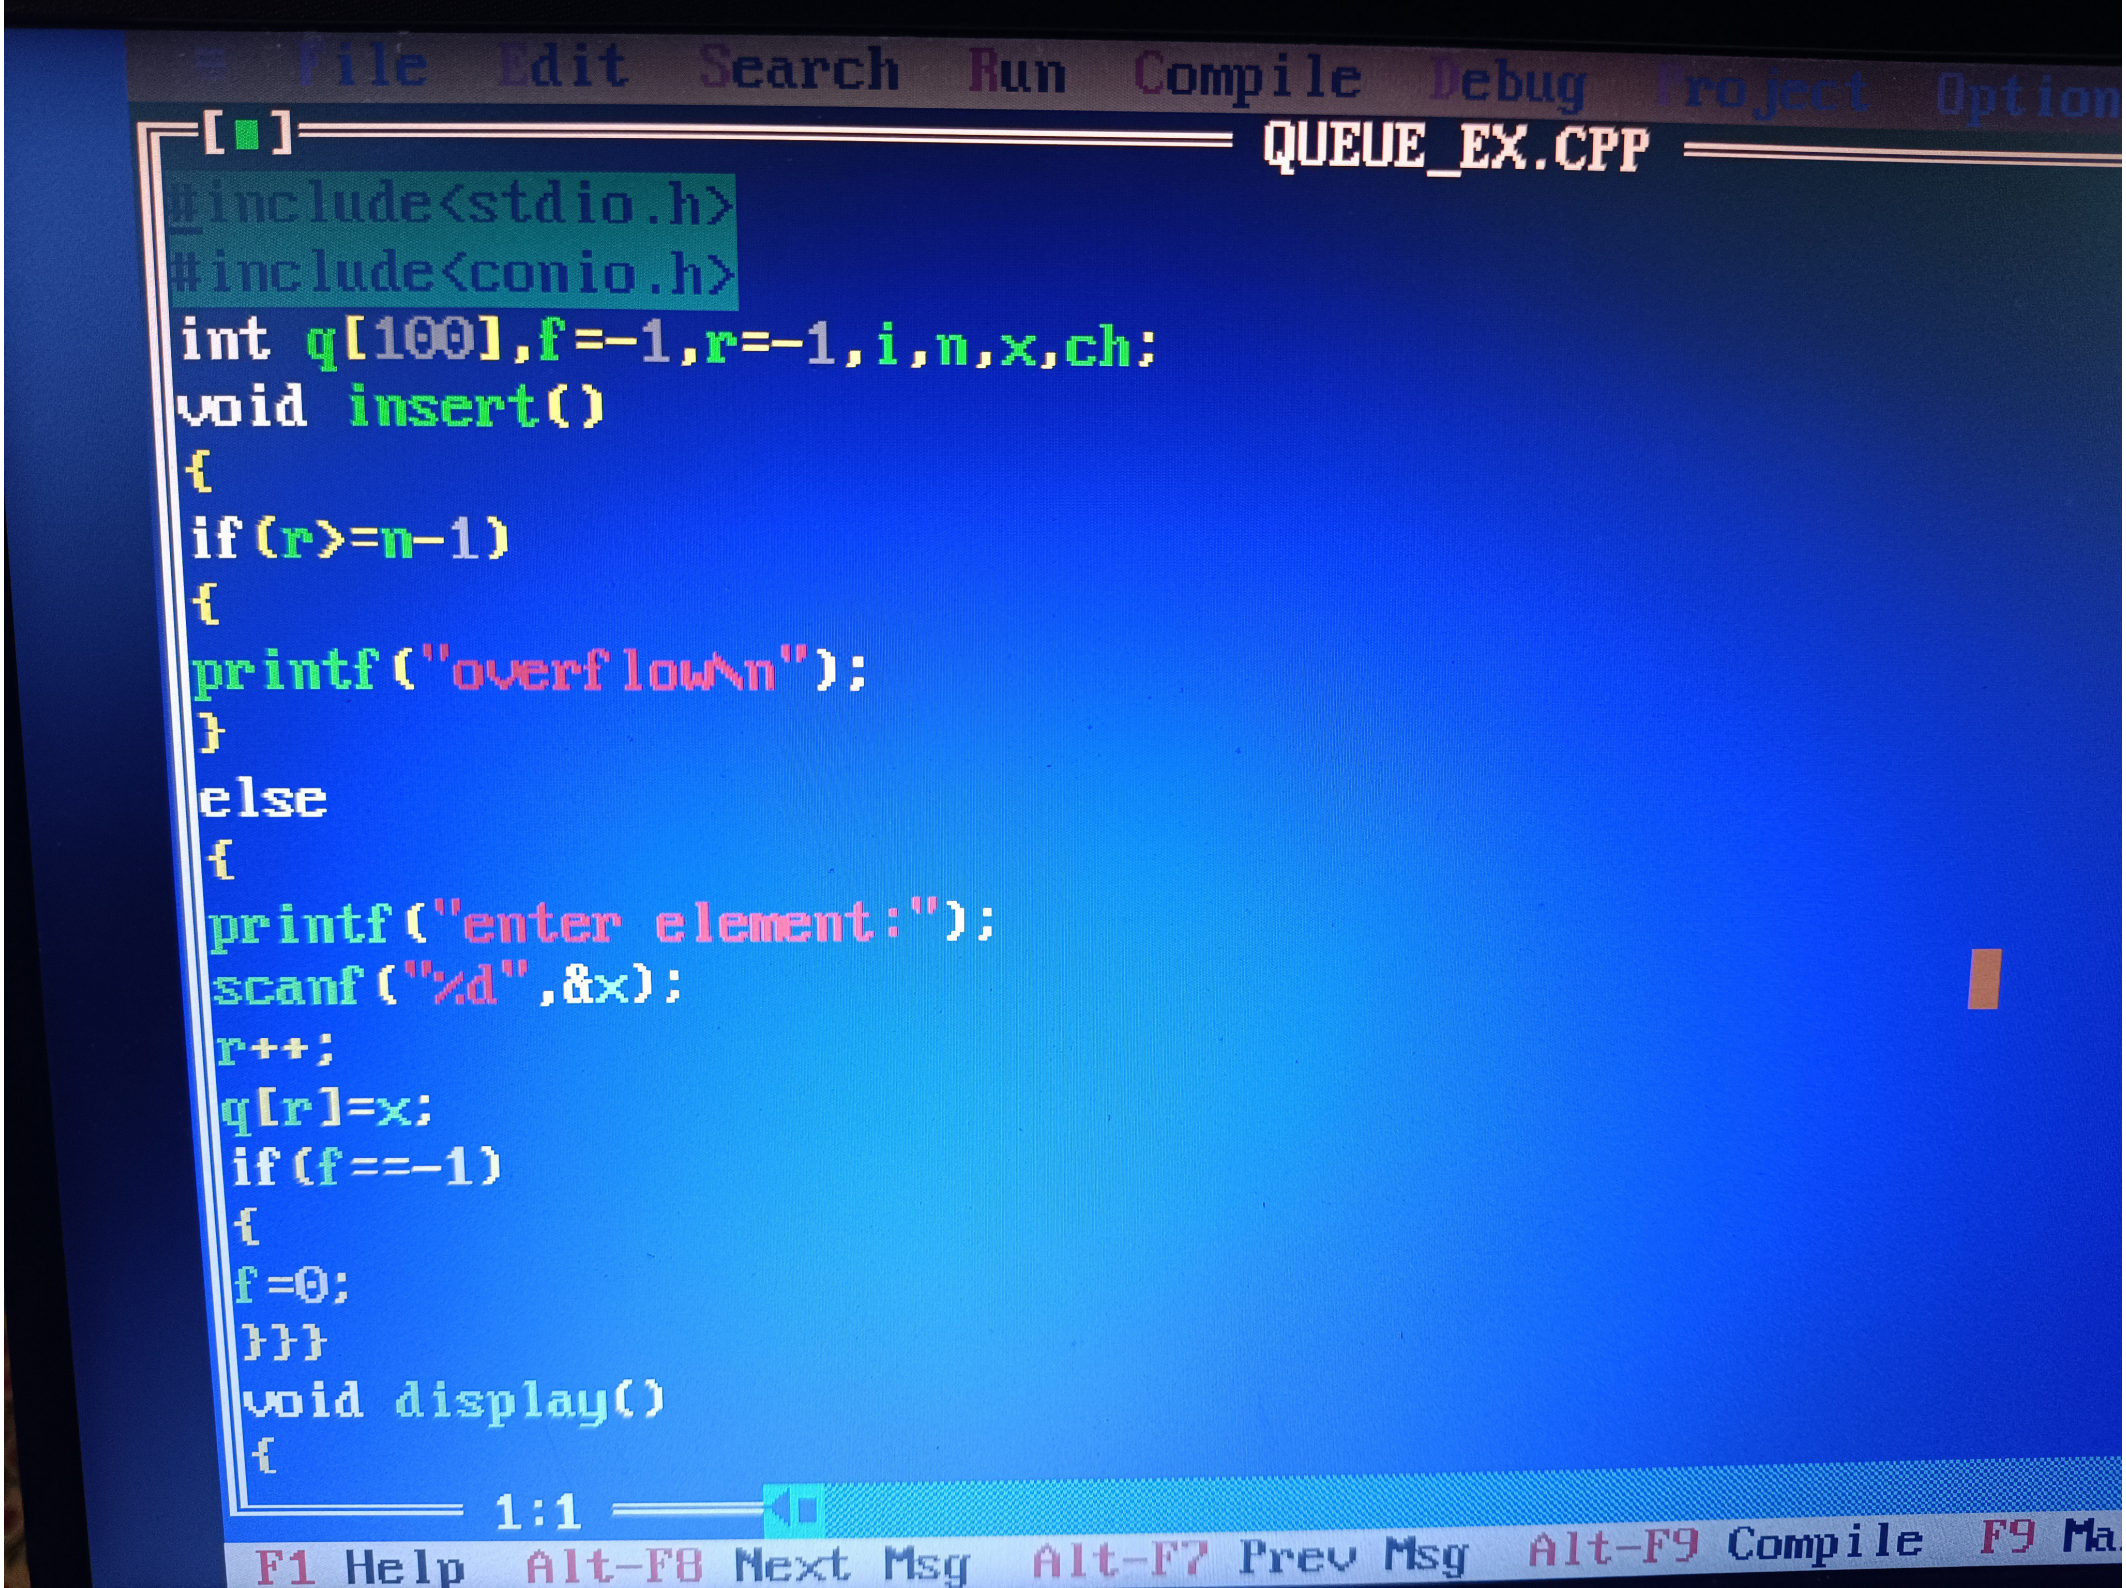
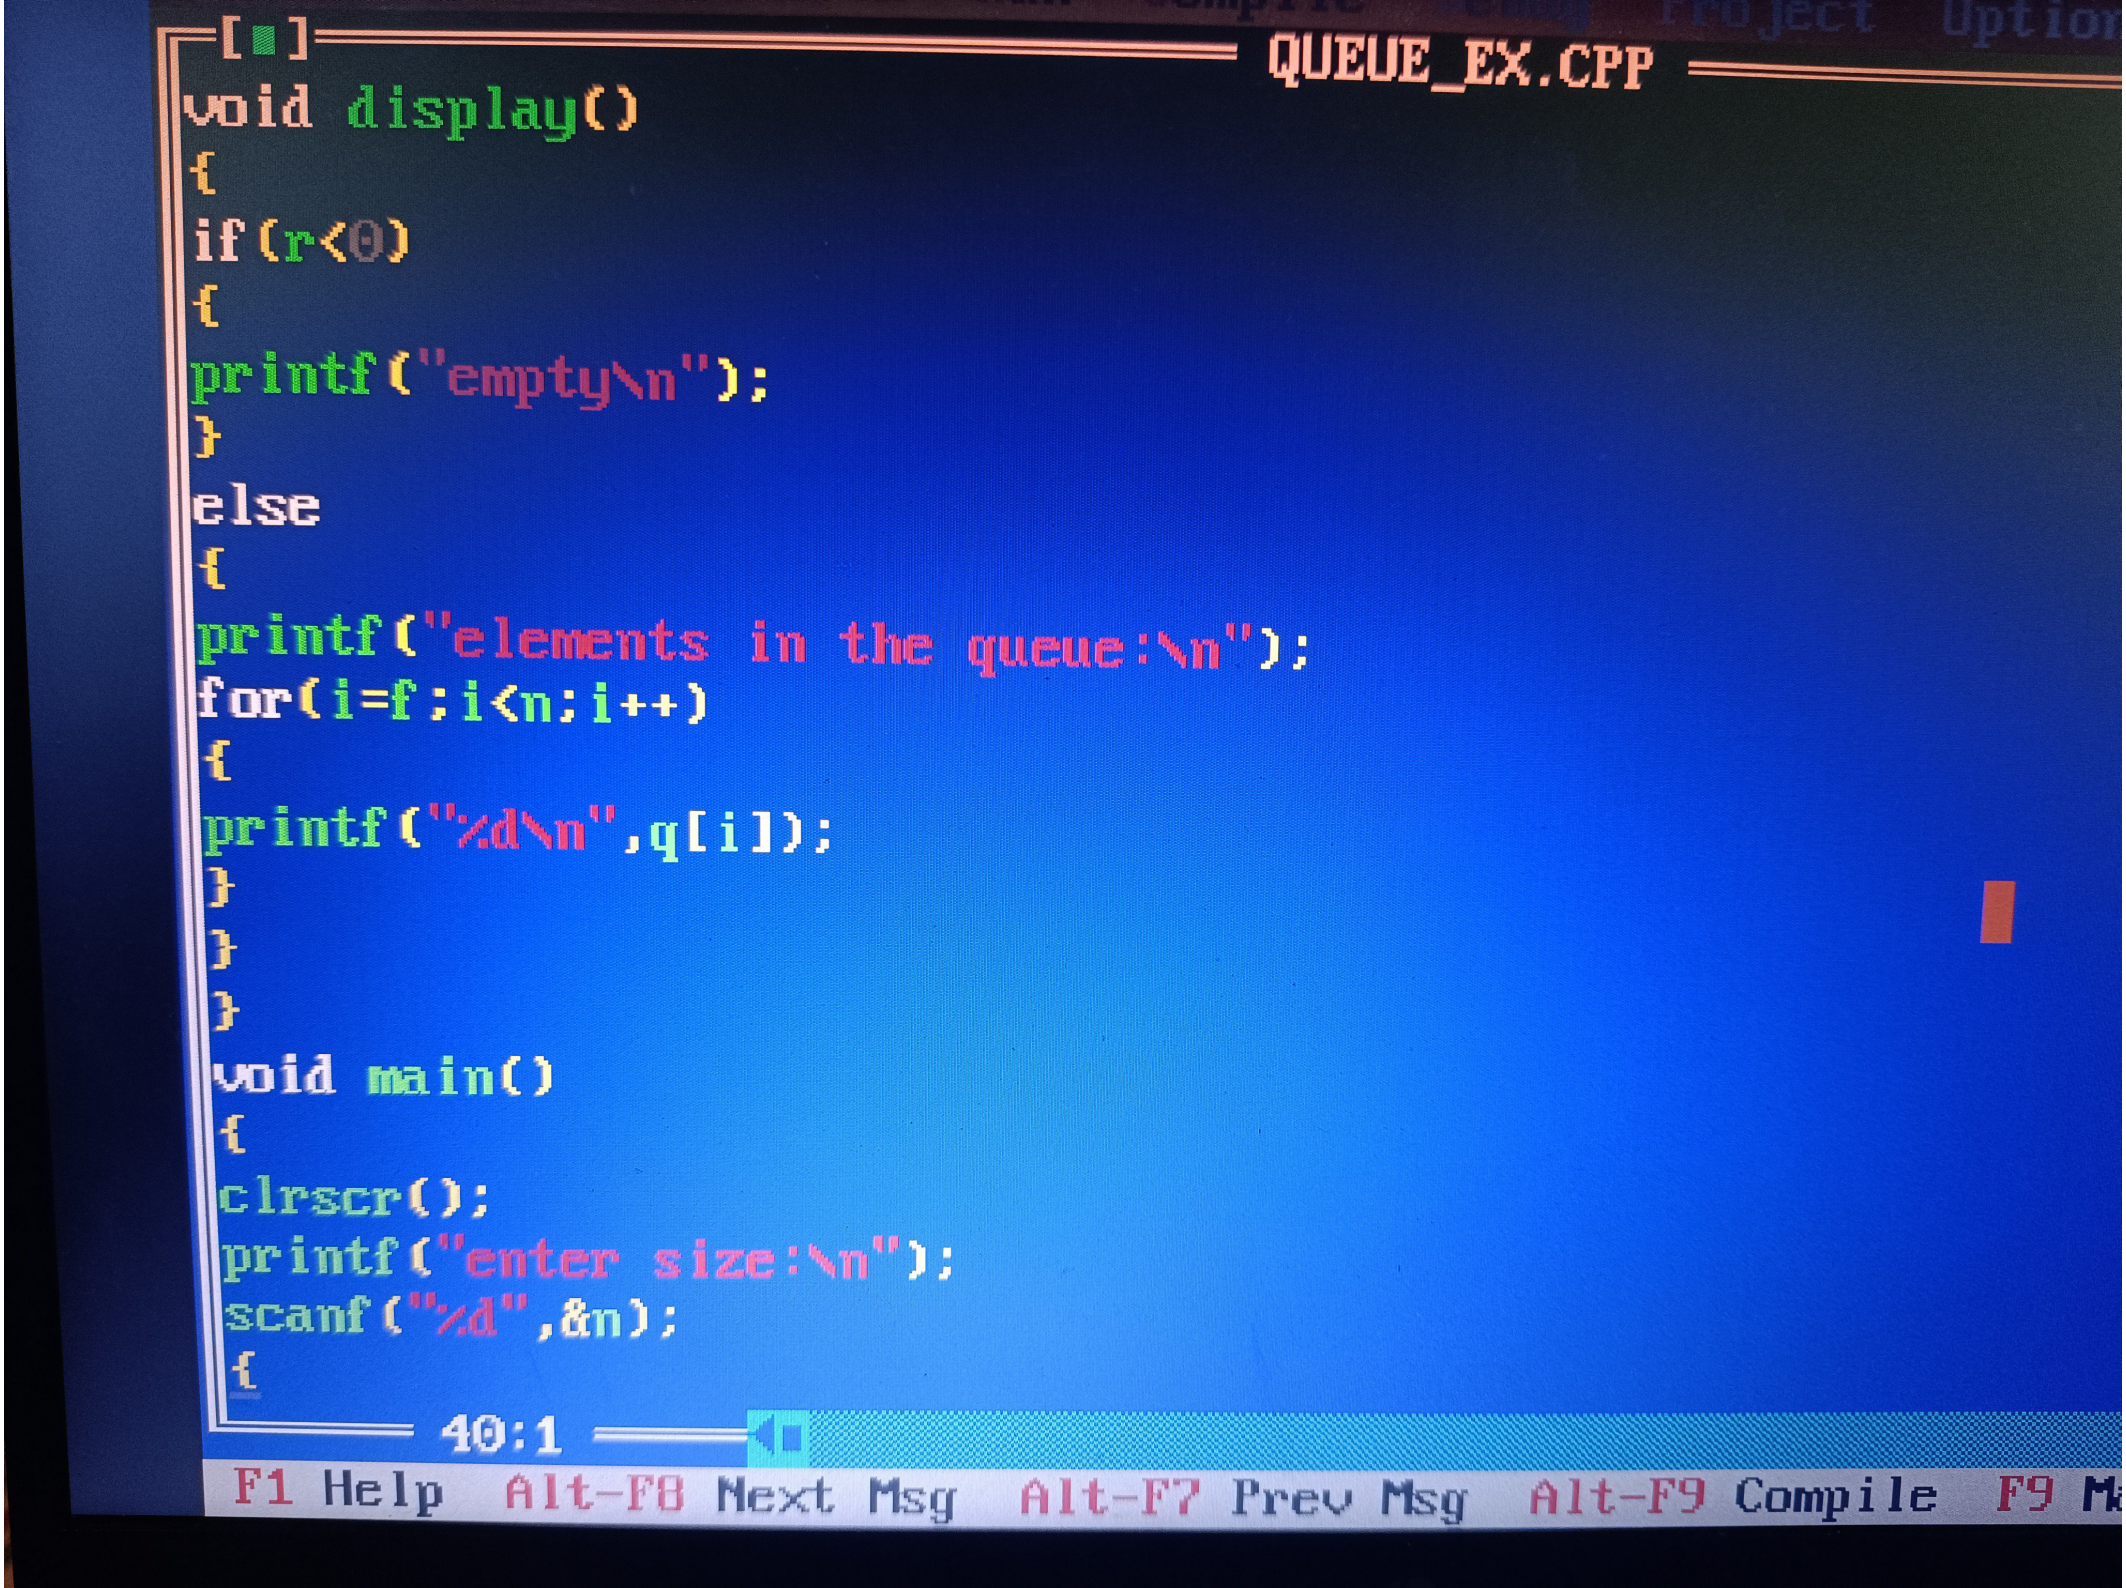

File Edit Search Run Compile Debug Project Option
QUEUE_EX.CPP
#include<stdio.h>
#include<conio.h>
int q[100],f=-1,r=-1,i,n,x,ch;
void insert()
{
if(r>=n-1)
{
printf("overflow\n");
}
else
{
printf("enter element:");
scanf("%d",&x);
r++;
q[r]=x;
if(f==-1)
{
f=0;
}}}
void display()
{
1:1
F1 Help Alt-F8 Next Msg Alt-F7 Prev Msg Alt-F9 Compile F9 Ma


QUEUE_EX.CPP
void display()
{
if(r<0)
{
printf("empty\n");
}
else
{
printf("elements in the queue:\n");
for(i=f;i<n;i++)
{
printf("%d\n",q[i]);
}
}
}
void main()
{
clrscr();
printf("enter size:\n");
scanf("%d",&n);
{
40:1
F1 Help
Alt-F8 Next Msg
Alt-F7 Prev Msg
Alt-F9 Compile
F9

File Edit Search Run Compile Debug Project Options Window Help

QUEUE_EX.CPP

```
{
do
{
printf("queue operations\n1.insert\n2.display\n3.exit\nenter your choice:\n");
scanf("%d",&ch);
switch(ch)
{
case 1:
insert();
break;
case 2:
display();
break;
case 3:
printf("exit");
break;
default:
printf("error");
break;
}
}while(ch!=4);
```

60:1

F1 Help Alt-F8 Next Msg Alt-F7 Prev Msg Alt-F9 Compile F9 Make F10 Menu

```
enter size:
3
queue operations
1.insert
2.display
3.exit
enter your choice:
1
enter element:10
queue operations
1.insert
2.display
3.exit
enter your choice:
1
enter element:20
queue operations
1.insert
2.display
3.exit
enter your choice:
_
```

```
2
elements in the queue:
10
20
0
queue operations
1.insert
2.display
3.exit
enter your choice:
1
enter element:30
queue operations
1.insert
2.display
3.exit
enter your choice:
1
overflow
queue operations
1.insert
2.display
3.exit
enter your choice:
2
```

```
1.insert
2.display
3.exit
enter your choice:
1
overflow
queue operations
1.insert
2.display
3.exit
enter your choice:
2
elements in the queue:
10
20
30
queue operations
1.insert
2.display
3.exit
enter your choice:
3
```