


2.Creating student app

Aim:

To Create a react app for Student Management Portal named StudentApp and create a component named Home which will display the Message “Welcome to the Home page of Student Management Portal”. Create another component named About and display the Message “Welcome to the About page of the Student Management Portal”. Create a third component named Contact and display the Message “Welcome to the Contact page of the Student Management Portal”. Call all the three components.


Codes:

Home.js:

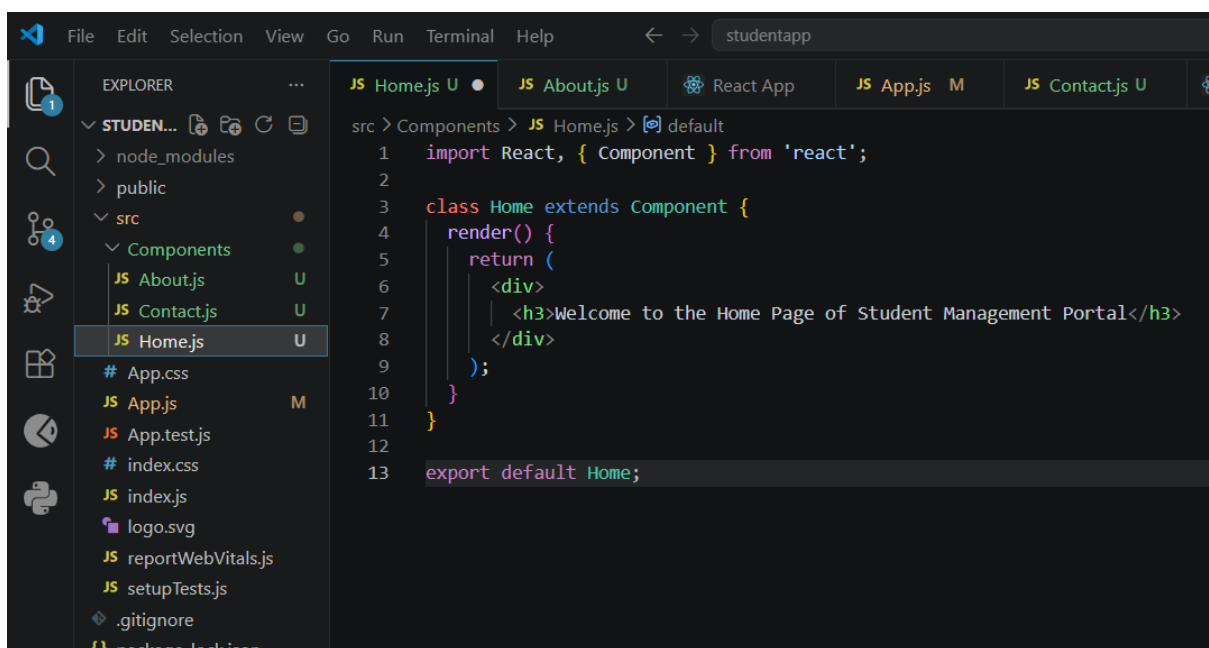


```
1 import React, { Component } from 'react';
2
3 class Home extends Component {
4   render() {
5     return (
6       <div>
7         <h3>Welcome to the Home Page of Student Management Portal</h3>
8       </div>
9     );
10  }
11 }
12
13 export default Home;
```

About.js:

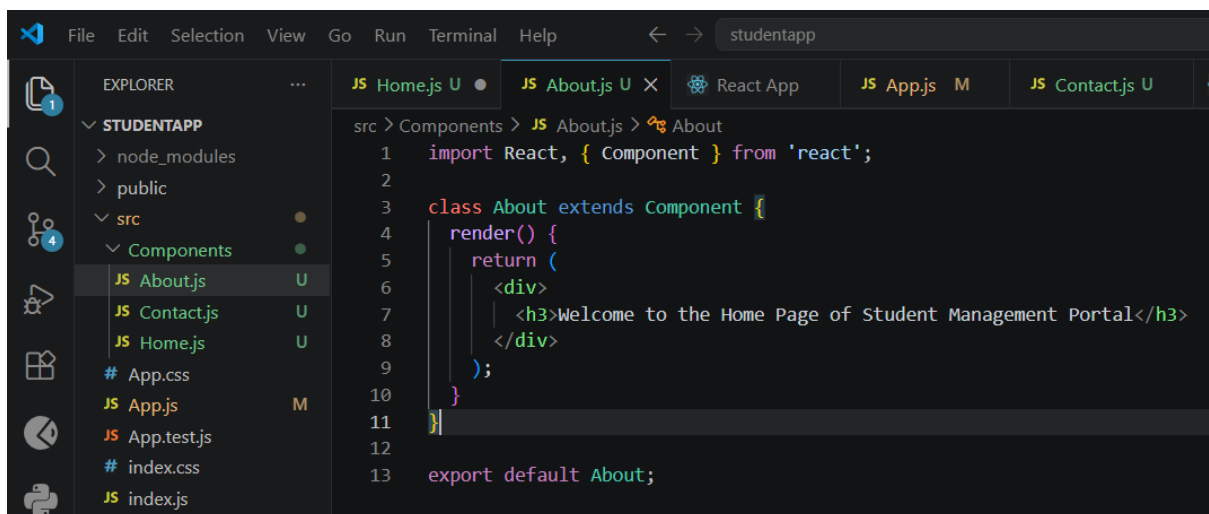

```
1 import React, { Component } from 'react';
2
3 class About extends Component {
4   render() {
5     return (
6       <div>
7         <h3>Welcome to the Home Page of Student Management Portal</h3>
8       </div>
9     );
10  }
11 }
12
13 export default About;
```


Contact.js

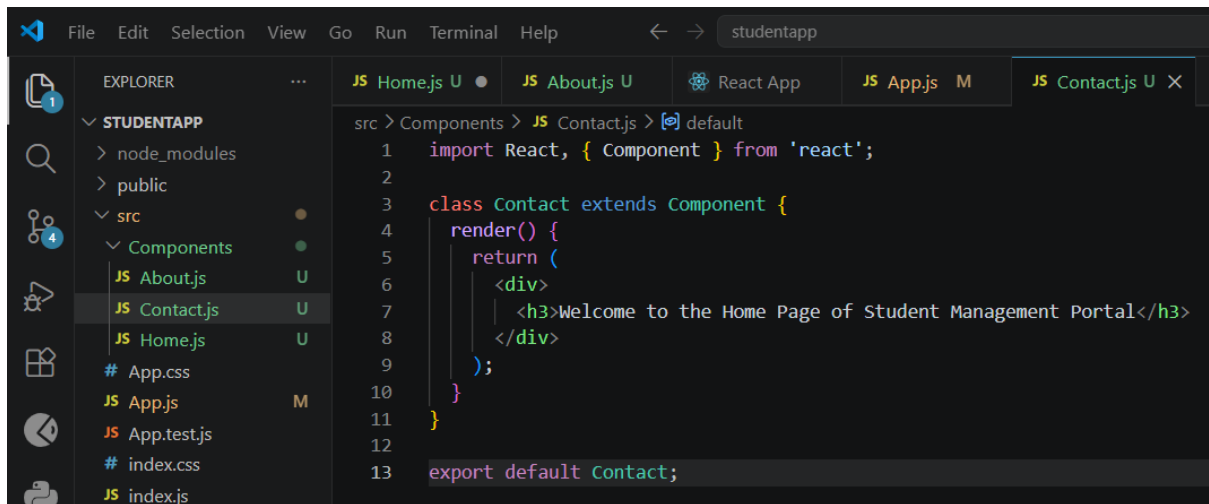

The screenshot shows the Visual Studio Code editor with the 'studentapp' project open. The Explorer sidebar on the left shows the file structure: 'STUDENTAPP' contains 'node_modules', 'public', and 'src'. The 'src' folder contains 'Components', 'App.css', 'App.js', 'App.test.js', 'index.css', and 'index.js'. The 'Components' folder contains 'About.js', 'Contact.js', and 'Home.js'. The 'Contact.js' file is selected and its code is displayed in the main editor. The code imports React and Component from 'react', defines a 'Contact' class extending 'Component', and renders a div with an h3 tag. The class is exported as the default export.

```
src > Components > JS Contact.js > default
1  import React, { Component } from 'react';
2
3  class Contact extends Component {
4    render() {
5      return (
6        <div>
7          <h3>Welcome to the Home Page of Student Management Portal</h3>
8        </div>
9      );
10   }
11 }
12
13 export default Contact;
```

App.js:

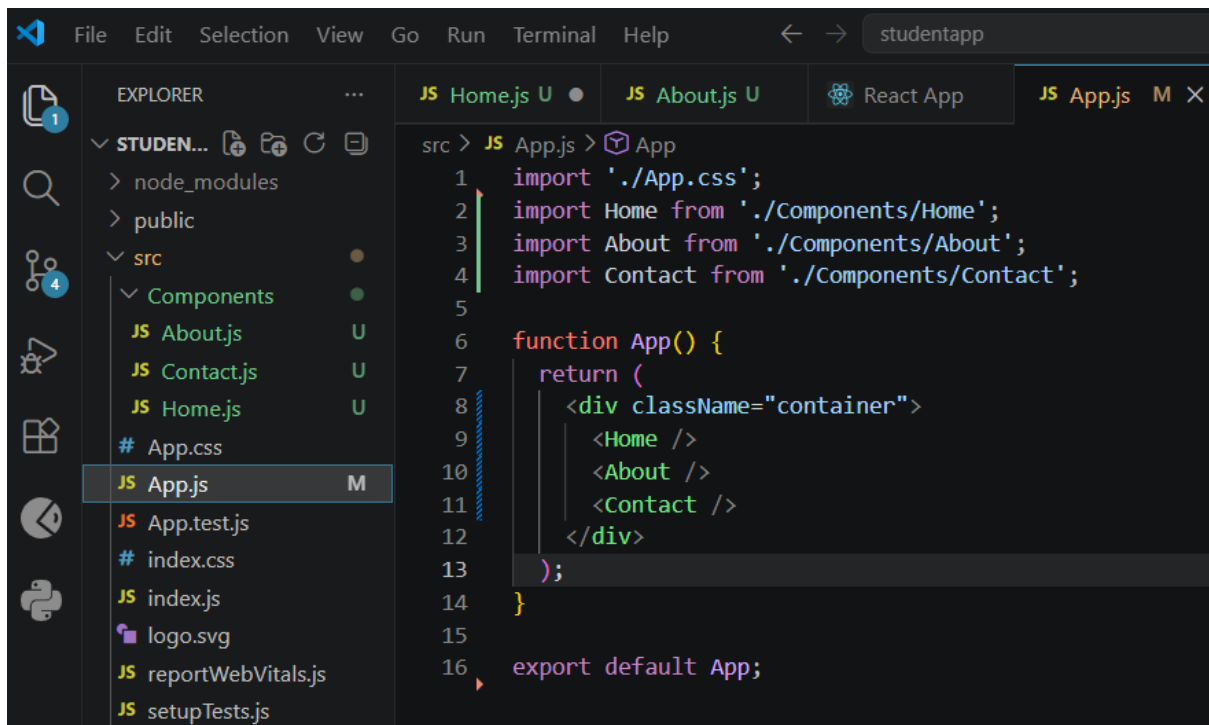

The screenshot shows the Visual Studio Code editor with the 'studentapp' project open. The Explorer sidebar on the left shows the file structure: 'STUDENT...' contains 'node_modules', 'public', and 'src'. The 'src' folder contains 'Components', 'App.css', 'App.js', 'App.test.js', 'index.css', 'index.js', 'logo.svg', 'reportWebVitals.js', and 'setupTests.js'. The 'App.js' file is selected and its code is displayed in the main editor. The code imports './App.css' and the 'Home', 'About', and 'Contact' components from their respective files. It defines an 'App' function that returns a div containing the three components, and exports it as the default export.

```
src > JS App.js > App
1  import './App.css';
2  import Home from './Components/Home';
3  import About from './Components/About';
4  import Contact from './Components/Contact';
5
6  function App() {
7    return (
8      <div className="container">
9        <Home />
10       <About />
11       <Contact />
12     </div>
13   );
14 }
15
16 export default App;
```

Output:

```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS POSTMAN
PS C:\Users\laksh\studentapp> npm start
Compiled successfully!

You can now view studentapp in the browser.

  Local:            http://localhost:3000
  On Your Network:  http://10.180.5.36:3000

Note that the development build is not optimized.
To create a production build, use npm run build.

webpack compiled successfully
█
```

