

Used in:-

- Dynamic data structures (linked list, trees).
- Objects in OOP.

Advantages:-

- Flexible memory usage.
- Supports dynamic structures.

Disadvantages:-

- Slower than stack.
- Risk of memory leaks.

Eg:- `int *p = malloc(sizeof(int));`


6) The call sequence is:-
`main() → A() → B()`.

This means:-

- `main()` is called first.
- `main()` calls `A()`.
- `A()` calls `B()`.

So, B is currently executing.

Stack follows LIFO:-

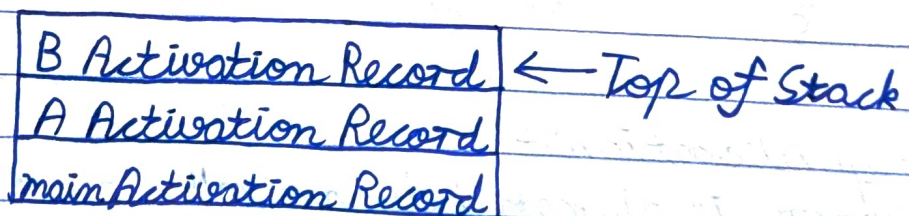

Activation Record Structure:-

Each function call creates an activation record (stack frame).