



Subquery

How Subquery Works

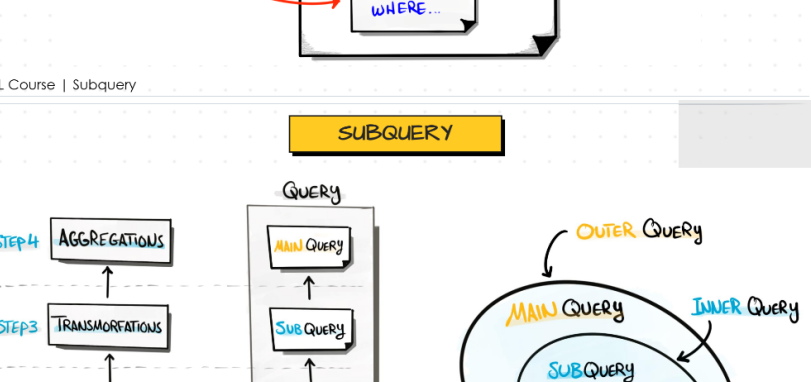


SQL Course | Subquery


SUBQUERY

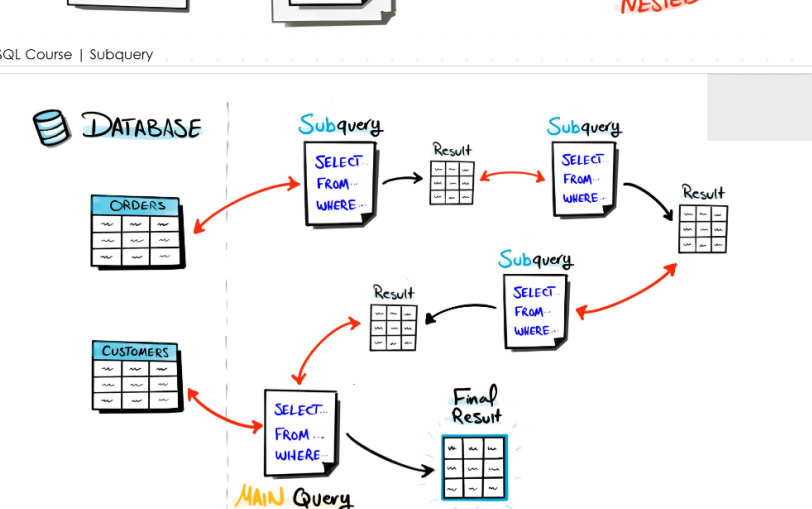


SQL Course | Subquery

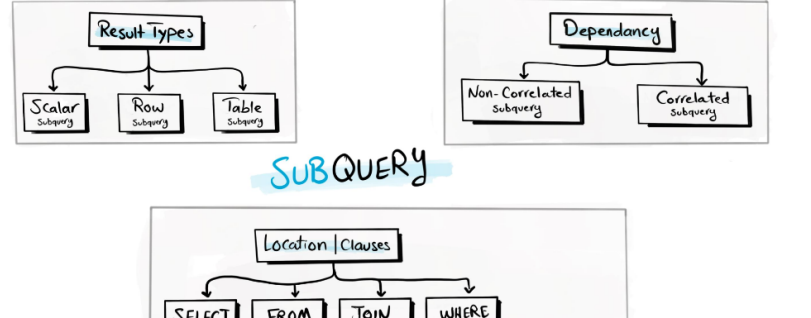


SQL Course | Subquery

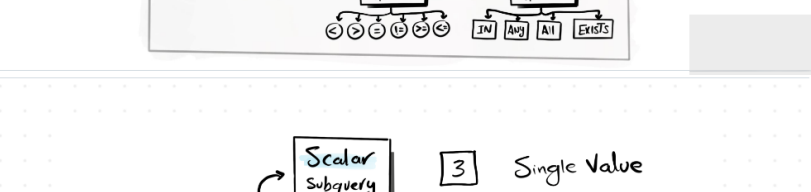

SQL Course | Subquery

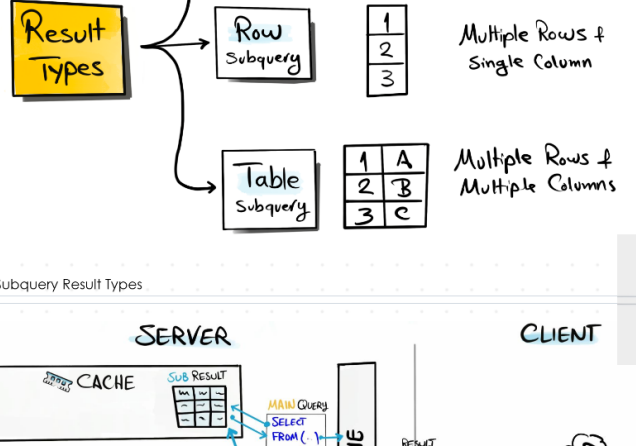


SQL Course | Subquery Result Types

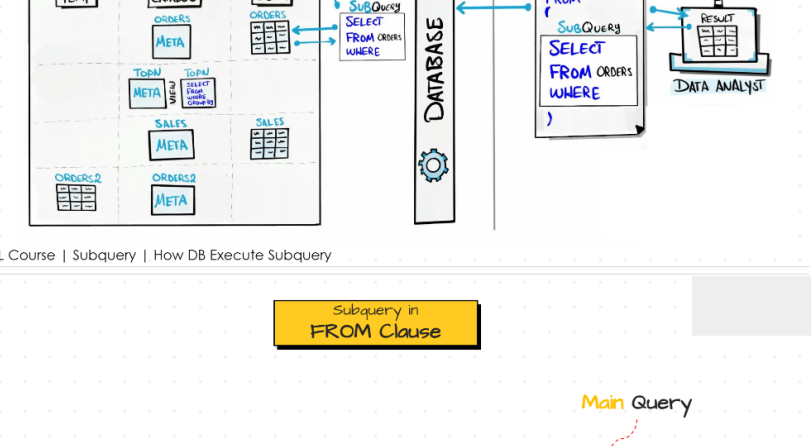


SQL Course | Subquery | How DB Execute Subquery

Subquery in FROM Clause

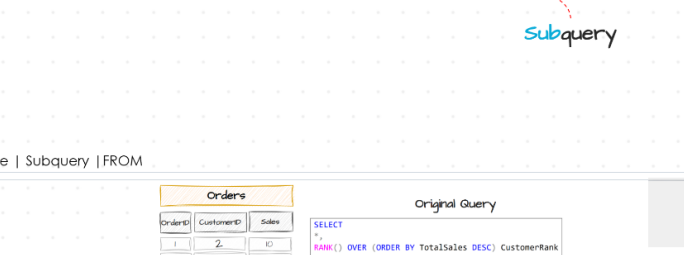


SQL Course | Subquery | FROM

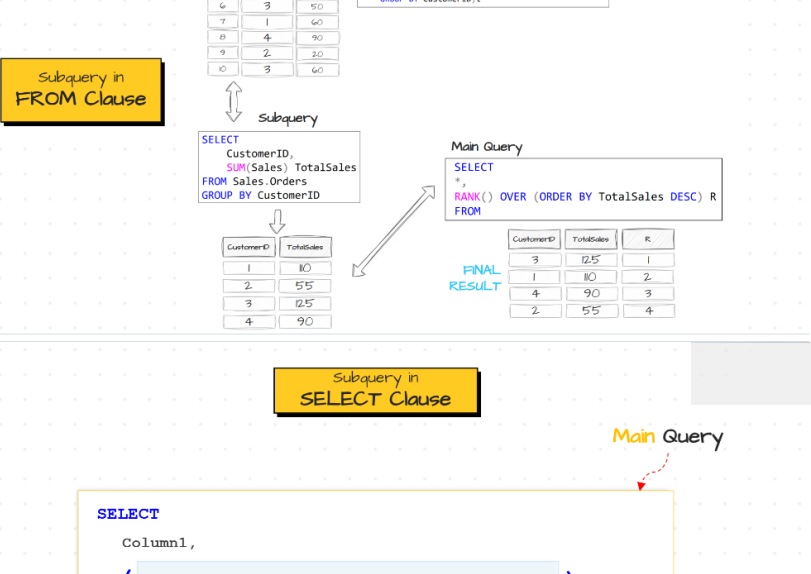


SQL Course | Subquery | FROM

Subquery in SELECT Clause

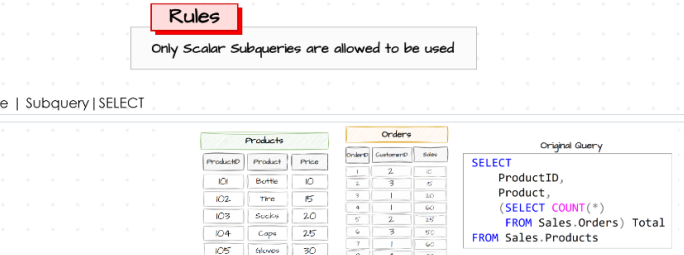


SQL Course | Subquery | SELECT

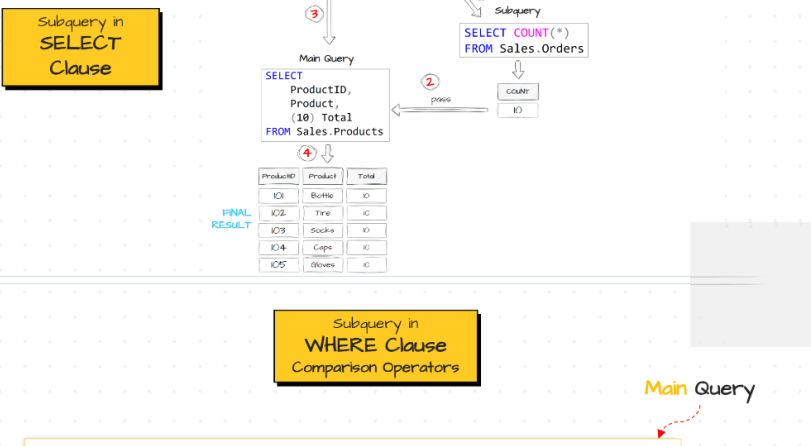


SQL Course | Subquery | SELECT

Subquery in WHERE Clause Comparison Operators

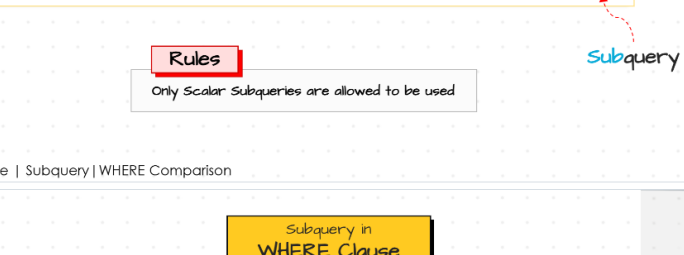


SQL Course | Subquery | WHERE Comparison

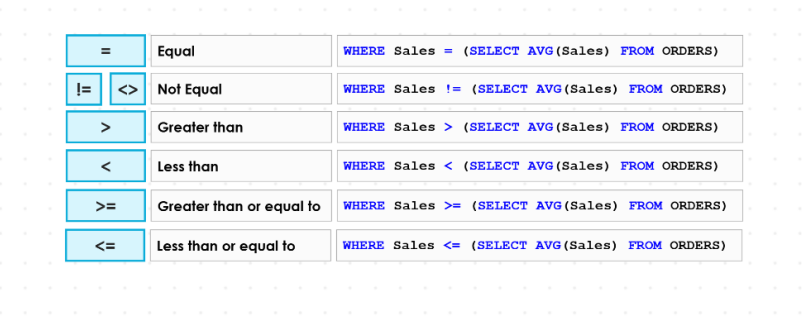


SQL Course | Subquery | WHERE Comparison

Subquery in WHERE Clause Comparison Operators

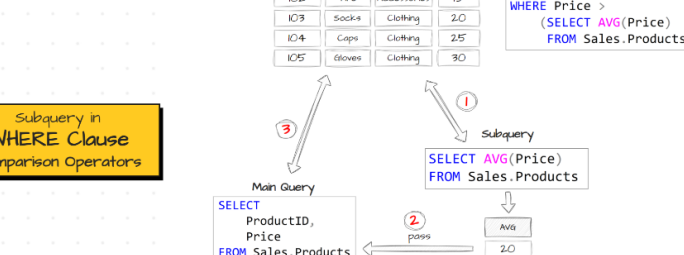


SQL Course | Subquery | WHERE Comparison

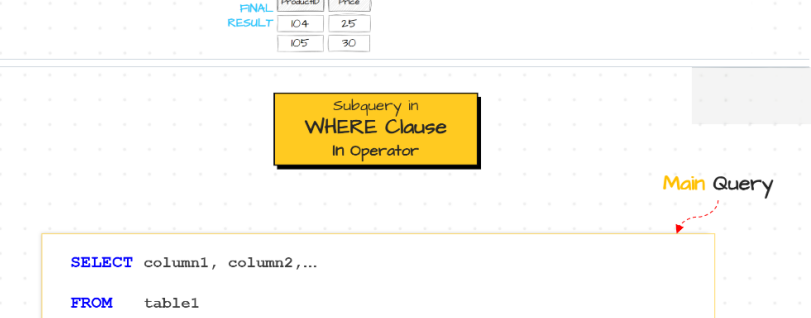


SQL Course | Subquery | WHERE Comparison

Subquery in WHERE Clause IN Operator

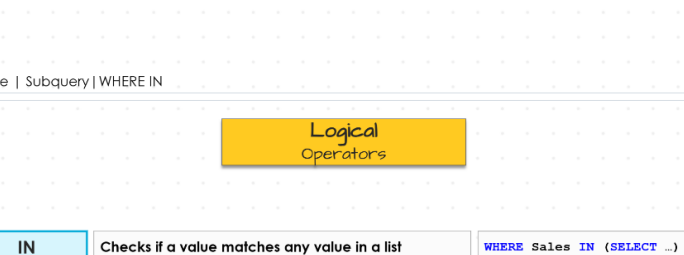

SQL Course | Subquery | WHERE IN

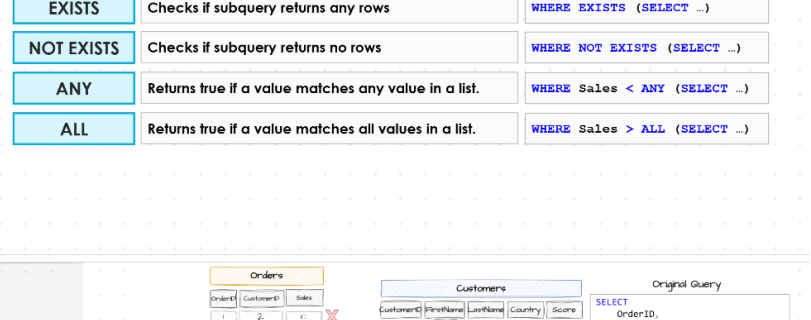


SQL Course | Subquery | WHERE IN

Logical Operators


IN	Checks if a value matches any value in a list	WHERE Sales IN (SELECT ...)
NOT IN	Checks if a value does not match any value in a list	WHERE Sales NOT IN (SELECT ...)
EXISTS	Checks if subquery returns any rows	WHERE EXISTS (SELECT ...)
NOT EXISTS	Checks if subquery returns no rows	WHERE NOT EXISTS (SELECT ...)
ANY	Returns true if a value matches any value in a list	WHERE Sales < ANY (SELECT ...)
ALL	Returns true if a value matches all values in a list	WHERE Sales > ALL (SELECT ...)

SQL Course | Subquery | Logical Operators

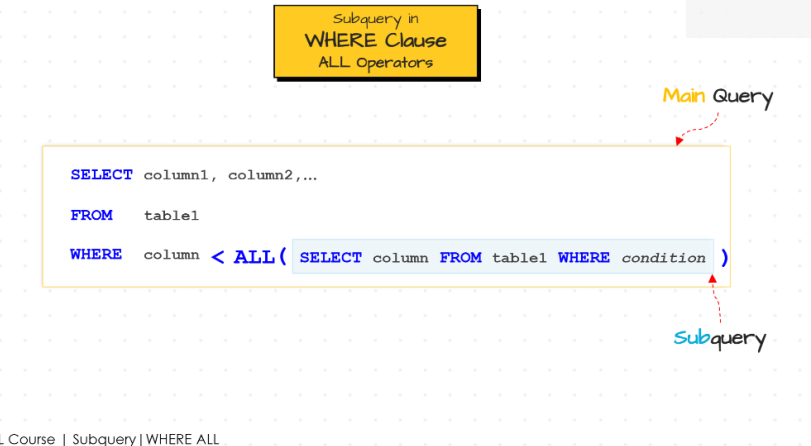


SQL Course | Subquery | WHERE IN

Subquery in WHERE Clause ALL Operators

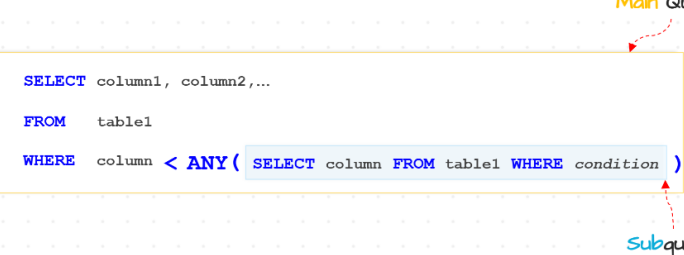


SQL Course | Subquery | WHERE ALL

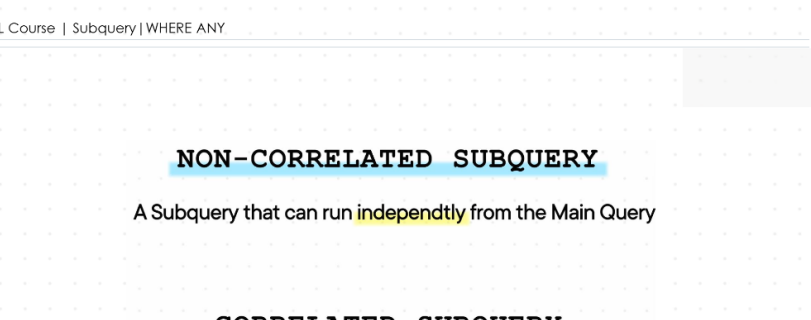

SQL Course | Subquery | WHERE ALL

Subquery in WHERE Clause ANY Operator

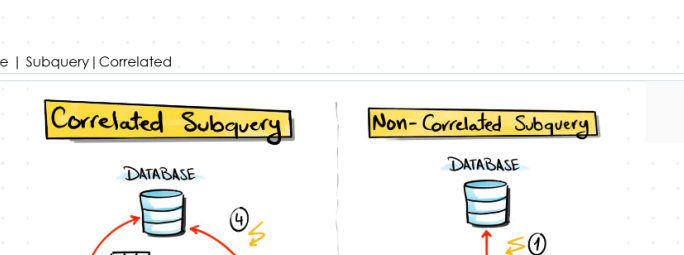

SQL Course | Subquery | WHERE ANY


NON-CORRELATED SUBQUERY

A Subquery that can run independently from the Main Query

CORRELATED SUBQUERY


A Subquery that relies on values from the Main Query

SQL Course | Subquery | Correlated

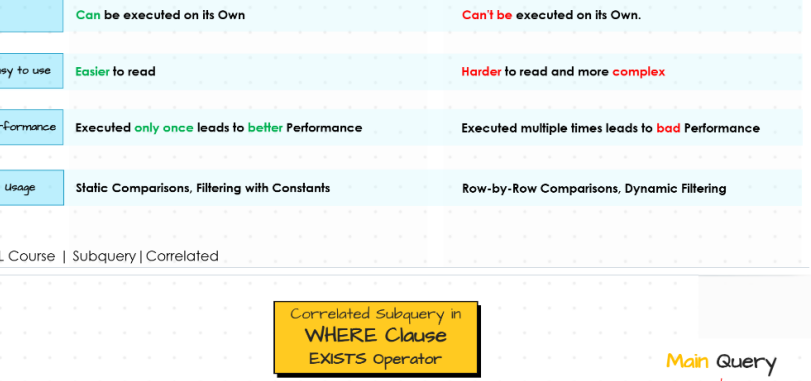


SQL Course | Subquery | Correlated

Correlated Subquery in WHERE Clause EXISTS Operator

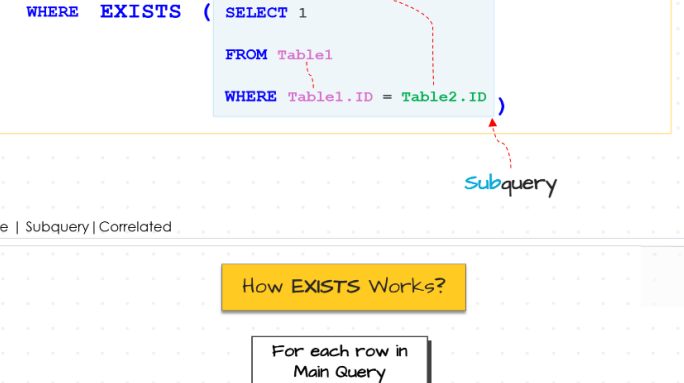

SQL Course | Subquery | Correlated

How EXISTS Works?

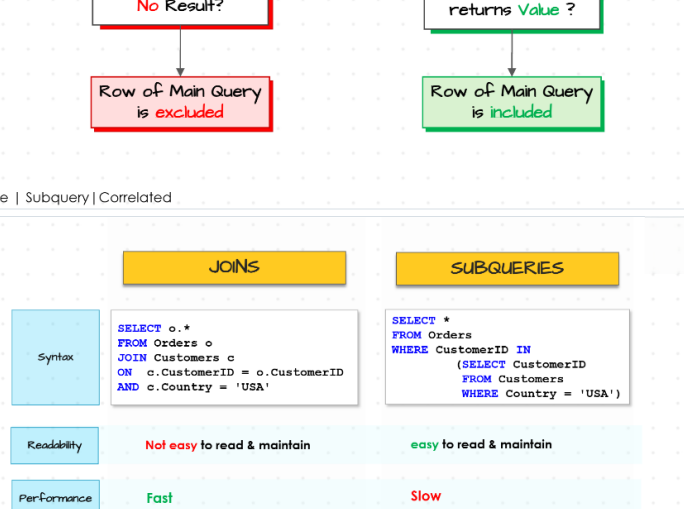

SQL Course | Subquery | Correlated

JOINS

SUBQUERIES

Syntax	SELECT o.* FROM Orders o WHERE o.CustomerID = s.CustomerID AND o.Country = 'USA'	SELECT * FROM Orders WHERE CustomerID IN (SELECT CustomerID FROM Customers WHERE Country = 'USA')
Flexibility	Not easy to read & maintain	easy to read & maintain
Performance	Fast	Slow
Duplicate	May lead to duplicate	Safe no risk to have duplicates
Best Practices	Useful with large tables	Useful with small tables

SQL Course | Subquery vs Joins

