



DATA WITH BARAA

CASE STATEMENT


CASE WHEN

Baraa Khatib Salkini
YouTube | **DATA WITH BARAA**
SQL Course | Case Statement



CASE STATEMENT


Syntax

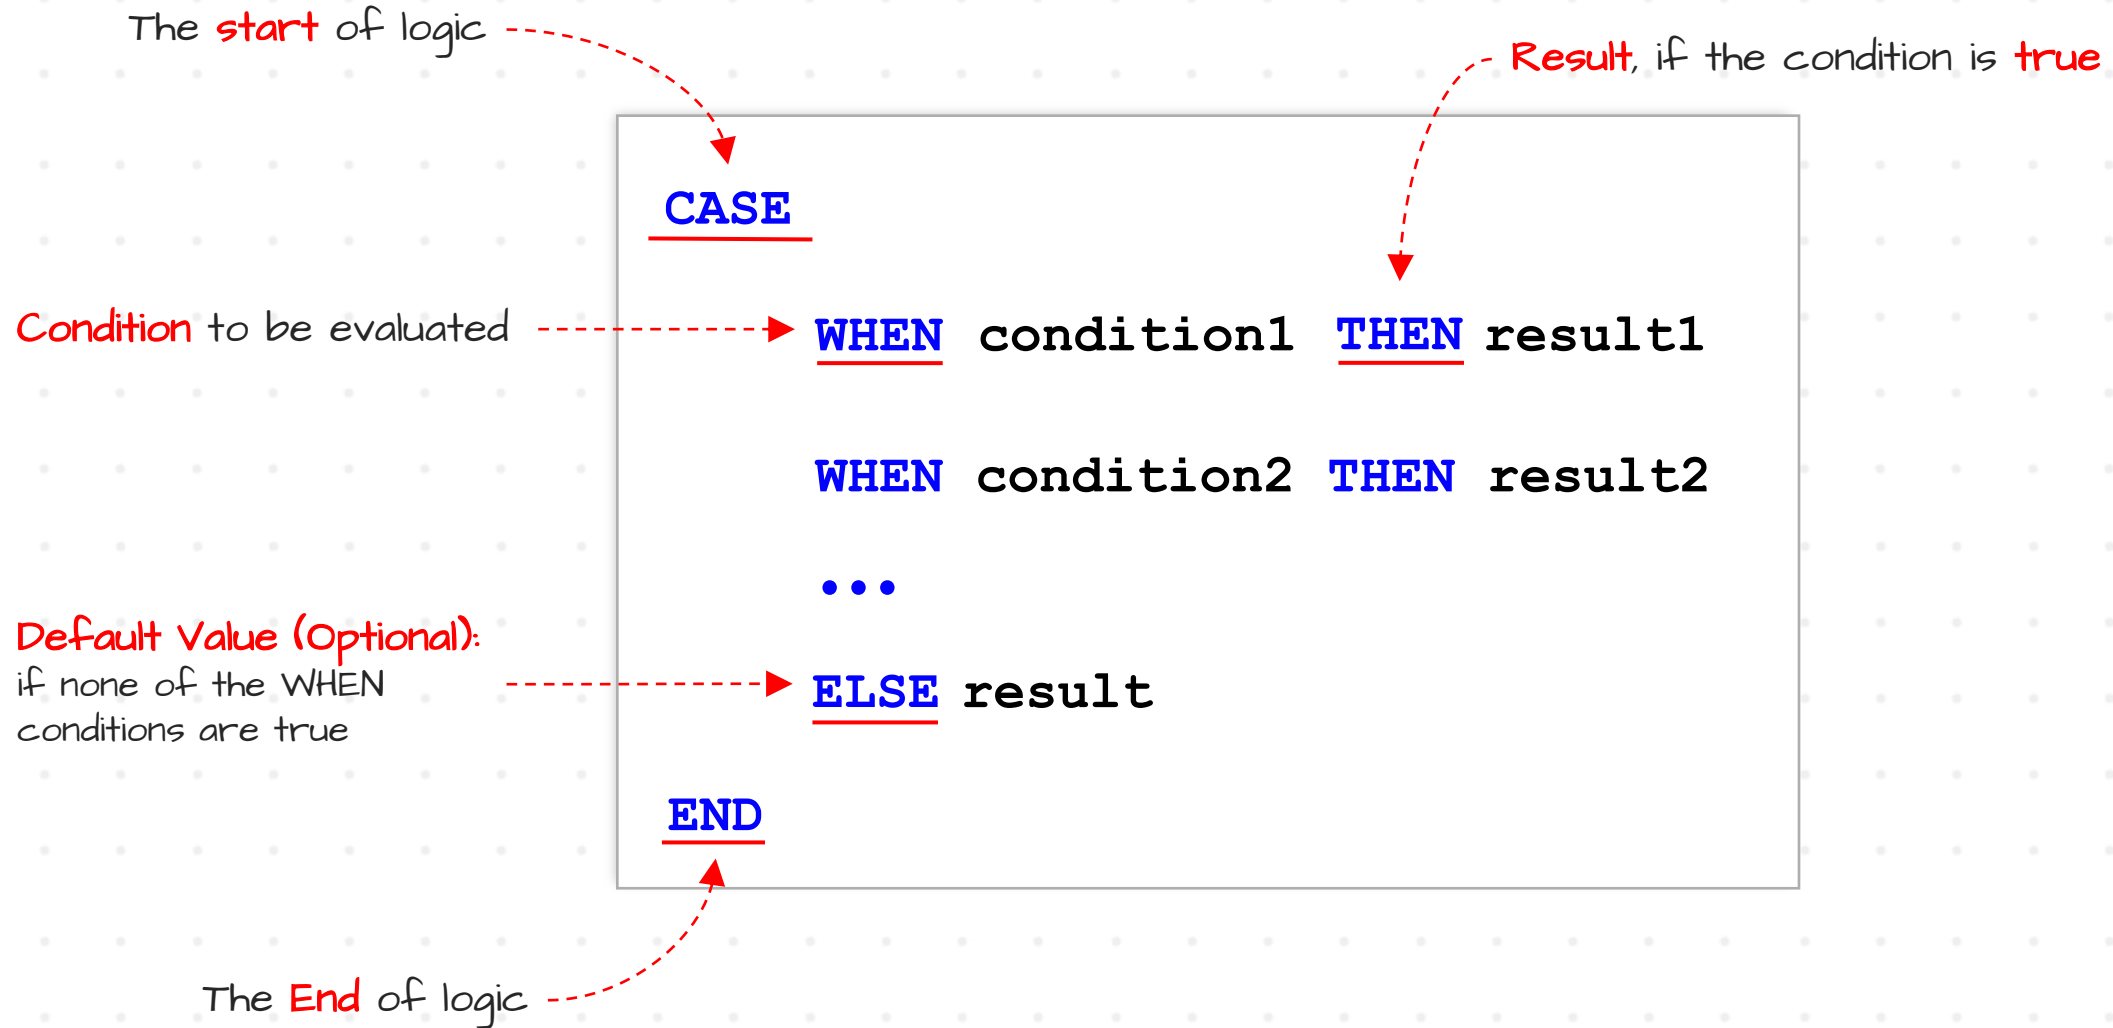

Use Case: Derive New Columns

The CASE statement in SQL categorizes values based on conditions


```
CASE
  WHEN Sales >= 100 THEN 'High'
  WHEN Sales >= 50 THEN 'Medium'
  ELSE 'Low'
END
```

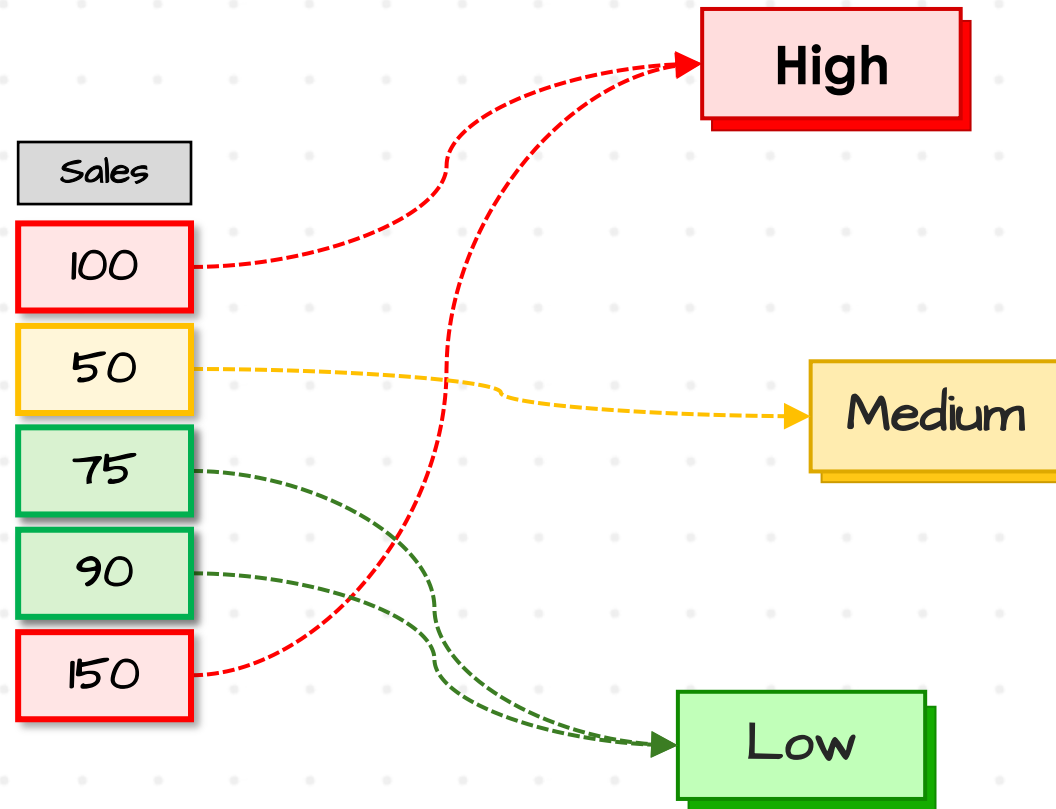


Transformation & Standardization

The CASE statement in SQL is used for data transformation and standardization by mapping specific values to standardized formats.

```
CASE
  WHEN Country = 'Germany' THEN 'DE'
  WHEN Country = 'France'   THEN 'FR'
  WHEN Country = 'Italy'    THEN 'IT'
ELSE 'n/a'
END
```

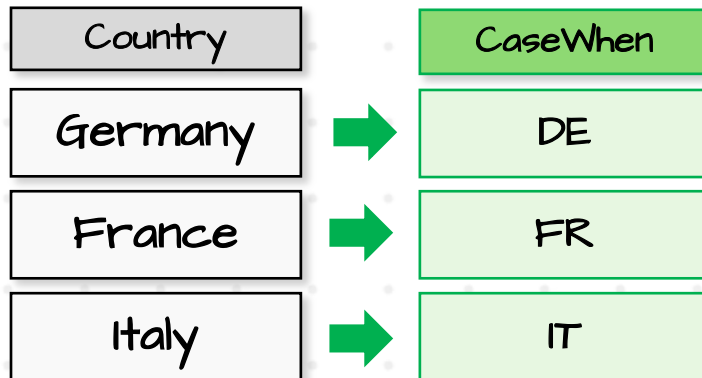

```
CASE
  WHEN Country = 'F' THEN 'Female'
  WHEN Country = 'M' THEN 'Male'
ELSE 'n/a'
END
```

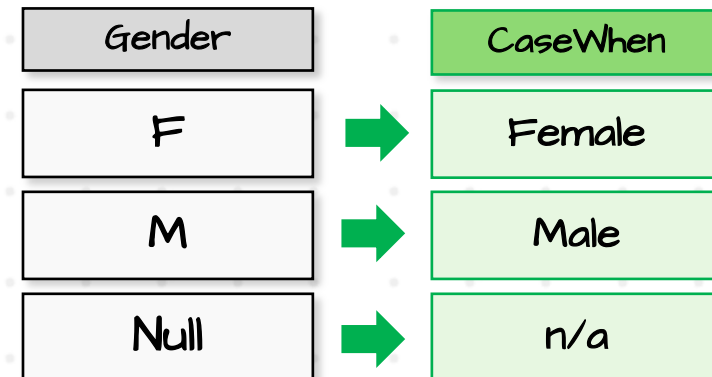

CASE

```
WHEN Country = 'Germany' THEN 'DE'  
WHEN Country = 'India' THEN 'IN'  
WHEN Country = 'United States' THEN 'US'  
WHEN Country = 'France' THEN 'FR'  
WHEN Country = 'Italy' THEN 'IT'  
ELSE 'n/a'
```

END

Full Form

Column Name
to be evaluated (Only One)

Column Value
To be compared

CASE Country

```
WHEN 'Germany' THEN 'DE'  
WHEN 'India' THEN 'IN'  
WHEN 'United States' THEN 'US'  
WHEN 'France' THEN 'FR'  
WHEN 'Italy' THEN 'IT'  
ELSE 'n/a'
```

END


Quick Form

CASE

WHEN Sales > 50 **THEN** 'High'

END

Sales	CASE
60	High
30	NULL
15	NULL
NULL	NULL

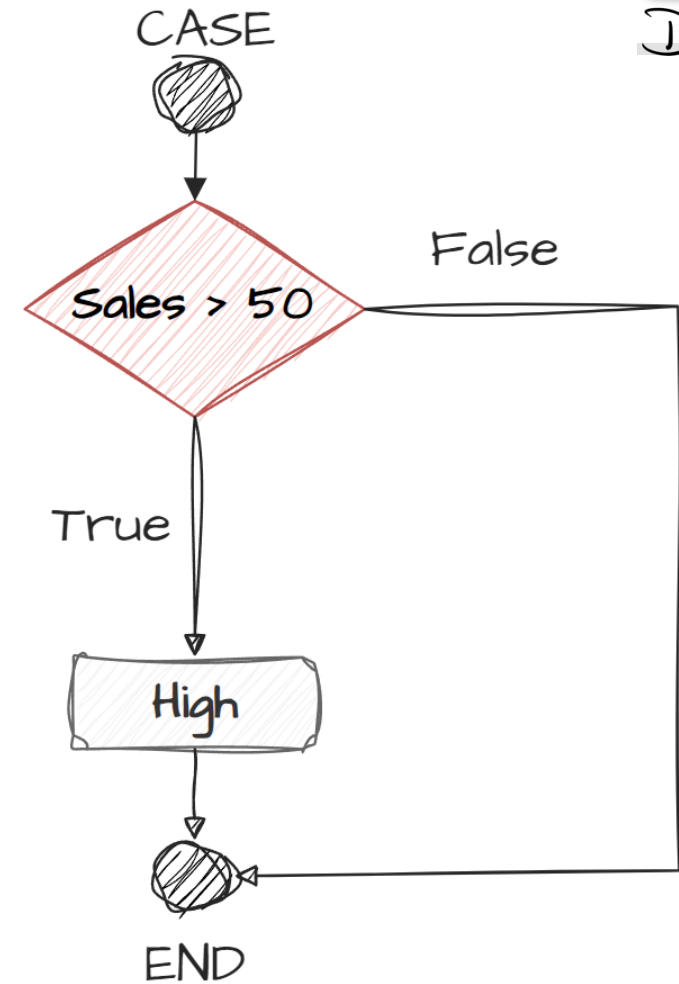


CASE

WHEN Sales > 50 **THEN** 'High'

WHEN Sales > 20 **THEN** 'Medium'

END

Sales	CASE
60	High
30	Medium
15	NULL
NULL	NULL

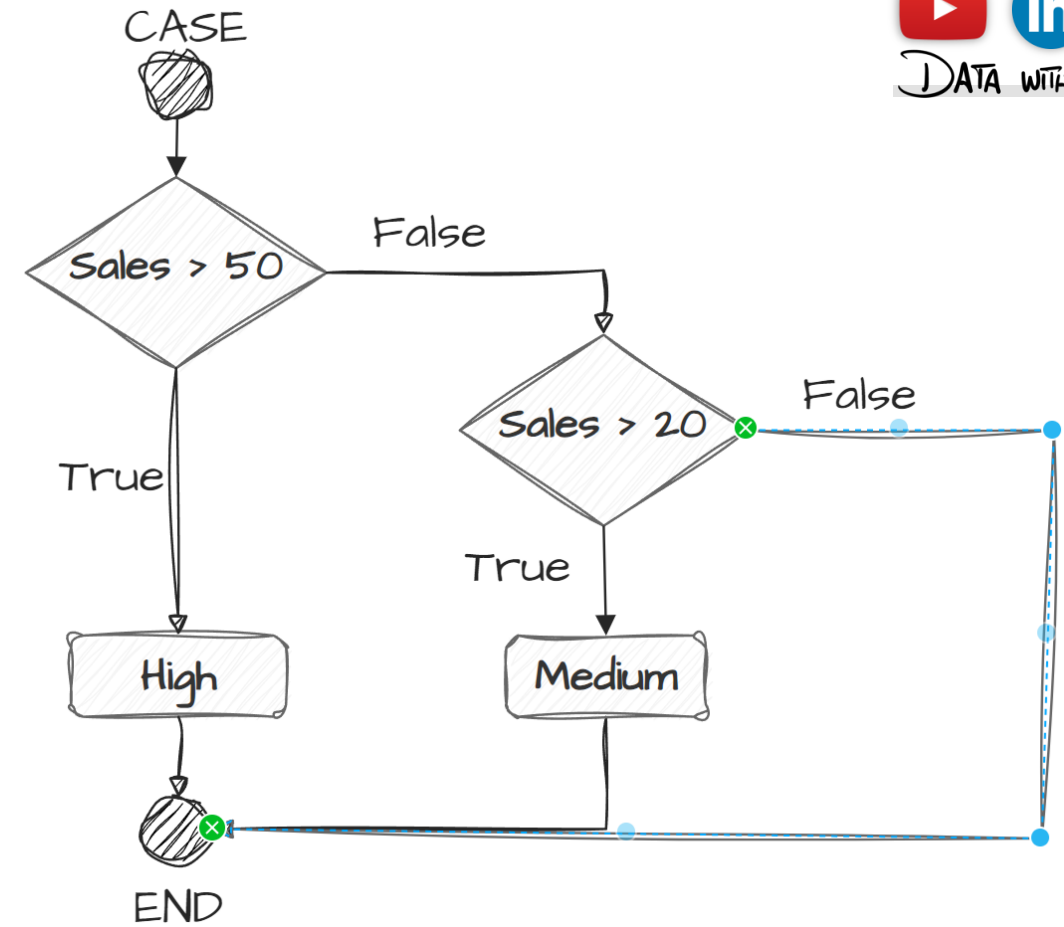


CASE

```

WHEN Sales > 50 THEN 'High'
WHEN Sales > 20 THEN 'Medium'
ELSE 'Low'
END
  
```

Sales	CASE
60	High
30	Medium
15	Low
NULL	Low

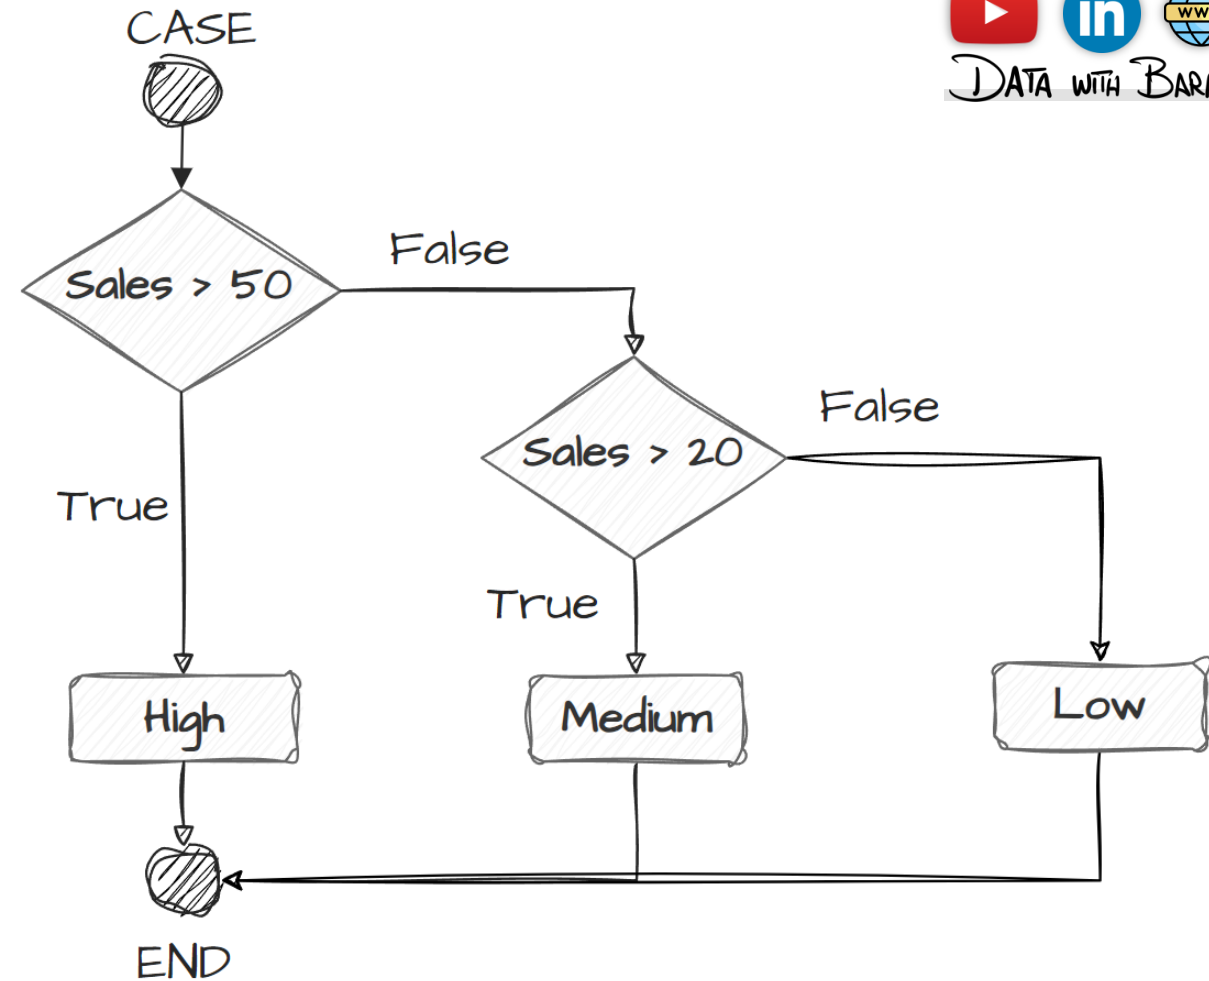

CASE STATEMENT

Evaluates a list of conditions and returns a value when the first Condition is met.

Rules

The data type of the results must be matching.

USE CASES

Derive New Information

- Categorizing Data
- Mapping Values
- Handling NULLs
- Conditional Aggregations