

HACKATHON S3 – MISSION 5: VOICEBOTS

TASK: Creating their own voice AI

Software used:

1. Milis Ai – website used for building voice agents
2. Bolt.new – Used for creating meta data form
3. Make.com – To collect the meta data from bolt and to trigger outbound call through HTTP POST request.
4. Twilio – To import mobile numbers for inbound and outbound calls

I have built 2 voice agents called Alex as workplace assistant and Ben as onboarding assistant.

Alex – Workplace Assistant:

Alex is responsible for answering all the queries that an employee has for his company, like Company policies (HR policies), office resources information, IT and Technical support and for booking meeting rooms.

Link for Alex – Workplace Assistant:

<https://app.millis.ai/agents/embedded?id=-OSIzipKvYDzZLoQ1Zv6&k=YBFGuHxSsowkAROCKBwIBr4ijE4ZBC8I>

Ben – Onboarding Assistant:

Ben does similar work to Alex, but its main responsibility is to handle onboarding of new employees. Ben collects basic information from employees (Name, Email, contact no., Job Title) by assisting them to fill in the form and immediately triggers the outbound call to each one of the employees to book call with the Manager, to assist them with all the basic information about the company and even answering all the queries relating to the company.

Link for Ben – Onboarding Assistant:

<https://app.millis.ai/agents/embedded?id=OSVFYkZOY3M04SYqBf&k=YBFGuHxSsowkAROCKBwIBr4ijE4ZBC8I>

Bolt.new

Bolt is used to create a meta data form to collect the basic information of employees



Link to the meta data form:



<https://onboarding-voice-assistant.netlify.app/>

Make.com – very popular automation platform

Make.com is used to collect the data from the meta data form and store it and to trigger an outbound call to each one of the employees to assist them with the onboarding process.

Make a scenario:

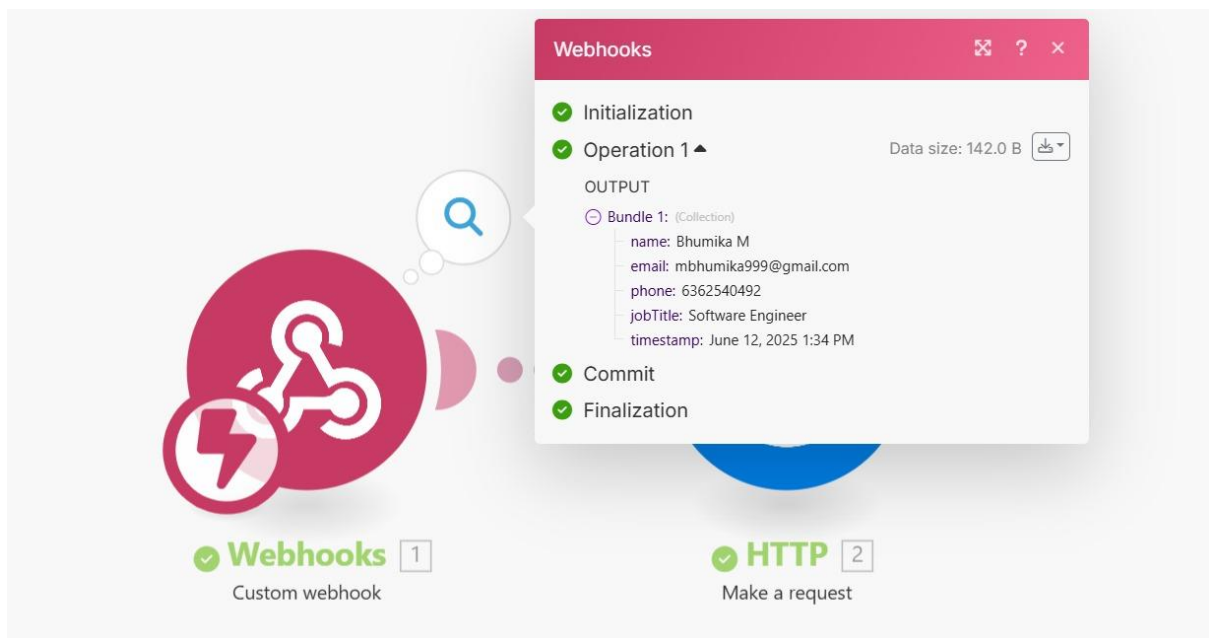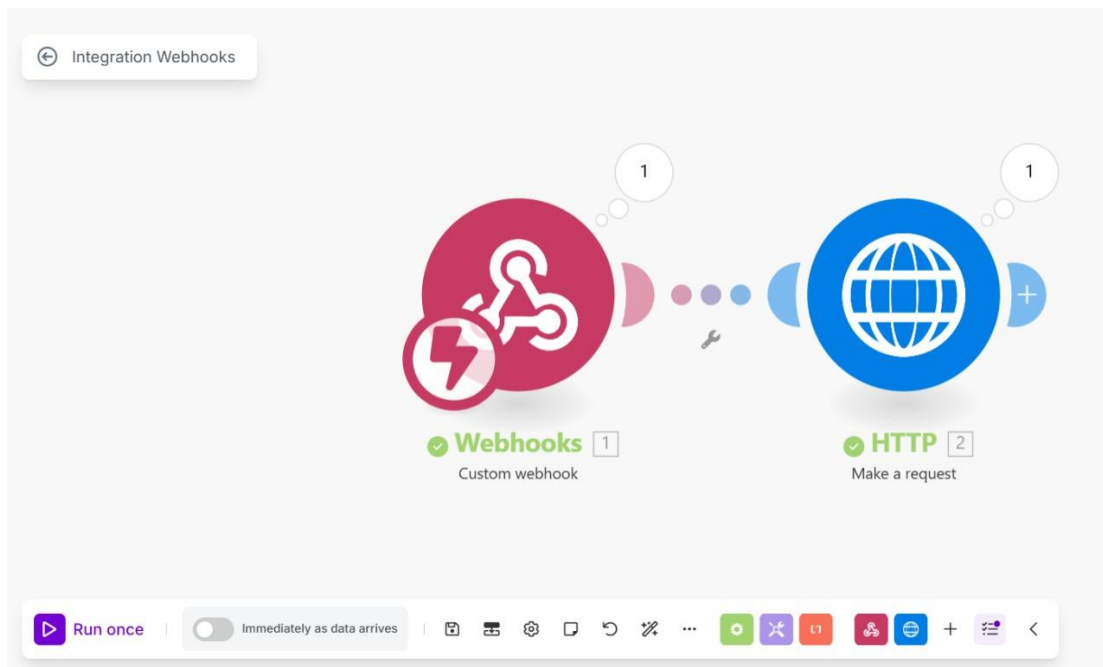

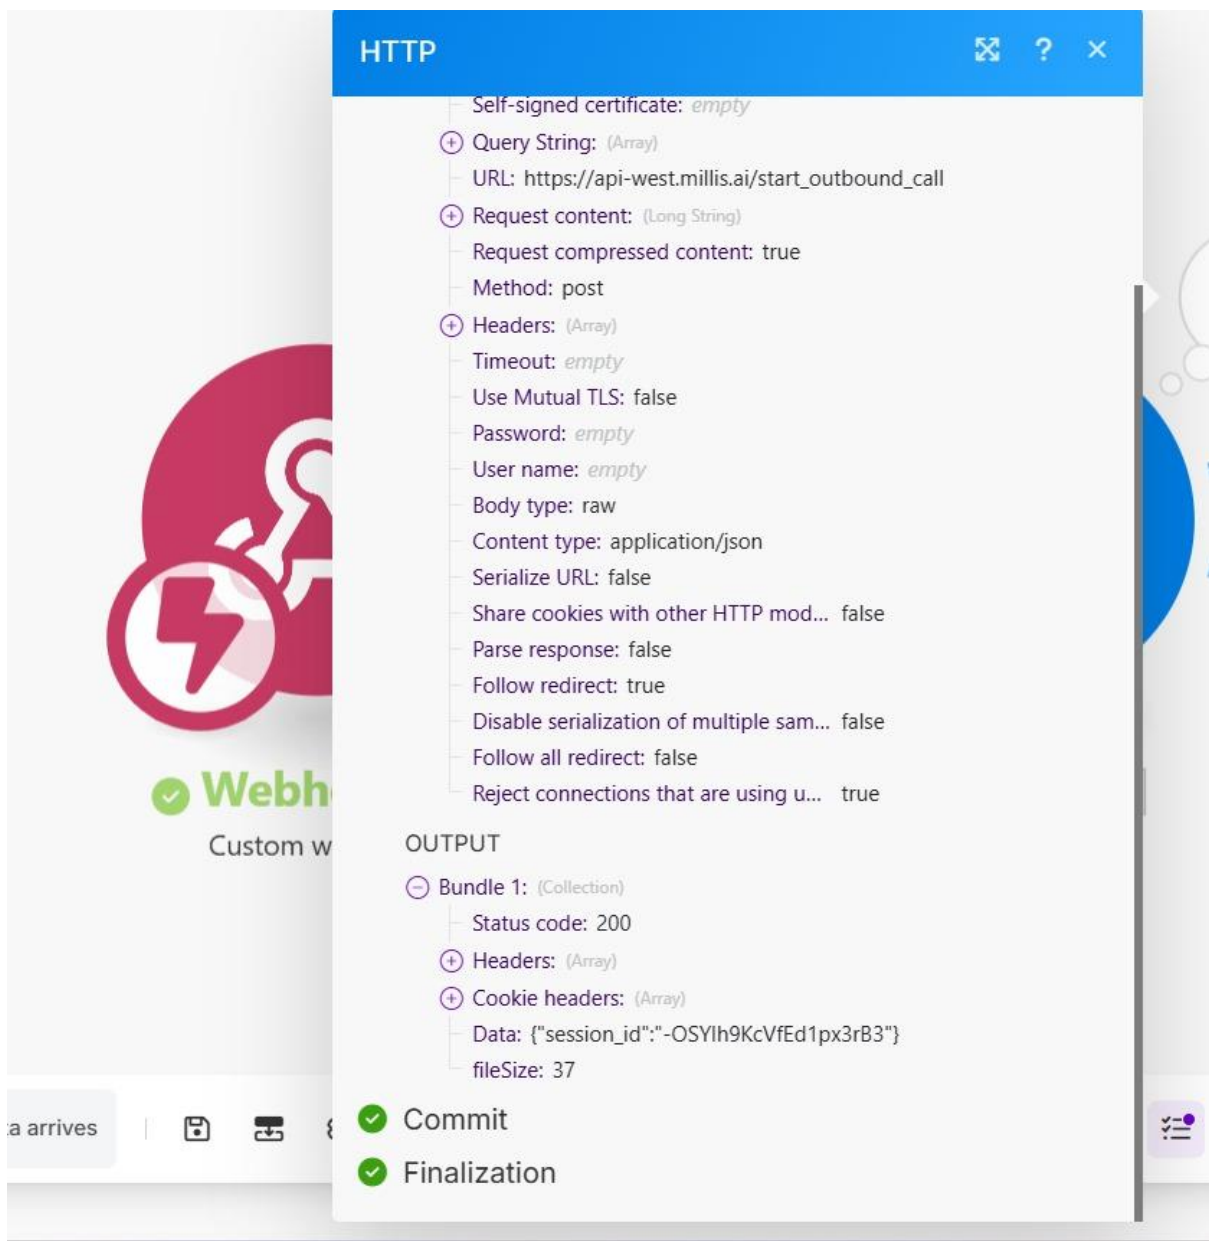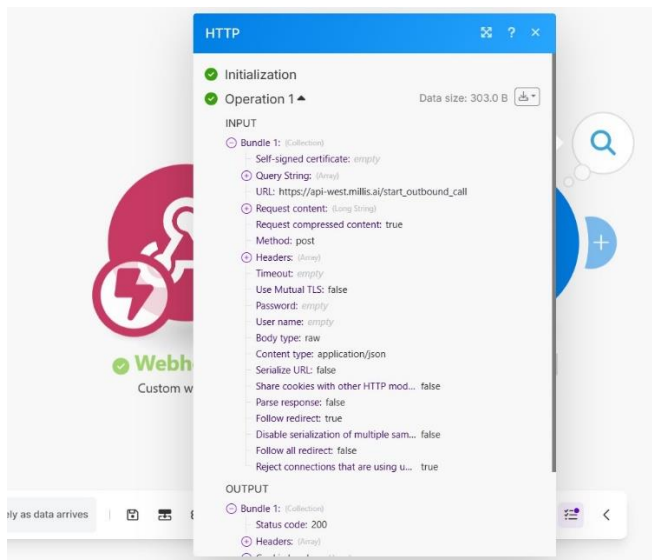

HTTP

☒ Evaluate all states as errors (except for 2xx and 3xx)
☒ Yes ☐ No

☒ URL *
https://api-west.millis.ai/start_outbound_call

☒ Method *
POST

☒ Headers
Item 1
Name *
Authorization
Value
EKRs58zDMjPt9fz9WqeJ8nOaSxiZqLbV

+ Add a header

☒ Query String

HTTP

☒ Body type
Raw

☒ Content type
JSON (application/json)
💡 Sets the Content-Type request header.

☒ Request content

```
{
  "from_phone": "+14845645303",
  "to_phone": "+91 1. phone ",
  "agent_id": "-OSVfYkZOY3M04-SYqBf",
  "metadata": {
    "job_title": " 1. jobTitle ",
    "email": " 1. email ",
    "phone": " 1. phone "
  },
  "include_metadata_in_prompt": true
}
```

☒ Parse response
☐ Yes ☒ No

The above images show the configuration of webhook and HTTP request.

