
1) Design a web page using Inline and Internal CSS

```
<!DOCTYPE html>
<html>
<head>
  <title>Inline and Internal CSS Example</title>
  <style>
    body {
      font-family: Arial, sans-serif;
      background-color: #f4f4f4;
      margin: 0;
      padding: 0;
    }
    header {
      background-color: rgb(159, 159, 243);
      color: rgb(35, 17, 232);
      text-align: center;
      padding: 20px;
    }
    header:hover{
      color: #c60bf5;
    }
    nav {
      background-color: #ef9191;
      padding: 10px;
      text-align: center;
    }
    .highlight {
      color: darkred;
      font-weight: bold;
    }
  </style>
</head>
<body>
  <header>
    <h1>My Styled Web Page</h1>
    <p>Using Inline and Internal CSS</p>
  </header>
  <nav>
    <a href="#">Home</a>
    <a href="#">About</a>
    <a href="#">Services</a>
    <a href="#">Contact</a>
  </nav>
```

```
    <h2>Welcome</h2>
    <p>This page demonstrates <span class="highlight">Internal CSS</span> styling.</p>

    <p style="color: green; font-size: 18px;">
      This paragraph is styled using Inline CSS.
    </p>
    <button style="background-color: orange; color: white; padding: 10px; border: none;
border-radius: 5px;">
      Click Me
    </button>
</body>
</html>
```

/*OUTPUT*/

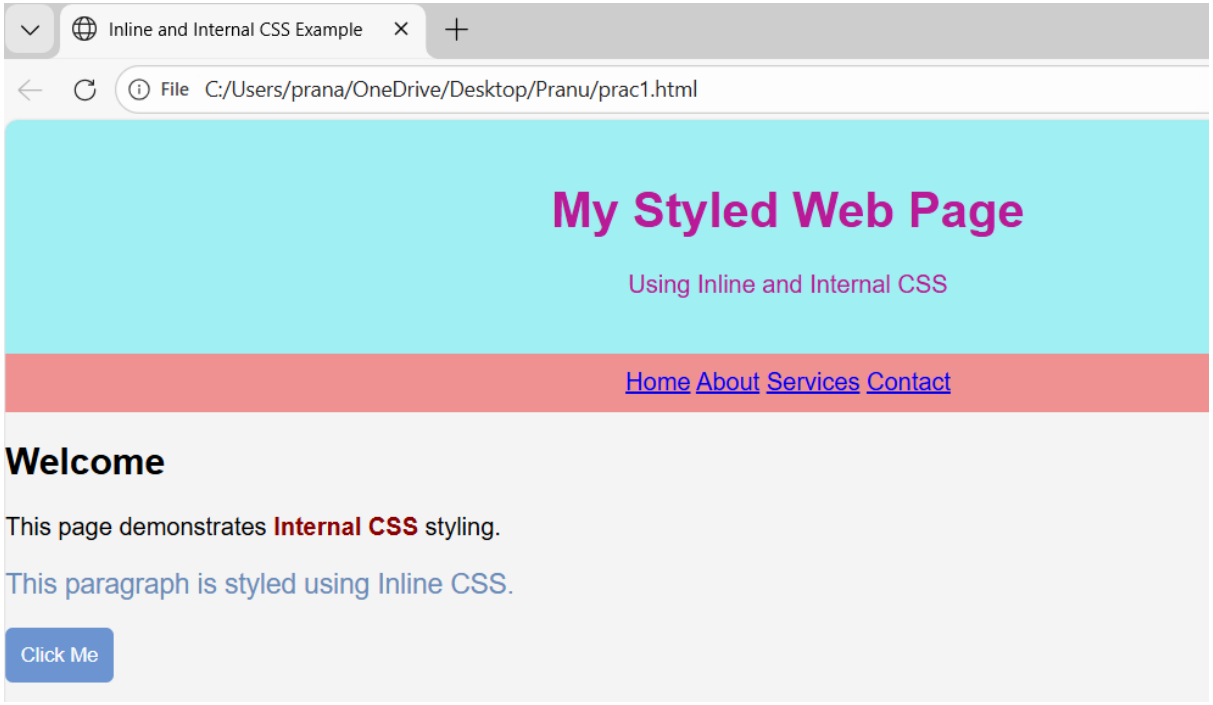

2) Demonstrate the use of External CSS

- **Style2.css**


```
body{
    font-family: Arial, sans-serif;
    background-color: #408c1a;
    margin: 0;
}
header{
    background-color: #56799c;
    color: #900f0f;
    text-align: center;
    padding: 20px;
}
nav{
    background-color: #1abc9c;
    text-align: center;
    padding: 12px;
}
nav a{
    color: #d1e197;
    text-decoration: none;
    margin: 15px;
    font-weight: bold;
}
nav a:hover{
    color: #f21616;
}
button{
    background-color: #060af1;
}
```

- **prac.html**

```
<!DOCTYPE html>
<html>
<head>
  <title>External CSS Example</title>
  <link rel="stylesheet" href="style1.css">
</head>
<body>
  <header>
    <h1>My Website</h1>
    <p>Demonstration of External CSS</p>
  </header>
  <nav>
    <a href="#">Home</a>
    <a href="#">About</a>
    <a href="#">Contact</a>
  </nav>
  <div class="content">
    <h2>Welcome</h2>
```

```
    <p>This is styled using an external CSS file</p>
    <button>Click Me</button>
  </div>
  <footer>
    <p>&copy; 2026 My Website</p>
  </footer>
</body>
</html>
```

/*OUTPUT*/

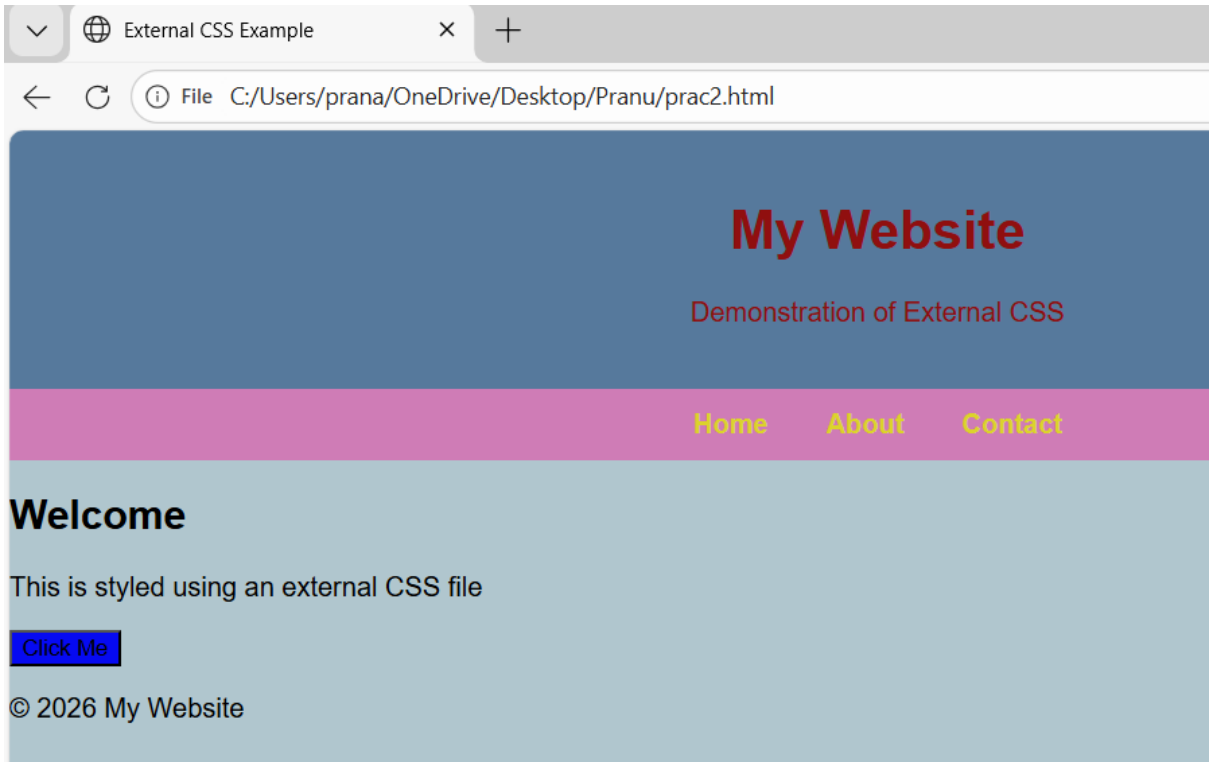

3) Demonstrate External CSS to format your class timetable as you created.

- **prac3.css**


```
body{
   background-color: bisque;
   font-family: 'Times New Roman', Times, serif;
   font-size: medium;
}
th{
   background-color: #aed2ae;
   color: #f36906;
}
td{
   background-color: #57e2fe;
   color: #1905f4;
}
h1{
   color: #ef0b0b;
   text-align: center;
}
h1:hover{
   color: #69f603;
}
```

- **prac3.html**

```
<!DOCTYPE html>
<html>
<head>
   <title>Class Timetable</title>
   <link rel="stylesheet" href="prac3.css">
</head>
<body>
   <h1>Class Timetable</h1>
   <table>
      <tr>
         <th>Day</th>
         <th>9:45 - 10:45</th>
         <th>10:45 - 11:45</th>
         <th>11:45 - 12:45</th>
         <th>12:45 - 01:45</th>
      </tr>
      <tr>
         <td>Monday</td>
```

```
            <td>CSS3</td>
            <td>TCS</td>
            <td>Nodejs</td>
            <td>Javascript</td>
        </tr>
        <tr>
            <td>Tuesday</td>
            <td>Javascript</td>
            <td>RDBMS</td>
            <td>TCs</td>
            <td>CSS3</td>
        </tr>
        <tr>
            <td>wednesday</td>
            <td>Nodejs</td>
            <td>RM</td>
            <td>TCS</td>
            <td>RDBMS</td>
        </tr>
        <tr>
            <td>Thursday</td>
            <td>Javascript</td>
            <td>CSS3</td>
            <td>RM</td>
            <td>Nodejs</td>
        </tr>
        <tr>
            <td>Friday</td>
            <td>RDBMS</td>
            <td>TCS</td>
            <td>Javascript</td>
            <td>CSS3</td>
        </tr>
        <tr>
            <td>Saturday</td>
            <td colspan="2">Lab on RDBMS</td>
            <td>Nodejs</td>
            <td></td>
        </tr>
    </table>
</body>
</html>
```

/*OUTPUT*/

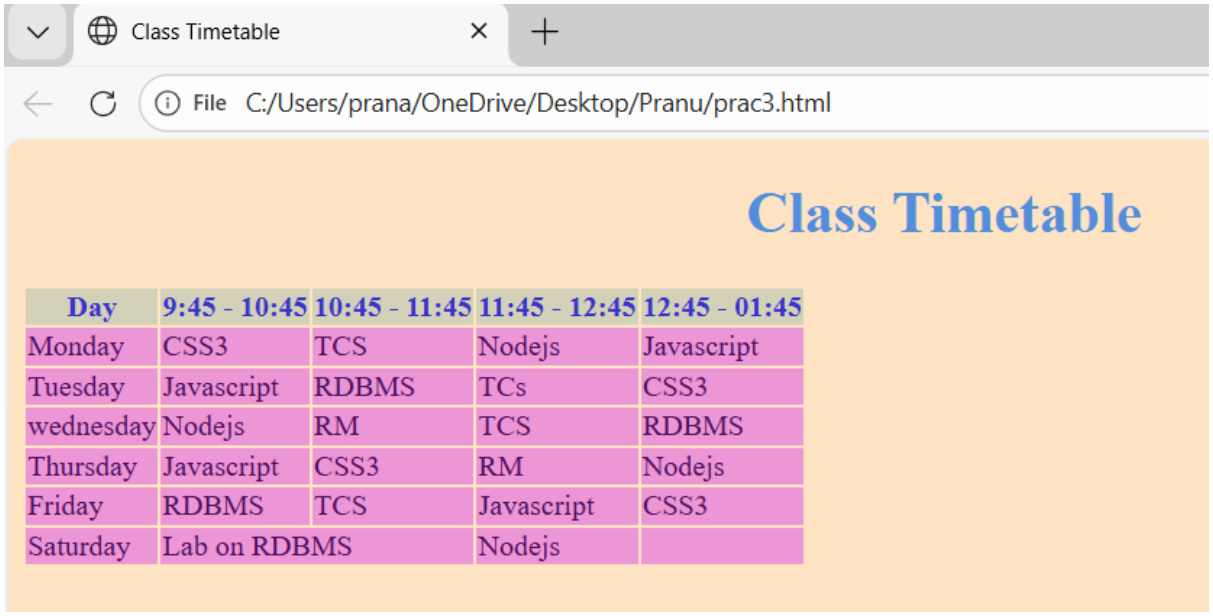

Class Timetable


Day	9:45 - 10:45	10:45 - 11:45	11:45 - 12:45	12:45 - 01:45
Monday	CSS3	TCS	Nodejs	Javascript
Tuesday	Javascript	RDBMS	TCs	CSS3
wednesday	Nodejs	RM	TCS	RDBMS
Thursday	Javascript	CSS3	RM	Nodejs
Friday	RDBMS	TCS	Javascript	CSS3
Saturday	Lab on RDBMS		Nodejs	

4) Demonstrate the Order list and unorder list in HTML using CSS.

```
<!DOCTYPE html>
<html>
<head>
   <title>Ordered and Unordered List</title>
   <style>
      body{
         background-color: #93d9e7;
      }
      ul{
         list-style-type: circle;
         color: #eb4886;
      }
      ol{
         list-style-type: lower-roman;
         color: #683d72;
      }
      h2{
         color: #990909;
      }
   </style>
</head>
<body>
   <h2>Unordered List</h2>
   <ul>
      <li>CSS3</li>
      <li>RDBMS</li>
      <li>Javascript</li>
      <li>TCS</li>
   </ul>

   <h2>Ordered List</h2>
   <ol>
      <li>Mozila Firefox</li>
      <li>Search Google</li>
      <li>Google Gemini</li>
      <li>Chatgpt</li>
   </ol>
</body>
</html>
```

/*OUTPUT*/

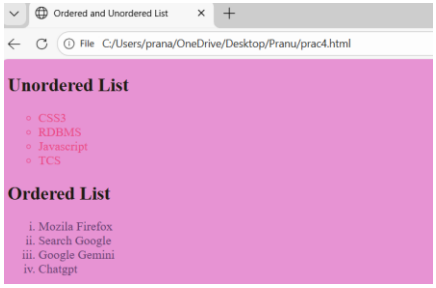


5) Create web page to set background color using CSS.

```
<!DOCTYPE html>
<html>
<head>
   <title>Background Color web Page</title>
   <style>
      body{
         background-color: #bfdaf7;
         font-family: 'Times New Roman', Times, serif;
      }
      header{
         background-color: #003366;
         color: #8bdff5;
         text-align: center;
      }
      section{
         padding: 20px;
      }
      h2{
         color: #1c08f7;
      }
      p{
         font-size: 17px;
         line-height: 1.4;
      }
      ul{
         background-color: #ea97f8;
         padding: 15px;
         width: 50%;
      }
      li{
         margin: 8px;
      }
   </style>
</head>
<body>
   <header>
   <h1>CSS Background color Example</h1>
   <p>Demonstration of background color using css</p>
   </header>
   <section>
      <h2>About This Page</h2>
      <p>
```

```
        This web page demonstrates how to set the background color of a web
        page using css.
      </p>
      <h2>Advantages of Using CSS Background Color</h2>
      <ul>
        <li>Improves visual appearance</li>
        <li>Makes content more readable</li>
        <li>Easy to customize</li>
      </ul>
      <h2>CSS Property Used</h2>
      <p>
        The <b>background-color</b> property is used to set the background color
        HTML elements like body, header, section, etc.
      </p>
    </section>
</body>
</html>
```


/*OUTPUT*/

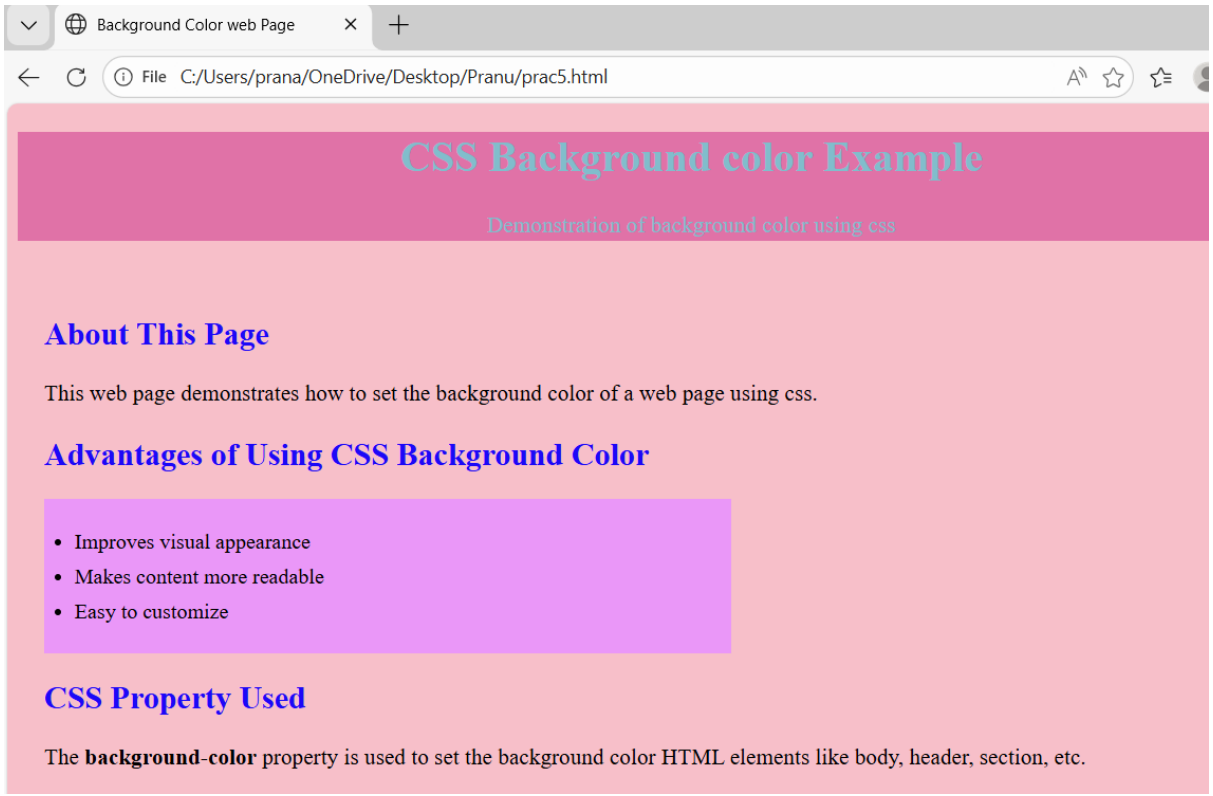

6) Create a Webpage different background images using CSS.

```
<!DOCTYPE html>
<html>
<head>
   <title>Different Background Image Example</title>
   <style>
      .section1{
       height: 300px;
       background-image: url(waterfall1.jpg), url(waterfall2.jpg);
       background-size: cover;
       background-repeat: no-repeat;
       text-align: center;
       display:flex;
       flex-direction: column;
       align-items: center;
       justify-content: flex-start;
       font-size: 30px;
       color: #f7cece;
      }
      .section2{
       height: 300px;
       background-image: url(waterfall2.jpg);
       background-size: cover;
       background-repeat: no-repeat;
       text-align: center;
       display:flex;
       flex-direction: column;
       align-items: center;
       justify-content: flex-start;
       font-size: 28px;
       color: #fafe03;
      }
   </style>
</head>
<body>
   <div class="section1">
      <p>This is use for background-image in HTML using styled for css.</p>
      <p> The <b>background-image</b> property is used to set the background image
         HTML elements like body, div, etc.</p>
   </div>
   <div class="section2">
      <p>This is second section use for background image in css</p>
      <p>Thank You!</p>
   </div>
</body>
</html>
```

/*OUTPUT*/

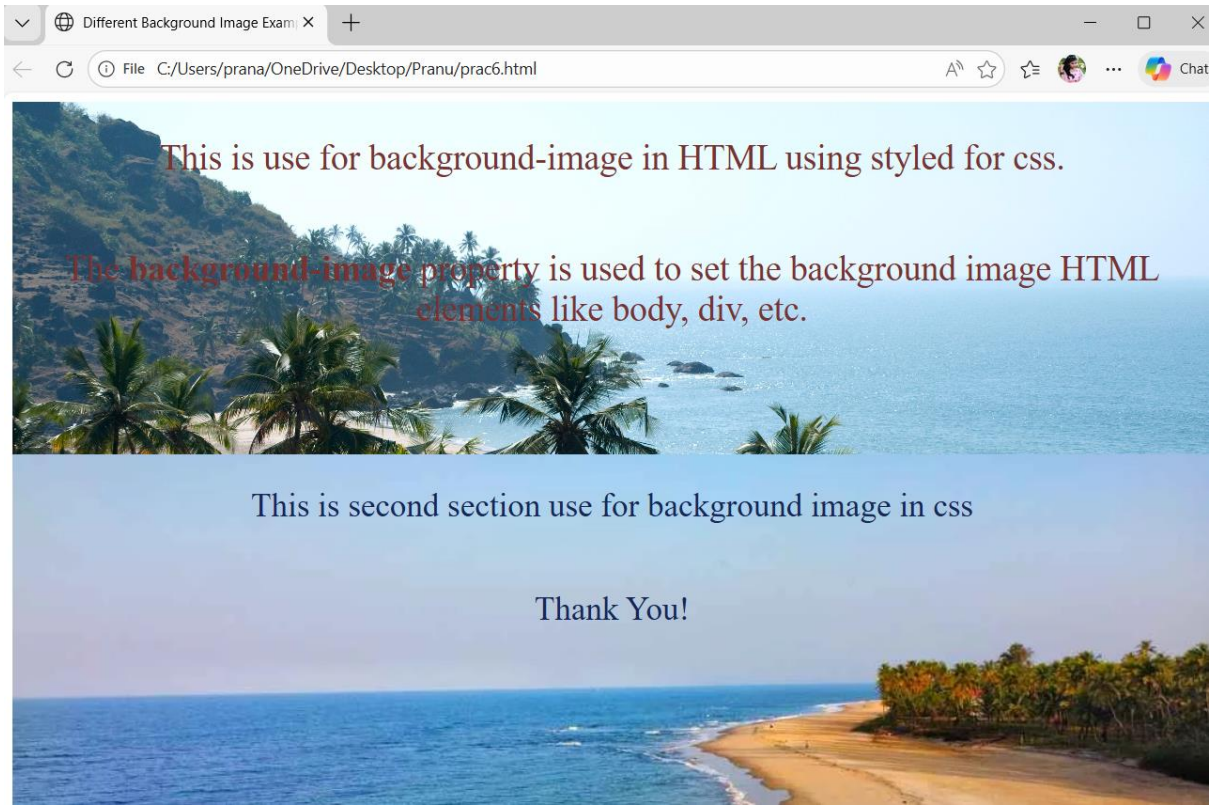
Different Background Image Exam
File C:/Users/prana/OneDrive/Desktop/Pranu/prac6.html
Chat
This is use for background-image in HTML using styled for css.
The background-image property is used to set the background image HTML elements like body, div, etc.
This is second section use for background image in css
Thank You!

7) Create web page to set different font style to each paragraph.

```
<!DOCTYPE html>
<html>
<head>
   <title>Different Font Style Example</title>
   <style>
      body{
         background-color: #6e6e6e;
      }
      h1{
         color: #f20707;
      }
      .para1{
         font-family: 'Courier New', Courier, monospace;
         color: aqua;
      }
      .para2{
         font-family: 'Gill Sans', 'Gill Sans MT', Calibri, 'Trebuchet MS', sans-serif;
         color: blue;
      }
      .para3{
         font-family: 'Times New Roman', Times, serif;
         color: rgb(74, 11, 132);
      }
      .para4{
         font-family: Arial, Helvetica, sans-serif;
         color: chocolate;
      }
      .para5{
         font-family: cursive;
         color: darkorange;
      }
   </style>
</head>
<body>
   <h1>Different Font Style</h1>
   <p class="para1">This is use for courier font</p>
   <p class="para2">This is use for gill sans font</p>
   <p class="para3">This is use for times new roman font</p>
   <p class="para4">This is use for Arial font</p>
   <p class="para5">This is use for cursive font</p>
</body>
</html>
```

/*OUTPUT*/


Different Font Style Example
File C:/Users/prana/OneDrive/Desktop/Pranu/prac7.html
Different Font Style
This is use for courier font
This is use for gill sans font
This is use for times new roman font
This is use for Arial font
This is use for cursive font

8) Demonstrate Text Format using CSS.

```
<!DOCTYPE html>
<html>
<head>
   <title>Different Text Formatting Example</title>
   <style>
      body{
         background-color: #8ebeca;
      }
      .text1{
         text-align: center;
         color: brown;
      }
      .text2{
         text-decoration: double;
         color: blue;
      }
      .text3{
         text-shadow: 20px;
         color: #4b8518;
      }
      .text4{
         text-transform: lowercase;
         color: #0a5b73;
      }
      .text5{
         letter-spacing: 5px;
         color: #1e1382;
      }
      .text6{
         text-overflow: clip;
         color: #5c0a73;
      }
   </style>
</head>
<body>
   <h2>Text Formatting Tag using CSS</h2>
   <p class="text1">This text is center aligned.</p>
   <p class="text2">This text is double</p>
   <p class="text3">This text is display from shadow</p>
   <p class="text4">This text is converted from lowercase</p>
   <p class="text5">This text has extra space between letters</p>
   <p class="text6">This text are overflow</p>
</body>
</html>
```

/*OUTPUT*/


Different Text Formatting Example
File C:/Users/prana/OneDrive/Desktop/Pranu/prac8.html
Text Formatting Tag using CSS
This text is center aligned.
This text is double
This text is display from shadow
this text is converted from lowercase
T h i s t e x t h a s e x t r a s p a c e b e t w e e n l e t t e r s
This text are overflow

9) Divide the page into three equal columns using Frameset tag and fill each frame with a different background colour Using CSS.

- Frame.html

```
<!DOCTYPE html>
<html>
<head>
   <style>
      body{
         background-color: lightblue;
      }
   </style>
</head>
<body>
   <h3>First Frame</h3>
</body>
</html>
```

- Frame2.html

```
<!DOCTYPE html>
<html>
<head>
   <style>
      body{
         background-color: lightgray;
      }
   </style>
</head>
<body>
   <h3>Second Frame</h3>
</body>
</html>
```


- Frame3.html

```
<!DOCTYPE html>
<html>
<head>
   <style>
      body{
         background-color: lightpink;
      }
   </style>
</head>
<body>
   <h3>Third Frame</h3>
</body>
</html>
```

- Prac9.html

```
<!DOCTYPE html>
<html>
<head>
    <title>Three columns Frameset</title>
</head>
<frameset cols="33%,33%,34%">
    <frame src="frame.html"></frame>
    <frame src="frame2.html"></frame>
    <frame src="frame3.html"></frame>
</frameset>
</html>
```

/*OUTPUT*/

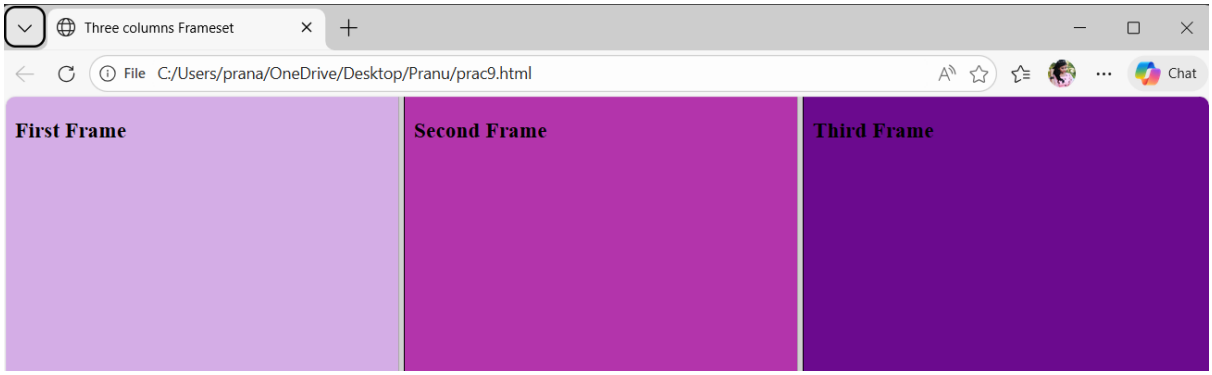

10) Create a web page using frame. Divide the page into two parts with Navigation links on left hand side of page (width=20%) and content page on right hand side of page (width = 80%). On clicking the navigation Links corresponding content must be shown on the right-hand side.

- **Nav.html**

```
<!DOCTYPE html>
<html>
<head>
   <title>Navigation</title>
</head>
<body bgcolor="#ff8ee3">
<h3>Navigation</h3>
<a href="home.html" target="content">Home</a><br><br>
<a href="about.html" target="content">About</a><br><br>
<a href="services.html" target="content">Services</a><br><br>
<a href="contact.html" target="content">Contact</a>
</body>
</html>
```

- **Home.html**

```
<!DOCTYPE html>
<html>
<head>
   <title>Home</title>
</head>
<body bgcolor="lightgreen">
<h2>Welcome to Home Page</h2>
<p>This content is displayed in the right frame.</p>
</body>
</html>
```

- **About.html**

```
<!DOCTYPE html>
<html>
<head>
   <title>About</title>
</head>
<body bgcolor="lightpink">
<h2>About Us</h2>
<p>This is the About page content.</p>
</body>
</html>
```

- **Services.html**

```
<!DOCTYPE html>
<html>
<head>
   <title>Services</title>
</head>
```

```
<body bgcolor="grey">
<h2>Our Services</h2>
<p>Details about services go here.</p>
</body>
</html>
```


- **Contact.html**

```
<!DOCTYPE html>
<html>
<head>
   <title>Contact</title>
</head>
<body bgcolor="lightblue">
<h2>Contact Us</h2>
<p>Email: example@email.com</p>
</body>
</html>
```


- **Index.html**

```
<!DOCTYPE html>
<html>
<head>
   <title>Frame Layout Example</title>
</head>
<frameset cols="20%,80%">
   <frame src="nav.html" name="navigation">
   <frame src="home.html" name="content">
</frameset>
</html>
```


/*OUTPUT*/

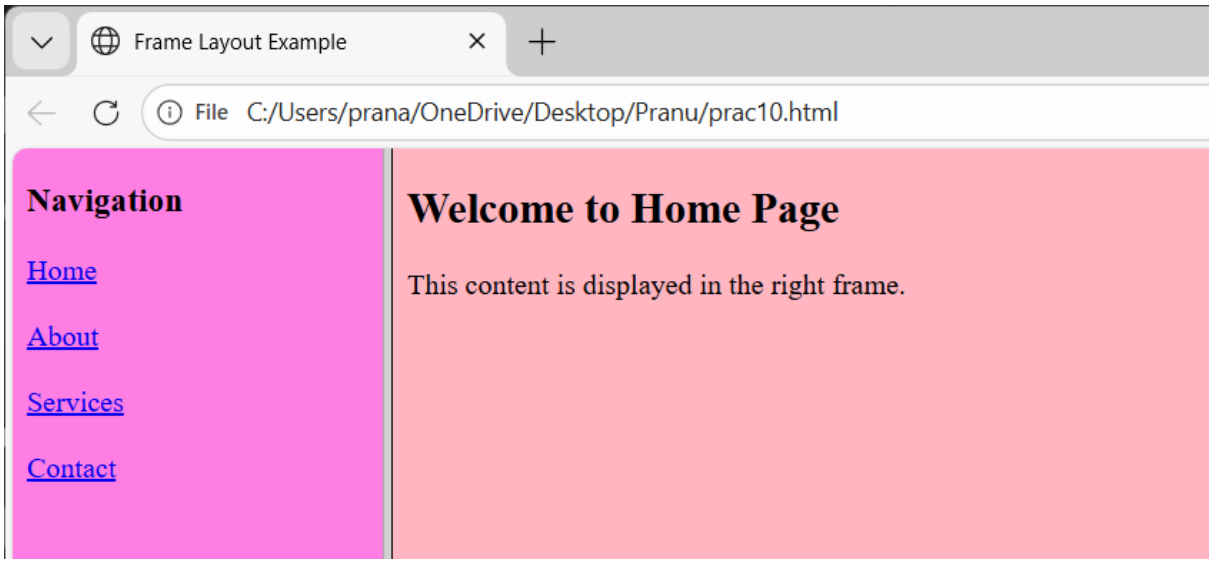


1.Home Page:-

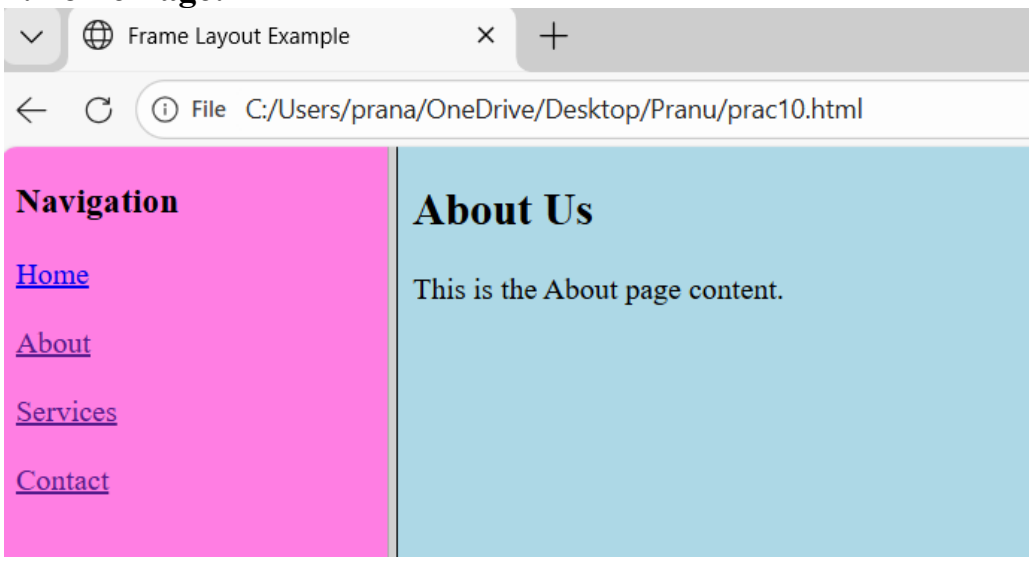


2.About Page:-

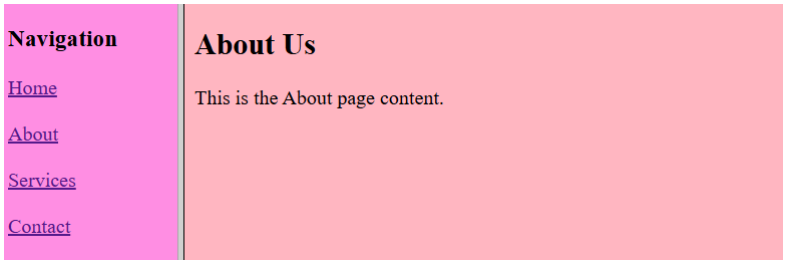

3.Services Page:-

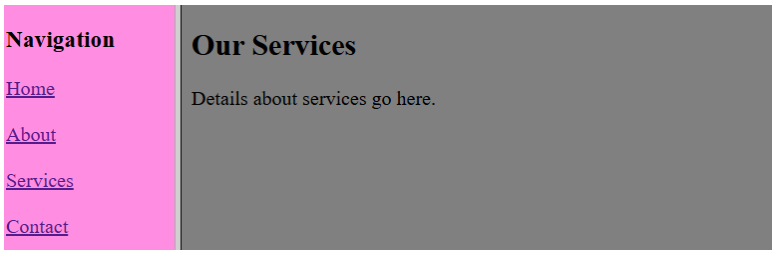

4.Contact Page:-

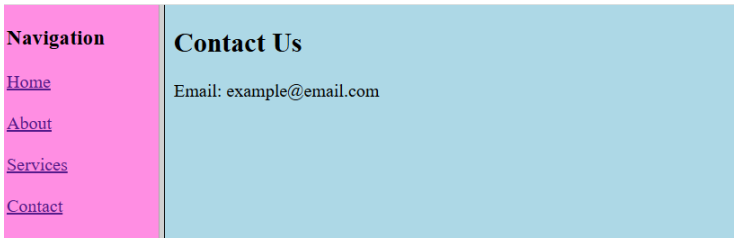

11) Divide the page into three equal Rows using Frameset tag and fill each frame with a different background colour using CSS.

- **Top.html**

```
<!DOCTYPE html>
<html>
<head>
  <style>
     body{
        background-color: lightsalmon;
     }
  </style>
</head>
<body>
   <h3>Top Frame</h3>
   <p>This is a top frame use in css.</p>
</body>
</html>
```

- **Middle.html**

```
<!DOCTYPE html>
<html>
<head>
   <style>
      body{
         background-color: lightskyblue;
      }
   </style>
</head>
<body>
   <h3>Middle Frame</h3>
   <p>This is middle frame use in css.</p>
</body>
</html>
```


- **Bottom.html**

```
<!DOCTYPE html>
<html>
<head>
   <style>
      body{
         background-color: lightseagreen;
      }
   </style>
</head>
<body>
   <h3>Bottom Frame</h3>
   <p>This is bottom frame use in css.</p>
</body>
</html>
```

- **Index.html**

```
<!DOCTYPE html>
<html>
<head>
   <title>Frame Layout Example</title>
</head>
<frameset rows="33%,33%,34%">
   <frame src="top.html"></frame>
   <frame src="middle.html"></frame>
   <frame src="bottom.html"></frame>
</frameset>
</html>
```


/*OUTPUT*/

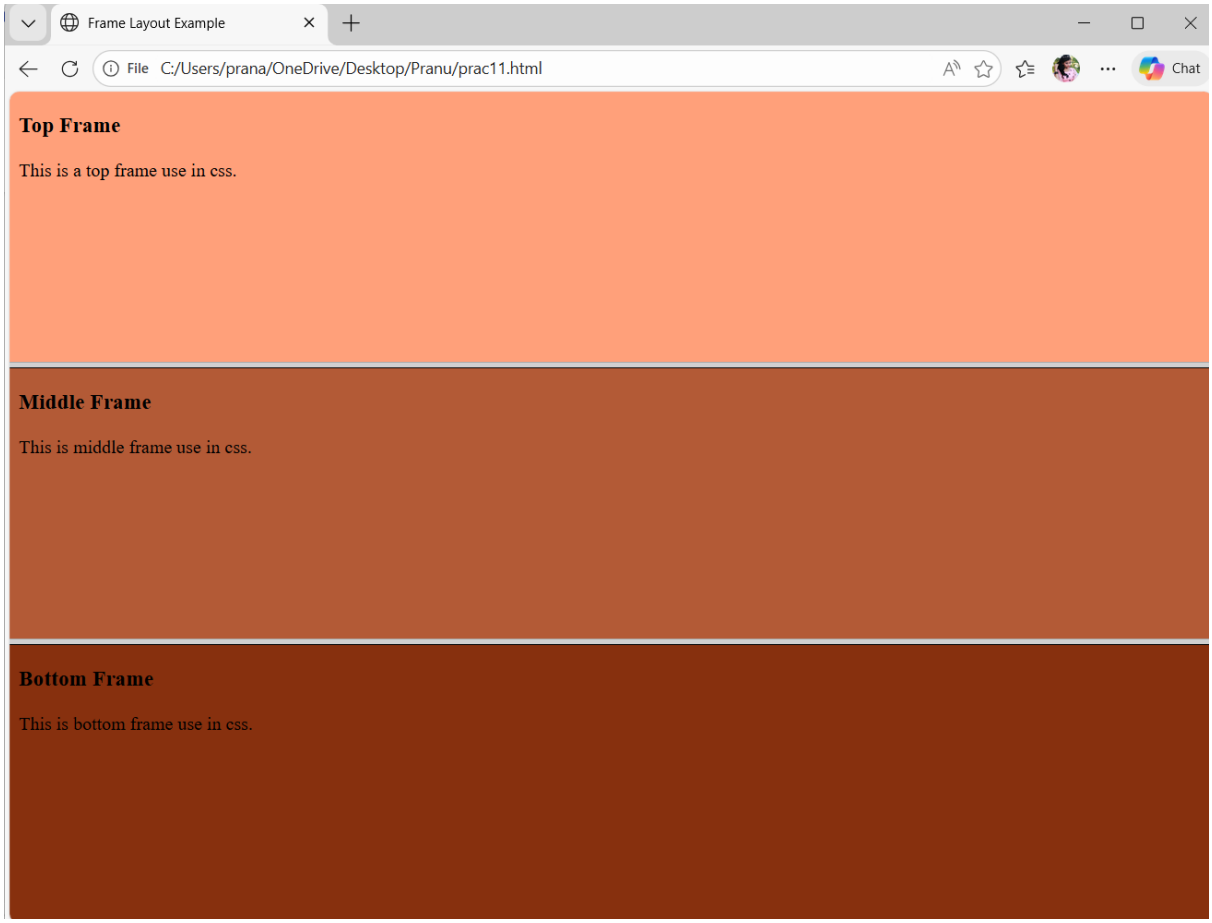

12) Write a program to demonstrate ID selector in CSS.

```
<!DOCTYPE html>
<html>
<head>
   <title>ID Selector Demo</title>
   <style>
      #heading1{
         color: darkblue;
         font-size: 24px;
         text-align: center;
         background-color: lightpink;
         padding: 8px;
         border-radius: 5px;
      }
      #highlight{
         color: brown;
         background-color: lightblue;
         padding: 8px;
         font-size: 20px;
         width: fit-content;
      }
   </style>
</head>
<body>
   <h1 id="heading1">This is styled using an ID selector</h1>
   <p id="highlight">This paragraph also uses an ID selector.</p>
</body>
</html>
```


/*OUTPUT*/

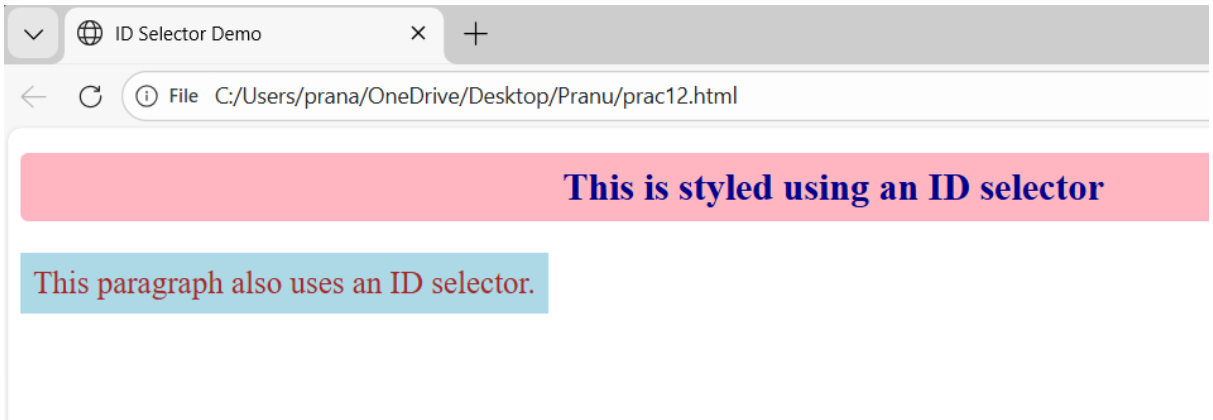

13) Write a program to demonstrate class selector in CSS.

```
<!DOCTYPE html>
<html>
<head>
   <title>Class Selector Demo</title>
   <style>
      .highlight{
         color: darkred;
         background-color: lightblue;
         padding: 8px;
         width: fit-content;
         border-radius: 4px;
         margin-bottom: 10px;
      }
      .titleText{
         color: darkmagenta;
         background-color: lightsalmon;
         font-size: 30px;
         font-weight: bold;
      }
   </style>
</head>
<body>
   <h2 class="titleText">This is a heading with class styling</h2>
   <p class="highlight">This is the first paragraph using the highlight class.</p>
   <p class="highlight">This is another paragraph using the same class.</p>
</body>
</html>
```


/*OUTPUT*/

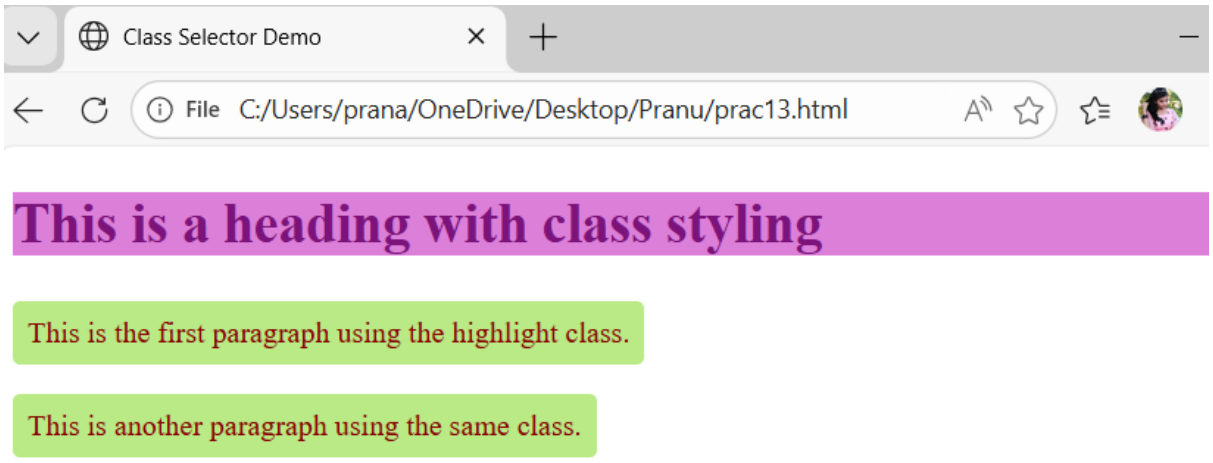

14) Demonstrate the border radius property using CSS.

```
<!DOCTYPE html>
<html>
<head>
   <title>Border Radius Demo</title>
   <style>
      .box{
         width: 120px;
         height: 120px;
         background-color: lightseagreen;
         border-radius: 20px;
         margin: 20px;
      }
      .circle{
         width: 150px;
         height: 150px;
         background-color: lightskyblue;
         border-radius: 50%;
         margin: 20px;
      }
   </style>
</head>
<body>
   <h2>Border Radius Property Demonstration</h2>
   <div class="box"></div>
   <div class="circle"></div>
</body>
</html>
```

/*OUTPUT*/

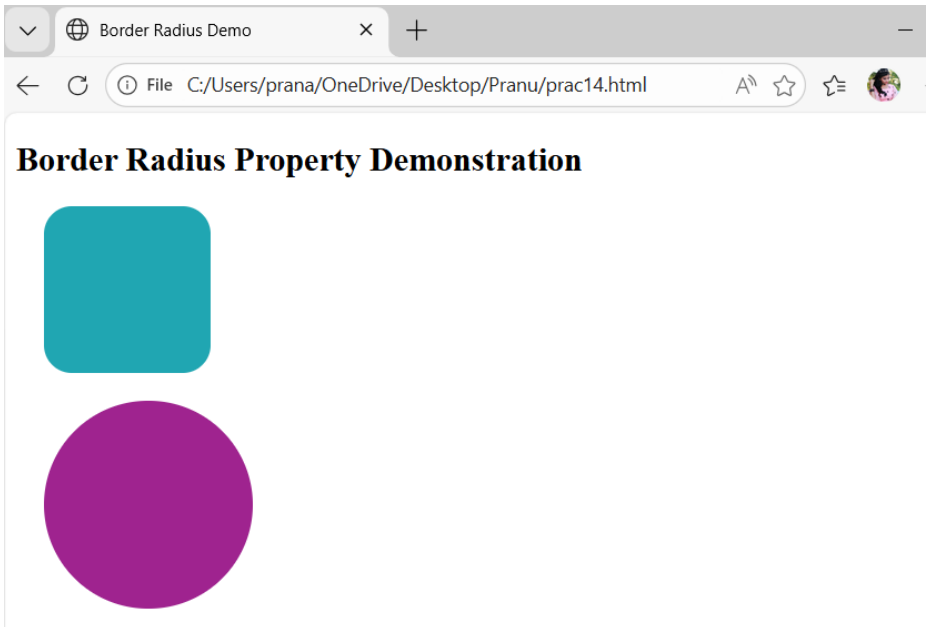

15) Demonstrate the RGBA colors property using CSS.

```
<!DOCTYPE html>
<html>
<head>
   <title>RGBA Colors Demo</title>
   <style>
      .box1{
         width: 200px;
         height: 100px;
         background-color: rgba(255, 0, 0, 0.7);
         margin-bottom: 20px;
      }
      .box2{
         width: 200px;
         height: 100px;
         background-color: rgba(37, 235, 37, 0.3);
         margin-bottom: 20px;
      }
      .box3{
         width: 200px;
         height: 100px;
         background-color: rgba(19, 19, 221, 0.3);
      }
   </style>
</head>
<body>
   <h2>RGBA Color Property Demonstration</h2>
   <div class="box1"></div>
   <div class="box2"></div>
   <div class="box3"></div>
</body>
</html>
```


/*OUTPUT*/



16) Demonstrate the Linear gradients are used to arrange two or more colors in linear formats (Top to Bottom)

```
<!DOCTYPE html>
<html>
<head>
   <title>Linear Gradient</title>
   <style>
      .gradient-box{
         width: 300px;
         height: 200px;
         background: linear-gradient(to bottom, red, yellow, lightgreen);
         border: 2px solid #333;
         border-radius: 8px;
         margin-top: 20px;
      }
   </style>
</head>
<body>
   <h2>Linear Gradient (Top to Bottom) Demonstration</h2>
   <div class="gradient-box"></div>
</body>
</html>
```


/*OUTPUT*/

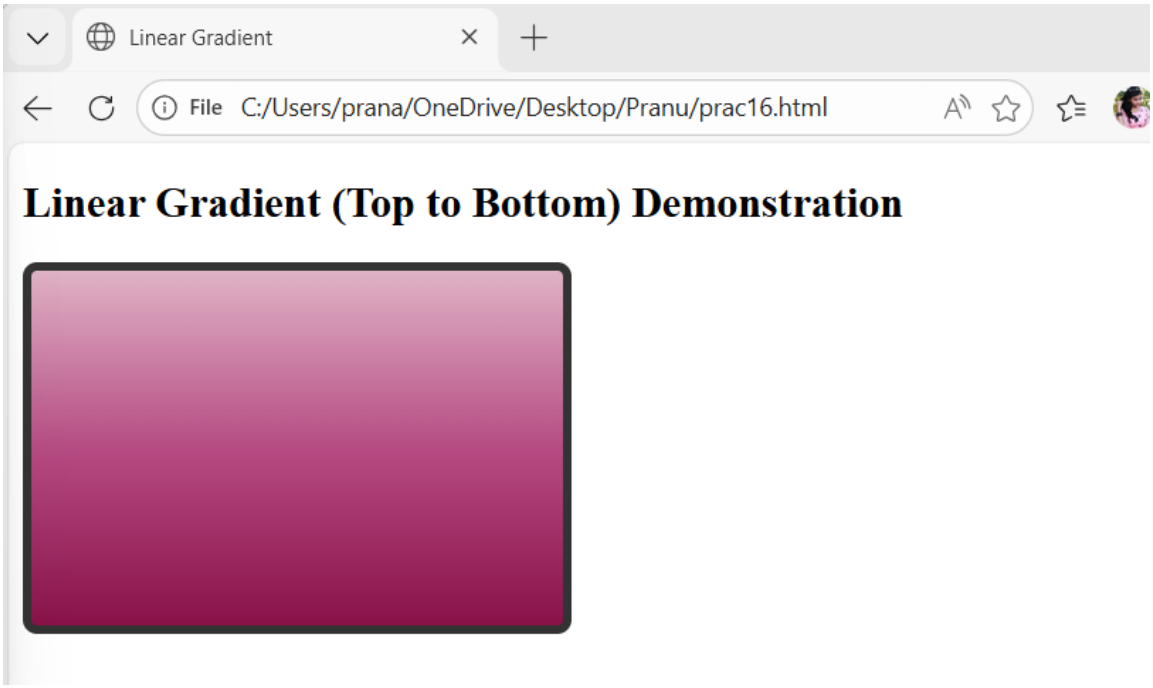

17) Demonstrate the repeat radial gradients using CSS

```
<!DOCTYPE html>
<html>
<head>
   <title>Repeating Radial Gradient Demo</title>
   <style>
      .radial-box{
         width: 300px;
         height: 300px;
         background: repeating-radial-gradient(circle, grey 0px,
                  lightgrey 30px, red 30px, orange 60px);
         border: 2px solid #333;
         border-radius: 10px;
         margin-top: 20px;
      }
   </style>
</head>
<body>
   <h2>Repeating Radial Gradient Demonstration</h2>
   <div class="radial-box"></div>
</body>
</html>
```

/*OUTPUT*/

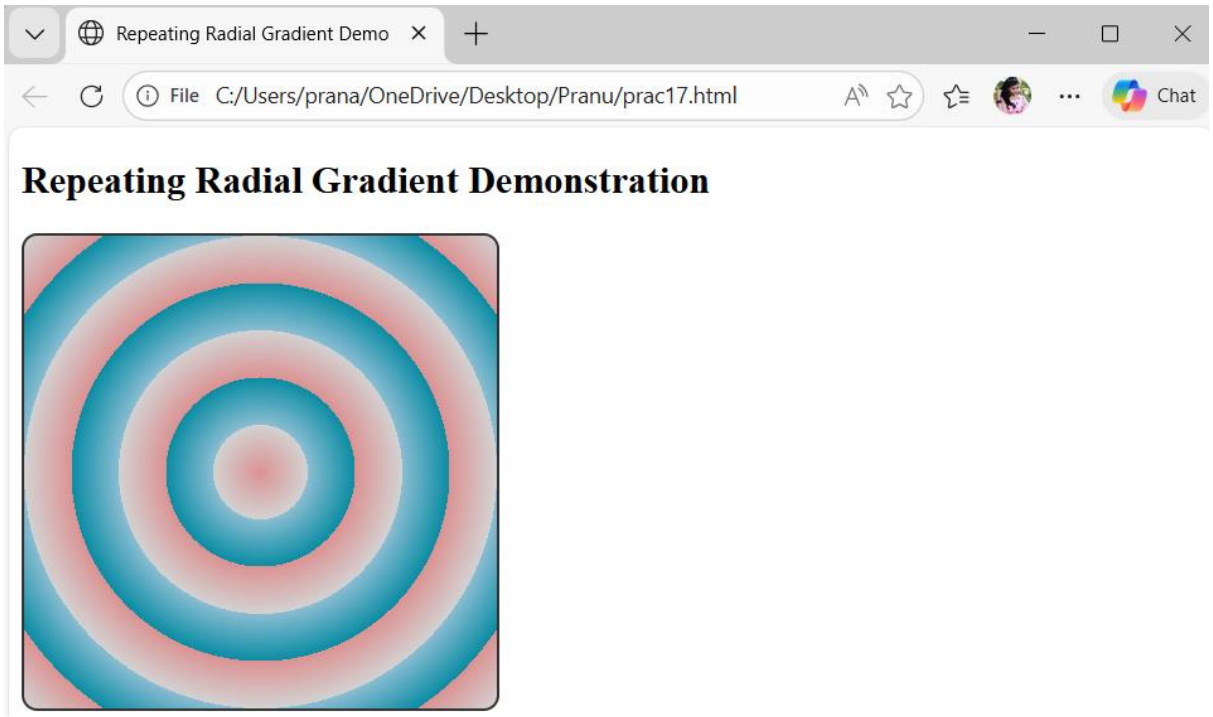


18) Design a webpage using CSS.

```
<!DOCTYPE html>
<html>
  <head>
    <title>GHRCEM Jalgaon</title>
    <style>
      body{
        font-family:'Times New Roman', Times, serif;
        margin: 0;
        background-color: #ea78ea;
      }
      nav{
        background-color: #003366;
        padding: 15px;
      }
      nav a{
        color: white;
        text-decoration: none;
        margin: 15px;
        font-size: 18px;
      }
      nav a:hover{
        color: yellow;
      }
      header{
        background-color: #0055aa;
        color: white;
        padding: 20px;
        text-align: center;
      }
      section{
        padding: 20px;
      }
      footer{
        background-color: #003366;
        color: white;
        text-align: center;
        padding: 10px;
        margin-top: 30px;
      }
    </style>
  </head>
  <body>
    <header>
      <h1>G. H. Raisoni College of Engineering & Management,Jalgaon</h1>
      <p>(Autonomous)-Approved by AICTE,New Delhi</p>
    </header>
    <nav>
      <a href="https://ghrcemj.raisoni.net/" target="_blank">Home</a>
```

```
        <a href="https://ghrcemj.raisoni.net/about-us" target="_blank">About</a>
        <a href="https://ghrcemj.raisoni.net/departments" target="_blank">Departments</a>
        <a href="https://ghrcemj.raisoni.net/admissions" target="_blank">Admission</a>
        <a href="https://ghrcemj.raisoni.net/contact-us" target="_blank">Contact</a>
    </nav>
    <section>
        <h2>Welcome to GHRCEM Jalgaon</h2>
        <p>This is a simple static website created for college representation using
          HTML and CSS.</p>
    </section>
    <footer>
        2025 GHRCEM Jalgaon|<a href="https://ghrcemj.raisoni.net/" style="color:yellow;"
target="_blank">official website</a>
    </footer>
  </body>
</html>
```


/*OUTPUT*/

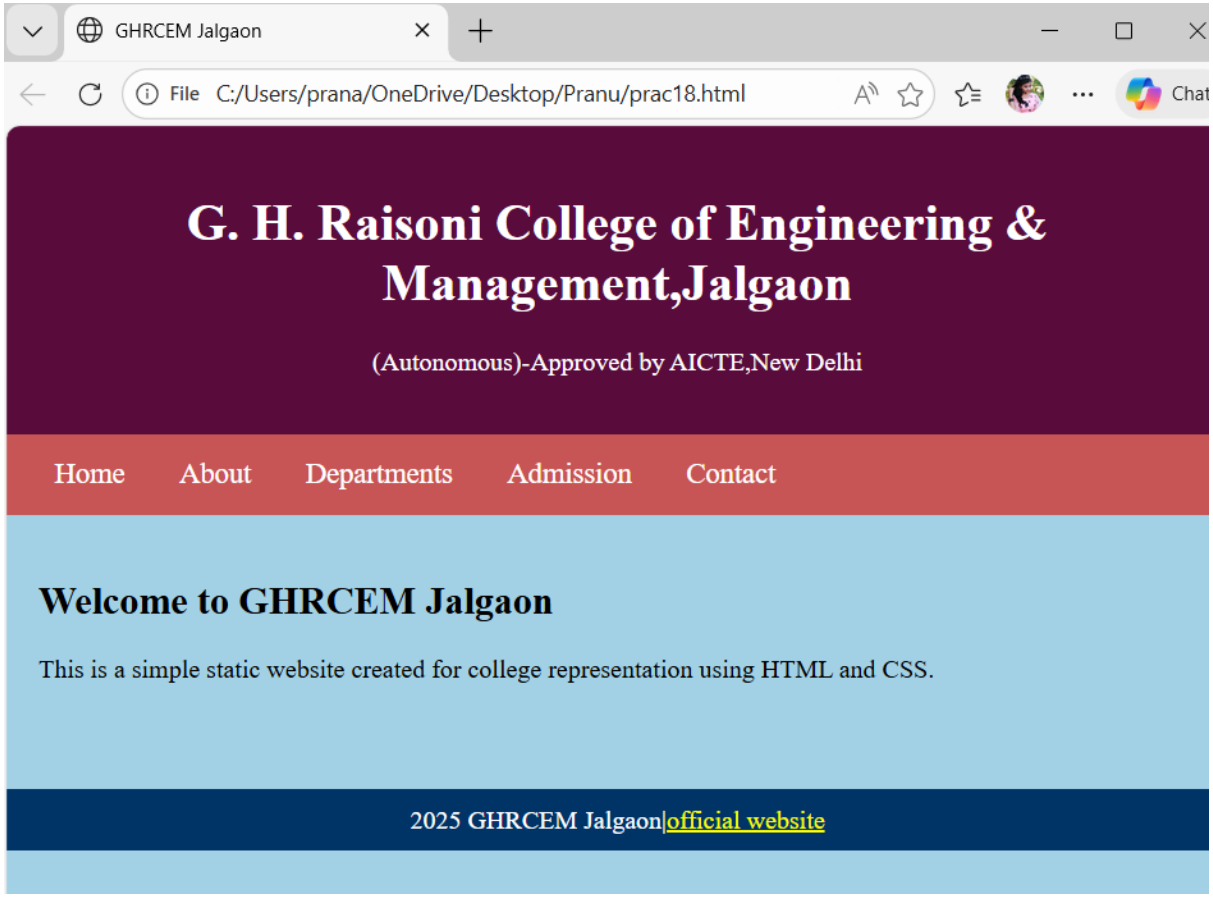

19) Develop JavaScript Program to Print Hello World

```
<!DOCTYPE html>
<html>
<head>
  <title>Hello</title>
</head>
<body bgcolor="lightgrey">
  <script>
    document.write("Hello, World!");
  </script>
</body>
</html>
```


/*OUTPUT*/

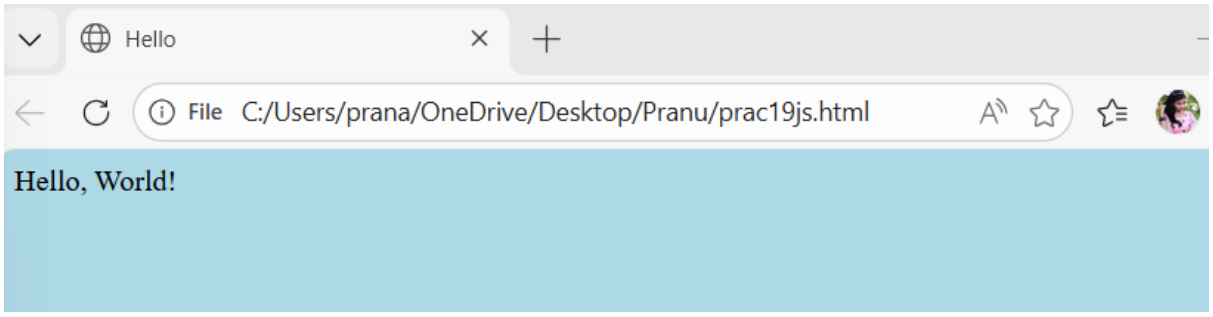

20) Develop JavaScript Program to Find the Square Root.

```
<!DOCTYPE html>
<html>
   <body>
      <script>
         let number = 25;
         let result = Math.sqrt(number);
         document.write("Square Root is: "+result);
      </script>
   </body>
</html>
```


/*OUTPUT*/

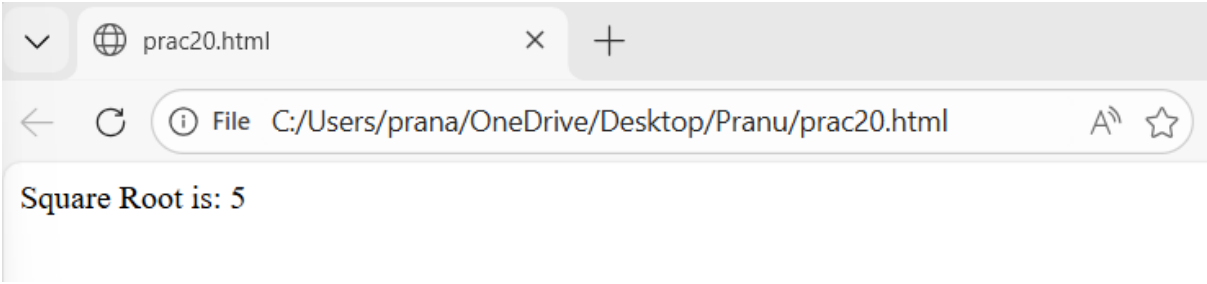

21) Develop JavaScript Program to Add Two Numbers

```
<!DOCTYPE html>
<html>
   <body>
      <script>
         let a = 10;
         let b = 20;
         let sum = a+b;
         document.write("Sum of a+b= "+sum);
      </script>
   </body>
</html>
```

/*OUTPUT*/

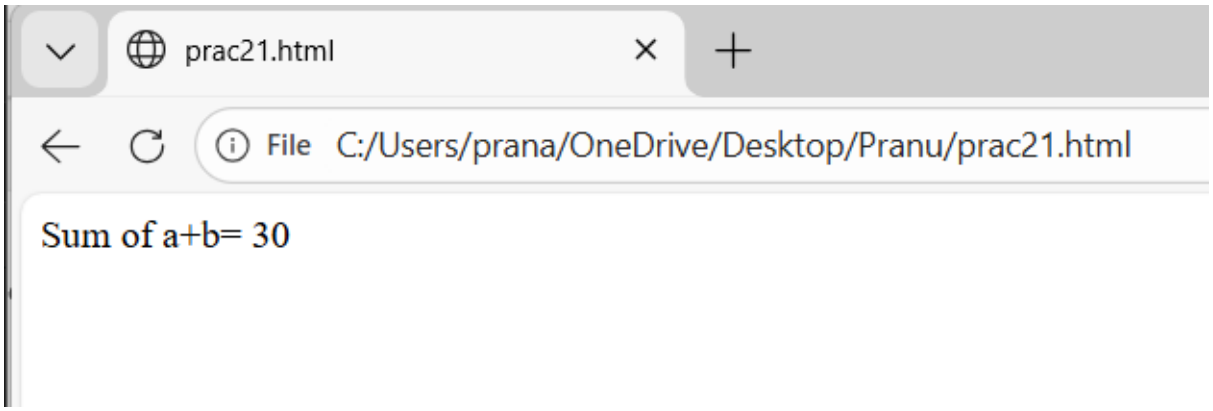


22) Develop JavaScript Program to Check if a Number is Odd or Even.

```
<!DOCTYPE html>
<html>
   <body>

      <script>
         let num = 20;
         if(num % 2 === 0){
            document.write("Number " +num +" is EVEN");
         }
         else{
            document.write("Number "+ num +" is ODD");
         }
      </script>
   </body>
</html>
```

/*OUTPUT*/

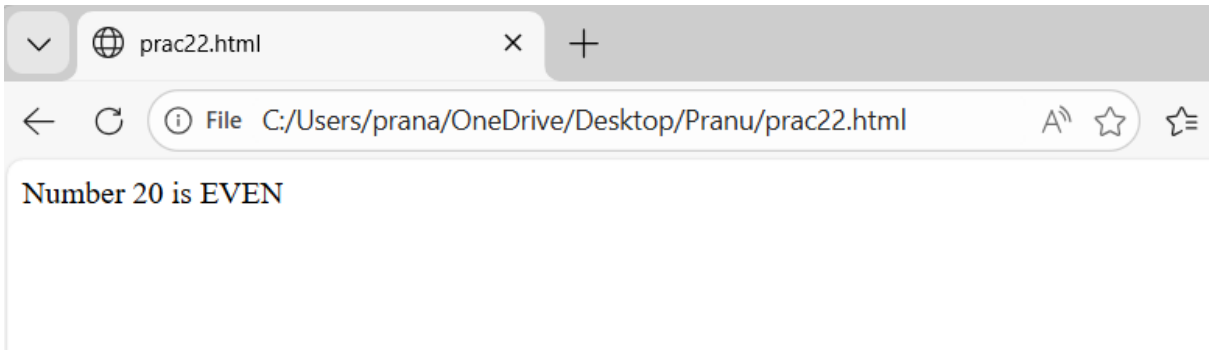



23) Develop a JavaScript Retype Password Validation.


```
<!DOCTYPE html>
<html>
   <body>
      <h2>Retype Password Validation</h2>
      <script>
         var pass1 = prompt("Enter your password: ");

         var pass2 = prompt("Re-enter your password: ");
         if(pass1 === pass2){
            alert("Password Matched");
         }else{
            alert("Password Not Matched");
         }
      </script>
   </body>
</html>
```

/*OUTPUT*/

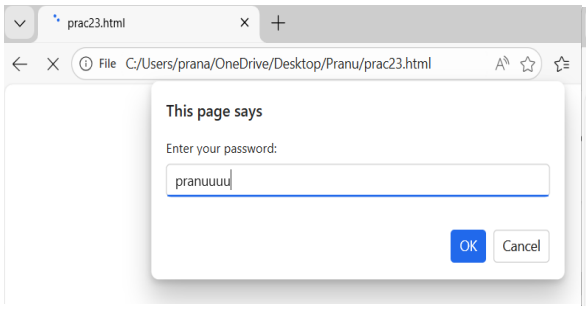

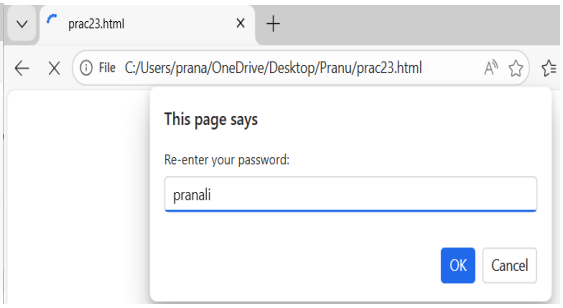

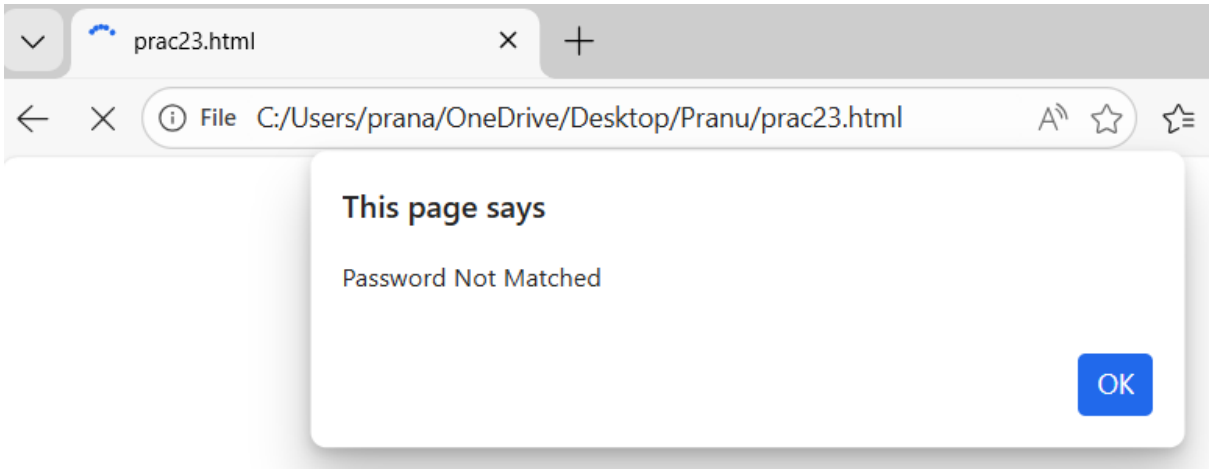


24) Develop a JavaScript to display today's date.

```
<!DOCTYPE html>
<html>
   <body>
      <h2>Display Today's Date</h2>
      <script>

         var today = new Date();

         document.write("Today's Date is: "+today);
      </script>
   </body>
</html>
```

/*OUTPUT*/

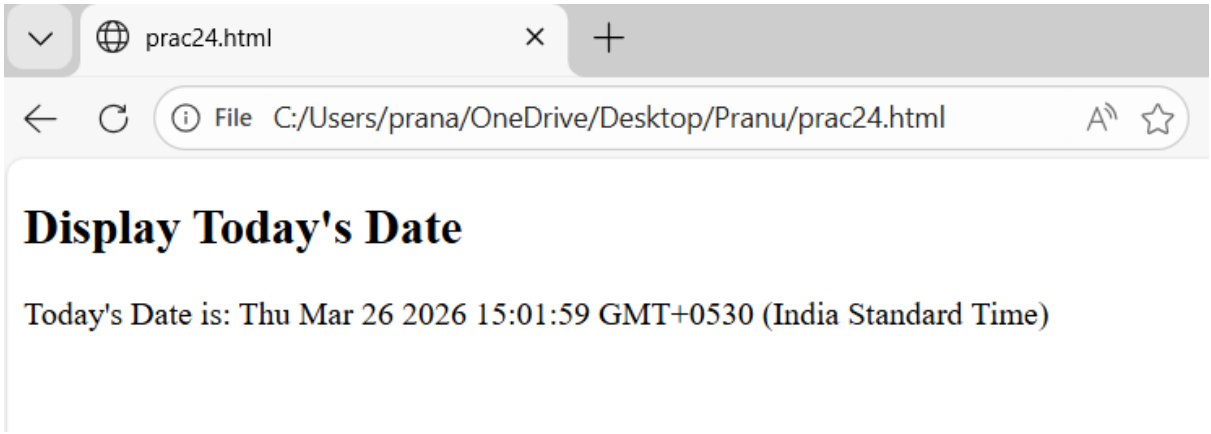


25) Develop a JavaScript Number Validation.


```
<!DOCTYPE html>
<html>
   <body>
      <script>

         var n = prompt("Enter a number: ");

         if(!isNaN(n)){
            alert("Valid Number");
         }
         else{
            alert("Invalid Number");
         }
      </script>
   </body>
</html>
```

/*OUTPUT*/

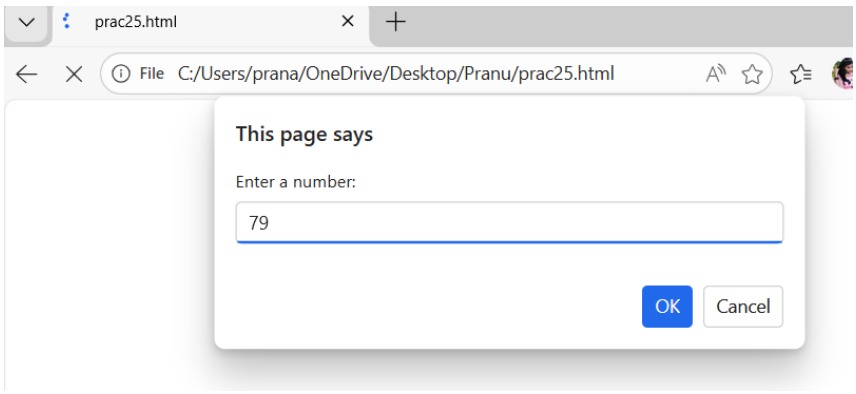


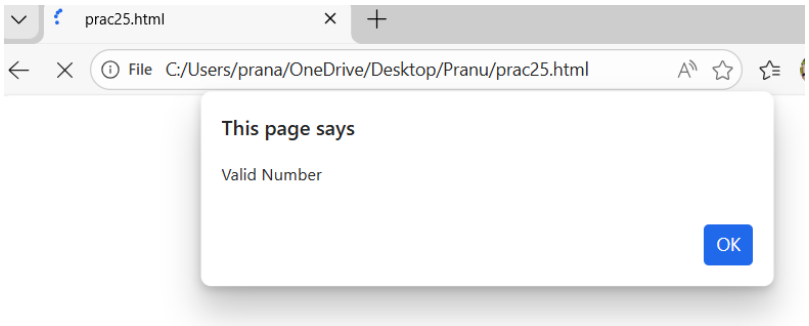

26) Write JavaScript code to demonstrate different events.

```
<!DOCTYPE html>
<html>
  <head>
    <title>JavaScript Events</title>
    <script>
      function showMessage(){
        alert("Button Clicked!");
      }
      function changeColor(){
        document.body.style.backgroundColor ="lightblue";
      }
      function normalColor(){
        document.body.style.background = "lightpink";
      }
      function keyPressed(){
        alert("Key is pressed");
      }
      function pageLoaded(){
        alert("Page Loaded Successfully");
      }
    </script>
  </head>
  <body onload="pageLoaded()">
    <h2>JavaScript Events Demonstration</h2>
    <!--click Event-->
    <button onclick="showMessage()">Click Me</button>
    <br><br>
    <p onmouseover="changeColor()" onmouseout="normalColor()">
      Move mouse over this text
    </p><br>
    <input type="text" onkeydown="keyPressed()" placeholder="Press any key">
  </body></html>
```

/*OUTPUT*/

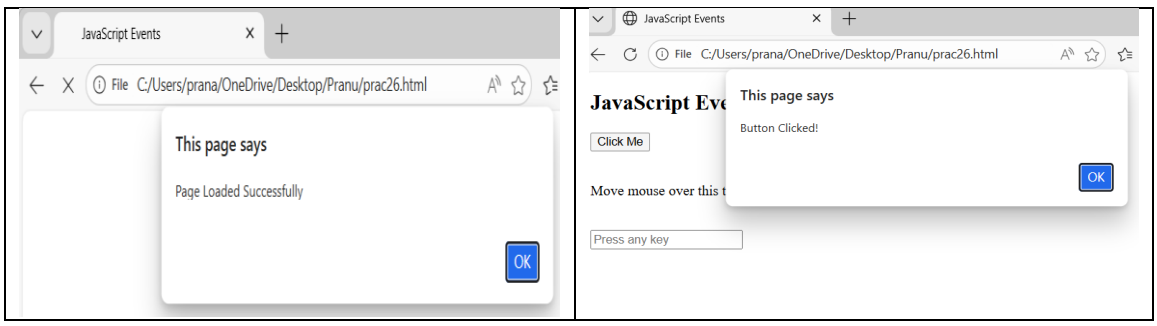

27) Create a HTML page to demonstrate Date & Time object using JavaScript.

```
<!DOCTYPE html>
<html>
<head>
   <title>Date and Time Example</title>
   <script>
      function showDateTime(){
         var d = new Date();
         document.getElementById("date").innerHTML = "Current Date: "+d.toDateString();
          document.getElementById("time").innerHTML="Current Time:
         "+d.toLocaleTimeString();
         document.getElementById("year").innerHTML="Current Year: "+d.getFullYear();
         document.getElementById("day").innerHTML="Day of week: "+d.getDay();
      }
   </script>
</head>
<body>
   <h2>JavaScript Date and Time Object</h2>
   <button onclick="showDateTime()">Show Date and Time</button>
   <p id="date"></p>
   <p id="time"></p>
   <p id="year"></p>
   <p id="day"></p>
</body>
</html>
```

/*OUTPUT*/



JavaScript Date and Time Object

Show Date and Time

Current Date: Thu Mar 26 2026

Current Time: 3:15:11 pm

Current Year: 2026

Day of week: 4

28) Write JavaScript code to demonstrate use of Dialog Boxes (Alert, Confirm, and Prompt).

```
<!DOCTYPE html>
<html>
<head>
   <title>JavaScript Dialog Boxes</title>

   <script>
      function showAlert(){
         alert("This is an Alert Box");
      }
      function showConfirm(){
         var result=confirm("Do you want to continue?");


         if(result==true){
            alert("You pressed OK");
         }
         else{
            alert("You pressed Cancel");
         }
      }
      function showPrompt(){
         var name=prompt("Enter your name: ");

         alert("Hello "+name);
      }
   </script>
</head>
<body>
   <h2>JavaScript Dialog Boxes Example</h2>
   <button onclick="showAlert()">Alert Box</button>
   <br><br>

   <button onclick="showConfirm()">Confirm Box</button>
   <br><br>

   <button onclick="showPrompt()">Prompt Box</button>
</body>
</html>
```


/*OUTPUT*/

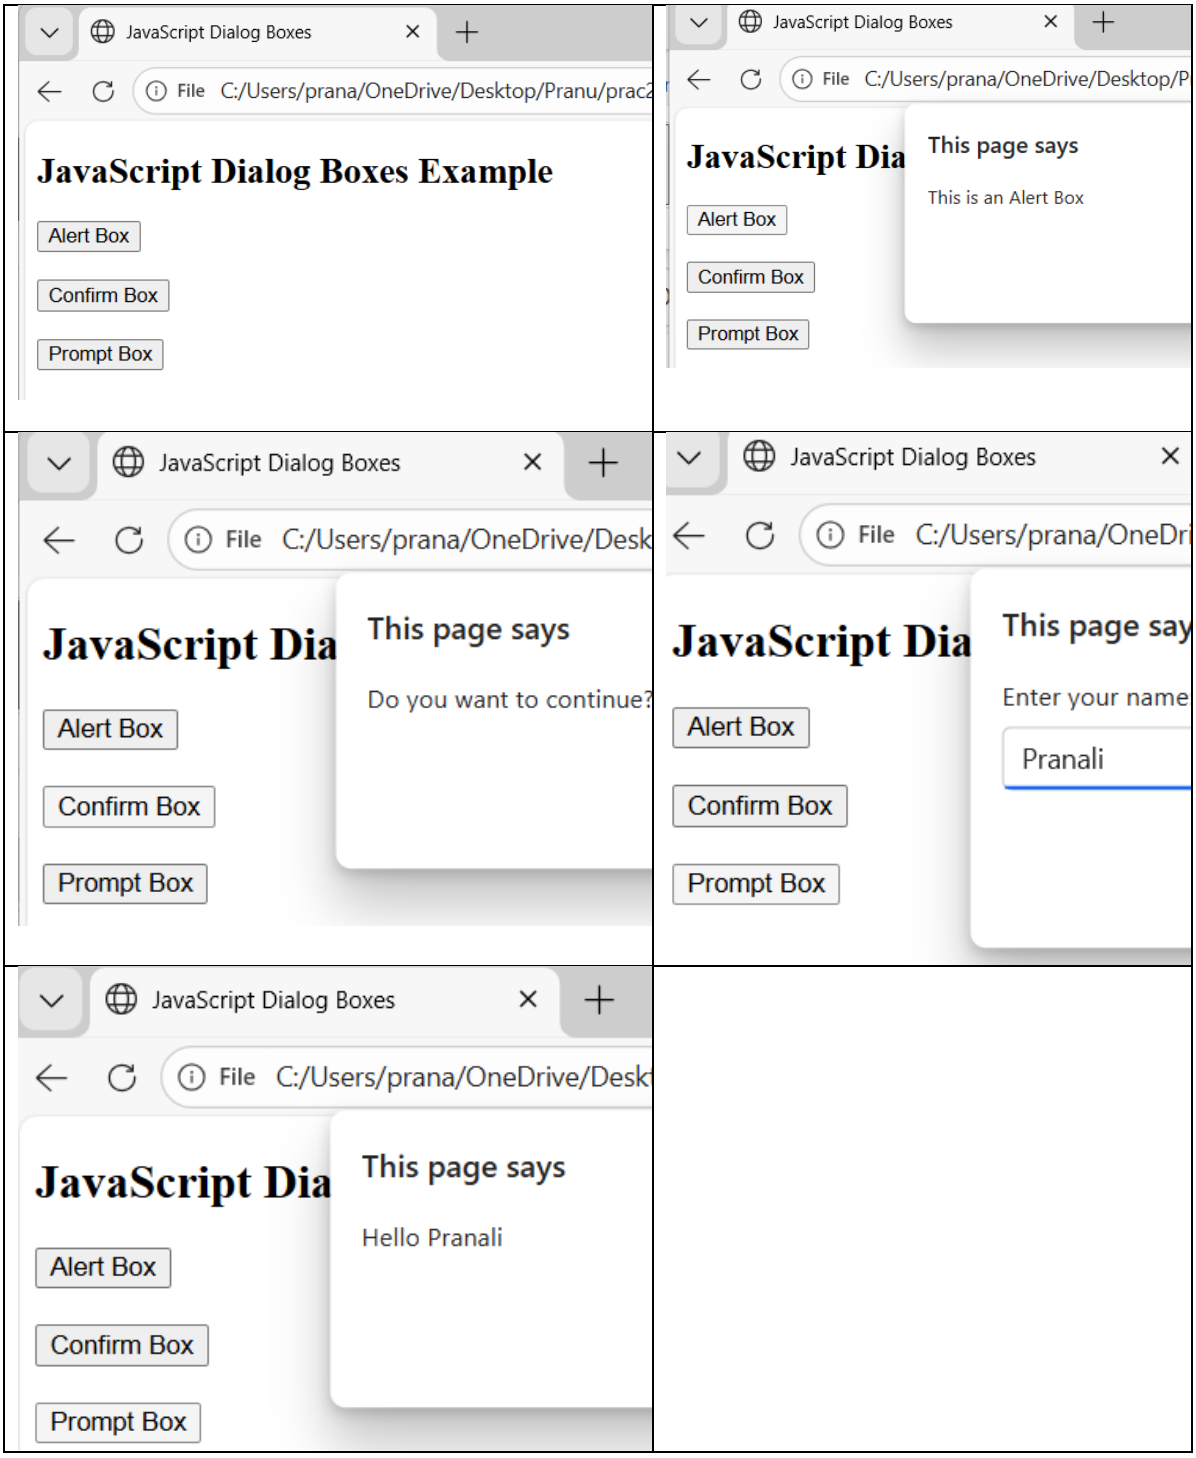
JavaScript Dialog Boxes
File C:/Users/prana/OneDrive/Desktop/Pranu/prac2
JavaScript Dialog Boxes Example
Alert Box
Confirm Box
Prompt Box
JavaScript Dialog Boxes
File C:/Users/prana/OneDrive/Desktop/P
JavaScript Dia
This page says
This is an Alert Box
Alert Box
Confirm Box
Prompt Box
JavaScript Dialog Boxes
File C:/Users/prana/OneDrive/Desk
JavaScript Dia
This page says
Do you want to continue?
Alert Box
Confirm Box
Prompt Box
JavaScript Dialog Boxes
File C:/Users/prana/OneDri
JavaScript Dia
This page say
Enter your name
Pranali
Alert Box
Confirm Box
Prompt Box
JavaScript Dialog Boxes
File C:/Users/prana/OneDrive/Desk
JavaScript Dia
This page says
Hello Pranali
Alert Box
Confirm Box
Prompt Box

29) Write JavaScript code to validate E-Mail Id.

```
<!DOCTYPE html>
<html>
<head>
   <title>Email Validation</title>
   <script>
      function validateEmail(){
         var email=document.getElementById("email").value;
         var pattern=/^[^\s@]+@[^\s@]+\.[^\s@]+$/;
         if(pattern.test(email)){
            alert("Valid Email Address");
         }else{
            alert("Invalid Email Address");
         }
      }
   </script>
</head>
<body>
   <h2>Email Validation Exmple</h2>
   Enter Email:
   <input type="text" id="email">
   <br><br>
   <button onclick="validateEmail()">Validate Email</button>
</body>
</html>
```

/*OUTPUT*/

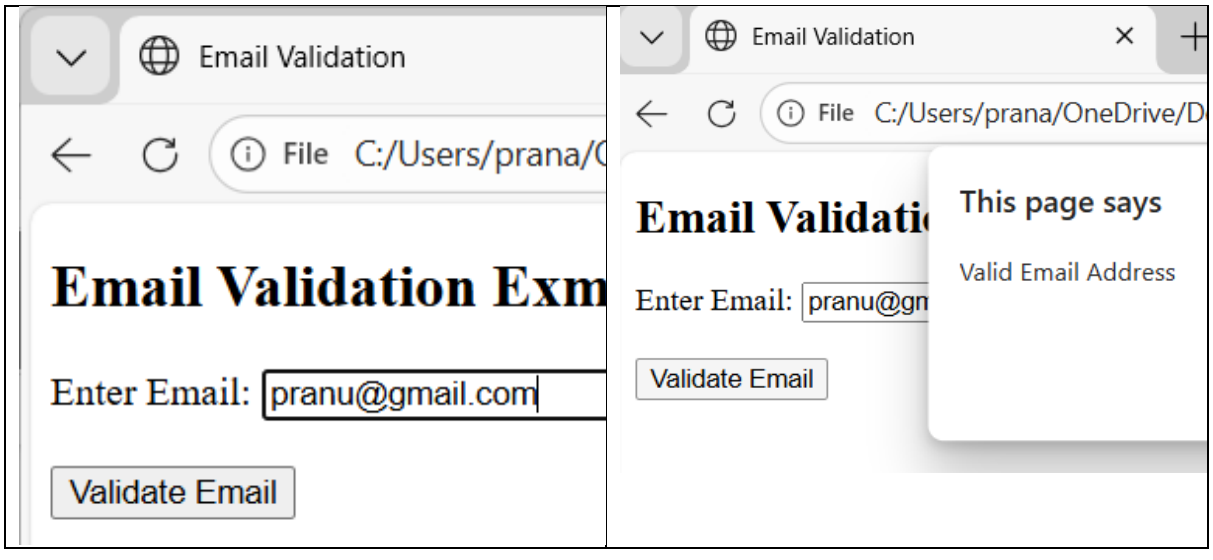

30) Write JavaScript code to demonstrate different string functions.

```
<!DOCTYPE html>
<html>
<head>
   <title>String Functions</title>
   <script>
      function stringDemo(){
         var str="Hello JavaScript";
         document.getElementById("len").innerHTML="Length: "+str.length;
         document.getElementById("upper").innerHTML="Upper Case: "+str.toUpperCase();
         document.getElementById("lower").innerHTML="Lower Case: "+str.toLowerCase();
          document.getElementById("char").innerHTML="character at position 1:
         "+str.charAt(1);
         document.getElementById("index").innerHTML="Index of JavaScript:
         "+str.indexOf("JavaScript");
         document.getElementById("sub").innerHTML="Substring(0,5): "+str.substring(0,5);
      }
   </script>
</head>
<body>
   <h2>JavaScript String Functions</h2>
   <button onclick="stringDemo()">Show String Functions</button>
   <p id="len"></p>
   <p id="upper"></p>
   <p id="lower"></p>
   <p id="char"></p>
   <p id="index"></p>
   <p id="sub"></p>
</body>
</html>
```

/*OUTPUT*/

