


FMCG SALES PERFORMANCE ANALYSIS (SQL Queries)

-- Total Revenue

```
SELECT ROUND(SUM(Revenue), 2) AS Total_Revenue  
FROM fmcg_sales_dataset;
```

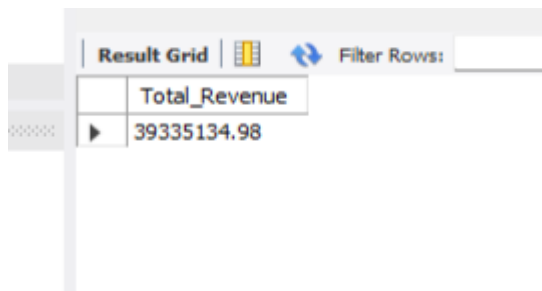


A screenshot of a SQL query result grid. The grid has a header row with the column name 'Total_Revenue' and a data row with the value '39335134.98'. Above the grid, there is a toolbar with a 'Result Grid' tab, a grid icon, a 'Filter Rows' button with a double-headed arrow, and a text input field.

Total_Revenue
39335134.98

-- Total Units Sold

```
SELECT SUM(Units) AS Units_Sold  
FROM fmcg_sales_dataset;
```

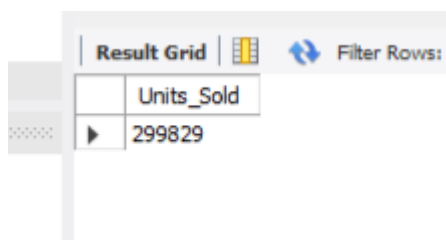


A screenshot of a SQL query result grid. The grid has a header row with the column name 'Units_Sold' and a data row with the value '299829'. Above the grid, there is a toolbar with a 'Result Grid' tab, a grid icon, a 'Filter Rows' button with a double-headed arrow, and a text input field.

Units_Sold
299829

-- Average Lead Time

```
SELECT ROUND(AVG(Lead_Time_Days), 2) AS Average_Lead_Time  
FROM fmcg_sales_dataset;
```

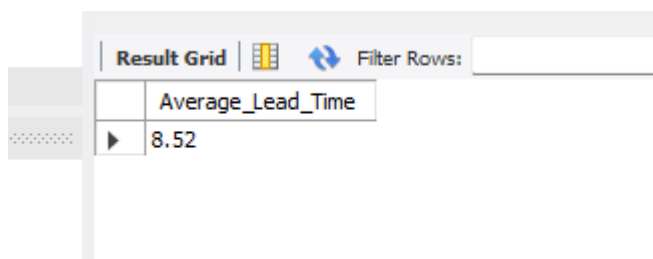

A screenshot of a SQL query result grid. The grid has a header row with the column name 'Average_Lead_Time' and a data row with the value '8.52'. Above the grid, there is a toolbar with a 'Result Grid' tab, a grid icon, a 'Filter Rows' button with a double-headed arrow, and a text input field.

Average_Lead_Time
8.52


-- Top Category

```
SELECT Category, ROUND(SUM(Revenue), 2) AS Category_Revenue
```

```
FROM fmcg_sales_dataset
```

```
GROUP BY Category
```

```
LIMIT 1;
```

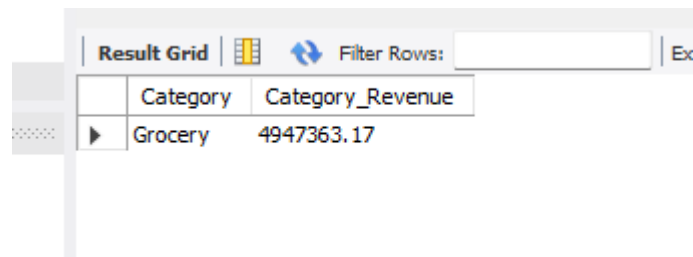

The screenshot shows a database interface with a 'Result Grid' tab. The grid has two columns: 'Category' and 'Category_Revenue'. The first row shows 'Grocery' with a revenue of 4947363.17. There is a 'Filter Rows' button and an 'Export' (Ex) button in the top right corner.

Category	Category_Revenue
Grocery	4947363.17


-- Revenue By City

```
SELECT City, ROUND(SUM(Revenue), 2) AS Revenue_by_City
```

```
FROM fmcg_sales_dataset
```

```
GROUP BY City
```

```
ORDER BY Revenue_by_City DESC;
```

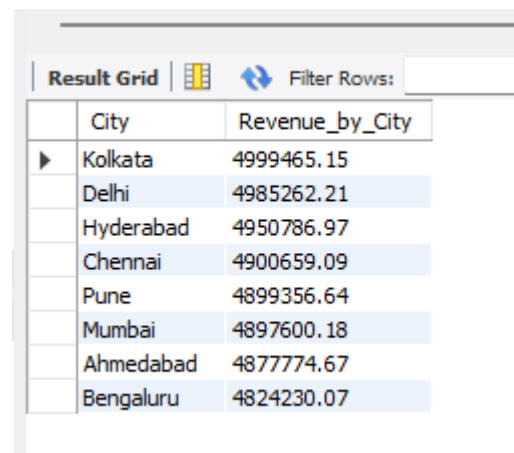

The screenshot shows a database interface with a 'Result Grid' tab. The grid has two columns: 'City' and 'Revenue_by_City'. The results are ordered by revenue in descending order. The cities listed are Kolkata, Delhi, Hyderabad, Chennai, Pune, Mumbai, Ahmedabad, and Bengaluru. There is a 'Filter Rows' button in the top right corner.

City	Revenue_by_City
Kolkata	4999465.15
Delhi	4985262.21
Hyderabad	4950786.97
Chennai	4900659.09
Pune	4899356.64
Mumbai	4897600.18
Ahmedabad	4877774.67
Bengaluru	4824230.07

-- Monthly Revenue Trend

```
SELECT Month, ROUND(SUM(Revenue), 2) AS Monthly_Revenue  
FROM fmcg_sales_dataset  
GROUP BY Month  
ORDER BY Monthly_Revenue DESC;
```

Result Grid	Filter Rows:
Month	Monthly_Revenue
▶ August	3375015.06
January	3365380.56
March	3350248.06
May	3346824.18
July	3346063.43
October	3330184.25
April	3280835.98
December	3220836.04
September	3211407.61
November	3192325.89
June	3175117.85
February	3140896.09

-- Channel by Units Sold

```
SELECT Channel, SUM(Units) AS Units_Sold  
FROM fmcg_sales_dataset  
GROUP BY Channel  
ORDER BY Units_Sold DESC;
```

Result Grid	Filter Rows:
Channel	Units_Sold
▶ Omnichannel	100280
Online	99851
Offline	99698


-- Category by Revenue

```
SELECT Category, ROUND(SUM(Revenue), 2) AS Total_Revenue
```

```
FROM fmcg_sales_dataset
```

```
GROUP BY Category
```

```
ORDER BY Total_Revenue DESC;
```

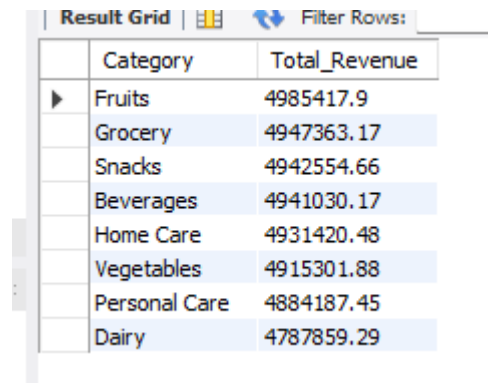

The screenshot shows a SQL query result grid with two columns: 'Category' and 'Total_Revenue'. The results are ordered by total revenue in descending order. The categories and their corresponding total revenues are: Fruits (4985417.9), Grocery (4947363.17), Snacks (4942554.66), Beverages (4941030.17), Home Care (4931420.48), Vegetables (4915301.88), Personal Care (4884187.45), and Dairy (4787859.29).

Category	Total_Revenue
Fruits	4985417.9
Grocery	4947363.17
Snacks	4942554.66
Beverages	4941030.17
Home Care	4931420.48
Vegetables	4915301.88
Personal Care	4884187.45
Dairy	4787859.29


-- Store format Performance

```
SELECT Store_Format, ROUND(SUM(Revenue), 2) AS Total_Revenue
```

```
FROM fmcg_sales_dataset
```

```
GROUP BY Store_Format
```

```
ORDER BY Total_Revenue DESC;
```

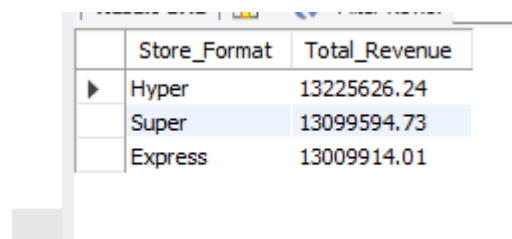

The screenshot shows a SQL query result grid with two columns: 'Store_Format' and 'Total_Revenue'. The results are ordered by total revenue in descending order. The store formats and their corresponding total revenues are: Hyper (13225626.24), Super (13099594.73), and Express (13009914.01).

Store_Format	Total_Revenue
Hyper	13225626.24
Super	13099594.73
Express	13009914.01