

Blockchain Security | Smart Contract Audits | KYC



LastApeStanding

Audit

Security Assessment 07. April, 2022

For



Disclaimer	3
Description	5
Project Engagement	5
Logo	5
Contract Link	5
Methodology	7
Used Code from other Frameworks/Smart Contracts (direct imports)	8
Tested Contract Files	9
Source Lines	10
Risk Level	10
Capabilities	11
Inheritance Graph	12
CallGraph	13
Scope of Work/Verify Claims	14
Modifiers and public functions	20
Source Units in Scope	22
Critical issues	23
High issues	23
Medium issues	23
Low issues	23
Informational issues	24
Audit Comments	24
SWC Attacks	25

Disclaimer

<u>SolidProof.io</u> reports are not, nor should be considered, an "endorsement" or "disapproval" of any particular project or team. These reports are not, nor should be considered, an indication of the economics or value of any "product" or "asset" created by any team. SolidProof.io do not cover testing or auditing the integration with external contract or services (such as Unicrypt, Uniswap, PancakeSwap etc'...)

SolidProof.io Audits do not provide any warranty or guarantee regarding the absolute bug- free nature of the technology analyzed, nor do they provide any indication of the technology proprietors. SolidProof Audits should not be used in any way to make decisions around investment or involvement with any particular project. These reports in no way provide investment advice, nor should be leveraged as investment advice of any sort.

SolidProof.io Reports represent an extensive auditing process intending to help our customers increase the quality of their code while reducing the high level of risk presented by cryptographic tokens and blockchain technology. Blockchain technology and cryptographic assets present a high level of ongoing risk. SolidProof's position is that each company and individual are responsible for their own due diligence and continuous security. SolidProof in no way claims any guarantee of security or functionality of the technology we agree to analyze.

Version	Date	Description
1.0	07. April 2022	Layout projectAutomated-/Manual-Security TestingSummary

Network

Binance Smart Chain (BEP20)

Website

https://thelastapestanding.com/

Telegram

https://t.me/TheLastApeStanding

Twitter

https://twitter.com/the_las_bsc

Description

The Last Ape Standing is a project on the Binance Smart Chain, that will cause a psychological effect to create infinite buy pressure.

Project Engagement

During the 4th of April 2022, **LastApeStanding Team** engaged Solidproof.io to audit smart contracts that they created. The engagement was technical in nature and focused on identifying security flaws in the design and implementation of the contracts. They provided Solidproof.io with access to their code repository and whitepaper.



Contract Link v1.0

Provided as files

Vulnerability & Risk Level

Risk represents the probability that a certain source-threat will exploit vulnerability, and the impact of that event on the organization or system. Risk Level is computed based on CVSS version 3.0.

Level	Value	Vulnerability	Risk (Required Action)
Critical	9 - 10	A vulnerability that can disrupt the contract functioning in a number of scenarios, or creates a risk that the contract may be broken.	Immediate action to reduce risk level.
High	7 – 8.9	A vulnerability that affects the desired outcome when using a contract, or provides the opportunity to use a contract in an unintended way.	Implementation of corrective actions as soon aspossible.
Medium	4 – 6.9	A vulnerability that could affect the desired outcome of executing the contract in a specific scenario.	Implementation of corrective actions in a certain period.
Low	2 – 3.9	A vulnerability that does not have a significant impact on possible scenarios for the use of the contract and is probably subjective.	Implementation of certain corrective actions or accepting the risk.
Informational	0 – 1.9	A vulnerability that have informational character but is not effecting any of the code.	An observation that does not determine a level of risk

Auditing Strategy and Techniques Applied

Throughout the review process, care was taken to evaluate the repository for security-related issues, code quality, and adherence to specification and best practices. To do so, reviewed line-by-line by our team of expert pentesters and smart contract developers, documenting any issues as there were discovered.

Methodology

The auditing process follows a routine series of steps:

- 1. Code review that includes the following:
 - i) Review of the specifications, sources, and instructions provided to SolidProof to make sure we understand the size, scope, and functionality of the smart contract.
 - ii) Manual review of code, which is the process of reading source code line-byline in an attempt to identify potential vulnerabilities.
 - iii) Comparison to specification, which is the process of checking whether the code does what the specifications, sources, and instructions provided to SolidProof describe.
- 2. Testing and automated analysis that includes the following:
 - i) Test coverage analysis, which is the process of determining whether the test cases are actually covering the code and how much code is exercised when we run those test cases.
 - ii) Symbolic execution, which is analysing a program to determine what inputs causes each part of a program to execute.
- 3. Best practices review, which is a review of the smart contracts to improve efficiency, effectiveness, clarify, maintainability, security, and control based on the established industry and academic practices, recommendations, and research.
- 4. Specific, itemized, actionable recommendations to help you take steps to secure your smart contracts.

Used Code from other Frameworks/Smart Contracts (direct imports)

Imported packages:

./Address.sol ./EnumerableSet.sol ./IBEP20.sol ./Ownable.sol ./Routers.sol

./SafeMath.sol

8

Tested Contract Files

This audit covered the following files listed below with a SHA-1 Hash.


A file with a different Hash has been modified, intentionally or otherwise, after the security review. A different Hash could be (but not necessarily) an indication of a changed condition or potential vulnerability that was not within the scope of this review.

v1.0

File Name	SHA-1 Hash
contracts/token/Routers.sol	1c5971386df2515660faad6f4ac6882d6607761b
contracts/token/IBEP20.sol	a08497f6c7d2d0098970df6ad43e934a92bd0bd3
contracts/token/LastApeStanding.sol	47bc3eb6335bb08db14f470b18d8bd0435804178
contracts/token/EnumerableSet.sol	7d538ac6120c6793721f6bb81816863392eb3097
contracts/token/Address.sol	a77aa33714f7f9c2e80c934836a77664683820cb
contracts/token/SafeMath.sol	5a5a292df7ba88465163ff4845a4fa1cf4cebc4c
contracts/token/Ownable.sol	02bc26c0ddddc5ada9f6d045c630fb4544386315

Metrics

Source Lines v1.0

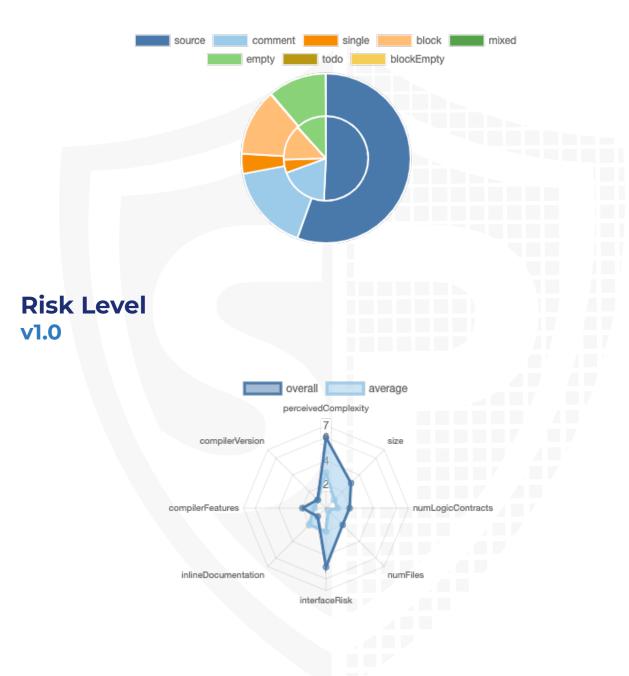

Capabilities

Components

Version	Contracts	Libraries	Interfaces	Abstract
1.0	2	3	5	1

Exposed Functions

This section lists functions that are explicitly declared public or payable. Please note that getter methods for public stateVars are not included.

Ve	rsion	Public	Payable
1.0		129	5

Version External		Internal	Private	Pure	View
1.0	83	119	20	24	65

State Variables

Version	Total	Public
1.0	86	21

Capabilities


Version	Solidity Versions observed	Experim ental Features	Can Receive Funds	Uses Assembl Y	Has Destroya ble Contract s
1.0	^0.8.1 3		yes	yes (2 asm blocks)	

Version	Transfer s ETH	Low- Level Calls	Deleg ateCa II	Uses Hash Function s	EC Rec ove r	New/ Create/ Create2	
---------	-------------------	------------------------	----------------------	-------------------------------	-----------------------	----------------------------	--


|--|

Inheritance Graph

v1.0

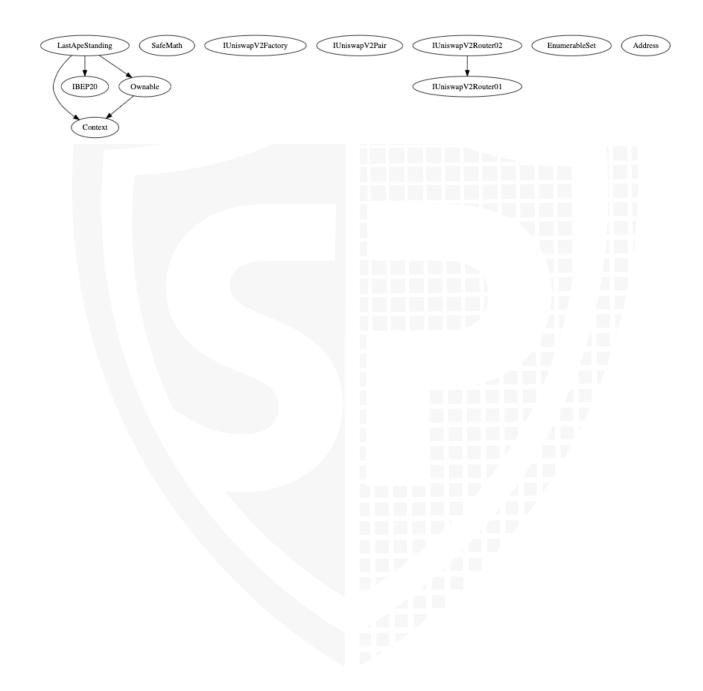

CallGraph v1.0

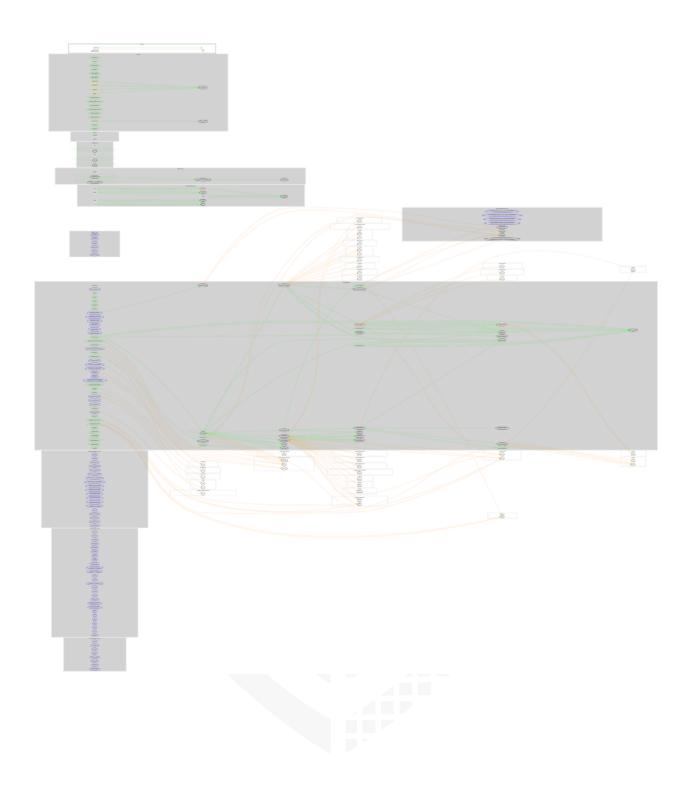

Scope of Work/Verify Claims

The above token Team provided us with the files that needs to be tested (Github, Bscscan, Etherscan, files, etc.). The scope of the audit is the main contract (usual the same name as team appended with .sol).

We will verify the following claims:

- 1. Correct implementation of Token standard
- 2. Deployer cannot mint any new tokens
- 3. Deployer cannot burn or lock user funds
- 4. Deployer cannot pause the contract
- 5. Overall checkup (Smart Contract Security)

Correct implementation of Token standard

	ERC20						
Function	Function Description						
TotalSupply	Provides information about the total token supply	√	√	\checkmark			
BalanceOf	Provides account balance of the owner's account	\checkmark	√	\checkmark			
Transfer	Executes transfers of a specified number of tokens to a specified address	√	√	√			
TransferFrom	Executes transfers of a specified number of tokens from a specified address	√	√	√			
Approve	Allow a spender to withdraw a set number of tokens from a specified account	√	√	√			
Allowance	Returns a set number of tokens from a spender to the owner	√	√	√			

Write functions of contract v1.0

LastApeStanding

transfer

approve

transferFrom

increaseAllowance

decreaseAllowance

excludeFromFee

includeInFee

setBuyFees

setSellFees

setJackpotFeatures

setJackpotHardFeatures

setJackpotTimespanInSeconds

setMaxTxAmount

setMaxWallet

setNumTokensSellToAddToLiquidity

setSwapAndLiquifyEnabled

includeFromSwapAndLiquify

excludeFromSwapAndLiquify

setUniswapRouter

setUniswapPair

enableTrading

collectMarketingFees

collectDevFees

setDevWalletAddress

setMarketingWalletAddress

setBuybackWallet

setLockedLiquidityAddress

renounceOwnership

transferOwnership

authorize

unauthorize



Deployer cannot mint any new tokens

Name	Exist	Tested	Status
Deployer cannot mint	-	_	-
Max / Total Supply		10.0	000.000



Deployer cannot burn or lock user funds

Name	Exist	Tested	Status
Deployer cannot lock	\checkmark	✓	\checkmark
Deployer cannot burn	-	-	-

Comments:

v1.0

Deployer cannot pause the contract

Name	Exist	Tested	Status
Deployer cannot pause	-	_	-



Overall checkup (Smart Contract Security)




Legend

Attribute	Symbol
Verfified / Checked	\checkmark
Partly Verified	P
Unverified / Not checked	X
Not available	-

Modifiers and public functions

v1.0

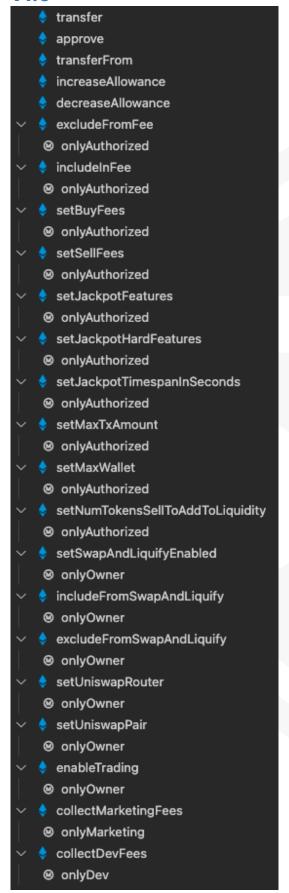

setDevWalletAddress ⊗ onlyOwner setMarketingWalletAddress ⊗ onlyOwner setBuybackWallet ⊗ onlyOwner setLockedLiquidityAddress ⊗ onlyOwner renounceOwnership ⊗ onlyOwner transferOwnership ⊗ onlyOwner authorize ⊗ onlyOwner unauthorize

Comments

- Deployer can set following state variables without any limitations
 - numTokensSellToAddToLiquidity
- Deployer can enable/disable following state variables
 - authorizations
 - tradingOpen
 - · Only once and cannot be set to false anymore
 - _isExcludedFromSwapAndLiquify
 - swapAndLiquifyEnabled
 - isExcludedFromFee
- Deployer can set following addresses
 - _owner
 - uniswapV2Pair
 - uniswapV2Router
- OnlyDev can call following functions
 - collectDevFees
- OnlyMarketing can call following functions
 - collectMarketingFees
- If the owner transfer ownership, the old owner has access to "onlyAuthorized" functions in the contract
 - getPendingTokens
 - getPendingBalances
 - setNumTokensSellToAddToLiquidity
 - setMaxWallet
 - setMaxTxAmount
 - setJackpotTimespanInSeconds
 - setJackpotHardFeatures
 - setJackpotFeatures
 - setSellFees
 - setBuyFees
 - excludeFromFee
 - excludeFromFee

Please check if an OnlyOwner or similar restrictive modifier has been forgotten.

Source Units in Scope

v1.0

Туре	File	Logic Contracts	Interfaces	Lines	nLines	nSLOC	Comment Lines	Complex. Score	Capabilities
Q	contracts/token/Routers.sol		4	348	23	18	1	136	. Š .
Q	contracts/token/IBEP20.sol		1	90	30	21	57	13	茶
9	contracts/token/LastApeStanding.sol	1		1080	944	706	93	537	.Š. *
E	contracts/token/EnumerableSet.sol	1		346	299	98	165	38	茶
\(\rightarrow\)	contracts/token/Address.sol	1		181	140	68	87	37	■ ☆
\(\rightarrow\)	contracts/token/SafeMath.sol	1		66	54	39	1	10	*
7%	contracts/token/Ownable.sol	2		222	206	115	61	70	
∌ ≨ Q%	Totals	6	5	2333	1696	1065	465	841	■ § ♣ ☆

Legend

Attribute	Description
Lines	total lines of the source unit
nLines	normalized lines of the source unit (e.g. normalizes functions spanning multiple lines)
nSLOC	normalized source lines of code (only source-code lines; no comments, no blank lines)
Comment Lines	lines containing single or block comments
Complexity Score	a custom complexity score derived from code statements that are known to introduce code complexity (branches, loops, calls, external interfaces,)

Audit Results

AUDIT PASSED

Critical issues

No critical issues

High issues

No high issues

Medium issues

No medium issues

Low issues

Issue	File	Type	Line	Description
#1	Main	Contract doesn't import npm packages from source (like OpenZeppelin etc.)		We recommend to import all packages from npm directly without flatten the contract. Functions could be modified or can be susceptible to vulnerabilities
#2	Main	A floating pragma is set	34	The current pragma Solidity directive is ""^0."".
#3	Main	Missing Zero Address Validation (missing- zero-check)	606	Check that the address is not zero
#4	Ownabl e	Missing Zero Address Validation (missing- zero-check)	151, 135, 154	Check that the address is not zero
#5	Ownabl e	Missing Events Arithmetic	151, 135, 143	Emit an event for critical parameter changes

#6 Main Missing Events Arithmetic	381-374, 432-434, 446, 454, 466, 474, 482, 489, 402-405	Emit an event for critical parameter changes
-----------------------------------	--	--

Informational issues

Issue	File	Туре	Line	Description
#1	Main	State variables that could be declared constant (constable-states)	55	Add the `constant` attributes to state variables that never change
#2	Main	Unused state variables	57	Remove unused state variables
#3	Main	Misspelling	See description	Change following words: - tokensIntoLiqudity L190 - receipient L976 Make sure to change it everywhere else as well.

Audit Comments

We recommend you to use the special form of comments (NatSpec Format, Follow link for more information https://docs.soliditylang.org/en/v0.5.10/natspec-format.html) for your contracts to provide rich documentation for functions, return variables and more. This helps investors to make clear what that variables, functions etc. do.

07. April 2022:

· Read whole report for more information

SWC Attacks

ID	Title	Relationships	Status
<u>SW</u> <u>C-1</u> <u>36</u>	Unencrypted Private Data On-Chain	CWE-767: Access to Critical Private Variable via Public Method	PASSED
<u>SW</u> <u>C-1</u> <u>35</u>	Code With No Effects	CWE-1164: Irrelevant Code	PASSED
<u>SW</u> <u>C-1</u> <u>34</u>	Message call with hardcoded gas amount	CWE-655: Improper Initialization	PASSED
<u>SW</u> <u>C-1</u> <u>33</u>	Hash Collisions With Multiple Variable Length Arguments	CWE-294: Authentication Bypass by Capture-replay	PASSED
<u>SW</u> <u>C-1</u> <u>32</u>	Unexpected Ether balance	CWE-667: Improper Locking	PASSED
<u>SW</u> <u>C-1</u> <u>31</u>	Presence of unused variables	CWE-1164: Irrelevant Code	NOT PASSED
<u>SW</u> <u>C-1</u> <u>30</u>	Right-To-Left- Override control character (U+202E)	CWE-451: User Interface (UI) Misrepresentation of Critical Information	PASSED
<u>SW</u> <u>C-1</u> <u>29</u>	Typographical Error	CWE-480: Use of Incorrect Operator	PASSED
<u>SW</u> <u>C-1</u> <u>28</u>	DoS With Block Gas Limit	CWE-400: Uncontrolled Resource Consumption	PASSED

<u>SW</u> <u>C-1</u> <u>27</u>	Arbitrary Jump with Function Type Variable	CWE-695: Use of Low-Level Functionality	PASSED
SW C-1 25	Incorrect Inheritance Order	CWE-696: Incorrect Behavior Order	PASSED
<u>SW</u> <u>C-1</u> <u>24</u>	Write to Arbitrary Storage Location	CWE-123: Write-what-where Condition	PASSED
<u>SW</u> <u>C-1</u> <u>23</u>	Requirement Violation	CWE-573: Improper Following of Specification by Caller	PASSED
<u>SW</u> <u>C-1</u> <u>22</u>	Lack of Proper Signature Verification	CWE-345: Insufficient Verification of Data Authenticity	PASSED
<u>SW</u> <u>C-1</u> <u>21</u>	Missing Protection against Signature Replay Attacks	CWE-347: Improper Verification of Cryptographic Signature	PASSED
SW C-1 20	Weak Sources of Randomness from Chain Attributes	CWE-330: Use of Insufficiently Random Values	PASSED
<u>SW</u> <u>C-11</u> <u>9</u>	Shadowing State Variables	CWE-710: Improper Adherence to Coding Standards	PASSED
<u>SW</u> <u>C-11</u> <u>8</u>	Incorrect Constructor Name	CWE-665: Improper Initialization	PASSED
<u>SW</u> C-11 7	Signature Malleability	CWE-347: Improper Verification of Cryptographic Signature	PASSED

<u>SW</u> <u>C-11</u> <u>6</u>	Timestamp Dependence	CWE-829: Inclusion of Functionality from Untrusted Control Sphere	PASSED
<u>SW</u> <u>C-11</u> <u>5</u>	Authorization through tx.origin	CWE-477: Use of Obsolete Function	PASSED
<u>SW</u> <u>C-11</u> <u>4</u>	Transaction Order Dependence	CWE-362: Concurrent Execution using Shared Resource with Improper Synchronization ('Race Condition')	PASSED
<u>SW</u> <u>C-11</u> <u>3</u>	DoS with Failed Call	CWE-703: Improper Check or Handling of Exceptional Conditions	PASSED
<u>SW</u> <u>C-11</u> <u>2</u>	Delegatecall to Untrusted Callee	CWE-829: Inclusion of Functionality from Untrusted Control Sphere	PASSED
<u>SW</u> <u>C-11</u> <u>1</u>	Use of Deprecated Solidity Functions	CWE-477: Use of Obsolete Function	PASSED
<u>SW</u> <u>C-11</u> <u>O</u>	Assert Violation	CWE-670: Always-Incorrect Control Flow Implementation	PASSED
SW C-1 09	Uninitialized Storage Pointer	CWE-824: Access of Uninitialized Pointer	PASSED
<u>SW</u> <u>C-1</u> <u>08</u>	State Variable Default Visibility	CWE-710: Improper Adherence to Coding Standards	PASSED
SW C-1 07	Reentrancy	CWE-841: Improper Enforcement of Behavioral Workflow	PASSED
<u>SW</u> <u>C-1</u> <u>06</u>	Unprotected SELFDESTRUC T Instruction	CWE-284: Improper Access Control	PASSED

<u>SW</u> <u>C-1</u> <u>05</u>	Unprotected Ether Withdrawal	CWE-284: Improper Access Control	PASSED
<u>SW</u> <u>C-1</u> <u>04</u>	Unchecked Call Return Value	CWE-252: Unchecked Return Value	PASSED
<u>SW</u> <u>C-1</u> <u>03</u>	Floating Pragma	CWE-664: Improper Control of a Resource Through its <u>Lifetime</u>	NOT PASSED
SW C-1 02	Outdated Compiler Version	CWE-937: Using Components with Known Vulnerabilities	PASSED
<u>SW</u> <u>C-1</u> <u>01</u>	Integer Overflow and Underflow	CWE-682: Incorrect Calculation	PASSED
<u>SW</u> <u>C-1</u> <u>00</u>	Function Default Visibility	CWE-710: Improper Adherence to Coding Standards	PASSED



Blockchain Security | Smart Contract Audits | KYC

MADE IN GERMANY