

Blockchain Security | Smart Contract Audits | KYC Development | Marketing



## Stealth Network

# AUDIT

SECURITY ASSESSMENT

17. August, 2023

**FOR** 







<b>SOLID</b> Proof	
Introduction	3
Disclaimer	3
Project Overview	4
Summary	4
Social Medias	4
Audit Summary	5
File Overview	6
Imported packages	6
Components	7
Exposed Functions	7
Capabilities	8
Inheritance Graph	9
Audit Information	10
Vulnerability & Risk Level	10
Auditing Strategy and Techniques Applied	11
Methodology	11
Overall Security	12
Upgradeability	12
Ownership	13
Ownership Privileges	14
Minting tokens	14
Burning tokens	15
Blacklist addresses	16
Fees and Tax	17

Lock User Funds

Centralization Privileges Audit Results 18

19 20



## Introduction

<u>SolidProof.io</u> is a brand of the officially registered company MAKE Network GmbH, based in Germany. We're mainly focused on Blockchain Security such as Smart Contract Audits and KYC verification for project teams.

Solidproof.io assess potential security issues in the smart contracts implementations, review for potential inconsistencies between the code base and the whitepaper/documentation, and provide suggestions for improvement.

## **Disclaimer**

<u>SolidProof.io</u> reports are not, nor should be considered, an "endorsement" or "disapproval" of any particular project or team. These reports are not, nor should be considered, an indication of the economics or value of any "product" or "asset" created by any team. SolidProof.io do not cover testing or auditing the integration with external contract or services (such as Unicrypt, Uniswap, PancakeSwap etc'...)

SolidProof.io Audits do not provide any warranty or guarantee regarding the absolute bug-free nature of the technology analyzed, nor do they provide any indication of the technology proprietors. SolidProof Audits should not be used in any way to make decisions around investment or involvement with any particular project. These reports in no way provide investment advice, nor should be leveraged as investment advice of any sort.

SolidProof.io Reports represent an extensive auditing process intending to help our customers increase the quality of their code while reducing the high level of risk presented by cryptographic tokens and blockchain technology. Blockchain technology and cryptographic assets present ahigh level of ongoing risk. SolidProof's position is that each company and individual are responsible for their own due diligence and continuous security. SolidProof in no way claims any guarantee of the security or functionality of the technology we agree to analyze.



## **Project Overview**

## **Summary**

Project Name	Stealth Network	
Website	https://stealthnetwork.vip/	
About the project	STEALTH NETWORK is a revolutionary ecosystem, designed to support and grow your investments, creating an ecosystem where a dump can be turned into a pump.	
Chain	Ethereum Network	
Language	Solidity	
Codebase	https://etherscan.io/token/0x5082clea537cd035c76f3bfb 3f8e459794b3331d#code	
Commit	N/A	
Unit Tests	Not Provided	

## **Social Medias**

Telegram	https://t.me/stealthnetwork
Twitter	https://twitter.com/sinja_network
Facebook	N/A
Instagram	N/A
GitHub	N/A
Reddit	N/A
Medium	N/A
Discord	N/A
YouTube	N/A
TikTok	N/A
LinkedIn	N/A



## **Audit Summary**

Version	Delivery Date	Change Log
v1.0	17. August 2023	· Layout Project
		Automated/ Manual-Security Testing
		· Summary

**Note -** The following audit report presents a comprehensive security analysis of the smart contract utilized in the project. This analysis did not include functional testing (or unit testing) of the contract's logic. We cannot guarantee 100% logical correctness of the contract as it was not functionally tested by us.



#### File Overview

The Team provided us with the files that should be tested in the security assessment. This audit covered the following files listed below with an SHA-1 Hash.

File Name	SHA-1 Hash
contracts/Sinja.sol	fa9c55d6b537a26004abc9db4e2de66389b4f97b

Please note: Files with a different hash value than in this table have been modified after the security check, either intentionally or unintentionally. A different hash value may (but need not) be an indication of a changed state or potential vulnerability that was not the subject of this scan.

## Imported packages

Used code from other Frameworks/Smart Contracts.

Dependency / Import Path	Count
@openzeppelin/contracts/access/AccessControl.sol	1
@openzeppelin/contracts/security/ReentrancyGuard.sol	1
@openzeppelin/contracts/token/ERC20/ERC20.sol	1
@openzeppelin/contracts/token/ERC20/IERC20.sol	1
@openzeppelin/contracts/token/ERC20/extensions/IERC20Metadata.sol	1
@openzeppelin/contracts/token/ERC20/utils/SafeERC20.sol	1
@openzeppelin/contracts/utils/Address.sol	1
@uniswap/v2-core/contracts/interfaces/IUniswapV2Factory.sol	1
@uniswap/v2-periphery/contracts/interfaces/IUniswapV2Router02.sol	1

**Note for Investors:** We only audited contracts mentioned in the scope above. All contracts related to the project apart from that are not a part of the audit, and we cannot comment on its security and are not responsible for it in any way.



#### **External/Public functions**

External/public functions are functions that can be called from outside of a contract, i.e., they can be accessed by other contracts or external accounts on the blockchain. These functions are specified using the function declaration's external or public visibility modifier.

#### **State variables**

State variables are variables that are stored on the blockchain as part of the contract's state. They are declared at the contract level and can be accessed and modified by any function within the contract. State variables can be needed within visibility modifier, such as public, private or internal, which determines the access level of the variable.

## **Components**

<b> ➢</b> Contracts	Libraries	Interfaces	Abstract
1	0	0	0

## **Exposed Functions**

This section lists functions that are explicitly declared public or payable. Please note that getter methods for public stateVars are not included.



External	Internal	Private	Pure	View
3	7	1	0	2

## **StateVariables**

Total	⊕ Public
22	6




## **Capabilities**

Solidity Versions observed	Experimental Features	Can Receive Funds	Uses Assembly	<ul><li>Has</li><li>Destroyable</li><li>Contracts</li></ul>
0.8.15		yes		



## **Inheritance Graph**

An inheritance graph is a graphical representation of the inheritance hierarchy among contracts. In object-oriented programming, inheritance is a mechanism that allows one class (or contract, in the case of Solidity) to inherit properties and methodsfrom another class. It shows the relationships between different contracts and how they are related to each other through inheritance.

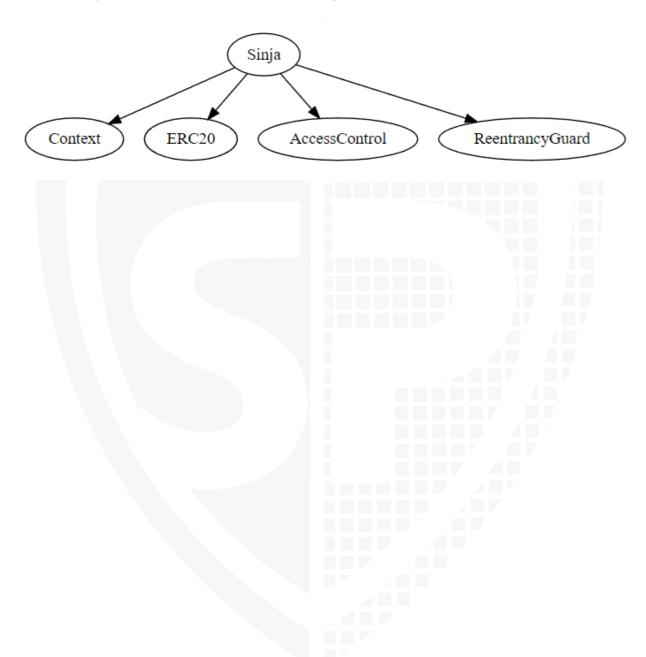



## **Audit Information**

## **Vulnerability & Risk Level**

Risk represents the probability that a certain source threat will exploit the vulnerability and the impact of that event on the organization or system. The risk level is computed based on CVSS version 3.0.

Level	Value	Vulnerability	Risk (Required Action)
Critical	9 - 10	A vulnerability that can disrupt the contract functioning in a number of scenarios, or creates a risk that the contract may be broken.	Immediate action to reduce risk level.
High	7 – 8.9	A vulnerability that affects the desired outcome when using a contract, or provides the opportunity to use a contract in an unintended way.	Implementation of corrective actions as soon aspossible.
Medium	4 – 6.9	A vulnerability that could affect the desired outcome of executingthe contract in a specific scenario.	Implementation of corrective actions in a certain period.
Low	2 – 3.9	A vulnerability that does not have a significant impact on possible scenarios for the use of the contract and is probably subjective.	Implementation of certain corrective actions or accepting the risk.
Informational	0 – 1.9	A vulnerability that have informational character but is not effecting any of the code.	An observation that does not determine a level of risk



## **Auditing Strategy and Techniques Applied**

Throughout the review process, care was taken to check the repository for security-related issues, code quality, and compliance with specifications and best practices. To this end, our team of experienced pen-testers and smart contract developers reviewed the code line by line and documented any issues discovered.

We check every file manually. We use automated tools only so that they help us achieve faster and better results.

## Methodology

The auditing process follows a routine series of steps:

- Leading Code review that includes the following:
  - a. Reviewing the specifications, sources, and instructions provided to SolidProof to ensure we understand the size, scope, and functionality of the smart contract.
  - b. Manual review of the code, i.e., reading the source code line by line to identify potential vulnerabilities.
  - c. Comparison to the specification, i.e., verifying that the code does what is described in the specifications, sources, and instructions provided to SolidProof.
- 2. Testing and automated analysis that includes the following:
  - a. Test coverage analysis determines whether test cases cover code and how much code is executed when those test cases are executed.
  - b. Symbolic execution, which is analysing a program to determine what inputs cause each part of a program to execute.
- Review best practices, i.e., review smart contracts to improve efficiency, effectiveness, clarity, maintainability, security, and control based on best practices, recommendations, and research from industry and academia.
- 4. Concrete, itemized and actionable recommendations to help you secure your smart contracts.



## Overall Security Upgradeability

Contract is not an upgradable	Deployer cannot update the contract with new functionalities.
Description	The contract is not an upgradeable contract. The Deployer is not able to change or add any functionalities to the contract after deploying.
Comment	N/A





## **Ownership**

The ownership is not renounced	X The ownership is not renounced	
Description	The owner has not renounced the ownership that means that the owner retains control over the contract's operations, including the ability to execute functions that may impact the contract's users or stakeholders. This can lead to several potential issues, including:	
	<ul> <li>Centralizations</li> </ul>	
	<ul> <li>The owner has significant control over contract's operations.</li> </ul>	
Example	N/A	
Comment	N/A	

**Note** – The contract cannot be considered as renounced till it is not deployed or having some functionality that can change the state of the contract.



## **Ownership Privileges**

These functions can be dangerous. Please note that abuse can lead to financial loss. We have a guide where you can learn more about these Functions.

## **Minting tokens**

Minting tokens refer to the process of creating new tokens in a cryptocurrency or blockchain network. This process is typically performed by the project's owner or designated authority, who has the ability to add new tokens to the network's total supply.

Contract owner cannot mint new tokens	The owner cannot mint new tokens	
Description	The owner is not able to mint new tokens once the contract is deployed.	
Comment	N/A	



## **Burning tokens**

Burning tokens is the process of permanently destroying a certain number of tokens, reducing the total supply of a cryptocurrency or token. This is usually done to increase the value of the remaining tokens, as the reduced supply can create scarcity and potentially drive up demand.

Contract owner cannot burn tokens	The owner cannot burn tokens
Description	The owner is not able burn tokens without any allowances.
Comment	N/A



#### **Blacklist addresses**

Blacklisting addresses in smart contracts is the process of adding a certain address to a blacklist, effectively preventing them from accessingor participating in certain functionalities or transactions within the contract. This can be useful in preventing fraudulent or malicious activities, such as hacking attempts or money laundering.

Contract owner can blacklist addresses	X The owner can blacklist addresses
Description	If the owner or developers of the smart contract abuse their power to blacklist addresses without proper justification or transparency, it can lead to a decrease in trust and credibility in the project. For example, suppose an owner or developer blacklists an address without proper explanation or communication to stakeholders. In that case, it can create speculation and uncertainty among investors, potentially causing them to sell their tokens and decreasing the token's value.
Comment	The ECO_PROJECT_MANAGER can blacklist multiple addresses at once.

## File/Line(s): Sinja.sol, L113 - 121 codebase:

```
ftrace|funcSig
function blacklistBot(address[] memory _addresst) public onlyRole(ECO_PROJECT_MANAGER) {
    require(block.timestamp <= maxWalletTimer, "Blacklisting Address has been Disabled");

    for(uint256 i = 0; i < _addresst.length; i++) {
        isBlacklisted[_addresst[i]] = true;
        emit blacklistedAddress(_addresst[i]);
    }
}</pre>
```



#### **Fees and Tax**

In some smart contracts, the owner or creator of the contract can set fees for certain actions or operations within the contract. These fees can be used to cover the cost of running the contract, such as paying for gas fees or compensating the contract's owner for their time and effort indeveloping and maintaining the contract.

Contract owner cannot set fees more than 25%.	The owner cannot set fees more than 25%	
Description	The owner is not able to set the fees above 25%.	
Comment	N/A	



#### **Lock User Funds**

In a smart contract, locking refers to the process of restricting access to certain tokens or assets for a specified period of time. When token or assets are locked in a smart contract, they cannot be transferred or used until the lock-up period has expired or certain conditions have been met.

Contract owner cannot lock user funds.	The owner cannot lock user funds	
Description	The owner is not able to lock the contract by any functions or updating any variables.	
Comment	N/A	



## **Centralization Privileges**

Centralization can arise when one or more parties have privileged access or control over the contract's functionality, data, or decision-making. This can occur, for example, if the contract is controlled by a single entity or if certain participants have special permissions or abilities that others do not.

In the project, there are authorities that have access to the following functions:

File	Privileges		
Sinja.sol	ECO_PROJECT_MANAGER can blacklist multiple addresses from transferring tokens.		
	ECO_PROJECT_MANGER can change the swap pair address.		
	ECO_PROJECT_MANGER can be able to add different tax tokens through which the swapping of tokens will be decided.		
	The contract balance will transfer to the marketing wallet address whenever the swapping is done.		
	devWallet1, devWallet2, and devWallet3 will receive the devAmount automatically once the swapping is done.		

#### Recommendations

To avoid potential hacking risks, it is advisable for the client to manage the private key of the privileged account with care. Additionally, we recommend enhancing the security practices of centralized privileges or roles in the protocol through a decentralized mechanism or smartcontract-based accounts, such as multi-signature wallets.

Here are some suggestions of what the client can do:

- Consider using multi-signature wallets: Multi-signature wallets require multiple parties to sign off on a transaction before it can be executed, providing an extra layer of security e.g. Gnosis Safe
- Use of a timelock at least with a latency of e.g. 48-72 hours for awareness of privileged operations
- Introduce a DAO/Governance/Voting module to increase transparency and user involvement
- Consider Renouncing the ownership so that the owner cannot modify any state variables of the contract anymore. Make sure to set up everything before renouncing.



## **Audit Result**

#### #1 | ECO\_PROJECT\_MANAGER can blacklist wallets from transferring of tokens.

File	Severity	Location	Status
Sinja.sol	Medium	L113-121	Open

**Description** – The eco project manager role can blacklist multiple wallets from transferring of tokens. In the extreme scenario this can lock the user funds and the user will not be able to use their tokens to transfer them to anyone.

#### #2 | Missing events

File	Severity	Location	Status
Sinja.sol	Low	L107-111	Open

**Description** – emit all the critical parameter changes.

#### #3 | Missing zero or dead address check

File	Severity	Location	Status
Sinja.sol	Low	L103-105, L107-111	Open

**Description -** It is recommended to add a 'require' check that the address cannot be set to zero or dead.

## #4 | Missing isContract check

File	Severity	Location	Status
Sinja.sol	Low	L85-101	Open

**Description** – Add a 'require' check that the address must be a contract address. As this will be used to get the swap amount it must be a contract address.

#### **#5 | NatSpec Documentation missing**

File	Severity	Location	Status
Sinja.sol	Informational		Open

**Description -** If you started to comment on your code, also comment on all other functions, variables, etc.



#### **Legend for the Issue Status**

Attribute or Symbol	Meaning
Open	The issue is not fixed by the project team.
Fixed	The issue is fixed by the project team.
Acknowledged(ACK)	The issue has been acknowledged or declared as part of business logic.





Blockchain Security | Smart Contract Audits | KYC Development | Marketing

