
Codility_

Candidate Report: trainingQF5QUB-SGN

Check out Codility training tasks

Test Name:

Summary Timeline Feedback

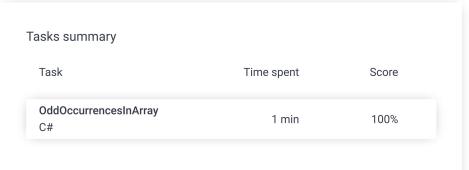



Tasks Details

1. OddOccurrencesInArray Task Score Correctness Performance
Find value that occurs in odd number of elements. 100% 100% 100%

Task description

A non-empty array A consisting of N integers is given. The array contains an odd number of elements, and each element of the array can be paired with another element that has the same value, except for one element that is left unpaired.

For example, in array A such that:

$$A[0] = 9$$
 $A[1] = 3$ $A[2] = 9$
 $A[3] = 3$ $A[4] = 9$ $A[5] = 7$
 $A[6] = 9$

- the elements at indexes 0 and 2 have value 9,
- the elements at indexes 1 and 3 have value 3,
- the elements at indexes 4 and 6 have value 9,
- the element at index 5 has value 7 and is unpaired.

Write a function:

that, given an array A consisting of N integers fulfilling the above conditions, returns the value of the unpaired element.

For example, given array A such that:

Programming language used:	C#	
Total time used:	1 minutes	Q
Effective time used:	1 minutes	•
Notes:	not defined yet	
ask timeline		
ask timeline		\vee
ask timeline		19:53:4

```
A[0] = 9 A[1] = 3 A[2] = 9

A[3] = 3 A[4] = 9 A[5] = 7

A[6] = 9
```

the function should return 7, as explained in the example above.

Write an efficient algorithm for the following assumptions:

- N is an odd integer within the range [1..1,000,000];
- each element of array A is an integer within the range [1..1.000.000.000];
- all but one of the values in A occur an even number of times

Copyright 2009–2020 by Codility Limited. All Rights Reserved. Unauthorized copying, publication or disclosure prohibited.

```
using System;
     using System.Collections.Generic;
     // you can also use other imports, for example:
3
 4
     // using System.Collections.Generic;
     // you can write to stdout for debugging purposes, e.g.
6
     // Console.WriteLine("this is a debug message");
8
9
     class Solution {
10
         public int solution(int[] A)
11
12
                 int keyToReturn = -1;
                 Dictionary<int, int> dict = new Dictionary<int,</pre>
13
14
                 for (int i = 0; i < A.Length; i++)</pre>
15
                      if (dict.ContainsKey(A[i]))
16
17
18
                          dict[A[i]]++;
19
                      }else
20
21
                          dict.Add(A[i], 1);
22
23
                 var isOdd = false;
24
25
                 while (!isOdd)
26
27
                      foreach (int key in dict.Keys)
28
29
30
31
                          keyToReturn = key;
                          isOdd = dict[key] % 2 != 0;
32
                          if (isOdd)
33
34
35
                              return key;
36
37
38
39
                 return keyToReturn;
40
             }
41
     }
```

Analysis summary

The solution obtained perfect score.

Analysis 👩

Detected time complexity: O(N) or O(N*log(N))

expar	nd all	Example tests		
•	example1 example test	✓	OK	
expar	nd all	Correctness tests		
>	simple1 simple test n=5	✓	OK	
•	simple2 simple test n=11	√	OK	
•	extreme_single_iter [42]	m 🗸	OK	

•	small1 small random test n=20	•	OK
•	small2 small random test n=60	•	OK
expa	nd all	Performance tests	
•	medium1 medium random test n=	•	OK
•	medium2 medium random test n	•	OK
•	big1 big random test n=999, repetitions	•	OK
•	big2 big random test n=999,	•	OK

The PDF version of this report that may be downloaded on top of this site may contain sensitive data including personal information. For security purposes, we recommend you remove it from your system once reviewed.