




nextwork.org

Host a Website on Amazon S3



anglinpgj@gmail.com

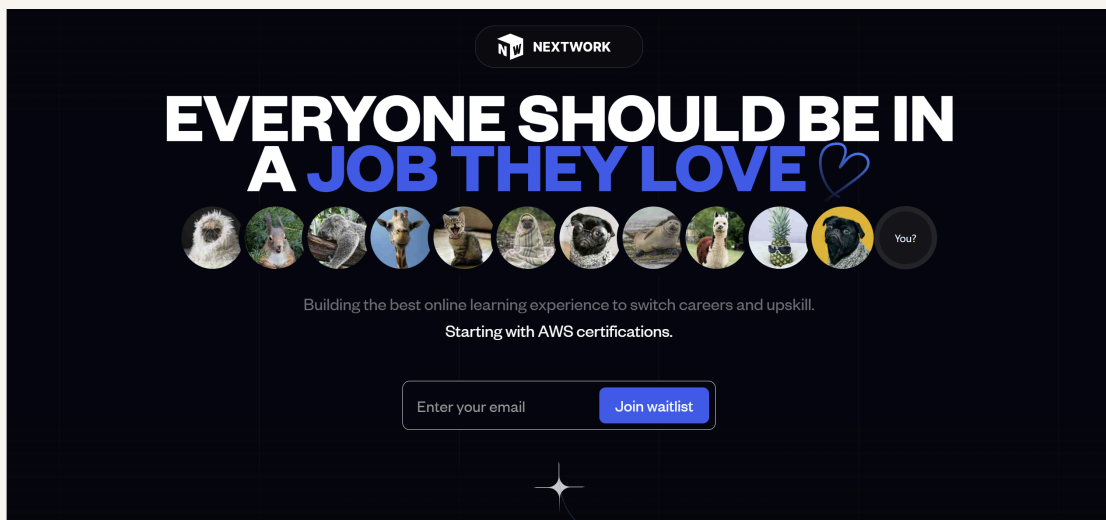



Introducing Today's Project!

In this project, I will demonstrate how to create a static website using s3 buckets in AWS.

Tools and concepts

I used AWS S3 to Host a Static website. I learned how to ensure that I had the correct privacy settings for the public to see my site and that the default is to keep the objects private.

Project reflection

This project took me approximately 45 minutes. The most challenging part was ensuring that I was using my ACL. It was most rewarding to get the error and being able to solve it by ensuring ACLs are set properly for it and seeing my site live.




How I Set Up an S3 Bucket

Creating an S3 bucket took me less than 5 minutes. Since I plan on this being for a static website that I want others to view, I had ensure to Disable the block public Access and to enable ACLs.

The Region I picked for my S3 bucket was us-east-2, and I chose it because it was the closest region to my geographical region as that is the best practice for that.

S3 bucket names are globally unique! This means that no two S3 buckets may have the same name. So all must be unique.

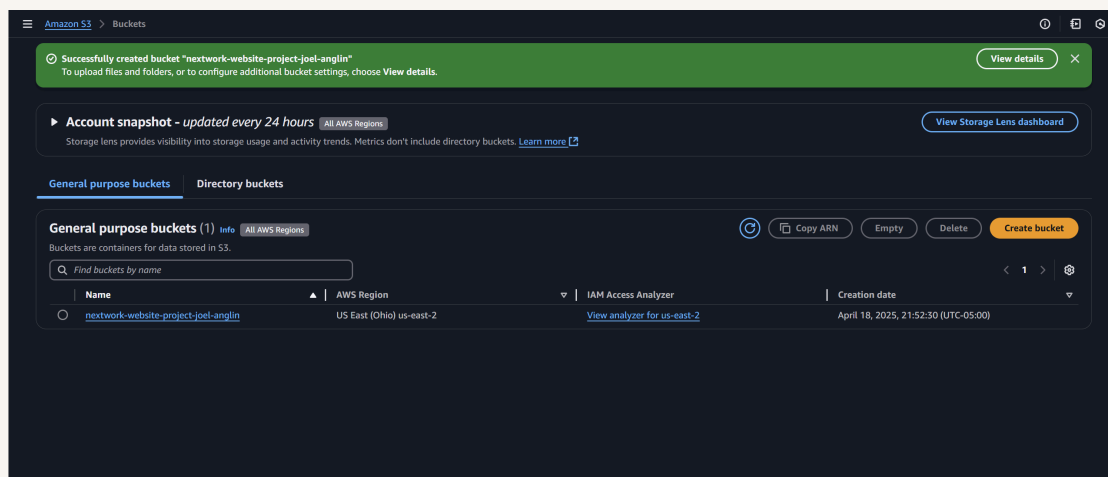




Upload Website Files to S3

index.html and image assets

I uploaded two files to my S3 bucket - they were my index.html file and this is what was used to determine the structure, and a folder of images for the site.

Both files are necessary for this project as the index is used for the structure of the site. This doesn't illustrate the site itself. The second file is necessary to actually fill in the images separately.

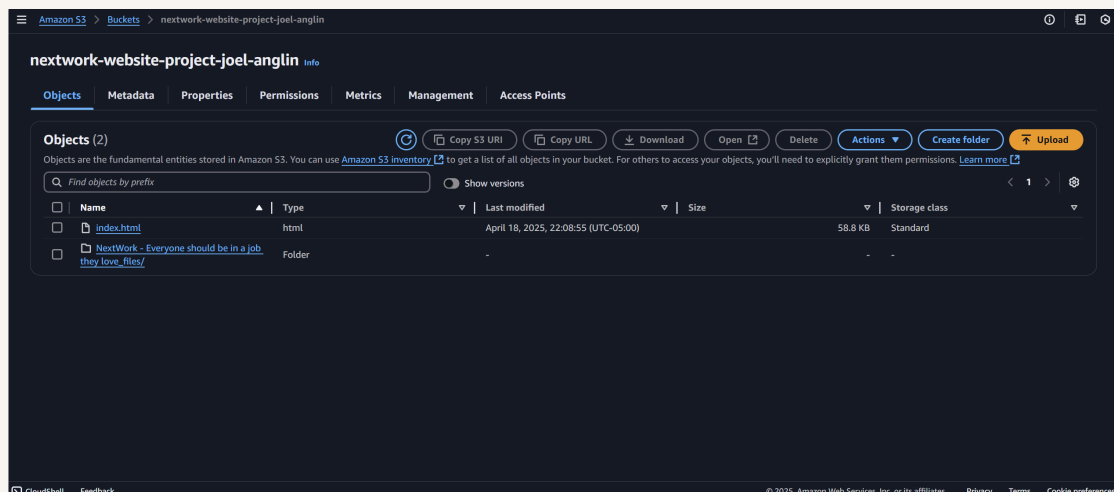




Static Website Hosting on S3

Website hosting means putting our website file on a webserver which is designed to turn our website files into a website that people can view.

To enable website hosting with my S3 bucket, I went into the Properties tab of my bucket and enabled static website hosting and used my index.html file as this the page that I wanted to host.

An ACL aka Access Control List is a way to configure permission settings inside of a bucket. We enabled ACLs so we can control access to our website files later. There was a popup mentioning disabling ACLs and will keep enabled to learn how they work.

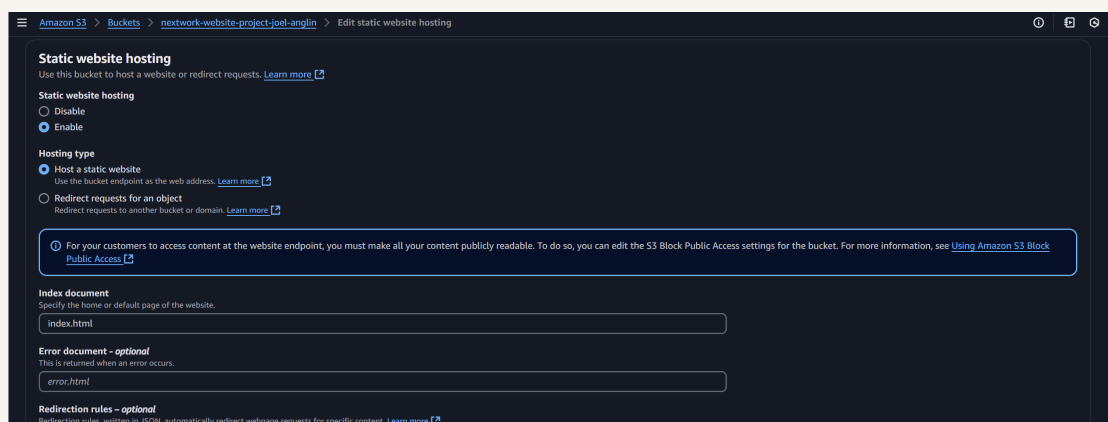



Bucket Endpoints

Once static website is enabled, S3 produces a bucket endpoint URL, which essentially takes you or anyone to the site that you are hosting.

When I first visited the bucket endpoint URL, I saw 403 Forbidden error. The reason for this error was due to all objects being private by default. Even though we disabled block all public access. So we need to manage settings separately for objects.


403 Forbidden

- Code: AccessDenied
- Message: Access Denied
- RequestId: W2Y8CE6ATZ5JXT0E
- HostId: UNWDPElucswq6P2W4MnrHqfoVsoepEpqyhUqxFLDAcRPqD0DqWM+qxSrAQFFF///cQzM+r5pdIg=



Success!

To resolve this 403 Forbidden error, I had to go to objects tab and select all for the two files and select the actions tab and then make public using ACL.

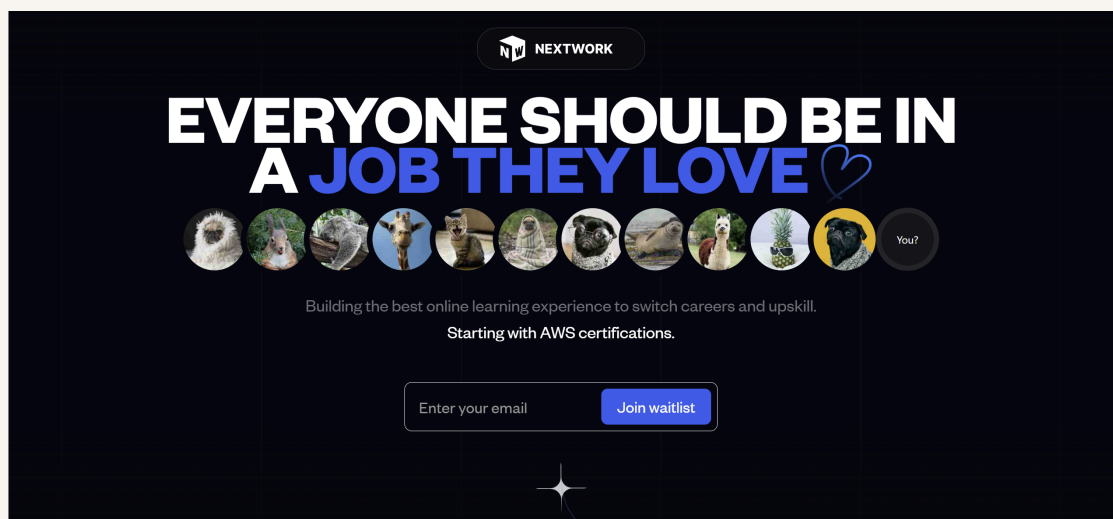



NextWork.org

Everyone should be in a job they love.

Check out nextwork.org for
more projects

